


LED FAUX CAN

LFC Series

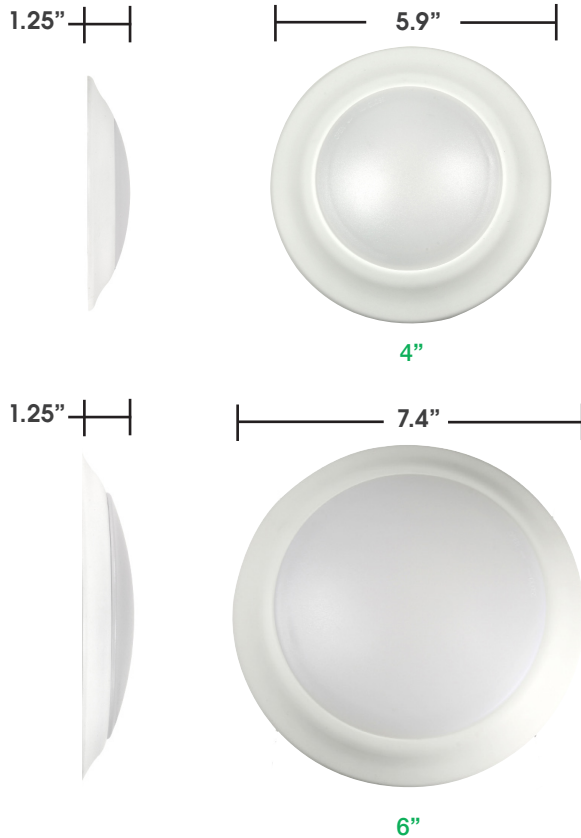

PRODUCT DESCRIPTION:

LED Faux Cans accomplish the task of recessed downlighting without requiring installers to use a recessed can. Faux Cans are mountable to a 4-inch junction box. An optional mounting bracket allows existing recessed cans to be retrofitted with the faux can, for an easy upgrade to LED lighting.

Featuring driverless technology that increases performance and reliability, LED Faux Cans are equivalent up to 75W PAR 30 halogen lamp and offer vivid color rendering. They are wet-listed, making them suitable for virtually any application that requires downlighting.

FEATURES:

- Mounts to a 4" junction boxes – Achieve Recessed Down lighting without using a bulky can
- Vivid Color Rendering – 90+ CRI standard
- Optional Mounting Bracket allows Recessed Cans to be retrofitted with the LED Faux Can
- No Driver – Key point of failure in LED systems is completely eliminated
- CSA Wet Listed – Install it virtually anywhere
- Dimmable with many Triac controls (visit website for complete list)

MODEL SELECTION (Full list of order codes on pg. 2)

Typical order example: LFC61527W/V2

LFC			W	/V2
FAMILY	SIZE & WATTAGE (NOMINAL)	CCT	COLOR	VERSION
LFC= LED Faux Can	413= 4 inches and 13W, replaces 50W Halogen 615= 6 inches and 15W, replaces 75W Halogen	27= 2700K 30= 3000K 41= 4100K	W= White	/V2= Version 2

ACCESSORIES

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
74006	LFC4-BRACKET	LED Faux Can Bracket for 4" Recessed Fixtures	
74005	LFC6-BRACKET	LED Faux Can Bracket for 6" Recessed Fixtures	

COMPATIBLE DIMMERS:

MAKE	DIMMER MODEL	MAKE	DIMMER MODEL
Lutron	CTCL-153PD	Leviton	IPL06
Lutron	LGCL-153PL	Leviton	SureSlide
Lutron	DVELV-300P	Leviton	IPL10
Smart Home	2876D		

NOTES:

1. Edison base adapter is not included.

SPECIFICATIONS:

		LFC41327 W/V2	LFC41330 W/V2	LFC41341 W/V2	LFC61527 W/V2	LFC61530 W/V2	LFC61541 W/V2
ITEM	SPECIFICATION	DETAILS					
GENERAL PERFORMANCE	Power Consumption (W)	12.0	12.0	12.0	14.7	15.0	15.6
	Lumens Delivered (lm)	630	630	630	1,000	1,000	1,000
	Efficacy (lm/W)*	75	75	75	67	67	67
	CRI	≥90					
	Color Temperature (K)	2700K	3000K	4100K	2700K	3000K	4100K
	L70 Lifetime (hours)	30,000					
ELECTRICAL	Power Factor	>0.99 @ 120V					
	Input Voltage	120V					
PHYSICAL	Weight	2 lbs					
	Operating Temperature	0°F to 104°F					
CERTIFICATION	Certification	CSA, FCC, LM-79, LM-80					
	Material Usage	RoHS compliant; no mercury					
	Environment	Indoor & Outdoor					
	Warranty	5 years					

ORDERING*:

ORDER CODE	MODEL	WATTAGE	FINISH	VOLTAGE	CCT
95548	LFC41327W/V2	13	White	120	2700K
95549	LFC41330W/V2				3000K
95550	LFC41341W/V2				4100K
76476	LFC61527W/V2	15			2700K
95459	LFC61530W/V2				3000K
95460	LFC61541W/V2				4100K

*Please contact your MaxLite representative to order products that don't have order codes listed here.