

light-tec
be bright. save energy.



CAMPANA HB 150W

CAMPANA

ADVANTAGES

Unique flat wheel form design

Patented ADC12 graded lightweight housing

Built in driver with 4KV surge protection

Wide input voltage AC 100-277V

Optical glass over 90% light transmitting

LED 3030 chip with low lumen decay


IP65 driver with short circuit/over-flow/over-temperature/over-voltage protection

160lm/W, over 90% energy saving

Lifespan 50,000 hours, 3 years' warranty

Easy installation and low maintenance

PRODUCT SIZE

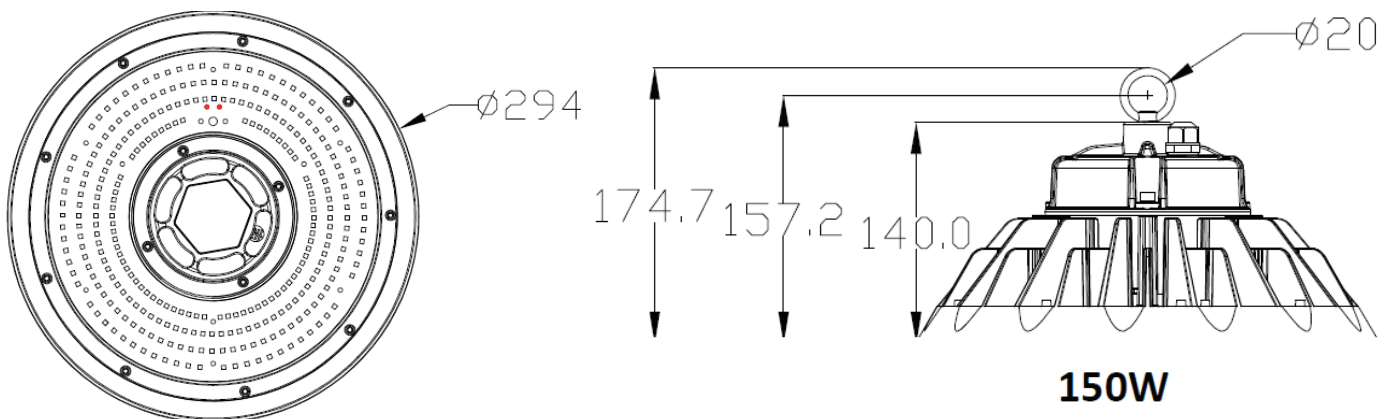

SPECIFICATION

Input Voltage	AC100-277V
Power	150W
Dimming	No/1-10V/Microwave Sensor/Lux Sensor
Spd.	4KV
PF	>0.95
LED Type	3030
Beam Angle	120°
Light Efficiency	160 lm/W
Luminous	24,000 lm
Color Temp	6500k
CRI	>70
IP	IP65
Working Temp	-20°C~45°C
Storage Temp	-40°C~60°C
Life Span	50000h@25°C


SPECIFICATION

QTY/Carton	1 pcs
Carton Size	335*335*218mm
N.W	2.9kg
G.W	3.5kg


CERTIFICATION




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

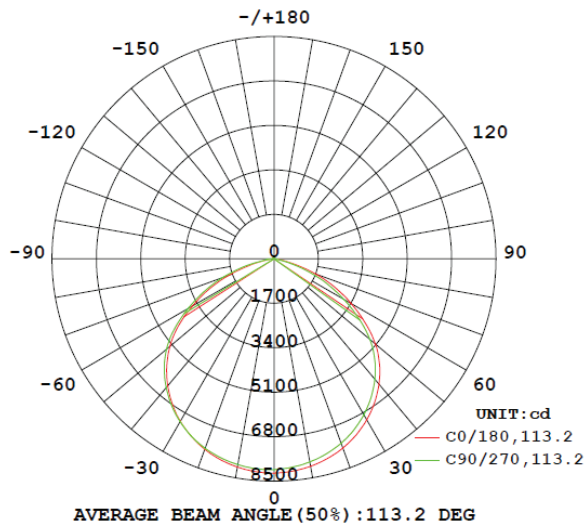

PLANAR ISOLUX DIAGRAM (UNIT: lx)

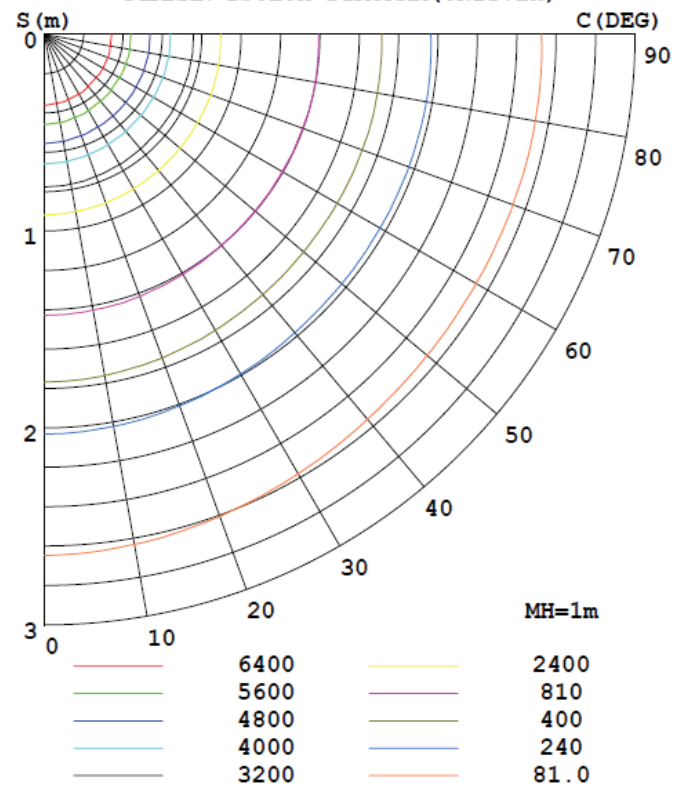

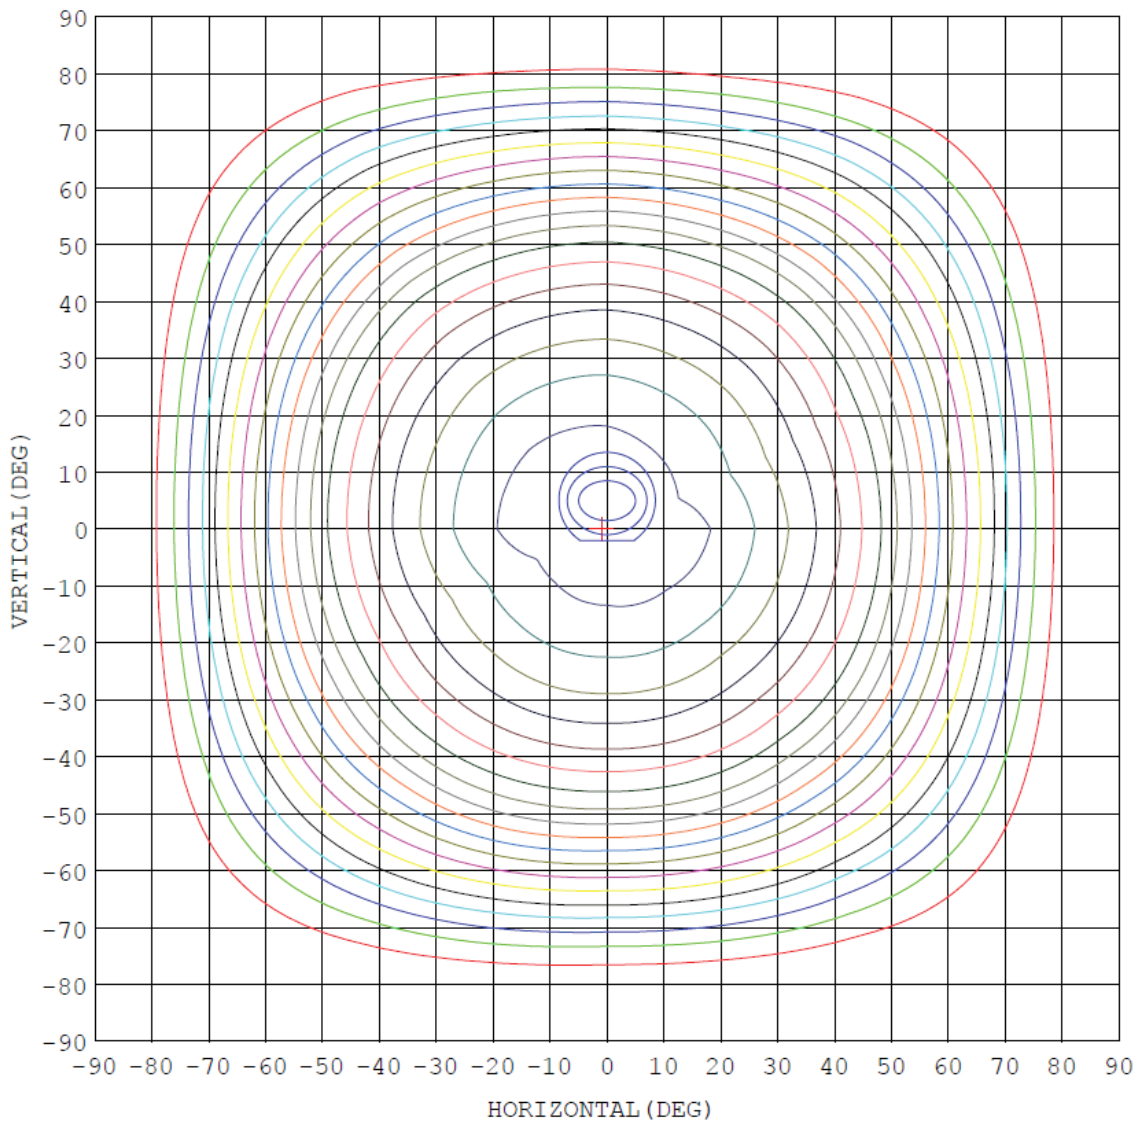

—	5%	409.5
—	10%	819.0
—	15%	1229
—	20%	1638
—	25%	2048
—	30%	2457
—	35%	2867
—	40%	3276
—	45%	3686
—	50%	4095
—	55%	4505
—	60%	4914
—	65%	5324
—	70%	5733
—	75%	6143
—	80%	6552
—	85%	6962
—	90%	7371
—	95%	7781

1. AVG=8039, MIN=7961
2. AVG=8035, MIN=7922
3. AVG=8022, MIN=7882

Imax:8190 (H=-1.0, V0.0)
 (At:C=180.0, Gamma=1.0)
 UNIT: cd

