



Master Product Guide

January **2025**



ELCO Lighting

Innovation Beyond Expectation

Who **We** Are

Founded in 1990 with a simple vision to make exceptional quality lighting at a fair market price. The last few decades have been a journey chasing that simple mission.



The Quality Choice

As a premiere luminaire manufacturer, with over sixty years of lighting experience, we know exactly what our customers want. That's why we use only the highest quality materials, and why we run our products through extensive tests before we add them to the ELCO family. When customers choose our lighting fixtures, they can rest assured they have chosen the best in functionality, design, performance, and quality.

The Timely Choice

Ordered today, shipped today. We at ELCO understand the importance of timing, so we send out almost all of our in-stock products the same day they are ordered. Our goal is to make timelines easier to hit and projects quicker to complete.

The Trusted Choice

With over 25 years in the lighting business, ELCO has become a trusted name throughout the country by doing the right thing. We stand behind every product we make. No exceptions. No excuses. It's a valuable trait that brings customers back again and again.

The Contractor's Choice

At ELCO, we design with the contractor in mind. Our packaging is easy to open, and our products are easy to install. This means a safe and orderly setup every time. Contractors feel confident choosing ELCO Lighting for their projects.

The Leading Choice

Both customers and competitors alike see ELCO as a leader in luminaire manufacturing. With many electrical engineers on site, we continue to be a pioneer in the world of illumination. Others may try to copy our designs, but they will never match our dedication to quality and service.

The Sustainable Choice

ELCO understands that lighting is a major contributor to energy consumption around the world. From the very beginning, we have engineered our products to be extremely efficient. Whether it's our CFL or LED product line, we strive to have a positive impact on energy use, one fixture at a time.

The Architect's Choice

We regularly talk with architects, and listen to their most pressing challenges. Not only do we go out of our way to save them time and money, we welcome their suggestions on how to improve our products. That's why architects specify ELCO for their projects.

Table of Contents

Recessed Lighting

The Oak™ System	5
The Teak™ System	10
The Koto™ System	14
The Alder™ System	42
The Mahogany™ System	44
3" LED Housings & Inserts	46
4" LED Housings & Inserts	47
5" & 6" LED Housings & Inserts	50
8" & 12" Specialty LED Retrofits	53
4" Housings for 2-Hour Fire Rated Ceilings	54
Fire Products & Emergency Battery Backups	56
Elm™ System	57
The Ply™ System	63
The Birch™ System	66
The Maple™ System	70
The Cedar™ System	72
The Laurel™ System	83
The Alpine™ System	91
4" Line Voltage	104
5" Line Voltage	109
6" Line Voltage	111
7" & 8" Incandescent	115
8" & 12" Square Retrofits	116
The Slant™ System	117



The Sylo™ Collection

Koto Sylo™ System	126
Ply Sylo™ System	142



Ceiling Mount Lighting

LED Sky™ Panels & Accessories	146
LED Disk Lights	148
Dustin™ & Darby™	149
LED Decorative Ceiling Lights	149



Track Lighting

Integrated LED Track Heads	151
Integrated LED Wall Wash Track Fixtures	154
MR16 Low Voltage Track Heads	155
MR16 GU10 Line Voltage Track Heads	158
120V Line Voltage Track Fixtures	159
Single & Two Circuit Track and Accessories	162
Pendant Lighting & Accessories	167



Undercabinet & Pucks Lighting

Lotus™ & Lotus II™ G2 LED Undercabinet	170
Zinnia™ LED Undercabinet Bar	171
Sage™ & Flax™ LED Undercabinet	172
Azalea™, Tansy™, & Ixia™ LED Undercabinet	173
LED Undercabinet Lightbars & Accessories	174
12V Puck Light	175
24V DC Dimmers, 12V & 24V DC Drivers	176



Exit & Emergency Lighting

Exit Signs, Emergency Lights, & Accessories	178
---	-----



LED Wallpacks, Floodlights, In-Ground, Brick & Step Lights

LED Wall Packs & Wall Mount	180
LED Floodlights & Accessories	181
In-Ground LED Lighting	183
Trogon™ LED Brick Lights & Accessories	184
Incandescent Brick Lights & Accessories	184
Mini Moa™ LED Step Lights	185
Ibis™ Diecast LED Step Lights	185
Incandescent Step Lights	188



The Ambio™ Collection

24V Indoor LED Tape Lights & Accessories	190
RGB Indoor LED Tape Lights & Accessories	193
24V Damp Location LED Tape Lights	193
Sectional LED Tape Lights & Accessories	194
Aluminum Channels for LED Tape Lights	195
24V DC Drivers	196
Duralights & Accessories	197
LED Flat Rope Lights & Accessories	198
Magnetic & Electronic Transformers	198



General Accessories & Overstock Sale

Lamps, Socket Adapters & General Accessories	200
Fire Rated Products	205
Emergency Battery Backup & Accessories	206
ELCO Marketing Products	207





LED Recessed Lighting




1" Oak™ System	5
2" Teak™ System	10
The Koto™ System	14
The Alder™ System	42
3" LED Housings & Inserts	46
4" LED Housings & Inserts	47
5" & 6" LED Housings & Inserts	50
LED Specialty Retrofits	53
4" Housings for 2-Hr Fire Rated Ceilings	54
Fire Rated Products & Emergency Battery Backups	56

The ELM™ System	57
The Ply™ System	63
The Birch™ System	66
The Maple™ System	70
The Cedar™ System	72
The Laurel™ System	83
The Alpine™ System	91
4", 5", & 6" Line Voltage	104
7" & 8" Incandescent	115
8" & 12" Square Retrofits	116

The Oak™ System

1" Miniature LED Downlights



STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 Round  Round Adjustable  Round Trimless  Square  Square Adjustable	 White  Black  Bronze  Haze	 450 lm to 700 lm	 2700K - 5000K & Sunset

The Oak™ System

1" Miniature LED Downlights



Recessed LED Downlights

Description			Cat. # / Specs				
	1" Round Downlight 2 ¼" O.D. - 2 ⅞" H	 WET LOCATION	2700K 6W/600 lm	3000K 6W/625 lm	3500K 6W/650 lm	4000K 6W/675 lm	Sunset 6W/450 lm
			E1L02F27W	E1L02F30W	E1L02F35W	E1L02F40W	E1L02FSDW
			E1L02F27B	E1L02F30B	E1L02F35B	E1L02F40B	E1L02FSDB
			E1L02F27BZ	E1L02F30BZ	E1L02F35BZ	E1L02F40BZ	E1L02FSDBZ
			E1L02F27H	E1L02F30H	E1L02F35H	E1L02F40H	E1L02FSDH
			E1L02F27BB	E1L02F30BB	E1L02F35BB	E1L02F40BB	E1L02FSDBB
	1" Square Downlight 2 ¼" Sq. - 2 ⅞" H	 WET LOCATION	6W/600 lm	6W/625 lm	6W/650 lm	6W/675 lm	6W/450 lm
			E1L12F27W	E1L12F30W	E1L12F35W	E1L12F40W	E1L12FSDW
			E1L12F27B	E1L12F30B	E1L12F35B	E1L12F40B	E1L12FSDB
			E1L12F27BZ	E1L12F30BZ	E1L12F35BZ	E1L12F40BZ	E1L12FSDBZ
			E1L12F27H	E1L12F30H	E1L12F35H	E1L12F40H	E1L12FSDH
			E1L12F27BB	E1L12F30BB	E1L12F35BB	E1L12F40BB	E1L12FSDBB
	1" Round Trimless Downlight 2 ⅜" O.D. - 3 ⅜" H	 WET LOCATION	6W/600 lm	6W/625 lm	6W/650 lm	6W/675 lm	6W/450 lm
			E1L61F27W	E1L61F30W	E1L61F35W	E1L61F40W	E1L61FSDW
			E1L61F27BB	E1L61F30BB	E1L61F35BB	E1L61F40BB	E1L61FSDBB
			E1L61F27BZ	E1L61F30BZ	E1L61F35BZ	E1L61F40BZ	E1L61FSDBZ
E1L61F + EL01SFR			1" Round Spackle Frame (Sold Separately)				
			EL01SFR				
4" O.D. - 2 ⅜" I.D.							

Finish: (W) All White, (B) Black/White, (BZ) All Bronze, (H) Haze/White, (BB) All Black


Recessed LED Adjustables

Description		Cat. # / Specs				
	1" Round Gimbal 2 1/16" O.D. - 2 1/16" H 36° Adjustability 	6W/625 lm	6W/650 lm	6W/675 lm	6W/700 lm	
		E1L32F27W	E1L32F30W	E1L32F35W	E1L32F40W	
		E1L32F27B	E1L32F30B	E1L32F35B		
		E1L32F27BZ	E1L32F30BZ	E1L32F35BZ	E1L32F40BZ	
	1" Square Pull Down 2 3/4" Sq. - 2 5/16" H 36° Adjustability 	6W/625 lm	6W/650 lm		6W/700 lm	
		E1L22F27W	E1L22F30W		E1L22F40W	
		E1L22F27B	E1L22F30B			
		E1L22F27BZ	E1L22F30BZ			

Finish: (W) All White, (B) All Black, (BZ) All Bronze

The Oak™ System

1" Miniature LED Downlights



Mounting Frames

Description	CAT. #	Specs
Optional Mounting Frame (Requires Transformer)	E1LF1	For E1L02, E1L12 & E111 Series. 2" Cutout
	E1LF2	For E1L22 & E1L32 Series. 2 3/8" Cutout
	E2LF2	For E1L61 Series. 2 1/4" Cutout
Optional Mounting Frame (Requires Transformer)	E1LF1-M2	For E1L02, E1L12 & E111F Series
	E1LF1-M3	For E1L02, E1L12 & E111F Series
	E1LF1-M4	For E1L02, E1L12 & E111F Series
	E1LF1-M5	For E1L02, E1L12 & E111F Series
	E1LF2-M2	For E1L22 & E1L32 Series
Optional R60 Housing for E1L02, E1L12 & E111F (Includes Transformer) 2" Opening - 5 1/2" H	E1LF2-M3	For E1L22 & E1L32 Series
	E1LF2-M4	For E1L22 & E1L32 Series
	E1LF2-M5	For E1L22 & E1L32 Series
	E1LF1CAJ	Input: 120V, ELV Dimmable
	E1LF1CAJ-7	Input: 277V
	E1LF1CAJDX	Input: 120V, 0-10V Dimmable
	E1LF1CAJDX-7	Input: 277V, 0-10V Dimmable
	E1LF2CAJ	Input: 120V, ELV Dimmable
	E1LF2CAJ-7	Input: 277V
	E1LF2CAJDX	Input: 120V, 0-10V Dimmable
	E1LF2CAJDX-7	Input: 277V, 0-10V Dimmable
Optional R60 Housing for E1L22, E1L32 & E1L61 (Includes Transformer) 2 3/8" Opening - 5 1/2" H		

Accessories Power Supplies

Description	CAT. #	Specs
Enclosed Electronic Transformer	E1LDRV60	Input: 120V, Out: 12V AC. 5 1/8" L x 1 3/8" W x 1" H
Electronic Transformer	LET-60	Input: 120V, Out: 12V AC, Side lead
	LET-60H	Input: 120V, Out: 12V AC, Bottom lead
	LET-60-277	Input: 277V, Out: 12V AC
0-10V Dimmable Electronic Transformer	LET-60DX	Input: 120V, Out: 12V AC
	LET-60DX-277	Input: 277V, Out: 12V AC
Magnetic Transformer	ETR12	50W, Daisy Chain 2-6
	ETR12-20	20W, Daisy Chain 1-3

Accessories Trims & Optional Lenses

Description	CAT. #	Specs
Round Trim Ring (for use with E1L02 series) 2 1/4" O.D. - 7/8" Aperture	RM1W	All White
	RM1B	Black/White Ring
	RM1BZ	All Bronze
	RM1H	Haze/White Ring
	RM1BB	All Black
Square Trim Ring (for use with E1L12 series) 2 1/4" Sq. - 7/8" Aperture	RM11W	All White
	RM11B	Black/White Ring
	RM11BZ	All Bronze
	RM11H	Haze/White Ring
	RM11BB	All Black
Field Changeable Optional Lens (for use with E1L02, E1L12 and E1L32 series)	EP713C	28°
	EP715C	50°

The Architectural Oak™ System

1" Miniature LED Downlights with up to 1000 lumens



NEW! Recessed Downlight & Adjustable

Description			Cat. # / Specs				
	1" Round Architectural Downlight 2 1/4" O.D. - 1 7/8" H		2700K 8W/850 lm	3000K 8W/900 lm	3500K 8W/950 lm	4000K 8W/1000 lm	Sunset 8W/850 lm
			E1AK02F27W	E1AK02F30W	E1AK02F35W	E1AK02F40W	E1AK02FSDW
			E1AK02F27B	E1AK02F30B	E1AK02F35B	E1AK02F40B	E1AK02FSDB
			E1AK02F27BZ	E1AK02F30BZ	E1AK02F35BZ	E1AK02F40BZ	E1AK02FSDBZ
			E1AK02F27H	E1AK02F30H	E1AK02F35H	E1AK02F40H	E1AK02FSDH
			E1AK02F27BB	E1AK02F30BB	E1AK02F35BB	E1AK02F40BB	E1AK02FSDBB
	1" Square Architectural Downlight 2 1/4" Sq. - 1 7/8" H		8W/850 lm	8W/900 lm	8W/950 lm	8W/1000 lm	8W/850 lm
			E1AK12F27W	E1AK12F30W	E1AK12F35W	E1AK12F40W	E1AK12FSDW
			E1AK12F27B	E1AK12F30B	E1AK12F35B	E1AK12F40B	E1AK12FSDB
			E1AK12F27BZ	E1AK12F30BZ	E1AK12F35BZ	E1AK12F40BZ	E1AK12FSDBZ
			E1AK12F27H	E1AK12F30H	E1AK12F35H	E1AK12F40H	E1AK12FSDH
			E1AK12F27BB	E1AK12F30BB	E1AK12F35BB	E1AK12F40BB	E1AK12FSDBB
	1" Round Architectural Trimless Downlight 2 3/8" O.D. - 2" H		8W/850 lm	8W/900 lm	8W/950 lm	8W/1000 lm	8W/850 lm
			E1AK61F27W	E1AK61F30W	E1AK61F35W	E1AK61F40W	E1AK61FSDW
			E1AK61F27BB	E1AK61F30BB	E1AK61F35BB	E1AK61F40BB	E1AK61FSDBB
			E1AK61F27BZ	E1AK61F30BZ	E1AK61F35BZ	E1AK61F40BZ	E1AK61FSDBZ
	1" Round Spackle Frame (Sold Separately) 4" O.D. - 2 3/8" I.D.		EL01SFR				

Finish: (W) All White, (B) Black/White, (BZ) All Bronze, (H) Haze/White, (BB) All Black

NEW! Recessed Downlight & Adjustable

Description		Cat. # / Specs				
	1" Round Architectural Gimbal 2 1/16" O.D. - 2 9/16" H 30° Adjustability		8W/850 lm	8W/900 lm		
			E1AK32F27W	E1AK32F30W		
			E1AK32F27B	E1AK32F30B		
	1" Square Architectural Pull Down 2 3/4" Sq. - 2 1/4" H 30° Adjustability		8W/850 lm	8W/900 lm		
			E1AK22F27W	E1AK22F30W		
			E1AK22F27B	E1AK22F30B		

Finish: (W) All White, (B) All Black

The Architectural Oak™ System

1" Miniature LED Downlights with up to 1000 lumens



NEW! Oak™ Architectural Housings & Frames


Description	CAT. #	Specs
	R60 ICA New Construction Housings for E1AK02 and E1AK12 Downlights. 2" Opening - 5 1/2" H	E1DWN08AJIC 120V, Triac/ELV E1DWN08AJICDX 120/277V, 0-10V/Triac/ELV
	for E1AK22 and E1AK32 Adjustables 2 3/8" Opening - 5 1/2" H	E1ATB08AJIC 120V, Triac/ELV E1ATB08AJICDX 120/277V, 0-10V/Triac/ELV
	for E1AK61 Trimless Downlights 2 3/4" Opening - 5 1/2" H	E1TRL08AJIC 120V, Triac/ELV E1TRL08AJICDX 120/277V, 0-10V/Triac/ELV
	IC New Construction Frame for E1AK02 and E1AK12 Downlights. 2" Opening - 2 5/8" H	E1DWN08IC 120V, Triac/ELV E1DWN08ICDX 120/277V, 0-10V/Triac/ELV
	for E1AK22 and E1AK32 Adjustables. 2 3/8" Opening - 2 5/8" H	E1ATB08IC 120V, Triac/ELV E1ATB08ICDX 120/277V, 0-10V/Triac/ELV
	for E1AK61 Trimless Downlights. 2 3/4" Opening - 2 5/8" H	E1TRL08IC 120V, Triac/ELV E1TRL08ICDX 120/277V, 0-10V/Triac/ELV
	IC Remodel Power Pack for use with Architectural Oak Light Engines. 1 1/2" W - 6 1/4" L - 3 1/4" H	E1RLA08IC 120V, Triac/ELV E1RLA08ICDX 120/277V, 0-10V/Triac/ELV
	Single Downlight Frame (Requires transformer)	E1LF1 For E1AK02 and E1AK12 Downlights. 2" Cutout E1LF2 For E1AK22 and E1AK32 Adjustables. 2 3/8" Cutout E2LF1 For E1AK61 Trimless Downlights. 2 5/8" Cutout
	Multiple Downlight Frames (Requires transformer) for E1AK02 and E1AK12 Downlights	E1LF1-M2 2 Set - frame Length: 8 3/4"
		E1LF1-M3 3 Set - frame Length: 13"
		E1LF1-M4 4 Set - frame Length: 17 1/2"
		E1LF1-M5 5 Set - frame Length: 21 3/4"
		E1LF2-M2 2 Set - frame Length: 8 3/4"
	for E1AK22 and E1AK32 Adjustables	E1LF2-M3 3 Set - frame Length: 13"
		E1LF2-M4 4 Set - frame Length: 17 1/2"
		E1LF2-M5 5 Set - frame Length: 21 3/4"
		E2LF2-M2 2 Set - frame Length: 8 3/4"
		E2LF2-M3 3 Set - frame Length: 13 1/8"
	for E1AK61 Trimless Downlights	E2LF2-M4 4 Set - frame Length: 17 1/2"
		E2LF2-M5 5 Set - frame Length: 21 7/8"



Accessories Trims & Optional Lenses

Description	CAT. #	Specs
	RM1W	All White
	RM1B	Black/White Ring
	RM1BZ	All Bronze
	RM1H	Haze/White Ring
	RM1BB	All Black
	RM11W	All White
	RM11B	Black/White Ring
	RM11BZ	All Bronze
	RM11H	Haze/White Ring
	RM11BB	All Black
	RM1TLW	All White
	RM1TLB	All Black
	RM1TLBZ	All Bronze
	EP713C	28°
	EP714C	38°
	EP715C	50°
	L60	For a softer light
	L61	For a better glare shield

The **Teak™** System


2" LED Downlights & Adjustables

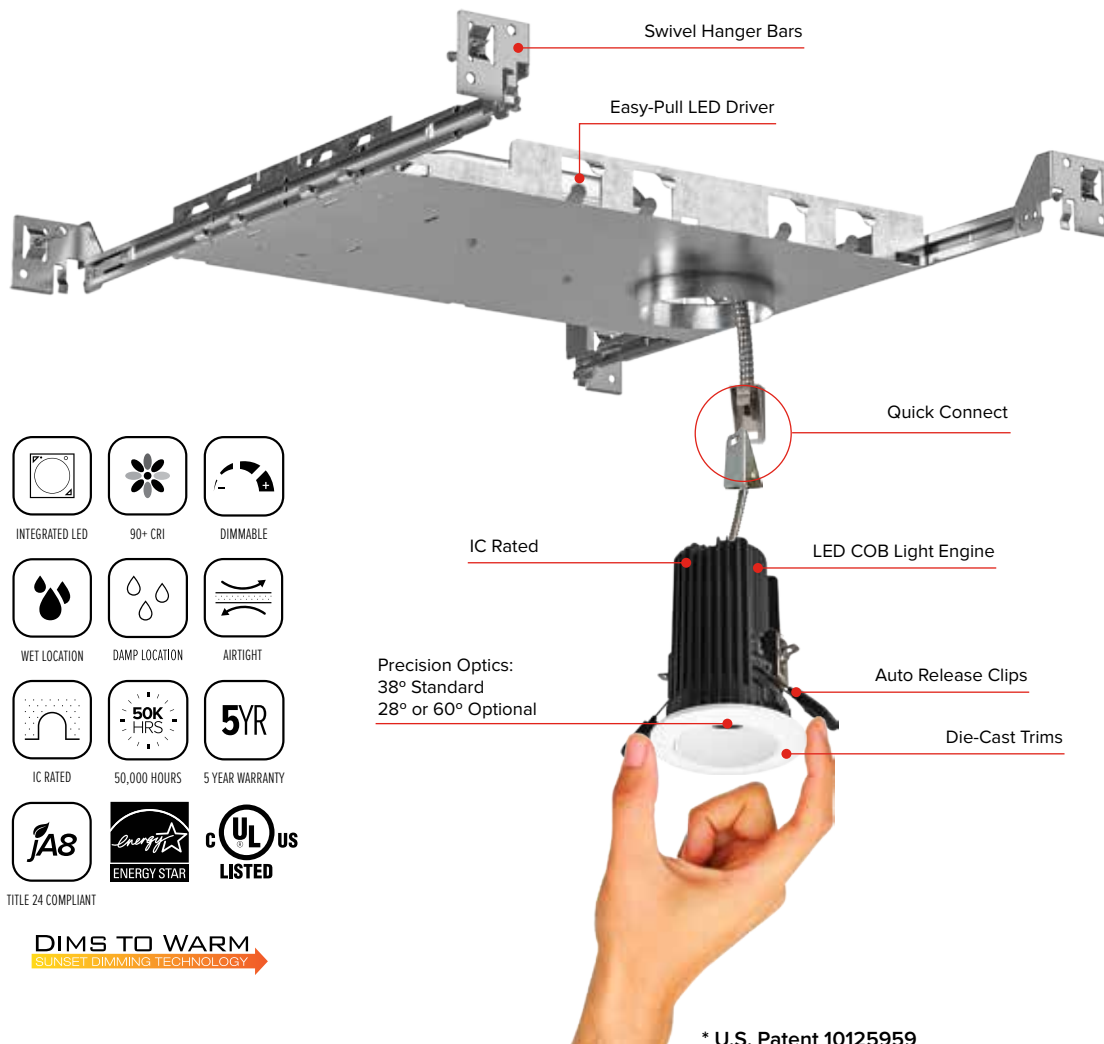

STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 Round  Round Gimbal  Round Pull-Down  Square  Square Gimbal	 White  Black  Bronze  Haze  Chrome	 850 lm to 1100 lm	 2700K - 4000K & Sunset

The Teak™ System

2" LED Downlights & Adjustables



2" IC Rated Housings & Frames

Description	Cat. #	Specs
 2" IC New Construction Frame with Driver 2 1/16" Opening - 2 5/8" H	E2L08ICA	10.5W, 850 lm, 120V
	E2L11ICA	12.5W, 1100 lm, 120V
	E2L08ICAD	10.5W, 850 lm, 120/277V
	E2L11ICAD	12.5W, 1100 lm, 120/277V
 2" R60 IC New Construction Housing with Driver 2 1/2" Opening - 5 1/2" H	E2LAJ08ICA	10.5W, 850 lm, 120V
	E2LAJ11ICA	12.5W, 1100 lm, 120V
	E2LAJ08ICAD	10.5W, 850 lm, 120/277V
	E2LAJ11ICAD	12.5W, 1100 lm, 120/277V
 2" IC Remodel Power Pack 2 1/2" W - 5 3/4" L - 2 1/4" H	E2L08RIC	10.5W, 850 lm, 120V
	E2L11RIC	12.5W, 1100 lm, 120V
	E2L08RICD	10.5W, 850 lm, 120/277V
	E2L11RICD	12.5W, 1100 lm, 120/277V

Plaster Frames for Remodel Power Packs

Description	Cat. #	Specs
 Single Cutout Plaster Frame 2 5/8" Opening	E2LF1	Requires Power Pack
 Large New Construction Frame 2 1/16" Opening	E2LF2	Requires Power Pack
 Multiple Cutout Plaster Frame For row mounting fixtures 2 5/8" Opening	E2LF1-M2	2 Set
	E2LF1-M3	3 Set
	E2LF1-M4	4 Set
	E2LF1-M5	5 Set

The Teak™ System

2" LED Downlights & Adjustables



TITLE 24 COMPLIANT

DIMMABLE

93+ CRI

IC RATED

IN TODAY
OUT TODAY


50,000 HOURS

2" LED Light Engines

Description			Cat. # / Specs				
			2700K 10.5W - 12W 850/1100 lm	3000K 10.5W - 12W 850/1100 lm	3500K 10.5W - 12W 850/1100 lm	4000K 10.5W - 12W 850/1100 lm	Sunset 10.5W - 12W 800/1000 lm
	2" Round Reflector 3 1/4" O.D. - 4 1/2" H		E2L10F27W	E2L10F30W	E2L10F35W	E2L10F40W	E2L10FSDW
			E2L10F27B	E2L10F30B	E2L10F35B	E2L10F40B	E2L10FSDB
			E2L10F27BZ	E2L10F30BZ	E2L10F35BZ	E2L10F40BZ	E2L10FSDBZ
			E2L10F27C	E2L10F30C	E2L10F35C	E2L10F40C	E2L10FSDC
			E2L10F27H	E2L10F30H	E2L10F35H	E2L10F40H	E2L10FSDH
			E2L10F27BB	E2L10F30BB	E2L10F35BB	E2L10F40BB	E2L10FSDBB
	2" Round Baffle 3 1/4" O.D. - 4 1/2" H		E2L14F27W	E2L14F30W	E2L14F35W	E2L14F40W	E2L14FSDW
			E2L14F27B	E2L14F30B	E2L14F35B	E2L14F40B	E2L14FSDB
			E2L14F27BZ	E2L14F30BZ	E2L14F35BZ	E2L14F40BZ	E2L14FSDBZ
			E2L14F27BB	E2L14F30BB	E2L14F35BB	E2L14F40BB	E2L14FSDBB
	2" Square Reflector 3 1/4" Sq. - 4 1/2" H		E2L13F27W	E2L13F30W	E2L13F35W	E2L13F40W	E2L13FSDW
			E2L13F27B	E2L13F30B	E2L13F35B	E2L13F40B	E2L13FSDB
			E2L13F27BZ	E2L13F30BZ	E2L13F35BZ	E2L13F40BZ	E2L13FSDBZ
			E2L13F27C	E2L13F30C	E2L13F35C	E2L13F40C	E2L13FSDC
			E2L13F27H	E2L13F30H	E2L13F35H	E2L13F40H	E2L13FSDH
			E2L13F27BB	E2L13F30BB	E2L13F35BB	E2L13F40BB	E2L13FSDBB
	2" Square Baffle 3 1/4" Sq. - 4 1/2" H		E2L15F27W	E2L15F30W	E2L15F35W	E2L15F40W	E2L15FSDW
			E2L15F27B	E2L15F30B	E2L15F35B	E2L15F40B	E2L15FSDB
			E2L15F27BZ	E2L15F30BZ	E2L15F35BZ	E2L15F40BZ	E2L15FSDBZ
			E2L15F27BB	E2L15F30BB	E2L15F35BB	E2L15F40BB	E2L15FSDBB
	2" Round Adjustable 3 1/4" O.D. - 4 1/2" H 35° Adjustability		E2L18F27W	E2L18F30W	E2L18F35W	E2L18F40W	
			E2L18F27B	E2L18F30B	E2L18F35B		
			E2L18F27BZ	E2L18F30BZ			
	2" Square Adjustable 3 1/4" Sq. - 4 1/2" H 35° Adjustability		E2L19F27W	E2L19F30W			
			E2L19F27B	E2L19F30B			
			E2L19F27BZ	E2L19F30BZ			

The Teak™ System

2" LED Downlights & Adjustables



2" LED Light Engines

Description		Cat. # / Specs			
 2" Round Pull Down 3 1/4" O.D. - 4 1/2" H 80° Adjustability	 DAMP LOCATION	2700K 10.5W - 12W 850/1100 lm	3000K 10.5W - 12W 850/1100 lm	3500K 10.5W - 12W 850/1100 lm	4000K 10.5W - 12W 850/1100 lm
		E2L97F27W	E2L97F30W		
		E2L97F27B	E2L97F30B		
		E2L97F27BZ	E2L97F30BZ		

Accessories Interchangeable Trims


Description	CAT. #	Specs
 2" Flexa Round Ring (For use with E2L10, E2L13, E2L14, and E2L15 Series)	RM2W	White
	RM2B	Black
	RM2BZ	Bronze
 Reflector for 2" Flexa Round Ring (For use with RM2)	PR2W	White
	PR2B	Black
	PR2BZ	Bronze
	PR2C	Chrome
	PR2H	Haze
 2" Flexa Square Ring (For use with E2L10, E2L13, E2L14, and E2L15 Series)	RM22W	White
	RM22B	Black
	RM22BZ	Bronze
 Reflector for 2" Flexa Square Ring (For use with RM22)	PR22W	White
	PR22B	Black
	PR22BZ	Bronze

Accessories Optional Lenses

Description	CAT. #	Specs
 Field Changeable Optional Lens	EP716C	28°
	EP717C	38°
	EP718C	60°

The Koto™ System

Koto™ Module & Twist-On Trims

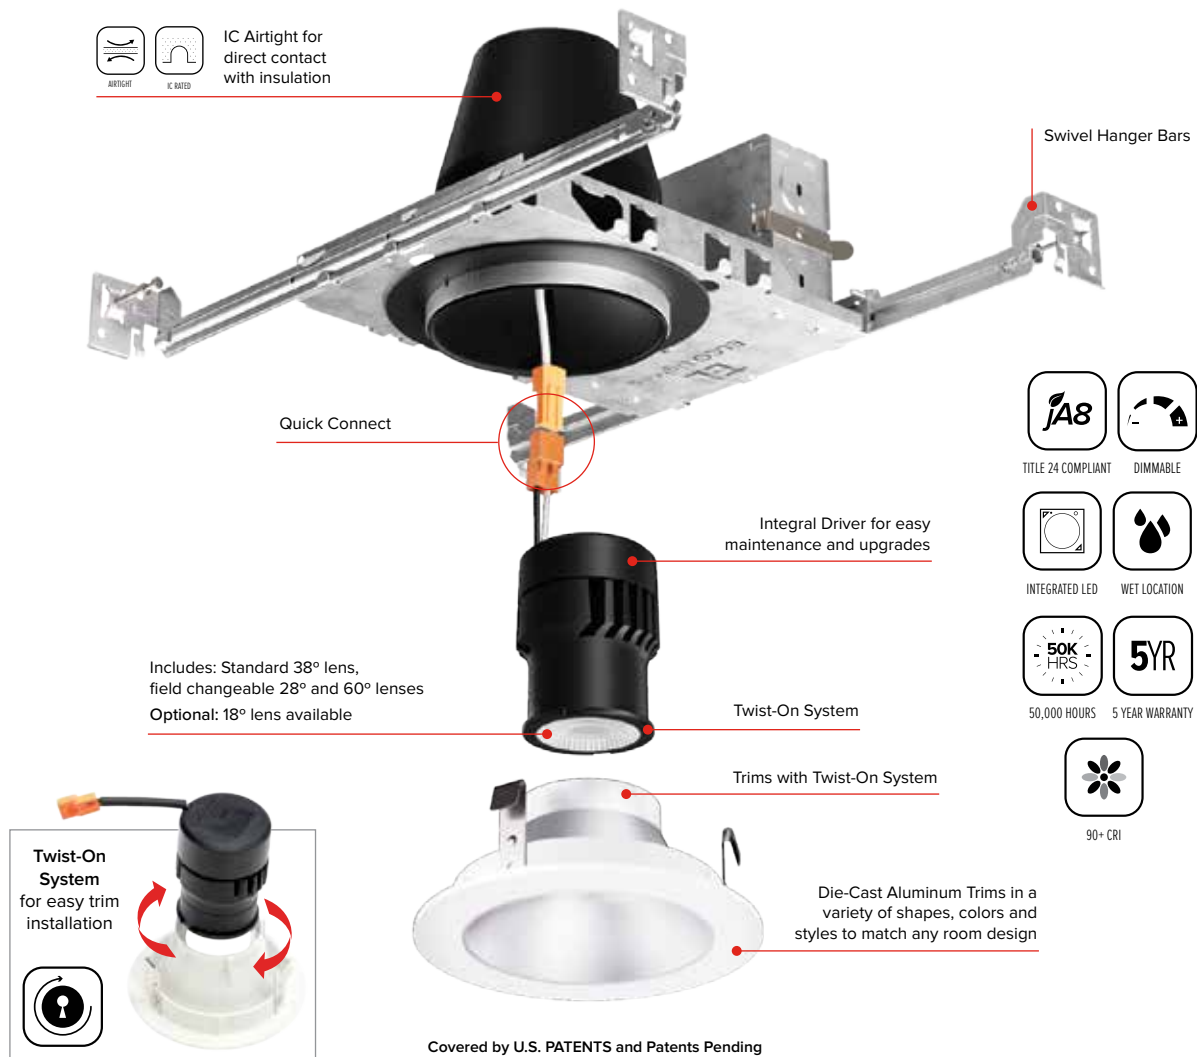

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 2"	 Round (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)	 White	 350 lm to 1950 lm	 2400K - 5000K & Sunset
 3"		 Black		
 4"	 Square (Reflector, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)	 Bronze		
 6"		 Haze		
		 Chrome		

The Koto™ System

2" Aperture Module with Twist-On Trims



Standard Koto™ LED Module & Housings

Description	CAT. #	Specs
 Koto™ LED Module 2 1/8" O.D. - 2 7/8" H Standard 38° Lens, with 25° & 60° lenses included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55) Optional Reflectors: 15° (EP735C), 25° (EP736C), 38° (EP737C), 60° (EP738C)	NEW!	ELK0724 10.5W, 730 lm, 2400K, 120V
		ELK0727 10.5W, 770 lm, 2700K, 120V
		ELK0730 10.5W, 800 lm, 3000K, 120V
		ELK0735 10.5W, 830 lm, 3500K, 120V
		ELK0740 10.5W, 860 lm, 4000K, 120V
		ELK0924 10.5W, 900 lm, 2400K, 120V
		ELK0927 10.5W, 940 lm, 2700K, 120V
		ELK0930 10.5W, 990 lm, 3000K, 120V
		ELK0935 10.5W, 1040 lm, 3500K, 120V
		ELK0940 10.5W, 1100 lm, 4000K, 120V
		ELK09SD 10.5W, 940 lm, Sunset, 120V
		ELK1124 12.5W, 1060 lm, 2400K, 120V
		ELK1127 12.5W, 1100 lm, 2700K, 120V
		ELK1130 12.5W, 1150 lm, 3000K, 120V
		ELK1135 12.5W, 1200 lm, 3500K, 120V
		ELK1140 12.5W, 1260 lm, 4000K, 120V
		ELK11HC 12.5W, 1050 lm, Human Centric, 120V
		ELK11SD 12.5W, 1050 lm, Sunset, 120V
		ELK1327 12.5W, 1250 lm, 2700K, 120V
		ELK1330 12.5W, 1300 lm, 3000K, 120V
 10° Koto™ LED Module (Narrow Spot) Includes <u>38° lens installed</u>, and field changeable 10° & 25° lens included.	NEW!	ELK0327 5W, 350 lm, 2700K, 120V
		ELK0330 5W, 350 lm, 3000K, 120V
		ELK0827-NSP 10.5W, 850 lm, 2700K, 120V
		ELK0830-NSP 10.5W, 850 lm, 3000K, 120V
 Koto™ 5-CCT LED Module Switch to desire Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K	CCT SWITCH	ELK08CT5 10.5W, 825 lm, 120V, 2700K - 5000K
		ELK10CT5 12.5W, 1000 lm, 120V, 2700K - 5000K
 Koto™ FOCUS LED Module 18° - 50° Adjustable Focus with a simple twist of the lens. Includes white snoot installed on module and field changeable black snoot.		ELK0727-FC 10.5W, 770 lm, 2700K, 120V
		ELK0730-FC 10.5W, 800 lm, 3000K, 120V
		ELK0735-FC 10.5W, 830 lm, 3500K, 120V
		ELK0740-FC 10.5W, 860 lm, 4000K, 120V
		ELK07SD-FC 10.5W, 720 lm, Sunset, 120V

The Koto™ System

2" Aperture Module with Twist-On Trims



Standard Koto™ LED Module & Housings

Description		CAT. #	Specs
	MAX. Adjustability IC Airtight New Construction Housing	EL276ICA	2" Housing. 5 1/2" Height
		EL386ICA	3" Housing. 5 1/2" Height
		EL485ICA	4" Housing. 5 1/2" Height
	Standard IC Airtight New Construction Housing	EL390ICA	3" Housing. 5 1/2" Height
		EL390ICA-EM5	3" Housing, Emergency Battery Back-Up
		EL490ICA	4" Housing. 5 1/2" Height
		EL490ICA-EM5	4" Housing, Emergency Battery Back-Up
		EL570ICA	5" Housing. 7 1/2" Height
		EL570ICA-EM5	5" Housing, Emergency Battery Back-Up
		EL770ICA	6" Housing. 7" Height
	Shallow IC Airtight New Construction Housing	EL770ICA-EM5	6" Housing, Emergency Battery Back-Up
		EL492ICA	4" Shallow Housing. 3 1/2" Height
		EL560ICA	5" Shallow Housing. 5 1/2" Height
	Standard IC Airtight Remodel Housing	EL760ICA	6" Shallow Housing. 5 1/2" Height
		EL760ICA-EM5	6" Housing, Emergency Battery Back-Up
		EL390RICA	3" Housing. 5 1/2" Height
	Shallow IC Airtight Remodel Housing	EL490RICA	4" Housing. 5 1/2" Height
		EL570RICA	5" Housing. 7 1/2" Height
		EL770RICA	6" Housing. 7 1/2" Height
	R-60 Foam Insulation Dedicated LED IC Airtight New Construction Housing	EL560RICA	5" Shallow Housing. 5 1/2" Height
		EL760RICA	6" Shallow Housing. 5 1/2" Height
	2-Hour Fire Rated ICA New Construction Housing (Sound Rated)	EL490AJICA	4" Housing. 5 1/2" Height
		EL490AJICA-EM7	4" Housing, Emergency Battery Back-Up
		EL39FICA	3" Housing. 7 3/4" Height
		EL48FICA	4" Housing. 6 7/8" Height
	Shallow 2-Hour Fire Rated ICA New Construction Housing (Sound Rated)	EL56FICA	5" Housing. 7 3/4" Height
		EL76FICA	6" Housing. 7 3/4" Height
		EL75FICAS	6" Shallow Housing 6 3/16" Height
	4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings 4 1/2" Height
		EJB4ICA-EM5	Housing with Emergency Battery Back-Up
		EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs. 4 1/2" Height
	4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA-EM5	Housing with Emergency Battery Back-Up
		ELJ4OV	For use with EJB4RICA to cover tabs. 5 3/4" O.D. - 4" I.D. - 1/4" H

A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714

The Koto™ System

2" Aperture Module with Twist-On Trims



120/277V, 0-10V/Triac/ELV Koto™ LED Module & Housings

Description	CAT. #	Specs
 120/277V, 0-10V/Triac/ELV Koto™ LED Module 2 1/8" O.D. - 3 1/4" H Includes 38° lens installed, and field changeable 25° & 60° lens included. 	ELK10DX27	11.8W, 1000 lm, 2700K, 120/277V
	ELK10DX30	11.8W, 1000 lm, 3000K, 120/277V
	ELK10DX35	11.8W, 1000 lm, 3500K, 120/277V
	ELK10DX40	11.8W, 1000 lm, 4000K, 120/277V
	ELK10DXSD	11.8W, 1000 lm, Sunset, 120/277V
 MAX. Adjustability 0-10V IC Airtight New Construction Housing	EL276ICDXA	2" Housing. 5 1/2" Height
	EL386ICDXA	3" Housing. 5 1/2" Height
	EL485ICDXA	4" Housing. 5 1/2" Height
 Standard 0-10V IC Airtight New Construction Housing	EL390ICDXA	3" Housing. 5 1/2" Height
	EL390ICDXA-EM5	3" Housing, Emergency Battery Back-Up
	EL490ICDXA	4" Housing. 5 1/2" Height
	EL490ICDXA-EM5	4" Housing, Emergency Battery Back-Up
	EL760ICDXA	6" Shallow Housing. 5 1/2" Height
 Standard 0-10V IC Airtight Remodel Housing	EL770ICDXA	6" Housing. 7 1/2" Height
	EL390RICDXA	3" Housing. 5 1/2" Height
	EL490RICDXA	4" Housing. 5 1/2" Height
 R-60 Foam Insulation Dedicated LED 0-10V IC Airtight New Construction Housing with	EL760RICDXA	6" Shallow Housing. 5 1/2" Height
	EL770RICDXA	6" Housing. 7 1/2" Height
 2-Hour Fire Rated 0-10V ICA Housing (Sound Rated) 	EL490AJICDXA	4" Housing. 5 1/2" Height
	EL39FICDXA	3" Housing. 7 3/4" Height
	EL49FICDXA	4" Housing. 6 3/4" Height
	EL75FICDXAS	6" Shallow Housing. 6 3/16" Height
 4" New Construction 0-10V IC Airtight Housing for 2-Hour Fire Rated Ceilings  NEW!	EL76FICDXA	6" Housing. 7 3/4" Height
	EJB4ICDXA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings. 4 1/2" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716
	EJB4RICDXA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs. 4 1/2" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716
	ELJ4OV	For use with EJB4RICDXA to cover tabs. 5 3/4" O.D. - 4" I.D. - 1/4" H
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714  4" Remodel 0-10V IC Airtight Housing for 2-Hour Fire Rated Ceilings  NEW! 		

The Koto™ System

2" Aperture Module with Twist-On Trims



Architectural Koto™ LED Module & Housings

Description		CAT. #	Specs
 Architectural Construction Koto™ LED Light Engine 2 1/8" O.D. - 2 3/8" H Standard 38° Lens, with 25° & 60° lenses included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49) Optional Reflectors: 15° (EP735C), 25° (EP736C), 38° (EP737C), 60° (EP738C)		ELK1927D	970 lm MAX., 2700K
		ELK1930D	1000 lm MAX., 3000K
		ELK1935D	1030 lm MAX., 3500K
		ELK1940D	1050 lm MAX., 4000K
		ELK19SD	940 lm MAX., Sunset
		ELK2127D	1360 lm MAX., 2700K
		ELK2130D	1430 lm MAX., 3000K
		ELK2135D	1510 lm MAX., 3500K
		ELK2140D	1690 lm MAX., 4000K
		ELK2427D	1720 lm MAX., 2700K
		ELK2430D	1800 lm MAX., 3000K
		ELK2435D	1875 lm MAX., 3500K
		ELK2440D	1950 lm MAX., 4000K
 Architectural Construction Koto™ FOCUS LED Module 18° - 50° Adjustable Focus with a simple twist of the lens Includes white snoot installed on module and field changeable black snoot.		ELK2127D-FC	1360 lm MAX., 2700K
		ELK2130D-FC	1430 lm MAX., 3000K
		ELK2135D-FC	1510 lm MAX., 3500K
		ELK2140D-FC	1690 lm MAX., 4000K
 Shallow Max. Adjustability ICA Housing 1000 lm with ELK19 Series Module 1200 lm with ELK21 Series Module 1500 lm with ELK24 Series Module 3 1/2" Height		E2LK34ICA	2" Housing, 14.7W, 120V, Triac/ELV
		E2LK35ICAD	2" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
 Shallow Max. Adjustability ICA Housing 850 lm with ELK19 Series Module 1100 lm with ELK21 Series Module 1500 lm with ELK24 Series Module 3 1/2" Height		E3LK76ICA	3" Housing, 14.7W, 120V, Triac/ELV
		E3LK77ICAD	3" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
		E4LK98ICA	4" Housing, 14.7W, 120V, Triac/ELV
		E4LK99ICAD	4" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
 High Lumen Max. Adjustability ICA Housing For use with ELK21 & ELK24 Series Module 5 1/2" Height		E2LK41ICA	2" Housing, 15.7W, 120V, Triac/ELV
		E2LK42ICAD	2" Housing, 15.7W, 120/277V, 0-10V/Triac/ELV
		E2LK94ICA	2" Housing, 18.9W, 120V, Triac/ELV
		E2LK95ICAD	2" Housing, 18.9W, 120/277V, 0-10V/Triac/ELV
 High Lumen Max. Adjustability ICA Housing For use with ELK21 & ELK24 Series Module 5 1/2" Height		E3LK53ICA	3" Housing, 15.7W, 1250 lm, 120V, Triac/ELV
		E3LK54ICAD	3" Housing, 15.7W, 1250 lm, 120/277V, 0-10V/Triac/ELV
		E3LK84ICA	3" Housing, 18.9W, 1500 lm, 120V, Triac/ELV
		E3LK85ICAD	3" Housing, 18.9W, 1500 lm, 120/277V, 0-10V/Triac/ELV
		E4LK47ICA	4" Housing, 15.7W, 1250 lm, 120V, Triac/ELV
		E4LK48ICAD	4" Housing, 15.7W, 1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LK78ICA	4" Housing, 18.9W, 1500 lm, 120V, Triac/ELV
		E4LK79ICAD	4" Housing, 18.9W, 1500 lm, 120/277V, 0-10V/Triac/ELV
 High Lumen ICA Housing For use with ELK21 & ELK24 Series Module 7 1/4" Height		E6LK43ICA	6" Housing, 15.7W, 1250 lm, 120V, Triac/ELV
		E6LK44ICAD	6" Housing, 15.7W, 1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LK56ICA	6" Housing, 18.9W, 1500 lm, 120V, Triac/ELV
		E6LK57ICAD	6" Housing, 18.9W, 1500 lm, 120/277V, 0-10V/Triac/ELV

The Koto™ System

2" Aperture Module with Twist-On Trims



Architectural Koto™ LED Module & Housings

Description		CAT. #	Specs
 Standard ICA New Construction Housing with Driver 750 lm with ELK19 Series Module 950 lm with ELK21 Series Module 1100 lm with ELK24 Series Module 5 ½" Height	E3LK65ICA	3" Housing, 12.5W, 120V, Triac/ELV	
	E3LK65ICA-EM1	3" Housing, Emergency Battery Back-Up	
	E3LK66ICAD	3" Housing, 12.5W, 120/277V, 0-10V/Triac/ELV	
	E3LK66ICAD-EM1	3" Housing, Emergency Battery Back-Up	
	E4LK87ICA	4" Housing, 11.8W, 120V, Triac/ELV	
	E4LK87ICA-EM1	4" Housing, Emergency Battery Back-Up	
 Standard ICA New Construction Housing with Driver 1100 lm with ELK21 & ELK24 Series Module 7 ½" Height	E4LK88ICAD	4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV	
	E4LK88ICAD-EM1	4" Housing, Emergency Battery Back-Up	
	E6LK37ICA	6" Housing, 14.7W, 120V, Triac/ELV	
	E6LK37ICA-EM1	6" Housing, Emergency Battery Back-Up	
	E6LK38ICAD	6" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV	
	E6LK38ICAD-EM1	6" Housing, Emergency Battery Back-Up	
 Standard Remodel ICA Housing with Driver 750 lm with ELK19 Series Module 950 lm with ELK21 Series Module 1100 lm with ELK24 Series Module 4 ⅝" Height for 2" Housing 5 ½" Height for 3" & 4" Housings	E2LK57RICA	2" Housing, 10.5W, 120V, Triac/ELV	
	E3LK65RICA	3" Housing, 10.5W, 120V, Triac/ELV	
	E3LK66RICAD	3" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV	
	E4LK87RICA	4" Housing, 11.8W, 120V, Triac/ELV	
	E4LK88RICAD	4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV	
	 2-Hour Fire Rated ICA Housing with Driver 750 lm with ELK19 Series Module 950 lm with ELK21 Series Module 1100 lm with ELK24 Series Module 7 ½" Height - Sound Rated 	ELK72FICA	3" Housing, 10.5W, 120V, Triac/ELV
ELK73FICAD		3" Housing, 10.5W, 120/277V, 0-10V/Triac/ELV	
ELK93FICA		4" Housing, 11.8W, 120V, Triac/ELV	
ELK94FICAD		4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV	
 4" New Construction IC Airtight Housing with Driver for 2-Hour Fire Rated Ceilings  	E4JB85ICA	4" Housing, 120V, Triac/ELV	
	E4JB86ICAD	4" Housing, 120/277V, 0-10V/Triac/ELV	
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716
 4" Remodel IC Airtight Housing with Driver for 2-Hour Fire Rated Ceilings Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ40V) to cover tabs  	E4JB85RICA	4" Housing, 120V, Triac/ELV. 4 ½" Height	
	E4JB85RICAD	4" Housing, 120/277V, 0-10V/Triac/ELV. 4 ½" Height	
Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ40V) to cover tabs			Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716
		ELJ40V	For use with E4JB85RICA & E4JB85RICAD to cover tabs. 5 ¾" O.D. - 4" I.D. - ¼" H

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 24V DC Koto™ LED Module & Housings

Description	CAT. #	Specs
 24V DC Koto™ LED Module Works with Koto™ 24V DC Housings & Koto Twist-On Trims. 2 1/8" O.D. - 2 7/8" H Standard 25°, 38° & 60° Lens Included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spead Lens (L47), Clear Lens (L48), Frosted Lens (L49), Snoot (L50), Color Shifter (L51) Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)	 ELK0827-24	10W, 800 lm, 2700K, 24V DC
	ELK0830-24	10W, 800 lm, 3000K, 24V DC
 24V DC MAX. Adjustability IC Airtight New Construction Housing	E24V276ICA	2" Housing, 24V DC input. 5 1/2" Height
	E24V386ICA	3" Housing, 24V DC input. 5 1/2" Height
	E24V485ICA	4" Housing, 24V DC input. 5 1/2" Height
 24V DC Standard IC Airtight New Construction Housing	E24V390ICA	3" Housing, 24V DC input. 5 1/2" Height
	E24V490ICA	4" Housing, 24V DC input. 5 1/2" Height
	E24V770ICA	6" Housing, 24V DC input. 7" Height
 24V DC Shallow IC Airtight New Construction Housing	E24V760ICA	6" Shallow Housing, 24V DC input 5 1/2" Height
 24V DC Standard IC Airtight Remodel Housing	E24V390RICA	3" Housing, 24V DC input. 5 1/2" Height
	E24V490RICA	4" Housing, 24V DC input. 5 1/2" Height
	E24V770RICA	6" Housing, 24V DC input. 7 1/2" Height
 24V DC Shallow IC Airtight Remodel Housing	E24V760RICA	6" Shallow Housing, 24V DC input 5 1/2" Height
 R-60 Foam Insulation 24V DC Dedicated LED IC Airtight New Construction Housing	E24V490AJICA	4" Housing, 24V DC input. 5 1/2" Height
 2-Hour Fire Rated 24V DC New Construction ICA Housing (Sound Rated)	 E24V39FICA	3" Housing, 24V DC input. 7 3/4" Height
	E24V48FICA	4" Housing, 24V DC input. 6 7/8" Height
	E24V76FICA	6" Housing, 24V DC input. 7 3/4" Height
 Shallow 2-Hour Fire Rated 24V DC New Construction ICA Housing (Sound Rated)	 E24V75FICAS	6" Shallow Housing, 24V DC input. 6 3/16" Height

12V AC Koto™ Retrofit LED Module

Description	CAT. #	Specs
 12V AC Retrofit Koto™ LED Module Works with 3" & 4" MR16 Bi-Pin Low Voltage Housings & Koto Trims 2 1/8" O.D. - 2 7/8" H Standard 25°, 38° & 60° Lens Included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spead Lens (L47), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)	 ELK0827-12	9W, 800 lm, 2700K, 12V AC
	ELK0830-12	9W, 800 lm, 3000K, 12V AC
	ELK08SD-12	9W, 800 lm, Sunset, 12V AC

The Koto™ System

2" Aperture Module with Twist-On Trims



2" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 2" Round Deep Reflector 3 1/2" O.D. - 2 1/8" I.D.	ELK2818W	All White
	ELK2818BB	All Black
	ELK2818BZ	All Bronze
	ELK2818B	Black/White Ring
	ELK2818H	Haze/White Ring
 2" Round Adjustable Pinhole 3 1/2" O.D. - 1 1/2" I.D.	ELK2827W	All White
	ELK2827BB	All Black
	ELK2827BZ	All Bronze
	ELK2827B	Black/White Ring
 2" Round Adjustable Reflector 3 1/2" O.D. - 2 3/8" I.D. - 30° tilt	ELK2829W	All White
	ELK2829BB	All Black
	ELK2829BZ	All Bronze
	ELK2829B	Black/White Ring
 2" Round Micro Flange Reflector 3 1/2" O.D. - 2 1/2" I.D.	ELK2863W	All White
	ELK2863BB	All Black
 2" Round Curved Reflector 3 1/2" O.D. - 1 1/2" I.D.	ELK2872W	All White
	ELK2872B	All Black
 2" Round Gimbal 3 1/2" O.D. - 1 1/2" I.D. - 30° tilt	ELK2888W	All White
	ELK2888B	All Black
	ELK2888BZ	All Bronze
 2" Square Deep Reflector 3 1/2" Sq. - 2 1/8" I.D.	ELK2518W	All White
	ELK2518BB	All Black
	ELK2518B	Black/White Ring
 2" Square Adjustable Reflector 3 1/2" Sq. - 2 3/8" I.D. - 30° tilt	ELK2529W	All White
	ELK2529BB	All Black
	ELK2529B	Black/White Ring
 2" Square Reflector 3 1/2" Sq. - 1 3/8" Sq.	ELK2541W	All White
	ELK2541BB	All Black
	ELK2541B	Black/White Ring
 2" Square Adjustable Pinhole 3 1/2" Sq. - 1 1/2" Sq. - 30° tilt	ELK2527W	All White
	ELK2527BB	All Black
	ELK2527B	Black/White Ring
 2" Square Gimbal 3 1/2" Sq. - 1 1/2" I.D. - 30° tilt	ELK2588W	All White
	ELK2588B	All Black
	ELK2588BZ	All Bronze

2" Pex™ Trimless for Koto™ Module

Description	CAT. #	Specs
 2" Round Adjustable Trimless Reflector 2 5/8" O.D.	ELK215W	White
	ELK215B	Black
 2" Round Trimless Spackle Frame 7 1/8" O.D. - 2 5/8" I.D.	EL2SFR	For use with ELK215

The Koto™ System

2" Aperture Module with Twist-On Trims



3" Pex™ Diecast Trims for Koto™ Module

Description		CAT. #	Specs	
	3" Round Deep Reflector 4 3/8" O.D. - 3" I.D.	ELK3618W	All White	
		ELK3618BB	All Black	
		ELK3618BZ	All Bronze	
		ELK3618B	Black/White Ring	
		ELK3618C	Chrome/White Ring	
		ELK3618H	Haze/White Ring	
	3" Round Adjustable Reflector 4 3/8" O.D. - 3" I.D. - 15° - 30° tilt	ELK3629W	All White	
		ELK3629BB	All Black	
		ELK3629BZ	All Bronze	
		ELK3629B	Black/White Ring	
		ELK3629C	Chrome/White Ring	
		ELK3629H	Haze/White Ring	
	3" Round Adjustable Pinhole 4 3/8" O.D. - 1 3/4" I.D. - 15° - 30° tilt	ELK3627W	All White	
		ELK3627B	Black/White Ring	
		ELK3627H	Haze/White Ring	
		ELK3627BB	All Black	
		ELK3627BZ	All Bronze	
	3" Round Adjustable Slot Aperture 4 3/8" O.D. - 45° tilt	ELK3620W	Black Slot/White Ring	
	3" Round Adjustable Reflector Wall Wash 4 3/8" O.D. - 3" I.D. - 45° tilt	ELK3622W	All White	
	3" Round Regressed Eyeball 4 3/8" O.D. - 2 7/8" I.D. - 15° - 30° tilt	NEW!	ELK3653W	All White
			ELK3653B	Black/White Ring
			ELK3653BB	All Black
	3" Round Micro Flange Reflector 4 3/8" O.D. - 3 3/8" I.D.	NEW!	ELK3663W	All White
			ELK3663BB	All Black
	3" Round Curved Reflector 4 3/8" O.D. - 1 1/2" I.D.	NEW!	ELK3672W	All White
			ELK3672B	All Black
	3" Round Directional Gimbal 4 3/8" O.D. - 3" I.D. - 25° tilt	NEW!	ELK3679W	All White
			ELK3679B	Black/White Ring
			ELK3679H	Haze/White Ring
			ELK3679BB	All Black
	3" Round Adjustable Baffle 4 3/8" O.D. - 3" I.D. - 35° tilt	ELK3693W	All White	
	3" Square Deep Reflector 4 3/8" Sq. - 3" I.D.	ELK3318W	All White	
		ELK3318B	Black/White Ring	
		ELK3318BB	All Black	
		ELK3318BZ	All Bronze	
		ELK3318C	Chrome/White Ring	
		ELK3318H	Haze/White Ring	
	3" Square Adjustable Reflector 4 3/8" Sq. - 3" I.D. - 15° - 30° tilt	ELK3329W	All White	
		ELK3329BB	All Black	
		ELK3329BZ	All Bronze	
		ELK3329B	Black/White Ring	
		ELK3329C	Chrome/White Ring	
		ELK3329H	Haze/White Ring	
	3" Square Adjustable Reflector Wall Wash 4 3/8" Sq. - 3" I.D. - 35° tilt	ELK3322W	All White	

The Koto™ System

2" Aperture Module with Twist-On Trims



3" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 3" Square Adjustable Pinhole 4 3/8" Sq. - 2" Sq. - 15° - 30° tilt	ELK3327W	All White
	ELK3327B	Black/White Ring
	ELK3327H	Haze/White Ring
	ELK3327BB	All Black
	ELK3327BZ	All Bronze
 3" Square Reflector 4 3/8" Sq. - 2" Sq.	ELK3341W	All White
	ELK3341B	Black/White Ring
	ELK3341BB	All Black
	ELK3341BZ	All Bronze
 3" Square Regressed Eyeball 4 3/8" Sq. - 2 7/8" I.D. - 15° - 30° tilt	ELK3353W	All White
	ELK3353B	Black/White Ring
	ELK3353BB	All Black
 3" Square Adjustable Baffle 4 3/8" Sq. - 3" I.D. - 35° tilt	ELK3393W	All White

3" Pex™ Flush Mount Trim Adaptors for Koto™ Trims

Description	CAT. #	Specs
 3" Round Flush Mount Trim Adaptor 7 1/8" O.D. - 4 3/8" I.D.	EL3FMR	For 3" Pex Round Trims
 3" Square Flush Mount Trim Adaptor 7 1/8" Sq. - 4 3/8" Sq.	EL3FMS	For 3" Pex Square Trims

3" Pex™ Trimless for Koto™ Module

Description	CAT. #	Specs
 3" Round Trimless Reflector 3" O.D.	ELK308W	White
	ELK308B	Black
	ELK308H	Haze
 3" Round Adjustable Trimless Reflector 3" O.D. - 35° tilt	ELK315W	White
	ELK315B	Black
	ELK315H	Haze
 3" Round Trimless Spackle Frame 7 1/8" O.D. - 3" I.D.	EL3SFR	For use with ELK315
 3" Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 7/8" O.D. - 3 3/8" I.D.	EL3WCRW	White, for use with ELK315
	EL3WCRB	Black, for use with ELK315
 3" Square Trimless Reflector 2 9/16" Sq.	ELK370W	White
	ELK370B	Black
	ELK370H	Haze
 3" Square Adjustable Trimless Reflector 2 9/16" Sq. - 35° tilt	ELK381W	White
	ELK381B	Black
	ELK381H	Haze
 3" Square Trimless Spackle Frame 7 1/8" O.D. - 2 9/16" I.D.	EL03SFS	For use with ELK370 & ELK381

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 4" Round Shallow Reflector 5" O.D. - 3 5/8" I.D.	ELK4116W	All White
	ELK4116H	Haze/White Ring
 4" Round Deep Reflector 5" O.D. - 3 5/8" I.D.	ELK4118W	All White
	ELK4118BB	All Black
	ELK4118BZ	All Bronze
	ELK4118B	Black/White Ring
	ELK4118C	Chrome/White Ring
	ELK4118H	Haze/White Ring
 4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	ELK4129W	All White
	ELK4129BB	All Black
	ELK4129BZ	All Bronze
	ELK4129B	Black/White Ring
	ELK4129C	Chrome/White Ring
	ELK4129H	Haze/White Ring
 4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	ELK4111W	All White
	ELK4111BB	All Black
	ELK4111BZ	All Bronze
	ELK4111B	Black/White Ring
	ELK4111C	Chrome/White Ring
	ELK4111H	Haze/White Ring
 4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	ELK4112W	All White
	ELK4112BB	All Black
	ELK4112BZ	All Bronze
	ELK4112B	Black/White Ring
	ELK4112C	Chrome/White Ring
	ELK4112H	Haze/White Ring
 4" Round Rotatable Slot Aperture 5" O.D. - 4" I.D. - 45° tilt	ELK4120W	Black Inside/White Ring
 4" Round Adjustable Wall Wash 5" O.D. - 3 3/4" I.D. - 45° tilt	ELK4122W	All White
 4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	ELK4127W	All White
	ELK4127BB	All Black
	ELK4127BZ	All Bronze
	ELK4127B	Black/White Ring
	ELK4127H	Haze/White Ring
 4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	ELK4125W	All White
	ELK4125BB	All Black
	ELK4125BZ	All Bronze
	ELK4125H	Haze/White Ring

NEW!

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Pex™ Diecast Trims for Koto™ Module

Description		CAT. #	Specs
	4" Round Slot Aperture 5" O.D. - 2 3/8" I.D. - 45° tilt	ELK4130W	Black Inside/White Ring
	4" Round Adjustable Spot 5" O.D. - 25° tilt	ELK4188W	All White
		ELK4188B	All Black
		ELK4188BZ	All Bronze
	4" Round Regressed Eyeball 5" O.D. - 3 1/2" I.D. - 15° - 30° tilt	ELK4153W	All White
		ELK4153BB	All Black
		ELK4153B	Black/White Ring
	4" Round Micro Flange Reflector 5" O.D. - 3 7/8" I.D.	ELK4163W	All White
		ELK4163W	All Black
	4" Round Curved Reflector 5" O.D. - 1 1/2" I.D.	ELK4172W	All White
		ELK4172B	All Black
	4" Round Directional Gimbal 5" O.D. - 3 1/2" I.D. - 25° tilt	ELK4179W	All White
		ELK4179BB	All Black
		ELK4179B	Black/White Ring
		ELK4179H	Haze/White Ring
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt	ELK4193W	All White
		ELK4193BB	All Black
		ELK4193B	Black/White Ring
	4" Square Shallow Reflector 5" Sq. - 3 5/8" I.D.	ELK4216W	All White
		ELK4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 3/4" I.D.	ELK4218W	All White
		ELK4218B	Black/White Ring
		ELK4218BB	All Black
		ELK4218BZ	All Bronze
		ELK4218C	Chrome/White Ring
		ELK4218H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 3 5/8" I.D. - 25° - 35° tilt	ELK4229W	All White
		ELK4229BB	All Black
		ELK4229BZ	All Bronze
		ELK4229B	Black/White Ring
		ELK4229C	Chrome/White Ring
		ELK4229H	Haze/White Ring

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 4" Square Adjustable Reflector 5" Sq. - 2 1/2" Sq. - 25° - 35° tilt NEW!	ELK4212W	All White
	ELK4212BB	All Black
	ELK4212BZ	All Bronze
	ELK4212B	Black/White Ring
	ELK4212C	Chrome/White Ring
	ELK4212H	Haze/White Ring
 4" Square Adjustable Slot Rotatable Aperture 5" Sq. - 4" I.D. - 45° tilt	ELK4220W	Black Slot/White Ring
 4" Square Adjustable Wall Wash 5" Sq. - 3 3/4" I.D. - 45° tilt	ELK4222W	White Ring
 4" Square Adjustable Pinhole 5" Sq. - 2 1/2" Sq. - 25° - 35° tilt	ELK4227W	All White
	ELK4227BB	All Black
	ELK4227BZ	All Bronze
	ELK4227B	Black/White Ring
	ELK4227H	Haze/White Ring
	ELK4227N	Black/Nickel Ring
 4" Square Regressed Eyeball 5" Sq. - 3 1/2" I.D. - 15° - 30° tilt NEW!	ELK4253W	All White
	ELK4253BB	All Black
	ELK4253B	Black/White Ring
 4" Square Adjustable Reflector 5" Sq. - 2 5/8" Sq. - 35° tilt	ELK4282W	All White
	ELK4282BZ	All Bronze
 4" Square Adjustable Baffle 5" Sq. - 3 5/8" Sq. - 35° tilt	ELK4284W	All White
	ELK4284B	All Black
	ELK4284BZ	All Bronze
 4" Square Adjustable Phenolic Baffle 5" Sq. - 4" I.D. - 35° tilt	ELK4293W	All White
	ELK4293BB	All Black
	ELK4293B	Black/White Ring

4" Pex™ Flush Mount Trim Adaptors for Koto™ Trims

Description	CAT. #	Specs
 4" Round Flush Mount Trim Adaptor 7 1/8" O.D. - 5" I.D.	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
 4" Square Flush Mount Trim Adaptor 7 1/8" Sq. - 4 3/8" Sq.	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Pex™ Trimless for Koto™ Module

Description	CAT. #	Specs
 4" Round Non-Adjustable Trimless Reflector 4" O.D.	ELK408W	White
	ELK408B	Black
	ELK408H	Haze
	ELK408BZ	Bronze
 4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	ELK415W	White
	ELK415B	Black
	ELK415H	Haze
	ELK415BZ	Bronze
 4" Round Trimless Spackle Frame 7 1/8" O.D. - 4" I.D.	EL4SFR	For use with ELK408 and ELK415
 4" Spackle Frame with Trimless Adjustable Reflector	ELK430W	White
	ELK430B	Black
	ELK430BZ	Bronze
 4" Spackle Frame with Trimless Adjustable Baffle	ELK434W	White
	ELK434B	Black
	ELK434BZ	Bronze
 4" Square Trimless Reflector 3 1/4" Sq.	ELK445W	White
	ELK445B	Black
	ELK445H	Haze
 4" Square Adjustable Trimless Reflector 3 1/4" Sq.	ELK459W	White
	ELK459B	Black
	ELK459H	Haze
 4" Square Trimless Spackle Frame 6 1/4" Sq. - 3 1/8" Sq.	EL4SFS	For use with ELK445 and ELK459

4" Unique™ Trims for Koto™ Module

Description	CAT. #	Specs
 4" Round Adjustable Reflector 5" O.D. - 3 7/8" I.D. - 25° - 35° tilt	ELK4710W	All White
	ELK4717W	All White, Deep Reflector
 4" Round Adjustable Baffle 5" O.D. - 3 7/8" I.D. - 25° - 35° tilt	ELK4713W	All White
	ELK4719W	All White, Deep Baffle
 4" Round Wall Wash 5" O.D. - 3 7/8" I.D.	ELK4715W	All White
 4" Square Reflector 4 1/2" Sq. - 2 3/4" Sq.	ELK4714W	All White
 4" Square Baffle 4 5/8" Sq. - 2 7/8" Sq.	ELK4716W	All White

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Flexa™ Trims for Koto™ Module

Description	CAT. #	Specs
 4" Round Adjustable Reflector 5" O.D. - 3 1/8" I.D. - 35° tilt	ELK4721WW	All White
	ELK4721BB	All Black
	ELK4721BZBZ	All Bronze
	ELK4721BW	Black Ref./White Ring
	ELK4721CW	Chrome Ref./White Ring
	ELK4721HW	Haze Ref./White Ring
 4" Square Reflector 4 3/4" Sq. - 2 3/8" Sq.	ELK4741WW	All White
	ELK4741BB	All Black
	ELK4741BZBZ	All Bronze
	ELK4741BW	Black Ref./White Ring
 4" Round Baffle 5" O.D. - 3 1/8" I.D. - 35° tilt	ELK4723WW	All White
	ELK4723BB	All Black
	ELK4723BZBZ	All Bronze
	ELK4723BW	Black Baffle/White Ring
 4" Square Baffle 4 3/4" Sq. - 2 3/8" Sq.	ELK4743WW	All White
	ELK4743BB	All Black
	ELK4743BZBZ	All Bronze
	ELK4743BW	Black Baffle/White Ring
 4" Adjustable Square Reflector 4 3/4" Sq. - 2 3/8" Sq. - 35° tilt	ELK4759WW	All White
	ELK4759BB	All Black
	ELK4759B	Black Ref./White Ring
	ELK4759H	Haze Ref./White Ring

4" Pex™ Universal Sloped Ceiling Trims for Koto™ Module

Description	CAT. #	Specs
 4" Round Universal Sloped Ceiling Reflector 5" O.D. - 3 5/8" I.D.	ELK4357W	All White
	ELK4357BB	All Black
	ELK4357BZ	All Bronze
	ELK4357B	Black/White Ring
	ELK4357H	Haze/White Ring
 4" Round Universal Sloped Ceiling Reflector with Clear Glass 5" O.D. - 3 5/8" I.D.	ELK4347W	All White
	ELK4347BB	All Black
	ELK4347BZ	All Bronze
	ELK4347B	Black/White Ring
 4" Round Universal Sloped Ceiling Reflector with Frosted Glass 5" O.D. - 3 5/8" I.D.	ELK4347H	Haze/White Ring
	ELK4349W	All White
	ELK4349BB	All Black
	ELK4349BZ	All Bronze
	ELK4349B	Black/White Ring
	ELK4349H	Haze/White Ring

4" Pex™ Universal Sloped Ceiling Trims for use in EL470ICA and EL470RICA housings only with Standard Koto™ LED Module.
 Designed for use in 2/12 (10°) to 12/12 (45°) sloped ceiling

The Koto™ System

2" Aperture Module with Twist-On Trims



5" & 6" Pex™ Trims for Koto™ Module

Description	CAT. #	Specs
 5" Round Reflector 6 1/4" O.D. - 3 5/8" I.D.	ELK5421W	All White
 5" Round Baffle 5 1/2" O.D. - 3 5/8" I.D.	ELK5493W	All White
 6" Round Reflector 7 1/2" O.D. - 6" I.D.	ELK6418W	All White
	ELK6418BB	All Black
	ELK6418BZ	All Bronze
	ELK6418H	Haze Ref./White Ring
 6" Round Adjustable Reflector 7 1/2" O.D. - 6" I.D. - 30° tilt NEW!	ELK6429W	All White
	ELK6429BB	All Black
	ELK6429BZ	All Bronze
	ELK6429H	Haze Ref./White Ring
 6" Round Adjustable Slot Aperture 7 1/4" O.D. - 1 3/8" x 2 1/4" Slot	ELK6420W	All White
 6" Round Adjustable Pinhole with Reflector 8" O.D. - 1 3/4" I.D. - 25° tilt	ELK6427W	All White
	ELK6427B	Black Ref./White Ring
	ELK6427H	Haze Ref./White Ring
 6" Square Adjustable Reflector 6 3/4" Sq. - 4 1/4" Sq. NEW!	ELK6829W	All White
	ELK6829BB	All Black
	ELK6829H	Haze Ref./White Ring

6" Flexa™ Trims for Koto™ Module

Description	CAT. #	Specs
 6" Round Adjustable Reflector 7 3/8" O.D. - 6 1/8" I.D. - 35° tilt	ELK629WW	All White
	ELK629BB	All Black
	ELK629BW	Black Ref./White Ring
	ELK629BZBZ	All Bronze
	ELK629CW	Chrome Ref./White Ring
	ELK629HW	Haze Ref./White Ring
 6" Round Adjustable Baffle 7 3/8" O.D. - 6 1/8" I.D. - 35° tilt	ELK693WW	All White
	ELK693BB	All Black
	ELK693BZBZ	All Bronze
	ELK693BW	Black Ref./White Ring

6" Unique™ Trims for Koto™ Module

Description	CAT. #	Specs
 6" Round Reflector 7 1/2" O.D.	ELK6710W	All White
	ELK6710B	All Black
	ELK6710BZ	All Bronze
 6" Round Baffle 7 1/2" O.D.	ELK6713W	All White
	ELK6713BZ	All Bronze
 6" Round Wall Wash 7 1/2" O.D. - 6" I.D.	ELK6715W	All White
	ELK6715BZ	All Bronze

The Koto™ System

Canless Koto™ LED Module

DESIGNED TO BE INSTALLED WITHOUT A RECESSED HOUSING!



SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2" 3" 4" 6"	Round (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, and Wall Wash) Square (Reflector, Adjustable, Pinhole, Slot Aperture, and Wall Wash) Trimless (Round and Square)	White Black Bronze Haze Chrome	Up to 950 lm	2700K - 4000K & Sunset

Covered by U.S. PATENTS and Patents Pending

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! Canless Koto™ LED Module, Frames & Power Packs

Description	CAT. #	Specs
 Canless Koto™ LED Module Designed to be installed without a recessed housing! 2 1/8" O.D. - 2" H Standard 38° Lens, with 25° & 60° lenses included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55) Optional Reflectors: 15° (EP735C), 25° (EP736C), 38° (EP737C), 60° (EP738C) 	EKCL2127D	Up to 950 lm, 2700K
	EKCL2130D	1Up to 950 lm, 3000K
	EKCL2135D	Up to 950 lm, 3500K
	EKCL2140D	Up to 950 lm, 4000K
	EKCL21SDD	Up to 950 lm, Sunset
	EKCL21HCD	Up to 950 lm, Human Centric
 Canless Koto™ New Construction Frames Driver specified for 120V (Triac/ELV) or 120/277V (0-10V/Triac/ELV) (Easy-to-Remove Driver on frame)	E2KCL10IC	2" Frame, 10.5W, 120V, Triac/ELV. 3" Cutout
	E2KCL10IC-EM1	2" Frame, Emergency Battery Backup
	E2KCL10ICDX	2" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E2KCL10ICDX-EM1	2" Frame, Emergency Battery Backup
	E3KCL10IC	3" Frame, 10.5W, 120V, Triac/ELV. 3 5/8" Cutout
	E3KCL10IC-EM1	3" Frame, Emergency Battery Backup
	E3KCL10ICDX	3" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E3KCL10ICDX-EM1	3" Frame, Emergency Battery Backup
	E4KCL10IC	4" Frame, 10.5W, 120V, Triac/ELV. 4 1/4" Cutout
	E4KCL10IC-EM1	4" Frame, Emergency Battery Backup
	E4KCL10ICDX	4" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E4KCL10ICDX-EM1	4" Frame, Emergency Battery Backup
 Remodel IC Power Packs Driver specified for 120V (Triac/ELV) or 120/277V (0-10V/Triac/ELV) 2 1/2" W - 5 13/16" L - 2 1/8" H	EKCL10IC	10.5W, 950 lm, 120V, Triac/ELV
	EKCL10IC-EM1	10.5W, 950 lm, Emergency Battery Backup
	EKCL10ICDX	10.5W, 950 lm, 120/277V, 0-10V/Triac/ELV
	EKCL10ICDX-EM1	10.5W, 950 lm, Emergency Battery Backup
 New Construction Plaster Frames for Remodel Power Pack (Optional)	E2LKF1	2" Frame. 3" Cutout
	E3LKF1	3" Frame. 3 5/8" Cutout
	E4LF1	4" Frame. 4 1/4" Cutout
	E6LF1	6" Frame. 6 1/4" Cutout
 Emergency Battery Backup (Optional) 15 1/2" L - 2 1/8" W - 1 5/8" H	KEM-ERT	120/277V optional 90 min. battery backup

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 2" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 2" Round Deep Reflector 3 1/2" O.D. - 2 1/8" I.D.	EKCL2818W	All White
	EKCL2818BB	All Black
	EKCL2818BZ	All Bronze
	EKCL2818B	Black/White Ring
	EKCL2818H	Haze/White Ring
 2" Round Adjustable Pinhole 3 1/2" O.D. - 1 1/2" I.D.	EKCL2827W	All White
	EKCL2827BB	All Black
	EKCL2827BZ	All Bronze
	EKCL2827B	Black/White Ring
 2" Round Adjustable Reflector 3 1/2" O.D. - 2 3/8" I.D. - 30° tilt	EKCL2829W	All White
	EKCL2829BB	All Black
	EKCL2829BZ	All Bronze
	EKCL2829B	Black/White Ring
	EKCL2829H	Haze/White Ring
 2" Round Micro Flange Reflector 3 1/2" O.D. - 2 1/2" I.D.	EKCL2863W	All White
	EKCL2863BB	All Black
 2" Round Curved Reflector 3 1/2" O.D. - 1 1/2" I.D.	EKCL2872W	All White
	EKCL2872B	All Black
 2" Round Gimbal 3 1/2" O.D. - 1 1/2" I.D. - 30° tilt	EKCL2888W	All White
	EKCL2888B	All Black
	EKCL2888BZ	All Bronze
 2" Square Deep Reflector 3 1/2" Sq. - 2 1/8" I.D.	EKCL2518W	All White
	EKCL2518BB	All Black
	EKCL2518B	Black/White Ring
 2" Square Adjustable Reflector 3 1/2" Sq. - 2 3/8" I.D. - 30° tilt	EKCL2529W	All White
	EKCL2529BB	All Black
	EKCL2529B	Black/White Ring
 2" Square Reflector 3 1/2" Sq. - 1 3/8" Sq.	EKCL2541W	All White
	EKCL2541BB	All Black
	EKCL2541B	Black/White Ring
 2" Square Adjustable Pinhole 3 1/2" Sq. - 1 1/2" Sq. - 30° tilt	EKCL2527W	All White
	EKCL2527BB	All Black
	EKCL2527B	Black/White Ring
 2" Square Gimbal 3 1/2" Sq. - 1 1/2" I.D. - 30° tilt	EKCL2588W	All White
	EKCL2588B	All Black
	EKCL2588BZ	All Bronze

2" Pex™ Trimless for Canless Koto™ Module

Description	CAT. #	Specs
 2" Round Adjustable Trimless Reflector 2 5/8" O.D.	ELK215W	White
	ELK215B	Black
 2" Round Trimless Spackle Frame 7 1/8" O.D. - 2 5/8" I.D.	EL2SFR	For use with ELK215

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 3" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 3" Round Deep Reflector 4 3/8" O.D. - 3" I.D.	EKCL3618W	All White
	EKCL3618BB	All Black
	EKCL3618BZ	All Bronze
	EKCL3618B	Black/White Ring
	EKCL3618C	Chrome/White Ring
	EKCL3618H	Haze/White Ring
 3" Round Adjustable Reflector 4 3/8" O.D. - 3" I.D. - 15° - 30° tilt	EKCL3629W	All White
	EKCL3629BB	All Black
	EKCL3629BZ	All Bronze
	EKCL3629B	Black/White Ring
	EKCL3629C	Chrome/White Ring
	EKCL3629H	Haze/White Ring
 3" Round Adjustable Pinhole 4 3/8" O.D. - 1 3/4" I.D. - 15° - 30° tilt	EKCL3627W	All White
	EKCL3627B	Black/White Ring
	EKCL3627H	Haze/White Ring
	EKCL3627BB	All Black
	EKCL3627BZ	All Bronze
 3" Round Adjustable Slot Aperture 4 3/8" O.D. - 45° tilt	EKCL3620W	Black Slot/White Ring
 3" Round Adjustable Reflector Wall Wash 4 3/8" O.D. - 3" I.D. - 45° tilt	EKCL3622W	All White
 3" Round Regressed Eyeball 4 3/8" O.D. - 2 7/8" I.D. - 15° - 30° tilt	EKCL3653W	All White
	EKCL3653B	Black/White Ring
	EKCL3653BB	All Black
 3" Round Micro Flange Reflector 4 3/8" O.D. - 3 3/8" I.D.	EKCL3663W	All White
	EKCL3663BB	All Black
 3" Round Curved Reflector 4 3/8" O.D. - 1 1/2" I.D.	EKCL3672W	All White
	EKCL3672B	All Black
 3" Round Directional Gimbal 4 3/8" O.D. - 3" I.D. - 25° tilt	EKCL3679W	All White
	EKCL3679B	Black/White Ring
	EKCL3679H	Haze/White Ring
	EKCL3679BB	All Black
 3" Round Adjustable Baffle 4 3/8" O.D. - 3" I.D. - 35° tilt	EKCL3693W	All White

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 3" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 3" Square Deep Reflector 4 3/8" Sq. - 3" I.D.	EKCL3318W	All White
	EKCL3318B	Black/White Ring
	EKCL3318BB	All Black
	EKCL3318BZ	All Bronze
	EKCL3318C	Chrome/White Ring
	EKCL3318H	Haze/White Ring
 3" Square Adjustable Reflector 4 3/8" Sq. - 3" I.D. - 15° - 30° tilt	EKCL3329W	All White
	EKCL3329BB	All Black
	EKCL3329BZ	All Bronze
	EKCL3329B	Black/White Ring
	EKCL3329C	Chrome/White Ring
	EKCL3329H	Haze/White Ring
 3" Square Adjustable Reflector Wall Wash 4 3/8" Sq. - 3" I.D. - 35° tilt	EKCL3322W	All White
 3" Square Adjustable Pinhole 4 3/8" Sq. - 2" Sq. - 15° - 30° tilt	EKCL3327W	All White
	EKCL3327B	Black/White Ring
	EKCL3327H	Haze/White Ring
	EKCL3327BB	All Black
	EKCL3327BZ	All Bronze
 3" Square Reflector 4 3/8" Sq. - 2" Sq.	EKCL3341W	All White
	EKCL3341B	Black/White Ring
	EKCL3341BB	All Black
	EKCL3341BZ	All Bronze
 3" Square Regressed Eyeball 4 3/8" Sq. - 2 7/8" I.D. - 15° - 30° tilt	EKCL3353W	All White
	EKCL3353B	Black/White Ring
	EKCL3353BB	All Black
 3" Square Adjustable Baffle 4 3/8" Sq. - 3" I.D. - 35° tilt	EKCL3393W	All White

3" Pex™ Flush Mount Trim Adaptors for Canless Koto™ Trims

Description	CAT. #	Specs
 3" Round Flush Mount Trim Adaptor 7 1/8" O.D. - 4 3/8" I.D.	EL3FMR	For 3" Pex Round Trims
 3" Square Flush Mount Trim Adaptor 7 1/8" Sq. - 4 3/8" Sq.	EL3FMS	For 3" Pex Square Trims

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 3" Pex™ Trimless for Canless Koto™ Module

Description		CAT. #	Specs
	3" Round Trimless Reflector 3" O.D.	ELK308W	White
		ELK308B	Black
		ELK308H	Haze
	3" Round Adjustable Trimless Reflector 3" O.D. - 35° tilt	ELK315W	White
		ELK315B	Black
		ELK315H	Haze
	3" Round Trimless Spackle Frame 7 1/8" O.D. - 3" I.D.	EL3SFR	For use with ELK308 and ELK315
	3" Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 7/8" O.D. - 3 3/8" I.D.	EL3WCRW	White, for use with ELK308 and ELK315
		EL3WCRB	Black, for use with ELK308 and ELK315
	3" Square Trimless Reflector 2 9/16" Sq.	ELK370W	White
		ELK370B	Black
		ELK370H	Haze
	3" Square Adjustable Trimless Reflector 2 9/16" Sq. - 35° tilt	ELK381W	White
		ELK381B	Black
		ELK381H	Haze
	3" Square Trimless Spackle Frame 7 1/8" O.D. - 2 9/16" I.D.	EL03SFS	For use with ELK370 and ELK381

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Diecast Trims for Canless Koto™ Module


Description	CAT. #	Specs
	EKCL4116W	All White
	EKCL4116H	Haze/White Ring
	EKCL4118W	All White
	EKCL4118BB	All Black
	EKCL4118BZ	All Bronze
	EKCL4118B	Black/White Ring
	EKCL4118C	Chrome/White Ring
	EKCL4118H	Haze/White Ring
	EKCL4129W	All White
	EKCL4129BB	All Black
	EKCL4129BZ	All Bronze
	EKCL4129B	Black/White Ring
	EKCL4129C	Chrome/White Ring
	EKCL4129H	Haze/White Ring
	EKCL4111W	All White
	EKCL4111BB	All Black
	EKCL4111BZ	All Bronze
	EKCL4111B	Black/White Ring
	EKCL4111C	Chrome/White Ring
	EKCL4111H	Haze/White Ring
	EKCL4112W	All White
	EKCL4112BB	All Black
	EKCL4112BZ	All Bronze
	EKCL4112B	Black/White Ring
	EKCL4112C	Chrome/White Ring
	EKCL4112H	Haze/White Ring
	EKCL4130W	Black Slot/White Ring
	EKCL4122W	All White
	EKCL4127W	All White
	EKCL4127BB	All Black
	EKCL4127BZ	All Bronze
	EKCL4127B	Black/White Ring
	EKCL4127H	Haze/White Ring
	EKCL4125W	All White
	EKCL4125BB	All Black
	EKCL4125BZ	All Bronze
	EKCL4125B	Black/White Ring
	EKCL4125H	Haze/White Ring
	EKCL4153W	All White
	EKCL4153BB	All Black
	EKCL4153B	Black/White Ring

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 4" Round Micro Flange Reflector 5" O.D. - 3 7/8" I.D.	EKCL4163W	All White
	EKCL4163BB	All Black
 4" Round Curved Reflector 5" O.D. - 1 1/2" I.D.	EKCL4172W	All White
	EKCL4172B	All Black
 4" Round Directional Gimbal 5" O.D. - 3 1/2" I.D. - 25° tilt	EKCL4179W	All White
	EKCL4179BB	All Black
	EKCL4179B	Black/White Ring
	EKCL4179H	Haze/White Ring
 4" Round Adjustable Spot 5" O.D. - 25° tilt	EKCL4188W	All White
	EKCL4188B	All Black
	EKCL4188BZ	All Bronze
 4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt	EKCL4193W	All White
	EKCL4193BB	All Black
	EKCL4193B	Black/White Ring
 4" Square Shallow Reflector 5" Sq. - 3 5/8" I.D.	EKCL4216W	All White
	EKCL4216H	Haze/White Ring
 4" Square Deep Reflector 5" Sq. - 3 3/4" I.D.	EKCL4218W	All White
	EKCL4218B	Black/White Ring
	EKCL4218BB	All Black
	EKCL4218BZ	All Bronze
	EKCL4218C	Chrome/White Ring
	EKCL4218H	Haze/White Ring
 4" Square Adjustable Pinhole 5" Sq. - 2 1/2" Sq. - 25° - 35° tilt	EKCL4227W	All White
	EKCL4227BB	All Black
	EKCL4227BZ	All Bronze
	EKCL4227B	Black/White Ring
	EKCL4227H	Haze/White Ring
 4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 1/2" Sq. - 25° - 35° tilt	EKCL4212W	All White
	EKCL4212BB	All Black
	EKCL4212BZ	All Bronze
	EKCL4212B	Black/White Ring
	EKCL4212H	Haze/White Ring
 4" Square Adjustable Reflector 5" Sq. - 3 5/8" I.D. - 25° - 35° tilt	EKCL4229W	All White
	EKCL4229BB	All Black
	EKCL4229BZ	All Bronze
	EKCL4229B	Black/White Ring
	EKCL4229C	Chrome/White Ring
	EKCL4229H	Haze/White Ring

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 4" Square Adjustable Wall Wash 5" Sq. - 3 3/4" I.D. - 45° tilt	EKCL4222W	White Ring
 4" Square Regressed Eyeball 5" Sq. - 3 1/2" I.D. - 15° - 30° tilt	EKCL4253W	All White
	EKCL4253BB	All Black
	EKCL4253B	Black/White Ring
 4" Square Adjustable Reflector 5" Sq. - 2 5/8" Sq. - 35° tilt	EKCL4282W	All White
	EKCL4282BZ	All Bronze
 4" Square Adjustable Baffle 5" Sq. - 3 5/8" Sq. - 35° tilt	EKCL4284W	All White
	EKCL4284B	All Black
	EKCL4284BZ	All Bronze

4" Pex™ Flush Mount Trim Adaptors for Canless Koto™ Trims

Description	CAT. #	Specs
 4" Round Flush Mount Trim Adaptor 7 1/8" O.D. - 5" I.D.	EL4FMR	For EKCL4116, EKCL4118, EKCL4127, EKCL4129, EKCL4710, EKCL4713, EKCL4715
 4" Square Flush Mount Trim Adaptor 7 1/8" Sq. - 4 3/8" Sq.	EL4FMS	For EKCL4216, EKCL4218, EKCL4227, EKCL4229

4" Pex™ Trimless for Canless Koto™ Module

Description	CAT. #	Specs
 4" Round Non-Adjustable Trimless Reflector 4" O.D.	ELK408W	White
	ELK408B	Black
	ELK408H	Haze
	ELK408BZ	Bronze
 4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	ELK415W	White
	ELK415B	Black
	ELK415H	Haze
	ELK415BZ	Bronze
 4" Round Trimless Spackle Frame 7 1/8" O.D. - 4" I.D.	EL4SFR	For use with ELK408 and ELK415
 4" Square Trimless Reflector 3 1/4" Sq.	ELK445W	White
	ELK445B	Black
	ELK445H	Haze
 4" Square Adjustable Trimless Reflector 3 1/4" Sq.	ELK459W	White
	ELK459B	Black
	ELK459H	Haze
 4" Square Trimless Spackle Frame 6 1/4" Sq. - 3 1/8" Sq.	EL4SFS	For use with ELK445 and ELK459

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Unique™ Trims for Canless Koto™ Module

Description	CAT. #	Specs
 4" Round Adjustable Reflector 5" O.D. - 3 7/8" I.D. - 25° - 35° tilt	EKCL4710W	All White
 4" Round Adjustable Deep Reflector 5" O.D. - 3 7/8" I.D. - 25° - 35° tilt	EKCL4717W	All White
 4" Round Adjustable Baffle 5" O.D. - 3 7/8" I.D. - 25° - 35° tilt	EKCL4713W	All White
 4" Round Wall Wash 5" O.D. - 3 7/8" I.D.	EKCL4715W	All White
 4" Square Reflector 4 1/2" Sq. - 2 3/4" Sq.	EKCL4714W	All White
 4" Square Baffle 4 5/8" Sq. - 2 7/8" Sq.	EKCL4716W	All White

4" Flexa™ Trims for Canless Koto™ Module

Description	CAT. #	Specs
 4" Round Adjustable Reflector 5" O.D. - 3 1/8" I.D. - 35° tilt	EKCL4721WW	All White
	EKCL4721BB	All Black
	EKCL4721BZBZ	All Bronze
	EKCL4721BW	Black Ref./White Ring
	EKCL4721CW	Chrome Ref./White Ring
	EKCL4721HW	Haze Ref./White Ring
 4" Square Reflector 4 3/4" Sq. - 2 3/8" Sq.	EKCL4741WW	All White
	EKCL4741BB	All Black
	EKCL4741BZBZ	All Bronze
	EKCL4741BW	Black Ref./White Ring
	EKCL4741HW	Haze Ref./White Ring
 4" Round Baffle 5" O.D. - 3 1/8" I.D. - 35° tilt	EKCL4723WW	All White
	EKCL4723BB	All Black
	EKCL4723BZBZ	All Bronze
	EKCL4723BW	Black Baffle/White Ring
 4" Square Baffle 4 3/4" Sq. - 2 3/8" Sq.	EKCL4743WW	All White
	EKCL4743BB	All Black
	EKCL4743BZBZ	All Bronze
	EKCL4743BW	Black Baffle/White Ring
 4" Adjustable Square Reflector 4 3/4" Sq. - 2 3/8" Sq. - 35° tilt	EKCL4759WW	All White
	EKCL4759BB	All Black
	EKCL4759B	Black Ref./White Ring
	EKCL4759H	Haze Ref./White Ring

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Universal Sloped Ceiling Trims for Canless Koto™ Module

Description	CAT. #	Specs
 4" Round Universal Sloped Ceiling Reflector 5" O.D. - 3 5/8" I.D.	EKCL4357W	All White
	EKCL4357BB	All Black
	EKCL4357BZ	All Bronze
	EKCL4357B	Black/White Ring
	EKCL4357H	Haze/White Ring
 4" Round Universal Sloped Ceiling Reflector with Clear Glass 5" O.D. - 3 5/8" I.D.	EKCL4347W	All White
	EKCL4347BB	All Black
	EKCL4347BZ	All Bronze
	EKCL4347B	Black/White Ring
	EKCL4347H	Haze/White Ring

6" Pex™ Trims for Canless Koto™ Module


Description	CAT. #	Specs
 6" Round Reflector 7 1/2" O.D. - 6" I.D.	EKCL6418W	All White
	EKCL6418BB	All Black
	EKCL6418BZ	All Bronze
	EKCL6418H	Haze Ref./White Ring
 6" Round Adjustable Reflector 7 1/2" O.D. - 6" I.D. - 30° tilt	EKCL6429W	All White
	EKCL6429BB	All Black
	EKCL6429BZ	All Bronze
	EKCL6429H	Haze Ref./White Ring
 6" Round Adjustable Slot Aperture 7 1/4" O.D. - 1 3/8" x 2 1/4" Slot	EKCL6420W	All White
 6" Round Adjustable Pinhole with Reflector 8" O.D. - 1 3/4" I.D. - 25° tilt	EKCL6427W	All White
	EKCL6427B	Black Ref./White Ring
	EKCL6427H	Haze Ref./White Ring
 6" Square Adjustable Reflector 6 3/4" Sq. - 4 1/4" Sq.	EKCL6829W	All White
	EKCL6829BB	All Black
	EKCL6829H	Haze Ref./White Ring

The Koto™ System

2" Aperture Module with Twist-&-Lock Trims




Accessories Field Changeable

Description	CAT. #	Specs
 Field Changeable Lens	EP731C	18° Lens
	EP732C	28° Lens
	EP733C	38° Lens
	EP734C	60° Lens
 Field Changeable Reflectors	EP735C	15° Reflector
	EP736C	25° Reflector
	EP737C	38° Reflector
	EP738C	60° Reflector
 Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
	L57	White, for a better glare shield
 Field Changeable Secondary Optic Linear	L46	For a wide rectangular illumination pattern
 Field Changeable Secondary Optic Spread	L47	For a symmetrical broadening of light beams
 Field Changeable Secondary Optic Frosted Diffuser	L49	For a frosted lens look
 Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
 Field Changeable Secondary Optic Color Lens	L52	Blue lens
	L53	Pink lens
 Asymmetric Lens	L54	Single asymmetric
	L55	Double asymmetric
 Snoot for Koto™ Modules	L50W	White
	L50B	Black
 Hard Wire Adapter	PSA38	Hard wire adapter to male Quick Connect terminal
 4" Hard Wire Adapter	PSA38-4	4" Hard Wire Adapter to male Quick
 Rewiring Kit	PSA38-22	22" Rewiring fit to male Quick Connect terminal.

The Alder™ System

2" Housings & LED Light Engines



ALDER SYSTEM	STYLES		LUMENS	COLOR TEMPERATURE
HIGHTECH	Round	Square	 600 lm to 1200 lm	 2700K & 4000K
STANDARDLUMEN	Round Adjustable	Square Adjustable		

The Alder™ System

2" LED Lighting Solution



2" LED Housings & Light Engines

Description		Cat. #	Specs
	2" IC Airtight New Construction LED Housing with Driver	E2LC106ICA	9W, 120V, Triac/ELV. 4" Height
	2" ICA New Construction LED Housing with Driver	E2LC175ICA	9W, 120V, Triac/ELV. 3 1/2" Height
	2" Non-IC New Construction LED Housing with Driver	E2LC106	9W, 120V, Triac/ELV. 3 1/2" Height
	2" ICA Remodel LED Housing with Driver	E2LC175RICA	9W, 120V, Triac/ELV. 3 1/2" Height
	2" Non-IC Remodel LED Housing with Driver	E2LRC106	9W, 120V, Triac/ELV. 3 1/2" Height
	2" LED Reflector 3 1/8" O.D. - 2" I.D. - 2 5/8" H	 E210C0627W	9W, 600 lm, 2700K
		E210C0630W	9W, 640 lm, 3000K
	2" HIGHLUMEN LED Reflector	 E210C0727W	9W, 800 lm, 2700K
		E210C0730W	9W, 840 lm, 3000K
		E210C0735W	9W, 860 lm, 3500K
		E210C0740W	9W, 875 lm, 4000K
	2" LED Baffle 3 1/8" O.D. - 2" I.D. - 2 5/8" H	 E214C0627W	9W, 600 lm, 2700K
		E214C0630W	9W, 640 lm, 3000K
	2" HIGHLUMEN LED Baffle	 E214C0727W	9W, 800 lm, 2700K
		E214C0730W	9W, 840 lm, 3000K
		E214C0735W	9W, 860 lm, 3500K
		E214C0740W	9W, 875 lm, 4000K
	2" LED Square Reflector 3 1/8" Sq. - 1 1/2" Sq. - 2 1/2" H	 E213C0627W	9W, 600 lm, 2700K
		E213C0630W	9W, 640 lm, 3000K
	2" HIGHLUMEN LED Square Reflector	 E213C0727W	9W, 800 lm, 2700K
		E213C0730W	9W, 840 lm, 3000K
		E213C0735W	9W, 860 lm, 3500K
		E213C0740W	9W, 875 lm, 4000K
	2" LED Square Baffle 3 1/8" Sq. - 1 1/2" Sq. - 2 1/2" H	 E215C0627W	9W, 600 lm, 2700K
		E215C0630W	9W, 640 lm, 3000K
	2" HIGHLUMEN LED Square Baffle	 E215C0727W	9W, 800 lm, 2700K
		E215C0730W	9W, 840 lm, 3000K
		E215C0735W	9W, 860 lm, 3500K
		E215C0740W	9W, 875 lm, 4000K
	2" LED Adjustable 3 1/8" Sq. - 1 5/8" H - 25° tilt	 E218C0627W	9W, 600 lm, 2700K
		E218C0630W	9W, 640 lm, 3000K
	2" HIGHLUMEN LED Adjustable	 E218C0727W	9W, 800 lm, 2700K
		E218C0730W	9W, 840 lm, 3000K
		E218C0735W	9W, 860 lm, 3500K
		E218C0740W	9W, 875 lm, 4000K
	2" LED Square Adjustable 3 1/8" Sq. - 1 3/4" H - 25° tilt	 E219C0627W	9W, 600 lm, 2700K
		E219C0630W	9W, 640 lm, 3000K
	2" HIGHLUMEN LED Square Adjustable	 E219C0727W	9W, 800 lm, 2700K
		E219C0730W	9W, 840 lm, 3000K
		E219C0735W	9W, 860 lm, 3500K
		E219C0740W	9W, 875 lm, 4000K

The Alder™ System

2" LED Lighting Solution




2" LED HighTech Housings & Light Engines

Description		Cat. #	Specs
	2" HIGHTECH IC Airtight New Construction Housing	E2AJU12ICA	11W, 120/277V. 5 1/2" Height
	2" HIGHTECH New Construction Housing	E2LCU86ICA	11W, 120/277V, 0-10V/Triac/ELV. 3 1/2" Height
		E2LC185ICA	11W, 120V, Triac/ELV
	2" HIGHTECH Remodel Housing	E2LCU86RICA	11W, 120/277V, 0-10V/Triac/ELV. 3 1/2" Height
		E2LC185RICA	11W, 120V, Triac/ELV
	2" HIGHLUMEN Round LED Reflector 3 1/8" O.D. - 2" I.D. - 2 5/8" H	E210C1827W	11W, 1000 lm, 2700K
		E210C1830W	11W, 1050 lm, 3000K
		E210C1835W	11W, 1100 lm, 3500K
		E210C1840W	11W, 1135 lm, 4000K
		E210C18SDW	11W, 800 lm, Sunset
	2" HIGHLUMEN Round LED Baffle 3 1/8" O.D. - 2" I.D. - 2 5/8" H	E214C1827W	11W, 1000 lm, 2700K
		E214C1830W	11W, 1050 lm, 3000K
		E214C1835W	11W, 1100 lm, 3500K
		E214C1840W	11W, 1135 lm, 4000K
		E214C18SDW	11W, 800 lm, Sunset
	2" HIGHLUMEN Square LED Reflector 3 1/8" Sq. - 1 1/2" Sq. - 2 1/2" H	E213C1827W	11W, 1000 lm, 2700K
		E213C1830W	11W, 1040 lm, 3000K
		E213C1835W	11W, 1100 lm, 3500K
		E213C1840W	11W, 1125 lm, 4000K
		E213C18SDW	11W, 800 lm, Sunset
	2" HIGHLUMEN Square LED Baffle 3 1/8" Sq. - 1 1/2" Sq. - 2 1/2" H	E215C1827W	11W, 1000 lm, 2700K
		E215C1830W	11W, 1040 lm, 3000K
		E215C1835W	11W, 1100 lm, 3500K
		E215C1840W	11W, 1125 lm, 4000K
		E215C18SDW	11W, 800 lm, Sunset
	2" HIGHLUMEN LED Round Adjustable 3 1/8" Sq. - 1 5/8" H - 25° tilt	E218C1827W	11W, 1040 lm, 2700K
		E218C1830W	11W, 1100 lm, 3000K
		E218C1835W	11W, 1150 lm, 3500K
		E218C1840W	11W, 1200 lm, 4000K
		E218C18SDW	11W, 800 lm, Sunset
	2" HIGHLUMEN LED Square Adjustable 3 1/8" Sq. - 1 3/4" H - 25° tilt	E219C1827W	11W, 1030 lm, 2700K
		E219C1830W	11W, 1090 lm, 3000K
		E219C1835W	11W, 1140 lm, 3500K
		E219C1840W	11W, 1190 lm, 4000K
		E219C18SDW	11W, 800 lm, Sunset


ELCO Lighting

Dedicated LED Housings & Inserts

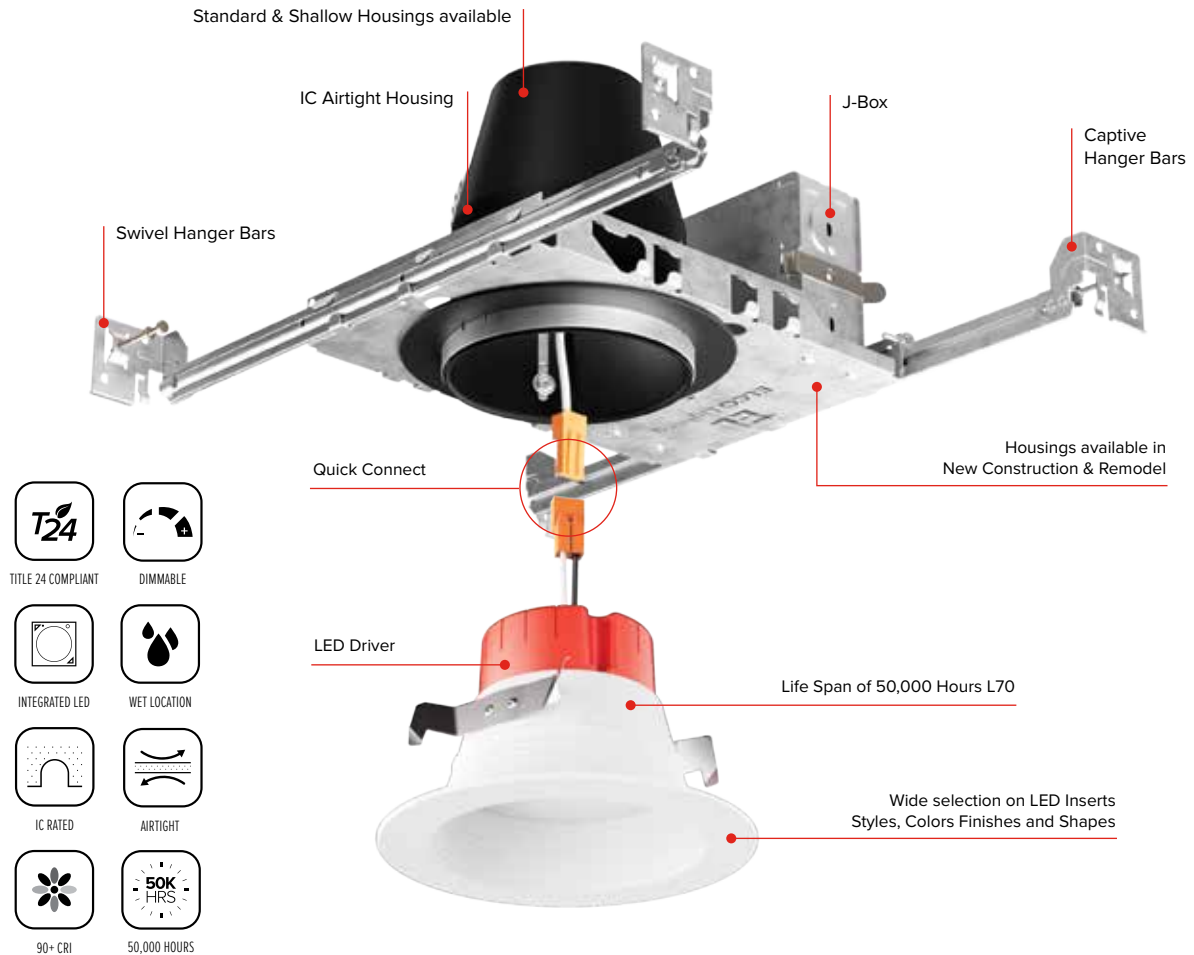


SIZES	STYLES	LUMENS	COLOR TEMPERATURE
3" 4" 5" 6" 8" & 12"	Round (Reflector & Baffle) Square (Reflector & Baffle) Adjustable Pull Down Gimbal	600 lm to 2000 lm	2700K - 5000K & Sunset

LED Dedicated





3" LED Housings & Inserts

Description		CAT. #	Specs
	3" New Construction Dedicated LED Housing Opening: 3 5/8" - 5 1/2" H	EL390ICA	
		EL390ICA-7	Step-down transformer 277V to 120V
		EL390ICA-EM5	Emergency Back-Up
	3" Remodel Dedicated LED Housing Opening: 3 5/8" - 5 1/2" H	EL390RICA	
	3" Maximum Adjustability IC Airtight New Construction Housing Opening: 3 5/8" - 5 1/2" H	EL386ICA	
		EL386ICA-EM7	Emergency Back-Up
	3" New Construction Dedicated LED 2-Hour Fire Rated Housing Opening: 3 1/2" - 7 3/4" H - STC/IC Sound Rated	EL39FICA	
		EL39FICA-7	Step-down transformer 277V to 120V
	3" Round LED Baffle 4 3/8" O.D. - 3 1/8" H	EL311CT3BZ	9W, 700 lm, 2700K - 3500K
		EL311CT5W	10W, 710 lm, 2700K - 5000K
	3" Round LED Reflector 4 3/8" O.D. - 3 1/8" H	EL312CT5W	10W, 710 lm, 2700K - 5000K
		EL312CT5BZ	10W, 710 lm, 2700K - 5000K
	3" Round LED Gimbal 4 3/8" O.D. - 2 13/16" O.D. - 2 5/16" H	EL313CT5W	9W, 700 lm, 2700K - 5000K
	3" Square LED Baffle 4 3/8" Sq. - 2 3/4" H	EL331CT5W	9W, 700 lm, 2700K - 5000K
	3" Square LED Reflector 4 3/8" Sq. - 2 3/4" H	EL332CT5W	9W, 640 lm, 2700K - 5000K
		EL332CT5BB	9W, 640 lm, 2700K - 5000K
	3" Round Pull Down Adjustable 4 3/8" O.D. - 4 1/8" H - 65° tilt	EL39727W	10.8W, 800 lm, 2700K
		EL39727BZ	10.8W, 800 lm, 2700K
		EL39730W	10.8W, 800 lm, 3000K



4" LED Housings & Inserts


Description		CAT. #	Specs
	4" IC Airtight New Construction Housing Opening: 4" - 5 1/2" H	EL490ICA	
		EL490ICA-7	Step-down transformer 277V to 120V
		EL490ICA-EM5	Emergency Back-Up
	4" Remodel Dedicated LED Housing Opening: 4" - 5 1/2" H	EL490RICA	
	4" IC Airtight Shallow New Construction Housing Opening: 4 1/4" - 3 1/2" H	EL492ICA	
		EL492ICA-7	Step-down transformer 277V to 120V
	4" Remodel Dedicated LED Housing Opening: 4 1/4" - 3 1/2" H	EL492RICA	
	R-60 Foam Insulation Dedicated LED IC Airtight New Construction Housing Opening: 4 1/4" - 5 1/2" H	EL490AJICA	4" Housing
	4" LED Fire Rated ICA New Construction Housing Opening: 4 1/4" - 6 7/8" H - STC/IIC Sound Rated	EL48FICA	
	4" LED Shallow Fire Rated ICA New Construction Housing Opening: 4 3/8" - 4 13/16" H	EL492FICAS	Shallow
	4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4" - 4 1/2" H	EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4" - 4 1/2" H	EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs
		ELJ4OV	For use with EJB4RICA to cover tabs
	4" Round LED Reflector Insert 5 1/2" O.D. - 2 3/4" H	EL455CT5W	9W, 600 lm, 2700K - 5000K
	4" Round Sunset Dimming LED Reflector (Automatically Dims from 3000K to 1800K on standard dimmer) 5 1/2" O.D. - 3" H	EL415SDW	10W, 700 lm, Sunset
		EL415SDBZ	10W, 700 lm, Sunset
	4" Round LED Reflector 5 1/2" O.D. - 3 3/8" H	EL41527W	11W, 770 lm, 2700K
		EL41530W	11W, 770 lm, 3000K
		EL41535W	11W, 770 lm, 3500K
		EL41535BZ	11W, 770 lm, 3500K
		EL41540W	11W, 770 lm, 4000K
		EL41550W	11W, 770 lm, 5000K
		EL415CT5W	12W, 800 lm, 2700K - 5000K
		EL415CT5BZ	12W, 800 lm, 2700K - 5000K
		EL415CT5BB	12W, 800 lm, 2700K - 5000K



4" LED Inserts

Description	CAT. #	Specs
 4" HIGHLUMEN Round LED Reflector 5 1/2" O.D. - 3" H  	EL41740W	14W, 1200 lm, 4000K
	EL417CT5W	14W, 1000 lm 2700K - 5000K
 4" HIGHLUMEN Round Haze Reflector 5 1/2" O.D. - 3" H  	EL41735H	14W, 1100 lm, 3500K
	EL41740H	14W, 1200 lm, 4000K
	EL417CT5H	14W, 1000 lm, 2700K - 5000K
 4" HIGHLUMEN Round Chrome Reflector 5 1/2" O.D. - 3" H 	EL41727C	14W, 1000 lm, 2700K
	EL41740C	14W, 1200 lm, 4000K
 4" Round LED Reflector with 5-CCT & Lumen Switch 5 1/2" O.D. - 4" H  	EL427CT5W	12.5W - 18W, 1000 lm - 1500 lm 2700K - 5000K
	EL427CT5BB	12.5W - 18W, 1000 lm - 1500 lm 2700K - 5000K
	EL427CT5HW	12.5W - 18W, 1000 lm - 1500 lm 2700K - 5000K
 4" Round Sunset Dimming LED Baffle (Automatically Dims from 3000K to 1800K on standard dimmer) 5 1/2" O.D. - 3" H  	EL410SDW	10W, 700 lm, Sunset
 4" Round LED Baffle 5 1/2" O.D. - 3" H 	EL41027W	10W, 800 lm, 2700K
	EL41030W	10W, 850 lm, 3000K
	EL41035W	10W, 900 lm, 3500K
	EL41040W	10W, 900 lm, 4000K
 4" Round 5-CCT LED Baffle 5 1/2" O.D. - 3 3/8" H  	EL410CT5W	12W, 850 lm, 2700K - 5000K
	EL410CT5BB	12W, 850 lm, 2700K - 5000K
 4" HIGHLUMEN LED Baffle 5 1/2" O.D. - 3 3/8" H  	EL412CT5W	14W, 1000 lm, 2700K - 5000K
 4" Round 5-CCT LED Shallow Baffle Insert 5 1/2" O.D. - 2 3/4" H 	EL460CT5W	9W, 600 lm, 2700K - 5000K
 4" Round LED Reflector 5 1/8" O.D. - 3 1/8" H  	EL431CT5W	12W, 850 lm, 2700K - 5000K
 4" Round LED Baffle 5 1/8" O.D. - 3 1/8" H  	EL439CT5W	12W, 850 lm, 2700K - 5000K
 4" Round LED Baffle Gimbal 5" O.D. - 3 5/16" H - 25° tilt  	EL414CT5W	12W, 650 lm, 2700K - 5000K
	EL414CT5B	12W, 650 lm, 2700K - 5000K
	EL414CT5BZ	12W, 650 lm, 2700K - 5000K

LED Dedicated



4" LED Inserts

Description		CAT. #	Specs
	4" Round LED Gimbal 5" O.D. - 3 3/8" I.D. - 3 1/2" H - 25° tilt	EL416CT5W	9W, 700 lm, 2700K - 5000K
		EL416CT5B	9W, 700 lm, 2700K - 5000K
		EL416CT5BZ	9W, 700 lm, 2700K - 5000K
	4" HIGHLUMEN LED Gimbal	EL416HLCT5W	12W, 1000 lm 2700K - 5000K
	4" Round LED Floating Adjustable Eyeball (90° tilt) 5" O.D. - 3 1/2" I.D. - 3 1/4" H 90° tilt - 360° rotation	EL456CT5W	9W, 700 lm, 2700K - 5000K
		EL456CT5B	9W, 700 lm, 2700K - 5000K
	4" Square LED Reflector Insert with 5-CCT Switch 4 7/8" Sq. - 2 3/4" Sq. - 4 1/4" H	EL434CT5W	10W, 1000 lm, 2700K - 5000K
		EL434CT5BB	10W, 1000 lm, 2700K - 5000K
	4" Square LED Gimbal 5" Sq. - 3" H - 25° tilt	EL446CT5W	11W, 700 lm, 2700K - 5000K
		EL446CT5B	11W, 700 lm, 2700K - 5000K
		EL446CT5BZ	11W, 700 lm, 2700K - 5000K
	4" HIGHLUMEN Square LED Gimbal	EL446HLCT5W	12W, 1000 lm, 2700K - 5000K
	4" Square LED Baffle 5" Sq. - 2 1/2" H	EL44127W	10W, 700 lm, 2700K
		EL441CT5W	11W, 750 lm, 2700K - 5000K
		EL441CT5BZ	11W, 750 lm, 2700K - 5000K
	4" Square LED Reflector 5" Sq. - 3 1/8" H	EL442CT5W	11W, 850 lm, 2700K - 5000K
		EL442CT5BB	11W, 850 lm, 2700K - 5000K
		EL442CT5BZ	11W, 750 lm, 2700K - 5000K
	4" Round LED Adjustable Pull Down 5" O.D. - 4 1/8" H - 65° tilt	EL49727W	12.6W, 800 lm, 2700K
		EL49730W	12.6W, 840 lm, 3000K
	4" Square LED Adjustable Pull Down 5" Sq. - 4 1/8" H - 65° tilt	EL44727W	12.6W, 800 lm, 2700K
		EL44730W	12.6W, 840 lm, 3000K
	Optional Interchangeables Lenses for LED Adjustable Pull Down (EL447 & EL497 Series - 1st Generation Only)	EP710C	20° beam angle
		EP711C	36° beam angle
		EP712C	60° beam angle
	4" Round LED Adjustable Pull-Down Insert (2nd Generation) Includes 28°, 40° & 60° lenses. 5" O.D. - 4 3/8" H - 80° tilt	EL49727W2	11W, 950 lm, 2700K
		EL49727B2	11W, 950 lm, 2700K
		EL49727BZ2	11W, 950 lm, 2700K
		EL49730W2	11W, 950 lm, 3000K
		EL49730B2	11W, 950 lm, 3000K
		EL49730BZ2	11W, 950 lm, 3000K
		EL497SDW2	11W, 950 lm, Sunset
		EL497CT5W2	12W, 950 lm, 2700K - 5000K
		EL497CT5B2	12W, 950 lm, 2700K - 5000K
	4" Square LED Adjustable Pull-Down Insert (2nd Generation) Includes 28°, 40° & 60° lenses. 5" Sq. - 4 3/8" H - 80° tilt	EL44727W2	11W, 950 lm, 2700K
		EL44727B2	11W, 950 lm, 2700K
		EL44730W2	11W, 950 lm, 3000K
		EL44730B2	11W, 950 lm, 3000K



5" & 6" LED Housings & Inserts

Description		CAT. #	Specs
	5" Dedicated LED IC Airtight New Construction Housings Opening: 5 1/2" - 7 1/2" H	EL570ICA	
		EL570ICA-7	Step-down transformer 277V to 120V
		EL560ICA	Shallow
	5" Dedicated LED IC Airtight Remodel Housings Opening: 5 1/2" - 7 1/2" H	EL570RICA	
		EL560RICA	Shallow
	5" New Construction IC Airtight 2-Hour Fire Rated Housing Opening: 5 1/2" - 7 3/4" H - STC/ICC Sound Rated	EL56FICA	
	6" Dedicated LED IC Airtight New Construction Housings Opening: 6 1/4" - 7" H	EL770ICA	
		EL770ICA-7	Step-down transformer 277V to 120V
		EL770ICA-EM5	Emergency Back-Up
	6" Shallow Dedicated LED IC Airtight New Construction Housings Opening: 6 1/4" - 5 1/2" H	EL760ICA	Shallow
		EL760ICA-7	Step-down transformer 277V to 120V
	6" Dedicated LED IC Airtight Remodel Housings Opening: 6 1/2" - 7 1/2" H	EL770RICA	
		EL760RICA	Shallow
	6" New Construction IC Airtight 2-Hour Fire Rated Housing Opening: 6 3/8" - 7 3/4" H - STC/ICC Sound Rated	EL76FICA	
		EL76FICA-7	Step-down transformer 277V to 120V
		EL75FICAS	Shallow
	5"- 6" LED Reflector Insert 7 1/4" O.D. - 2 3/4" H	EL655CT5W	  10W, 700 lm, 2700K - 5000K
	5"- 6" LED Reflector 7 1/4" O.D. - 3" H	EL61527W	10W, 800 lm, 2700K
		EL61530W	10W, 850 lm, 3000K
		EL61535W	10W, 850 lm, 3500K
		EL61540W	10W, 900 lm, 4000K
		EL61550W	10W, 950 lm, 5000K
		EL615CT5W	12W, 880 lm - 1080 lm, 2700K - 5000K
	5"- 6" LED Reflector with 5-CCT Switch 7 1/4" O.D. - 3" H	EL615CT5BB	12W, 880 lm - 1080 lm, 2700K - 5000K
		EL615CT5BZ	12W, 880 lm - 1080 lm, 2700K - 5000K
	5"- 6" HIGHTECH LED Reflector 7 1/4" O.D. - 3" H	EL61740W	14W, 1200 lm, 4000K
	5"- 6" HIGHTECH LED Reflector with 5-CCT Switch 7 1/4" O.D. - 3" H	EL617CT5W	  17W, 1100 lm, 2700K - 5000K



5" & 6" LED Housings & Inserts

Description	CAT. #	Specs
 EXTRA 5"- 6" HIGHLUMEN LED Reflector 7 1/4" O.D. - 3" H	 EL62727W	20W, 1400 lm, 2700K
5"- 6" LED Reflector with 5-CCT Switch  	EL627CT5W	20W, 1400 lm, 2700K - 5000K
 EXTRA 5"- 6" HIGHLUMEN LED Deep Reflector 7 1/2" O.D. - 4 3/8" H	  EL625CT5W	White, 12W, 880 lm - 1080 lm, 2700K - 5000K
 EXTRA 5"- 6" HIGHLUMEN Haze LED Deep Reflector 7 1/2" O.D. - 4 3/8" H	 EL62527H EL62535H EL62540H  EL625CT5H	Haze, 14W, 1000 lm, 2700K Haze, 14W, 1100 lm, 3500K Haze, 14W, 1200 lm, 4000K Haze, 12W, 880 lm - 1080 lm, 2700K - 5000K
 EXTRA 5"- 6" HIGHLUMEN Chrome LED Deep Reflector 7 1/2" O.D. - 4 3/8" H	 EL62535C EL62540C  EL625CT5C	Chrome, 14W, 1100 lm, 3500K Chrome, 14W, 1200 lm, 4000K Chrome, 12W, 880 lm - 1080 lm, 2700K - 5000K
 5"- 6" Round LED Reflector with 5-CCT & 3-Lumen Switch 7 1/2" O.D. - 5" H	  EL637CT5W EL637CT5BB EL637CT5HW	White, 120V, 2700K - 5000K 1000 lm - 2000 lm Black, 120V, 2700K - 5000K 1000 lm - 2000 lm Haze, 120V, 2700K - 5000K 1000 lm - 2000 lm
 5"- 6" Round Sunser Dimming LED Insert (Automatically Dims from 3000K to 1800K on standard dimmer) 7 1/2" O.D. - 3" H	 EL610SDW EL615SDW EL615SDBZ	10W, 750 lm, Sunset, Baffle 10W, 750 lm, Sunset, Reflector 10W, 750 lm, Sunset, Reflector
5"- 6" LED Baffle 7 1/2" O.D. - 3" H	 EL61027W EL61030W	12W, 800 lm, 2700K 12W, 850 lm, 3000K
 5"- 6" Round LED Baffle with 5-CCT Switch 7 1/4" O.D. - 3" H	  EL610CT5W EL610CT5BB	12W, 880 lm - 1080 lm, 2700K - 5000K 12W, 880 lm - 1080 lm, 2700K - 5000K
 EXTRA 5"- 6" HIGHLUMEN LED Baffle 7 1/2" O.D. - 3" H	 EL61140W	14W, 1200 lm, 4000K
5"- 6" HIGHLUMEN Round LED Baffle with 5-CCT Switch 7 1/4" O.D. - 3" H	  EL611CT5W EL612CT5W	17W, 1100 lm, 2700K - 5000K 20W, 1400 lm, 2700K - 5000K
 6" Round 5-CCT LED Baffle Insert with Adapter 7 1/4" O.D. - 2 3/4" H	  EL670CT5W	10W, 700 lm, 2700K - 5000K

LED Dedicated



5" & 6" LED Housings & Inserts

Description		CAT. #	Specs
 6" LED Regressed Gimbal Insert 7 1/4" O.D. - 3 1/2" H - 25° tilt	 	EL613CT5W	13W, 1000 lm, 2700K - 5000K
		EL613CT5B	13W, 1000 lm, 2700K - 5000K
 5" - 6" LED Gimbal Insert 7 1/4" O.D. - 3 1/2" H - 25° tilt	 	EL616CT5W	13W, 1000 lm, 2700K - 5000K
		EL616CT5B	13W, 1000 lm, 2700K - 5000K
		EL616CT5BZ	13W, 1000 lm, 2700K - 5000K
 5" - 6" LED HIGH LUMEN Deep Baffle Insert 7 1/2" O.D. - 4 3/8" H	 	EL621CT5W	15W, 1000 lm, 2700K - 5000K
 5" LED Square Reflector 6 1/2" Sq. - 3" H	 	EL552CT5W	15W, 1100 lm, 2700K - 5000K
 6" LED Square Reflector 7 1/4" Sq. - 3" H	 	EL662CT5W	16W, 1300 lm, 2700K - 5000K
 6" LED Square Baffle 7 1/4" Sq. - 3" H	 	EL661CT5W	16W, 1300 lm, 2700K - 5000K
 5" Pull Down Adjustable (2nd Generation) 6 1/4" O.D. - 4 1/8" H - 65° tilt		EL59727W2	12.6W, 840 lm, 2700K
		EL59727B2	12.6W, 840 lm, 2700K
		EL59727BZ2	12.6W, 840 lm, 2700K
		EL59730W2	12.6W, 840 lm, 3000K
		EL59730B2	12.6W, 840 lm, 3000K
 6" Pull Down Adjustable (2nd Generation) Includes 28°, 40° & 60° lenses. 7 1/4" O.D. - 4 3/8" H - 80° tilt		EL69727W2	11W, 950 lm, 2700K
		EL69727B2	11W, 950 lm, 2700K
		EL69727BZ2	11W, 950 lm, 2700K
		EL69730W2	11W, 950 lm, 3000K
		EL69730B2	11W, 950 lm, 3000K
 6" LED Adjustable Baffle Trim PAR30 Gimbal 7 1/4" O.D. - 4" H - 25° tilt		EL376CT5W	15W, 1050 lm, 2700K - 5000K
		EL376CT5B	15W, 1050 lm, 2700K - 5000K
		EL376CT5BZ	15W, 1050 lm, 2700K - 5000K
 6" LED Adjustable Baffle Trim PAR38 Gimbal 7 1/4" O.D. - 4" H - 25° tilt		EL476CT5W	18W, 1200 lm, 2700K - 5000K
		EL476CT5B	18W, 1200 lm, 2700K - 5000K
		EL476CT5BZ	18W, 1200 lm, 2700K - 5000K
 6" LED Adjustable Reflector Trim PAR30 Gimbal 7 1/4" O.D. - 4" H - 25° tilt		EL377CT5W	15W, 1050 lm, 2700K - 5000K
		EL377CT5B	15W, 1050 lm, 2700K - 5000K
 6" LED Adjustable Reflector Trim PAR38 Gimbal 7 1/4" O.D. - 4" H - 25° tilt		EL477CT5W	18W, 1200 lm, 2700K - 5000K
		EL477CT5B	18W, 1200 lm, 2700K - 5000K

LED Dedicated



8" & 12" LED Square Retrofit

Description	CAT. #	Specs
 8" Square LED Retrofit Insert with 5-CCT Switch 9 3/8" Sq. - 1 1/4" H Perfect for retrofitting existing 8" Square Housings  	EL881CT5W	18W, 1460 lm - 1530 lm, 2700K - 5000K, 120/277V, Triac/ELV
 12" Square LED Retrofit with 5-CCT Switch 12" Sq. - 5/8" H 	EL1212CT5W	22W, 1450 lm, 2700K - 5000K, 120V, Triac/ELV

Specialty Retrofits



4" LED BiPin Low Voltage Retrofits

Description	CAT. #	Specs
 4" LED Low Voltage Retrofit Baffle 5 1/8" O.D. - 3 1/2" H 	EL140CT5W	9W, 600 lm, 2700K - 5000K
 4" LED Low Voltage Retrofit Reflector 5 1/8" O.D. - 3 1/2" H 	EL141CT5W	9W, 600 lm, 2700K - 5000K

4" LED CFL Retrofits

Description	CAT. #	Specs
 4" CFL Retrofit 5 1/8" O.D. - 3 5/8" H	ECF41527W	9W, 850 lm, 2700K
	ECF41530W	9W, 850 lm, 3000K
	ECF41535W	9W, 850 lm, 3500K

* Fits in 13W, 18W, 26W - 4-Pin Connector to adapt to existing 4-Pin Socket (Electronic ballast CFL) included.
2-Pin Connector to adapt to 2-Pin Socket (Magnetic ballast CFL) sold separately*

Housings for **2-Hr Fire Rated** Ceilings

THE IDEAL SOLUTION FOR A VARIETY OF RECESSED & CEILING MOUNT LED FIXTURES



Maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714



DAMP LOCATION




WET LOCATION



IC RATED



AIRTIGHT

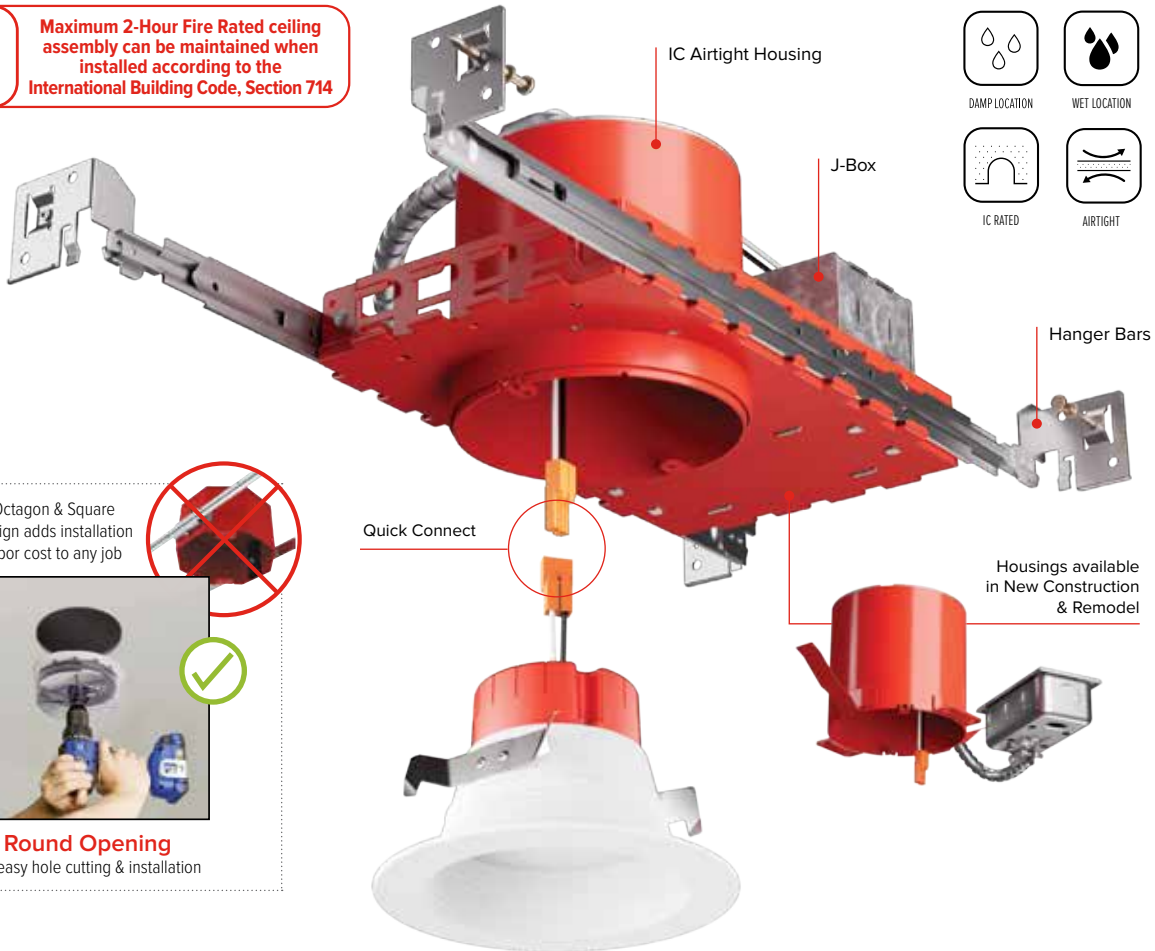

Octagon & Square design adds installation labor cost to any job



Round Opening
for easy hole cutting & installation

Covered by U.S. PATENTS and Patents Pending

COMPATIBLE APPLICATIONS

Koto™
LED Module
& 4" Trims

4" Round
& Square
LED Inserts

Ceiling
Mount LED
Fixtures



Housings for 2-Hour Fire Rated Ceilings

Description	CAT. #	Specs	Dist. Net
 4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4" - 4 1/2" H A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714	 EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.	
	EJB4ICA-EM5	Housing with Emergency Battery Back-Up	
 4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4" - 4 1/2" H	 EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs	
	EJB4RICA-EM5	Housing with Emergency Battery Back-Up	
	ELJ4OV	For use with EJB4RICA to cover tabs. 5 3/4" O.D. - 4" I.D. - 1/4" H	

Compatible Koto™ Fixtures

Koto™ Modules	
ELK0727	ELK11HC
ELK0730	ELK0827-NSP
ELK0735	ELK0830-NSP
ELK0740	ELK08CT5
ELK0927	ELK10CT5
ELK0930	ELK0727-FC
ELK0935	ELK0730-FC
ELK0940	ELK0735-FC
ELK09SD	ELK0740-FC
ELK1127	ELK07SD-FC
ELK1130	ELK1327
ELK1135	ELK1330
ELK1140	ELK1335
ELK11SD	ELK1340
Koto™ Trims	
ELK4116	ELK4713
ELK4127	ELK4715
ELK4129	ELK4216
ELK4172	ELK4229
ELK4179	ELK4227
ELK4188	ELK4714
ELK4710	ELK4716

Compatible 4" LED Inserts

4" LED inserts	
EL41027	EL415CT5
EL41030	EL416CT5
EL41035	EL41727
EL41040	EL41730
EL410CT5	EL41735
EL412CT5	EL41740
EL414CT5	EL417CT5
EL41527	EL455CT5
EL41530	EL44127
EL41535	EL441CT5
EL41540	EL442CT5
EL41550	EL446CT5
EL415SD	

Compatible LED Sky Panels™

LED Sky Panels™	
ELSP43CT5	ELSP22CT5
ELSP4430	ELSP63DXCT3
ELSP63CT5	ELSP83DXCT3
ELSP66CT5	ELSP1224CT5
ELSP83CT5	ELSP1248CT5
ELSP88CT5	ELSP2424CT5
ELSP12CT5	ELSP2448CT5


Compatible Ceiling Mounts

Darby™ Fixtures	Dustin™ Fixtures
ELD11030	ELD31430
ELD11040	ELD31440
ELD14CT5	ELD32230
ELD16CT5	ELD32240
ELD21030	ELD32430
ELD21040	ELD32440
ELD31230	ELD32630
ELD31240	ELD32640

Compatible LED Disk Lights

Alva™ LED Disk Lights	
ELSF1127	ELSF11CT5
ELSF1130	ELSF40CT5

4" LED Insert & Junction Boxes for 2-Hour Fire Rated Ceilings

Description	CAT. #	Specs
 4" Square Standard Deep Junction Box with Hanger Bars for use in Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC and Non-IC applications. 4" Sq - 3 1/2" H
 4" Square Standard Deep Junction Box for use in Fire Rated Ceilings	ELJ443	IC Airtight for use in IC and Non-IC applications. 4" Sq - 3 1/2" H
 4" LED Junction Box 1000 lm Insert	 ELJ42230W	15W, 1000 lm, 3000K 6" O.D. - 2 5/8" H



Fire Rated Products

Description	CAT. #	Specs
	FIREENCL	20 3/8" L - 14 3/8" W - 9" H
	FIREENCL-S	Shallow, 16" L - 14 3/8" W - 7 1/4" H
 Mica Fire tape for use with FIREENCL	FIRETAPE	16' Roll
 Recessed Fixture 2-Hour Fire Rated Cover	FIRECVR	Made of heat activated intumescent material. 17" O.D. - 13" I.D. - 9 3/4" H
	EL39FICA	3" LED Housing. 7 3/4" Height
	EL48FICA	4" LED Housing. 6 7/8" Height
	EL56FICA	5" LED Housing. 7 3/4" Height
	EL76FICA	6" LED Housing. 7 3/4" Height
	EL99FICA	4" LED Housing. 7 3/4" Height
	EL5FICA	5" LED Housing. 7 3/4" Height
	EL7FICA	6" LED Housing. 7 3/4" Height
	EL39FICA-GU10	3" LED Housing. 7 3/4" Height
	EL49FICA-GU10	4" LED Housing. 7 3/4" Height
 2-Hour Fire Rated Shallow Housing	EL492FICAS	4" LED Shallow Housing 4 13/16" Height
 2-Hour Fire Rated Shallow Housing	EL75FICAS	6" LED, Shallow Housing 6 3/16" Height


Emergency Battery Backups & Accessories

Description	CAT. #	Specs
 Emergency Battery Backup (Single Whip - 90 Min. of Emergency Light) 11 1/8" L - 2 5/8" W - 1 5/8" H	KEM-LD1	8W, Up to 750 lm EM output
	KEM-LD2	12W, Up to 1100 lm EM output
 Emergency Battery Backup (Double Whip - 90 Min. of Emergency Light) 11 1/8" L - 2 5/8" W - 1 5/8" H	KEM-LD3	8W, Up to 750 lm EM output
	KEM-LD4	12W, Up to 1100 lm EM output
 Emergency Battery Backup (90 Min. of Emergency Light) 17 1/2" L - 2 1/4" W - 1 5/8" H	KEM-LD5	25W, 120/277V, 50/60 Hz. Compatible with EL390, EL490, EL492, EL560, EL570, EL760, EL770 Series
 Emergency Battery Backup (90 Min. of Emergency Light) 15 1/2" L - 2 1/8" W - 1 5/8" H	KEM-ERT	25W, 100/277V AC, 50/60 Hz. Compatible to all 3"-8" Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto System
 Test Switch	T-SWITCH	for KEM Battery Backups for CFL
 Test Switch for KEM-LD1/2/3	T-SWITCH-LD1	for KEM-LD1, KEM-LD2, and KEM-LD3
 Test Switch for KEM-LD5	T-SWITCH-LD5	for KEM-LD5

The Elm™ System

Ultra Slim LED Panel Lights & LED Downlights

DESIGNED TO BE INSTALLED WITHOUT A RECESSED HOUSING!

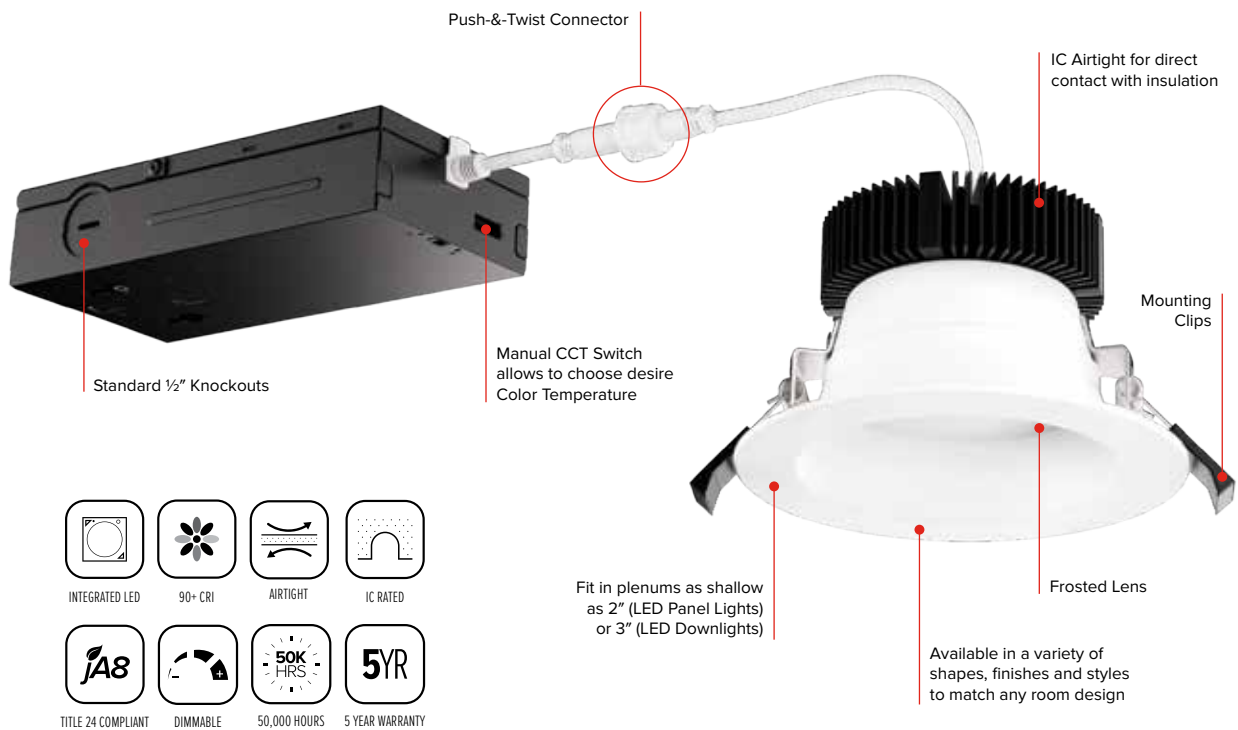

New Construction application requires optional mounting plate or frame. Remodel application requires no additional accessories

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE



Elm™ System LED Downlights

Description	CAT. #	Specs
-------------	--------	-------

2" Elm™ System LED Downlights featuring 5-CCT Switch to choose desire color temperature (2700K-5000K), and maximum flexibility by mix-&-matching any round or square trim with desire reflector or baffle finish.

Step 1: Choose a Module		2" LED Round Elm™ Downlight with 5-CCT Switch 3" O.D. - 2" I.D. - 2 1/2" H			ERT2L06CT5	8W, 600 lm, 120V, 2700K - 5000K, Triac/ELV dimmable
		2" HIGH LUMEN LED Round Elm™ Downlight with 5-CCT Switch 3" O.D. - 2" I.D. - 4 1/4" H			ERT2HL08CT5 ERT2HL10CT5	12W, 850 lm, 2700K - 5000K, 120V, Triac/ELV dimmable 15W, 1000 lm, 2700K - 5000K, 120V, Triac/ELV dimmable
		Reflector for 2" LED Elm™ Downlights 2 1/4" O.D. - 1 15/16" I.D. - 5/16" H			ERT210W ERT210B ERT210H ERT210BZ	White Black Haze Bronze
Step 2: Choose a Reflector or Baffle		Baffle for 2" LED Elm™ Downlights 2 1/4" O.D. - 1 15/16" I.D. - 5/16" H			ERT214W ERT214B ERT214BZ	White Black Bronze
		Round Flexa™ Trim Ring for 2" Elm™ LED Downlights 3 1/4" O.D. - 1 15/16" I.D.			ERT2RW ERT2RB ERT2RBZ	White Black Bronze
		Square Flexa™ Trim Ring for 2" Elm™ LED Downlights 3 1/4" Sq. - 1 15/16" I.D.			ERT22SQW ERT22SQB	White Black
Step 3: Choose a Trim Ring						


4" Elm™ System LED Downlights featuring 5-CCT Switch to choose desire color temperature (2700K-5000K), Our NEW LED Light Engine and trims feature twist-on mechanism for easy installation.

Step 1: 4" LED Module		4" LED Round Elm™ Downlight with 5-CCT Switch 3 1/8" O.D. - 2 3/8" I.D. - 1 7/8" H			ERT4L10CT5	15W, 1000 lm, 120V, 2700K - 5000K, Triac/ELV dimmable
		4" Round Reflector Trims 4 1/2" O.D. - 3" I.D. - 1 1/4" H			ERT415W ERT415BB	White Black
Step 2: Choose a Trim		4" Square Reflector Trims 4 1/2" Sq. - 2 3/8" Sq. - 1 1/4" H			ERT445W ERT445BB	White Black




Elm™ System LED Downlights & Slim Panels IC Rated

Description		CAT. #	Specs
New Construction Frame for Slim Panels		E2LF1	2" Frame. 2 5/8" Opening
		E4LF1	4" Frame. 4 1/4" Opening
		E6LF1	6" Frame. 6 1/4" Opening
		E8LF1	8" Frame. 8" Cutout
New Construction Round Mounting Plates		EMP4	4" Plate. 13 1/4" L - 6 1/2" W - 4 1/4" Opening
		EMP6	6" Plate. 17 1/4" L - 8 3/8" W - 6 1/4" Opening
		EMP8	8" Plate. 18 1/4" L - 10 3/8" W - 7 3/4" Opening
New Construction Universal Frame for Elm™ System Downlights 12 1/8" L - 7 5/8" W		E246LF1	For use with 2" (2 3/4" O.D.), 4" (4 3/8" O.D.) or 6" (6 1/4" O.D.) Round Downlights
2" LED Round Downlights 3 1/8" O.D. - 2" I.D. - 2 1/2" H		ERT210CT5W	Reflector 8W, 550 lm, 2700K - 5000K
		ERT214CT5W	Baffle 8W, 550 lm, 2700K - 5000K
2" LED Square Downlights 3 1/8" Sq. - 2 1/4" Sq. - 2 1/2" H		ERT213CT5W	Reflector 8W, 600 lm, 2700K - 5000K
		ERT215CT5W	Baffle 8W, 600 lm, 2700K - 5000K
2" LED Gimbal Lights 2 3/8" O.D. - 1 1/8" H		ERT218CT5W	5W, 350 lm, 2700K - 5000K
		ERT218CT5BZ	5W, 350 lm, 2700K - 5000K
3" Adjustable Eyeball Downlight with 5-CCT Switch 4 3/8" O.D. - 2 15/16" I.D. - 1 1/2" H		ERT317CT5W	8W, 600 lm, 2700K - 5000K
3" Gimbal with 5-CCT Switch 3 3/8" O.D. - 1 3/4" H		ERT318CT5W	8W, 600 lm, 2700K - 5000K
		ERT318CT5B	8W, 600 lm, 2700K - 5000K
		ERT318CT5BZ	8W, 600 lm, 2700K - 5000K
3" Ultra Slim LED Panel Light with 5-CCT Switch 4" O.D. - 2 1/2" I.D. - 1" H		ERT311CT5W	10W, 600 lm, 2700K - 5000K, 120V
4" Slim LED Panel Light with 5-CCT Switch 4 3/8" O.D. - 3" I.D. - 1" H		ERT411CT5W	9W, 500 lm, 2700K - 5000K
		ERT411CT5BZ	9W, 500 lm, 2700K - 5000K
4" HIGHLUMEN Slim LED Panel Light with 5-CCT Switch 4 3/8" O.D. - 3" I.D. - 1" H		ERT412CT5W	12W, 700 lm, 2700K - 5000K
		ERT412CT5BZ	12W, 700 lm, 2700K - 5000K



Elm™ System LED Downlights & Slim Panels IC Rated

Description	CAT. #	Specs
 4" 120/277/347V, 0-10V LED Slim Panel Light with 5-CCT Switch 4 7/8" O.D. - 3 1/8" I.D. - 1" H  	ERT41DXCT5W	12W, 750 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 4" Retrofit LED Recessed Downlight 5-CCT with Separate J-Box 5 1/2" O.D. - 4" I.D. - 2 1/2" H  	ERT415CT5W ERT415CT5BB ERT415CT5BZ	11W, 750 lm, 2700K - 5000K, 120V, White 11W, 750 lm, 2700K - 5000K, 120V, Black 11W, 750 lm, 2700K - 5000K, 120V, Bronze
 4" 120/277/347V, 0-10V Recessed Downlight with 5-CCT Switch 5 1/2" O.D. - 4" I.D. - 2 1/2" H  	ERT495CT5DXW	11W, 750 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 4" LED Recessed Gimbal Downlight with 5-CCT Switch 5" O.D. - 3" I.D. - 1 1/2" H  	ERT413CT5W	10W, 650 lm, 2700K - 5000K, 120V
 4" 120/277/347V, 0-10V LED Recessed Gimbal with 5-CCT Switch 5" O.D. - 3" I.D. - 1 1/2" H  	ERT413CT5DXW	10W, 650 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 4" LED Sloped Round Regressed Gimbal with 5-CCT Switch 5 3/4" O.D. - 3 7/8" I.D. - 2 1/2" H  	ERT425CT5W	8W, 510 lm, 2700K - 5000K, 120V
 4" Round Adjustable Eyeball Downlight with 5-CCT Switch 5" O.D. - 3 1/2" I.D. - 1 1/2" H  	ERT416CT5W ERT416CT5BZ ERT416CT5B	9W, 780 lm, 2700K - 5000K 9W, 780 lm, 2700K - 5000K 9W, 780 lm, 2700K - 5000K
 4" High Lumen LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch 5 1/2" O.D. - 4" I.D. - 3 1/2" H  	ERT475CT5DW ERT475CT5DH ERT475CT5DHW	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White 12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Haze 12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, Haze/White Ring
 4" LED Reflector Recessed Downlight with 5-CCT Switch 4 7/8" Sq. - 2 3/4" Sq. - 2 3/4" H 	ERT434CT5W ERT434CT5BB	10W, 1000 lm, 2700K - 5000K 10W, 1000 lm, 2700K - 5000K
 4" High Lumen LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch 4 7/8" Sq. - 2 3/4" Sq. - 2 3/4" H   	ERT487CT5W ERT487CT5BB	10W - 18W, 1000 lm - 1800 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White 10W - 18W, 1000 lm - 1800 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Black
 4" LED Square Panel 5" Sq. - 2 3/4" Sq. - 1" H 	ERT44130BZ ERT44140BZ ERT441CT5W	9W, 550 lm, 3000K 9W, 600 lm, 4000K 12W, 700 lm, 2700K - 5000K




Elm™ System LED Downlights & Slim Panel IC Rated

Description	CAT. #	Specs
 6" Ultra Slim LED Round Panel Light with 5-CCT Switch 6 1/2" O.D. - 5" I.D. - 1" H CCT SWITCH WET LOCATION	ERT611CT5W	12W, 700 lm, 2700K - 5000K
 6" HIGH LUMEN Ultra Slim LED Round Panel Light with 5-CCT Switch 6 1/2" O.D. - 5" I.D. - 1" H CCT SWITCH WET LOCATION	ERT612CT5W	15W, 950 lm, 2700K - 5000K, 120V
 6" 120/277/347V Ultra Slim LED Panel Light with 5-CCT Switch 6 3/4" O.D. - 5" I.D. - 1" H CCT SWITCH WET LOCATION	ERT61DXCT5W	15W, 950 lm, 2700K - 5000K, 120/277/347V
 6" LED Recessed Gimbal Downlight with 5-CCT Switch 7 1/8" O.D. - 4 5/8" I.D. - 2" H CCT SWITCH WET LOCATION	ERT613CT5W	15W, 900 lm, 2700K - 5000K, 120V
 6" 120/277/347V, 0-10V LED Recessed Gimbal with 5-CCT Switch 7 1/8" O.D. - 4 5/8" I.D. - 2" H CCT SWITCH DAMP LOCATION	ERT613CT5DXW	15W, 900 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 6" Shallow LED Recessed Downlight with 5-CCT Switch 7 1/4" O.D. - 4 7/8" I.D. - 2 1/4" H CCT SWITCH WET LOCATION	ERT615CT5W	12W, 900 lm, 2700K - 5000K, 120V
 6" Deep LED Recessed Downlight with 5-CCT Switch 7 1/2" O.D. - 4 7/8" I.D. - 3 1/2" H CCT SWITCH WET LOCATION	ERT625CT5W	12W, 950 lm, 2700K - 5000K, 120V
 6" 120/277/347V Deep LED Recessed Downlight with 5-CCT Switch 7 1/2" O.D. - 4 7/8" I.D. - 3 1/2" H CCT SWITCH WET LOCATION	ERT695CT5DXW	12W, 950 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 6" HIGH LUMEN LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch 7 1/2" O.D. - 4 7/8" I.D. - 4 1/2" H CCT SWITCH LUMEN Switch WET LOCATION	ERT685CT5DW	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White
	ERT685CT5DH	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Haze
	ERT685CT5DHW	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, Haze/White Ring
 6" LED Square Panel 7 1/4" Sq. - 4" Sq. CCT SWITCH WET LOCATION	ERT66130W	12W, 750 lm, 3000K
	ERT66130N	12W, 750 lm, 3000K
	ERT66130BZ	12W, 750 lm, 3000K
	ERT66140N	12W, 800 lm, 4000K
	ERT66140BZ	12W, 800 lm, 4000K
	ERT661CT5W	12W, 700 lm, 2700K - 5000K

ELM™ System

2"-8" Slim Panels



Elm™ System Slim Panel IC Rated

Description	CAT. #	Specs
 8" HIGH LUMEN LED Panel 9" O.D. - 6 3/8" I.D. - 1 1/8" H 	ERT812CT5W	26W, 2200 lm, 2700K - 5000K
 8" 120/277/347V Ultra Slim LED Panel Light with 5-CCT Switch 8 7/8" O.D. - 6 7/8" I.D. - 7/8" H  	ERT81DXCT5W	20W, 1200 lm, 2700K - 5000K, 120/277/347V

Elm™ System Accessories

Description	CAT. #	Specs
 Extension Cord for ELM™ System Fixtures	ECNE10	10" Extension Cord
	ECNE11	10 ft. Extension Cord
 Emergency Battery Backup for 3" - 8" ELM™ System Fixtures 15 1/2" L - 2 1/8" W - 1 5/8" H	KEM-ERT	90 min. of emergency light. Compatible with 3" - 8" Elm™ system fixtures (ERT3, ERT4, ERT6, & ERT8 Series)

Easy Pro™ Integral Junction Box LED Inserts


Description	CAT. #	Specs
-------------	--------	-------






Energy efficient LED Lighting fixtures designed to be easily install without the need of any recessed housing. For direct contact with insulation. Title 24 Compliant. ENERGY STAR Compliant. ETL Listed.

 6" Easy Pro™ Jbox LED Insert 7 1/2" O.D. - 2 13/16" H 	ELR68530W	23W, 1400 lm, 3000K
--	-----------	---------------------

The Ply™ System

0-10V Dimmable LED & Housings

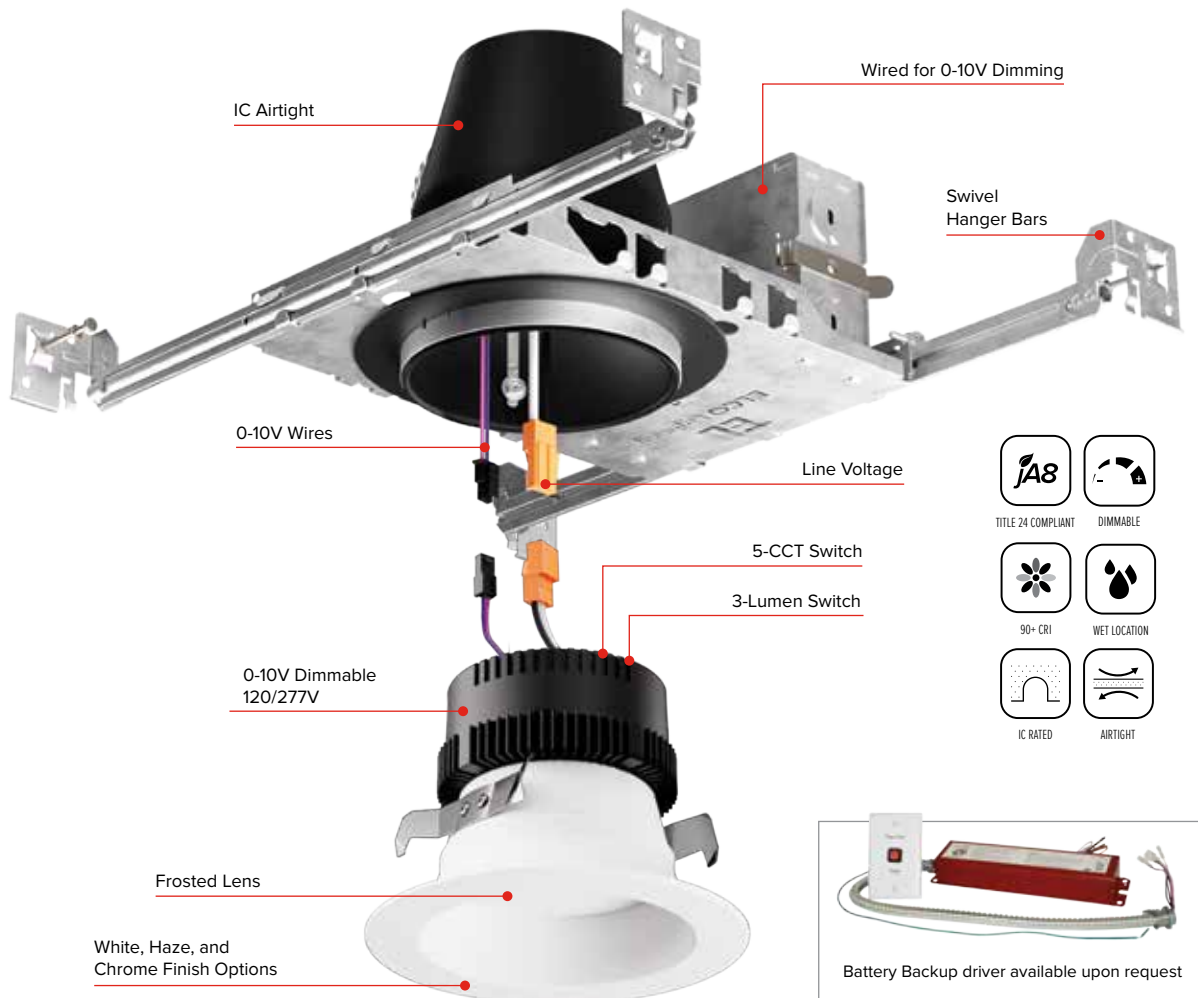

SIZE	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 4"	 Downlight	 White  Black  Bronze  Chrome  Haze	 650 lm to 2000 lm	 2700K - 5000K
 6"	 Adjustable			

The Ply™ System

0-10V Dimmable LED Recessed Fixtures



4" 0-10V Dedicated LED Housings

Description	CAT. #	Specs
4" New Construction 2-Hour Fire Rated Housing (Sound Rated)	EL49FICDXA	4" Housing. 6 3/4" Height
4" Standard IC Airtight New Construction Housing	EL490ICDXA	4" Housing. 5 1/2" Height
	EL490ICDXA-EM5	Emergency Back-Up
4" Standard IC Airtight Remodel Housing	EL490RICDXA	4" Housing. 5 1/2" Height
4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714	EJB4ICDXA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings. (For use with EL495 Series Only) 4 1/2" Height
4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICDXA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs. (For use with EL495 Series Only). 4 1/2" Height
	ELJ4OV	For use with EJB4RICDXA to cover tabs

4" 0-10V LED Inserts 120/277V

Description	CAT. #	Specs
4" 0-10V LED Insert with 5-CCT & 3-Lumen Switch 5 1/2" O.D. - 4" I.D. - 4 1/8" H	EL475CT5DW	All White, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	EL475CT5DH	All Haze, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	EL475CT5DHW	Haze/White Ring, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	EL475CT5DBB	All Black, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
4" 0-10V LED Insert with 5-CCT & 3-Lumen Switch 4 7/8" Sq. - 2 3/4" Sq. - 4 1/4" H	EL487CT5W	All White, 2700K - 5000K, 120/277V 1000 lm (10W), 1400 lm (14W), 1800 lm (18W)
	EL487CT5BB	All Black, 2700K - 5000K, 120/277V 1000 lm (10W), 1400 lm (14W), 1800 lm (18W)
4" 0-10V LED Insert 5 1/2" O.D. - 4" I.D. - 3" H	EL49530DW	All White, 12W, 800 lm, 3000K, 120/277V
	EL49530DCW	Chrome/White Ring, 12W, 800 lm, 3000K, 120/277V
	EL49540DCW	Chrome/White Ring, 12W, 900 lm, 4000K, 120/277V
4" 0-10V LED Round Adjustable Gimbal Insert 5" O.D. - 4 1/8" H - 25° tilt	EL4142DXW	All White, 10.5W, 650 lm, 2700K, 120/277V, 60°
	EL41430DXW	All White, 10.5W, 680 lm, 3000K, 120/277V, 60°
	EL41435DXW	All White, 10.5W, 710 lm, 3500K, 120/277V, 60°
4" Round Adjustable 0-10V LED LED Insert 5" O.D. - 4 1/8" H - 65° tilt Optional Lens: EP710C (20°), EP712C (60°)	EL49727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
	EL49727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
	EL49730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
	EL49730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V
4" Square Adjustable 0-10V LED LED Insert 5" Sq. - 4 1/8" H - 65° tilt Optional Lens: EP710C (20°), EP712C (60°)	EL44727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
	EL44727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
	EL44730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
	EL44730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V

The Ply™ System

0-10V Dimmable LED Recessed Fixtures



6" 0-10V Dedicated LED Housings

Description	CAT. #	Specs
 6" 0-10V New Construction 2-Hour Fire Rated Housing	EL75FICDXAS	6" Shallow Housing. 6 3/16" Height
	EL76FICDXA	6" Housing. 7 3/4" Height
 6" 0-10V New Construction Housing	EL760ICDXA	6" Shallow Housing. 5 1/2" Height
	EL760ICDXA-EM5	Emergency Back-Up
	EL770ICDXA	6" Housing. 7 1/2" Height
	EL770ICDXA-EM5	Emergency Back-Up
 6" 0-10V Remodel Housing	EL760RICDXA	6" Shallow Housing. 5 1/2" Height
	EL770RICDXA	6" Housing. 7 1/2" Height

6" 0-10V LED Inserts 120/277V

Description	CAT. #	Specs
 6" 0-10V LED Insert with 5-CCT & 3-Lumen Switch 7 1/2" O.D. - 5" I.D. - 5" H   	EL685CT5DW	All White, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DH	All Haze, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DHW	Haze/White Ring, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DCW	Chrome/White Ring, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DBB	All Black, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
 6" 0-10V LED Insert 7 1/2" O.D. - 4 3/8" H 	EL69535DCW	Chrome/White Ring, 20W, 1425 lm, 3500K, 120/277V
 6" Round Adjustable LED Insert 7 1/4" O.D. - 4 1/8" H - 65° tilt 	EL69727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
	EL69727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
	EL69730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
	EL69730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V

0-10V Zinnia™ LED Undercabinet Bar

Description	CAT. #	Specs
 0-10V Zinnia™ LED Undercabinet Bar 3 1/2" W - 1" H Bronze available (BZ)	EUM41DXW	12 1/4", White, 5W, 450 lm, 3000K, 120V
	EUM42DXW	21", White, 9W, 800 lm, 3000K, 120V
	EUM43DXW	24 1/4", White, 10W, 900 lm, 3000K, 120V
	EUM44DXW	33 1/4", White, 15W, 1350 lm, 3000K, 120V
	EUM45DXW	42 1/4", White, 20W, 1800 lm, 3000K, 120V
	EUM41DXW-7	12 1/4", White, 5W, 450 lm, 3000K, 277V
	EUM42DXW-7	21", White, 9W, 800 lm, 3000K, 277V
	EUM43DXW-7	24 1/4", White, 10W, 900 lm, 3000K, 277V
	EUM44DXW-7	33 1/4", White, 15W, 1350 lm, 3000K, 277V
	EUM45DXW-7	42 1/4", White, 20W, 1800 lm, 3000K, 277V

The Birch™ System

Commercial LED Downlights




SIZE & STYLE




BEAM ANGLES



FINISHES




LUMENS



COLOR TEMPERATURE




2700K - 5000K



4", 6", & 8" Round Commercial Frames




	Description	Cat. #	Specs
	New Construction Architectural Frames (hanger bars required)	ELB4EH	4" Architectural Frame. 4 1/2" H - 4 3/4" O.D.
		ELB6EH	6" Architectural Frame. 5 1/2" H - 6 1/4" O.D.
	New Construction Architectural Frames with 90 min. Emergency Battery Backup (hanger bars required)	ELB4EH-EM5	4" Architectural Frame with Battery Backup.
		ELB6EH-EM5	6" Architectural Frame with Battery Backup
	27" Flat Hanger Bars	FB27	For wood construction (Set of 2)
	26" C-Channel Hanger Bars	CH26	For T-Bar ceilings (Set of 2)
	New Construction Plaster Frames with Hanger Bars	ELB4PF	4" Plaster Frame. 4 3/4" O.D.
		ELB6PF	6" Plaster Frame. 6 1/2" O.D.
		ELB8PF	8" Plaster Frame. 7 7/8" O.D.
	New Construction Plaster Frames with Hanger Bars with 90 min. Emergency Battery Backup	ELB4PF-EM5	4" Plaster Frame with Battery Backup
		ELB6PF-EM5	6" Plaster Frame with Battery Backup
		ELB8PF-EM5	8" Plaster Frame with Battery Backup

4" Square Commercial Frames

	Description	Cat. #	Specs
	New Construction Architectural Frames (hanger bars required)	ELB44SQEH	4" Architectural Frame 5 1/4" O.D.
	New Construction Architectural Frames with 90 min. Emergency Battery Backup (hanger bars required)	ELB44SQEH-EM5	4" Architectural Frame with Battery Backup
	27" Flat Hanger Bars	FB27	For wood construction (Set of 2)
	26" C-Channel Hanger Bars	CH26	For T-Bar ceilings (Set of 2)
	New Construction Plaster Frames with Hanger Bars	ELB44SQPF	4" Plaster Frame 5 1/4" O.D.
	New Construction Plaster Frames with Hanger Bars with 90 min. Emergency Battery Backup	ELB44SQPF-EM5	4" Plaster Frame with Battery Backup



Retrofits for Birch™ Fixtures

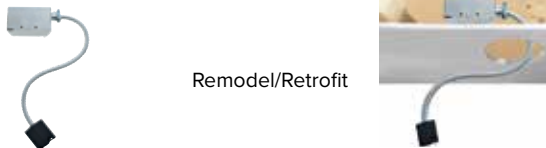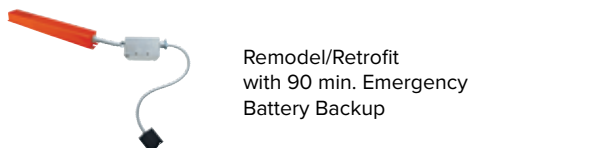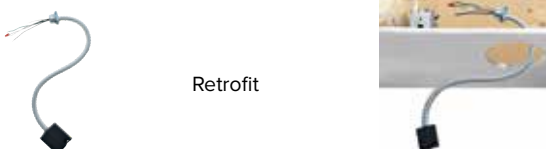Description		Cat. #	Specs
 Remodel/Retrofit		ELBRMD	Remodel/Retrofit (Add architectural downlighting to an existing ceiling) 4" Square J-Box with 15" Cable
 Remodel/Retrofit with 90 min. Emergency Battery Backup		ELBRMD-EM5	Remodel/Retrofit with Battery Backup
 Retrofit		ELBRT	Retrofit (To convert an existing fixture to a Birch™ fixture) 15" Cable

The Birch™ System



Architectural Commercial LED Lighting




Birch™ LED Modules & Trims

Description		CAT. #	Specs
 Birch™ Pro LED Module 850 lm - 1500 lm with 5-CCT Switch 5-CCT Switch 2700K - 5000K Lumen Switch 7L - 850 lm, 9W 10L - 1150 lm, 13W 15L - 1500 lm, 18W IC RATED	  	• IC Rated for IC and Non-IC applications • Focus Beam Angle Adjustment (30° - 70°) with the ease of a manual twist • Works with 4", 6", and 8" commercial frames, remodel and retrofit applications • 4 3/8" O.D. - 2 5/8" I.D. - 3 1/4" H	ELB15RCT5ICA 2700K - 5000K, 120/277V, 0-10V dimming
 Birch™ High Lumen LED Module 1500 lm - 2500 lm with 5-CCT Switch 5-CCT Switch 2700K - 5000K Lumen Switch 15L - 1500 lm, 16W 20L - 2000 lm, 23W 25L - 2500 lm, 30W HIGH LUMEN	NEW!  	• Non-IC Rated for Non-IC applications • Focus Beam Angle Adjustment (35° - 85°) with the ease of a manual twist • Works with 4", 6", and 8" commercial frames, remodel and retrofit applications • 4 3/8" O.D. - 2 5/8" I.D. - 3 1/4" H	ELB25RCT5 2700K - 5000K, 120/277V, 0-10V/Triac/ELV dimming
 Birch™ High Lumen LED Module 3200 lm - 5000 lm Lumen Switch 32L - 3200 lm, 32W 40L - 4000 lm, 40W 50L - 5000 lm, 55W EXTRA HIGH LUMEN	NEW! 	• Non-IC Rated for Non-IC applications • Focus Beam Angle Adjustment (22° - 50°) with the ease of a manual twist • Works with 6" and 8" commercial frames, remodel and retrofit applications (ELB610 and ELK810 trim series only) • 5 1/2" O.D. - 2 5/8" I.D. - 3" H	ELB50R35 3500K, 120/277V, 0-10V dimming
 4" Round Reflector Trim 6 7/8" O.D. - 4" I.D. - 2 5/8" H			ELB410W All White
			ELB410H All Haze
			ELB410HW Haze/White Ring
			ELB410BB All Black
 4" Square Reflector Trim 5 7/8" Sq. - 4 7/8" Sq. - 3 3/4" H			ELB440W All White
			ELB440H All Haze
			ELB440HW Haze/White Ring
			ELB440BB All Black
 6" Round Reflector Trim 8 1/2" O.D. - 5 1/2" I.D. - 3 1/8" H			ELB610W All White
			ELB610H All Haze
			ELB610HW Haze/White Ring
			ELB610BB All Black
 6" Round Adjustable Reflector Trim 7 3/8" O.D. - 5" I.D. - 2 1/4" H	NEW!		ELB629W All White
			ELB629B All Black
			ELB629H All Haze
 8" Round Reflector Trim 10 3/8" O.D. - 7 1/8" I.D. - 3 3/8" H			ELB810W All White
			ELB810H All Haze

5" & 8" LED Square Frames & Light Engines

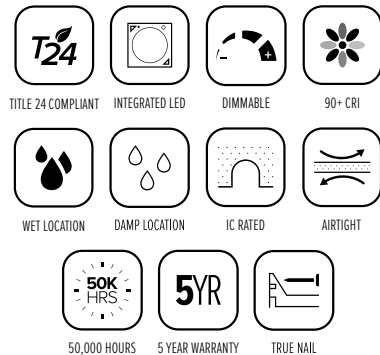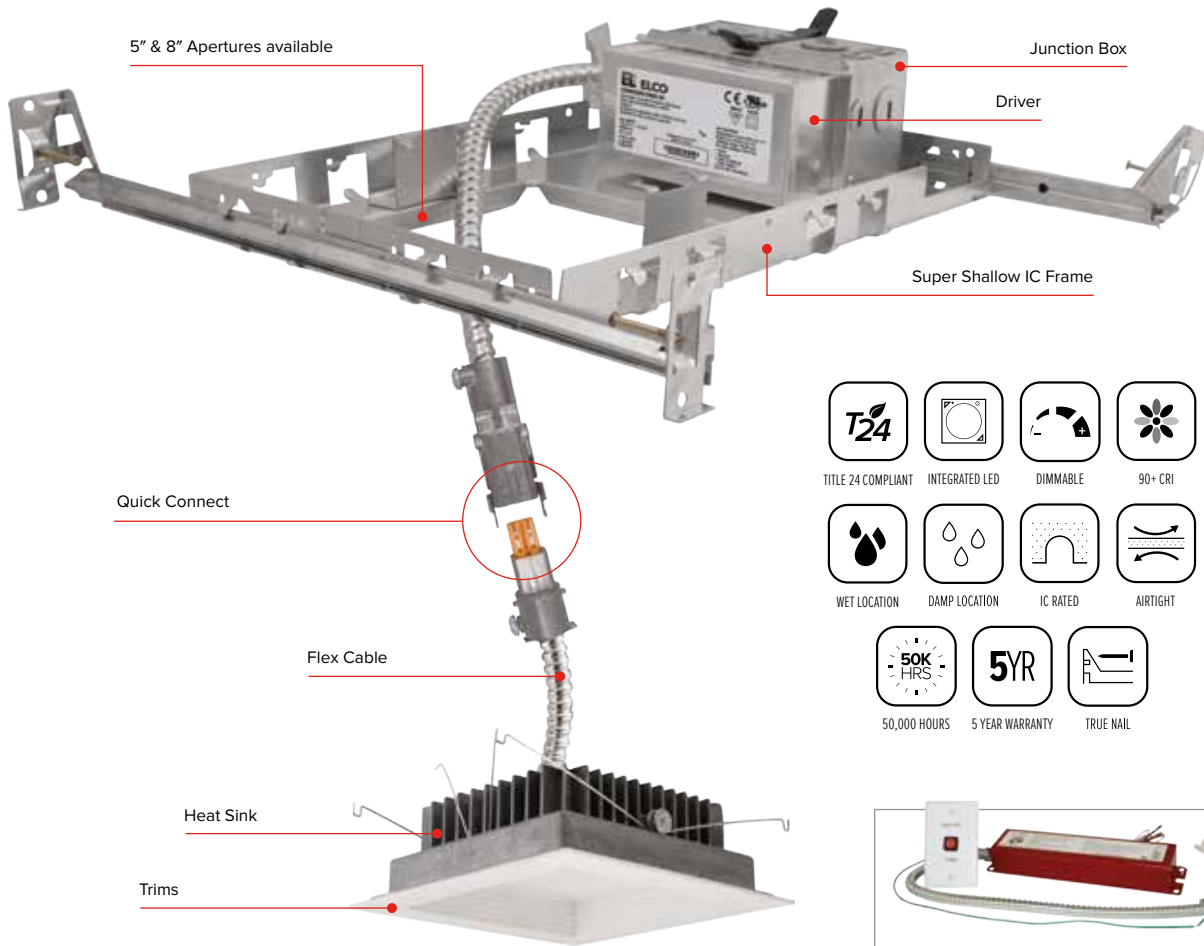

STYLES



Reflector


Baffle

Pull Down

FINISHES



LUMENS



650 lm to 1460 lm

COLOR TEMPERATURE



3000K - 4000K

The Maple™ System


5" LED Square Frame & Light engines



5" Maple™ Shallow Frames


Description	CAT. #	Specs
 5" IC Shallow Frame with Driver 2 7/8" H - 5 3/4" Sq.	E5SQLFU11	16W, 1100 lm, 120/277V, Triac/ELV
	E5SQLFU20	28W, 2000 lm, 120/277V, 0-10V
 5" IC Shallow Frame with Driver and Emergency Battery Backup	E5SQLFU11-EM1	1100 lm (Up to 750 lm Emergency Output)
	E5SQLFU11-EM2	1100 lm (Up to 1100 lm Emergency Output)
	E5SQLFU20-EM1	2000 lm (Up to 750 lm Emergency Output)
	E5SQLFU20-EM2	2000 lm (Up to 1100 lm Emergency Output)







5" Maple™ LED Light Engines

Description	CAT. #	Specs
 5" LED Light Engine with Baffle Trim 6" Sq. - 2" H 	E524L2030W	White, 26W, 2000 lm, 3000K
	E524L2030B	Black, 26W, 2000 lm, 3000K
	E524L2030BZ	Bronze, 26W, 2000 lm, 3000K
 5" LED Light Engine with Reflector Trim 6" Sq. - 2" H 	E520L2030W	White, 26W, 2000 lm, 3000K
	E520L2030B	Black, 26W, 2000 lm, 3000K
	E520L2030BZ	Bronze, 26W, 2000 lm, 3000K
 5" Adjustable Pull Down LED Light Engine 6" Sq. - 3 1/4" H 85° tilt, 356° rotation 	E523L1130W	White, 16W, 1100 lm, 3000K
	E523L1130BZ	Bronze, 16W, 1100 lm, 3000K
	E523L1140W	White, 16W, 1100 lm, 4000K
	E523L1140BZ	Bronze, 16W, 1100 lm, 4000K
 5" Pull Down LED Light Engine 6" Sq. - 4 1/4" H - 85° tilt 	E521L2030W	White, 26W, 2000 lm, 3000K
	E521L2040W	White, 26W, 2000 lm, 4000K

The Cedar™ System

High-End Residential & Light Commercial LED Lighting

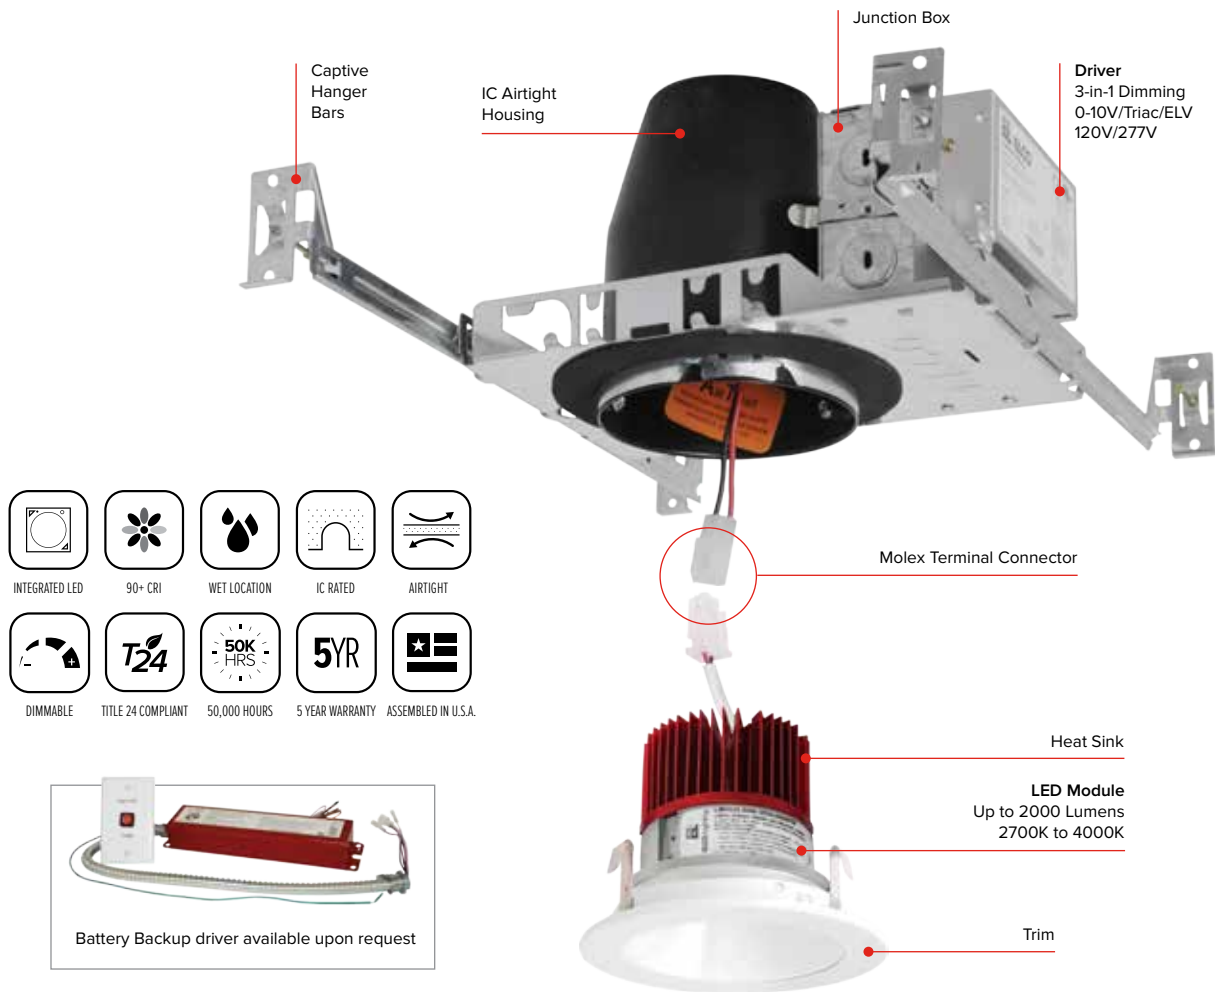

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 4"	 Round	 White  Black  Bronze  Copper  Haze	 850 lm to 2000 lm	 2700K - 4000K & Sunset Dimming
 6"	 Square  Adjustable  Trimless			

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



TITLE 24 COMPLIANT

DIMMABLE

50,000 HOURS

ASSEMBLED IN U.S.A.

3" LED IC Airtight Housings with Driver

Description	Cat. #	Specs
 3" New Construction LED ICA Housing with Driver Opening: 3 1/4" x 5 1/2" H IC RATED	E3LC08ICA2	850 lm, 120V, Triac/ELV
	E3LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 3" New Construction LED ICA Double Wall Housing with Driver Opening: 3 1/4" x 5 1/2" H IC RATED	E3LC10ICA2	1000 lm, 120V, Triac/ELV
	E3LC10ICAD2	1000 lm, 120/277V, 0-10V/Triac/ELV
	E3LC10ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 3" Remodel LED ICA Housing with Driver Opening: 3 1/4" x 5 1/2" H IC RATED	E3LRC08ICA2	850 lm, 120V, Triac/ELV
	E3LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LRC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 3" New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 3 1/4" x 7 3/4" H FIRE RATED	E3FH08ICA2	850 lm, 120V, Triac/ELV
	E3FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3FH08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

3" LED Housings with Driver (Non-IC Airtight)

Description	Cat. #	Specs
 3" New Construction LED Housing with Driver Opening: 3 1/4" x 5 1/2" H	E3LC082	850 lm, 120V, Triac/ELV
	E3LC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E3LC102	1000 lm, 120V, Triac/ELV
	E3LC10D2	1000 lm, 120/277V, 0-10V/Triac/ELV
	E3LC10SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 3" Remodel LED Housing with Driver Opening: 3 1/4" x 5 1/2" H	E3LRC082	850 lm, 120V, Triac/ELV
	E3LRC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LRC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E3LRC102	1000 lm, 120V, Triac/ELV
	E3LRC10D2	1000 lm, 120/277V, 0-10V/Triac/ELV
	E3LRC10SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



3" LED Light Engines

Round Reflector



E310C Series

Finishes:

W2, B2, BZ2, BB2, C2, H2

4 3/8" O.D. - 2 7/8" I.D. - 4 1/16" H

Round Baffle



E314C Series

Finishes:

W2, B2, BZ2, BB2

4 3/8" O.D. - 2 7/8" I.D. - 4 1/16" H

Square Pinhole



E315C Series

Finishes:

W2, B2, C2, BZ2, BB2

4 3/8" Sq. - 2" Sq. - 4 1/16" H

Square Reflector



E320C Series

Finishes:

W2, BZ2, BB2, C2, B2, H2

4 3/8" Sq. - 2 7/8" I.D. - 4 1/16" H

Round Pinhole



E329C Series

Finishes:

W2, B2, C2, BB2

4 3/8" O.D. - 1 1/2" I.D. - 4 1/16" H



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	Cedar™ 3" Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
	E310C Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2	60°
	E314C Round Baffle	10 1000 lm	30 3000K	B Black/Wht Trim		-F 38°
	E315C Square Pinhole		35 3500K	C Chrome/Wht Trim		-N 24°
	E320C Square Reflector		40 4000K	H Haze/Wht Trim		-S 15°
	E329C Round Pinhole		50 5000K	BZ All Bronze		
			SD Sunset	BB All Black		

Example: **E310C0827W2** [ELCO Cedar™ 3" Light Engine, 850 lm, 2700K, All White, Gen 2, 60° lens]

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



4" LED IC Airtight Housings with Driver

Description		Cat. #	Specs
 4" New Construction LED ICA Housing with Driver Opening: 4 1/4" x 5 1/2" H	 IC RATED	E4LC08ICA2	850 lm, 120V, Triac/ELV
		E4LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" New Construction LED ICA Double Wall Housing with Driver Opening: 4 1/4" x 5 1/2" H	 IC RATED	E4LC12ICA2	1250 lm, 120V, Triac/ELV
		E4LC12ICAD2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LC12ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" New Construction LED ICA Double Wall Housing with Driver Opening: 4 1/4" x 7 1/4" H	 IC RATED	E4LC16ICA2	1600 lm, 120V, Triac/ELV
		E4LC16ICAD2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LC16ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" Remodel LED ICA Housing with Driver Opening: 4 1/4" x 5 1/2" H	 IC RATED	E4LRC08ICA2	850 lm, 120V, Triac/ELV
		E4LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 4 1/4" x 7 3/4" H	 FIRE RATED	E4FH08ICA2	850 lm, 120V, Triac/ELV
		E4FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4FH08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" New Construction Foam Insulated R60 LED Housing Opening: 4 1/4" x 7 3/4" H	 IC RATED	E4AJ08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4AJ12ICAD2	1250 lm, 120/277V, 0-10V/Triac/ELV

4" LED Housings with Driver (Non-IC Airtight)

Description		Cat. #	Specs
 4" New Construction LED Housing with Driver Opening: 4 1/4" x 5 1/2" H		E4LC082	850 lm, 120V, Triac/ELV
		E4LC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E4LC122	1250 lm, 120V, Triac/ELV
		E4LC12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" New Construction LED Double Wall Housing with Driver Opening: 4 1/4" x 7 1/4" H		E4LC162	1600 lm, 120V, Triac/ELV
		E4LC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 4" Remodel LED Housing with Driver Opening: 4 1/4" x 5 1/2" H		E4LRC082	850 lm, 120V, Triac/ELV
		E4LRC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E4LRC122	1250 lm, 120V, Triac/ELV
		E4LRC12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E4LRC162	1600 lm, 120V, Triac/ELV
		E4LRC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



4" LED Light Engines

Round Reflector	Round Wall Wash	Round Drop Glass	Round Baffle	Round Adjustable	Round Pinhole
E410C Series Finishes: W2, B2, BZ2, BB2, C2, H2 5" O.D. - 3 1/4" I.D. - 4 3/8" H	E411C Series Finishes: W2, B2, BZ2, BB2, C2, H2 5" O.D. - 3 1/4" I.D. - 4 3/8" H	E412C Series Finishes: W2, B2, BZ2, BB2, C2, H2 5" O.D. - 1 3/4" I.D. - 4 3/8" H	E414C Series Finishes: W2, B2, BZ2, BB2 5" O.D. - 3 1/4" I.D. - 4 3/8" H	E418C Series Finishes: W2, BZ2, BB2 5" O.D. - 3 3/4" I.D. - 4 3/8" H	E429C Series Finishes: W2, B2, C2 5" O.D. - 1 3/4" I.D. - 4 3/8" H
Square on Square Baffle	Square on Square Reflector	Square on Round Reflector	Square on Round Baffle	Square Adjustable	
E415C Series Finishes: W2, BZ2, B2 5" Sq. - 2 3/8" Sq. - 4 3/8" H	E417C Series Finishes: W2 5" Sq. - 2 3/8" Sq. - 4 3/8" H	E420C Series Finishes: W2, B2, BZ2, BB2, C2, H2, MW2, MB2 5" Sq. - 3 5/8" I.D. - 4 3/8" H	E424C Series Finishes: W2, B2, BZ2, BB2 5" Sq. - 3 5/8" I.D. - 4 3/8" H	E428C Series Finishes: W2, BZ2, BB2, C2 4 7/8" Sq. - 3 3/8" I.D. - 4 3/8" H	



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number	Cedar™ 4" Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
E410C	Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2	60°
E411C	Round Wall Wash	12 1250 lm	30 3000K	B Black/Wht Trim		-F 38°
E412C	Round Drop Glass	16 1600 lm	35 3500K	C Chrome/Wht Trim		-N 24°
E414C	Round Baffle		40 4000K	H Haze/Wht Trim		-S 15°
E418C	Round Adjustable		50 5000K	BZ All Bronze		
E429C	Round Pinhole		SD Sunset	BB All Black		
E415C	Square Baffle			MW Matte White		
E417C	Sq/Sq Reflector			MB Matte Black		
E420C	Sq/Round Reflector					
E424C	Sq/Round Baffle					
E428C	Square Adjustable					

Example: **E429C16SDW2** [ELCO Cedar™ 4" Round Pinhole Light Engine, 1600 lm, Sunset Dimming, All White, Gen 2, 60° lens]

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



TITLE 24 COMPLIANT DIMMABLE 50,000 HOURS ASSEMBLED IN U.S.A.

4" Trimless LED IC Airtight Housings with Driver

Description	Cat. #	Specs
 4" New Construction LED ICA Trimless Housing with Driver Opening: 4 1/4" x 5 1/2" H IC RATED	E4TL08ICA2	850 lm, 120V, Triac/ELV
	E4TL08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E4TL08ICASD	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
	E4TL12ICA2	1250 lm, 120V, Triac/ELV
	E4TL12ICAD2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4TL12ICASD	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
 4" New Construction LED ICA Trimless Housing with Driver Opening: 4 1/4" x 7 1/4" H IC RATED	E4TL16ICA2	1600 lm, 120V, Triac/ELV
	E4TL16ICAD2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4TL16ICASD	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY

4" Trimless LED Light Engines

Round Trimless Reflector	Round Trimless Baffle	Square Trimless Reflector
 E430C Series Finishes: W2, B2, BZ2 Spackle Frame Included 3 7/8" O.D. - 3 3/4" I.D. - 4 9/16" H	 E434C Series Finishes: W2, B2, BZ2 Spackle Frame Included 3 7/8" O.D. - 3 3/4" I.D. - 4 9/16" H	 E444C Series Finishes: W2, B2, BZ2 Spackle Frame Included 3 1/4" Sq. - 2 3/8" H



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number	Cedar™ 4" Trimless	Lumen	Color Temp	Finish	Generation	Beam Angle
E430C	Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2	60°
E434C	Round Baffle	12 1250 lm*	30 3000K	B All Black		-F 38°
E444C	Square Reflector	16 1600 lm*	35 3500K	BZ All Bronze		-N 24°
			40 4000K			-S 15°
			50 5000K			
			SD Sunset			

Example: **E430C0830W2** [ELCO Cedar™ 4" Round Reflector, 850 lm, 3000K, All White, Gen 2, 60° lens]

*Round Light Engines only
Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



TITLE 24 COMPLIANT

DIMMABLE

50,000 HOURS

ASSEMBLED IN U.S.A.

6" LED IC Airtight Housings with Driver

Description		Cat. #	Specs
	6" New Construction LED ICA Housing with Driver Opening: 6 1/4" x 7 1/4" H		E6LC08ICA2 850 lm, 120V, Triac/ELV
			E6LC08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV
			E6LC08ICASD 850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
			E6LC12ICA2 1200 lm, 120V, Triac/ELV
			E6LC12ICAD2 1200 lm, 120/277V, 0-10V/Triac/ELV
			E6LC12ICASD 1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
	6" New Construction LED ICA Double Wall Housing with Driver Opening: 6 1/4" x 7 1/2" H		E6LC16ICA2 1600 lm, 120V, Triac/ELV
			E6LC16ICAD2 1600 lm, 120/277V, 0-10V/Triac/ELV
			E6LC16ICASD 1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
			E6LC20ICA2 2000 lm, 120V, Triac/ELV
			E6LC20ICAD2 2000 lm, 120/277V, 0-10V/Triac/ELV
			E6LC20ICASD 2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
	6" Remodel LED ICA Housing with Driver Opening: 6 1/4" x 7 1/4" H		E6LRC08ICA2 850 lm, 120V, Triac/ELV
			E6LRC08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV
			E6LRC08ICASD 850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
			E6LRC12ICA2 1200 lm, 120V, Triac/ELV
			E6LRC12ICAD2 1200 lm, 120/277V, 0-10V/Triac/ELV
			E6LRC12ICASD 1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
	6" New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 6 1/4" x 7 3/4" H		E6FH08ICA2 850 lm, 120V, Triac/ELV
			E6FH08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV
			E6FH08ICASD 850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY
			E6FH12ICA2 1200 lm, 120V, Triac/ELV
			E6FH12ICAD2 1200 lm, 120/277V, 0-10V/Triac/ELV
			E6FH12ICASD 1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM SUNSET DIMMING TECHNOLOGY

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



6" LED Housings with Driver (Non-IC Airtight)



6" New Construction
LED Housing with Driver
Opening: 6 1/4" x 7 1/4" H



6" Remodel LED
Housing with Driver
Opening: 6 1/4" x 7 1/4" H

Description	Cat. #	Specs
	E6LC082	850 lm, 120V, Triac/ELV
	E6LC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E6LC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LC122	1200 lm, 120V, Triac/ELV
	E6LC12D2	1200 lm, 120/277V, 0-10V/Triac/ELV
	E6LC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LC162	1600 lm, 120V, Triac/ELV
	E6LC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E6LC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LC202	2000 lm, 120V, Triac/ELV
	E6LC20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E6LC20SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LRC082	850 lm, 120V, Triac/ELV
	E6LRC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LRC122	1200 lm, 120V, Triac/ELV
	E6LRC12D2	1200 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LRC162	1600 lm, 120V, Triac/ELV
	E6LRC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LRC202	2000 lm, 120V, Triac/ELV
	E6LRC20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC20SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



TITLE 24 COMPLIANT

DIMMABLE

WET LOCATION

5 YEAR WARRANTY

50,000 HOURS

6" LED Light Engines

Round Reflector

Round Drop Glass Reflector

Round Baffle

Round Adjustable Baffle

Round Adjustable Reflector



E610C Series

Finishes:

W2, B2, BZ2, C2, G2, H2

7 1/4" O.D. - 5 3/4" I.D. - 4 5/8" H



E612C Series

Finishes:

W2, B2, BZ2, C2, G2, H2

7 1/4" O.D. - 5 7/8" I.D. - 4 5/8" H



E614C Series

Finishes:

W2, B2, BZ2, BB2

7 1/4" O.D. - 5 3/4" I.D. - 4 5/8" H



E616C Series

Finishes:

W2, B2, BZ2

7" O.D. - 6" I.D. - 4 3/8" H



E617C Series

Finishes:

W2, B2, BZ2

7" O.D. - 6" I.D. - 4 3/8" H



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number	Cedar™ 6" Light Engine		Lumen		Color Temp		Finish		Generation		Beam Angle	
Builder	E610C	Round Reflector	08	850 lm	27	2700K	W	All White	2	Gen 2		60°
	E612C	Round Drop Glass	12	1250 lm	30	3000K	B	Black/Wht Trim			-F	38°
	E614C	Round Baffle	16	1600 lm	35	3500K	C	Chrome/Wht Trim			-N	24°
	E616C	Round Adj. Baffle	20	2000 lm	40	4000K	G	Gold/Wht Trim			-S	15°
	E617C	Round Adj. Ref.			50	5000K	H	Haze/Wht Trim				
					SD	Sunset	BZ	All Bronze				

Example: **E614C2040BZ2** [ELCO Cedar™ 6" Round Baffle Light Engine, 2000 lm, 4000K, All Bronze, Gen 2, 60° lens]

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



TITLE 24 COMPLIANT DIMMABLE 50,000 HOURS ASSEMBLED IN U.S.A.

4" Dedicated LED IC Airtight Housings

Description	Cat. #	Specs
 4" New Construction LED ICA Housing Opening: 4" x 5 1/2" H	EL490ICA	14W MAX., 120/277V
	EL490ICA-7	Includes step-down transformer 277V to 12V
 4" Remodel LED ICA Housing Opening: 4" x 5 1/2" H	EL490RICA	14W MAX., 120/277V

4" LED Module & Driver

Round Reflector	Round Wall Wash	Round Drop Glass	Round Baffle	Round Adjustable
 E410R Series Finishes: W, B, BZ, BB, C, H, MW, MB 5" O.D. - 3 1/4" I.D. - 4 1/8" H	 E411R Series Finishes: W, B, BZ, BB, C, H, MW, MB 5" O.D. - 3 1/4" I.D. - 4 1/8" H	 E412R Series Finishes: W, B, BZ, BB, C, H, MW, MB 5" O.D. - 1 3/4" I.D. - 4 1/8" H	 E414R Series Finishes: W, B, BZ, BB 5" O.D. - 3 1/4" I.D. - 4 1/8" H	 E418R Series Finishes: W, BZ, BB, C 5" O.D. - 3 3/4" I.D.
Square on Square Baffle	Square on Square Reflector	Square on Round Reflector	Square on Round Baffle	Square Adjustable
 E415R Series Finishes: W, BZ 5" Sq. - 2 3/8" Sq. - 4 1/8" H	 E417R Series Finishes: W, BZ 5" Sq. - 2 3/8" Sq. - 4 1/8" H	 E420R Series Finishes: W, BZ, BB, C, H, MW, MB 5" Sq. - 3 5/8" I.D. - 4 1/8" H	 E424R Series Finishes: W, BZ, BB, C, H, MW, MB 5" Sq. - 3 5/8" I.D. - 4 1/8" H	 E428R Series Finishes: W, BZ, BB, C 4 7/8" Sq. - 3 9/16" I.D.



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number	4" LED Module & Driver	Lumen	Color Temp	Finish	Beam Angle
E410R	Round Reflector	08 850 lm	27 2700K	W All White	60°
E411R	Round Wall Wash		30 3000K	B Black/Wht Trim	-F 38°
E412R	Round Drop Glass		35 3500K	C Chrome/Wht Trim	-N 24°
E414R	Round Baffle		40 4000K	H Haze/Wht Trim	-S 15°
E418R	Round Adjustable		50 5000K	BZ All Bronze	
E415R	Sq/Sq Baffle		SD Sunset	BB All Black	
E417R	Sq/Sq Reflector			MW Matte White	
E420R	Sq/Round Reflector			MB Matte Black	
E424R	Sq/Round Baffle				
E428R	Square Adjustable				

Example: **E411R0827W-F** [ELCO 4" Round Wall Wash LED Module with Driver, 850 lm, 2700K, All White, 38° lens]

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



6" Dedicated LED IC Airtight Housings

Description	Cat. #	Specs
 6 New Construction LED ICA Housing 2-Hour Fire Rated Opening: 6 3/8" x 7 3/4" H FIRE RATED	EL76FICA	22W MAX., 120/277V
	EL76FICA-7	Includes step-down transformer 277V to 120V
 6" New Construction LED ICA Housing Opening: 6 1/4" x 7" H IC RATED	EL770ICA	24W MAX., 120/277V
	EL770ICA-7	Includes step-down transformer 277V to 120V
 6" Remodel LED ICA Housing Opening: 6 1/2" x 7" H IC RATED	EL770RICA	24W MAX., 120/277V
	EL770RICA-7	Includes step-down transformer 277V to 120V

6" LED Module & Driver

Round Reflector	Round Drop Glass	Round Baffle	Round Adjustable Baffle	Round Adjustable Reflector
 E610R Series Finishes: W, B, C, G, H, BZ 7 1/8" O.D. - 5 3/4" I.D. - 6 1/4" H	 E612R Series Finishes: W, B, C, G, H, BZ 7 1/8" O.D. - 5 3/4" I.D. - 4 5/8" - 6 1/4" H	 E614R Series Finishes: W, B, BZ 7 1/8" O.D. - 5 3/4" I.D. - 4 5/8" H	 E616R Series Finishes: W, B, BZ 7" O.D. - 6" I.D.	 E617R Series Finishes: W, B, C, H, BZ 7" O.D. - 6" I.D.

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings


Product Number	6" LED Module & Driver	Lumen	Color Temp	Finish	Beam Angle
E610R	Round Reflector	08 850 lm	27 2700K	W All White	60°
E612R	Round Drop Glass	12 1250 lm	30 3000K	B Black/Wht Trim	-F 38°
E614R	Round Baffle		35 3500K	C Chrome/Wht Trim	-N 24°
E616R	Round Adj. Baffle		40 4000K	G Gold/Wht Trim	-S 15°
E617R	Round Adj. Reflector		50 5000K	H Haze/Wht Trim	
			SD Sunset	BZ All Bronze	

Example: **E610R1250H** [ELCO 6" Round Reflector LED Module with Driver, 1250 lm, 5000K, Haze/White Trim, 60° lens]

Commercial LED Lighting

THE PERFECT LIGHTING SOLUTION FOR HOSPITALITY, RETAIL & COMMERCIAL PROJECTS



SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4"	Reflector	White	 850 lm to 6000 lm	 2700K - 5000K & Sunset Dimming
6"	Wall Wash	Black		
8"	Drop Glass	Chrome		
9"	Adjustable	Haze		



4" Round LED Architectural Frames with Driver

Description	Cat. #	Specs
 4" New Construction Architectural Frame with Driver Opening: 4 3/4" x 4 1/4" H	E4LHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E4LHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4LHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4LHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4LHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
 4" New Construction Plaster Frame with Driver Opening: 4 7/8" x 3 1/2" H	E4LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E4LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
 4" Remodel Frame with Driver Opening: 4 7/8" x 6 1/2" H	E4LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E4LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
 4" Retrofit Kit with Driver Height: 3 1/2" Width: 4 7/8" Depth: 3"	E4LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E4LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV

Product	ELCO 4" Round Frame	Voltage	Lumen	Dimming	Optional
Number Builder	E4LH Architectural	U 120/277V	08 850 lm	D2 Triac/ELV/0-10V	EM1 Emergency Backup up to 700 lm output
	E4LF Plaster		12 1250 lm	S Sunset	
	E4LR Remodel		16 1600 lm	L2 Lutron	EM2 Emergency Backup up to 1100 lm output
	E4LT Retrofit Kit		20 2000 lm		
			30 3000 lm		

Example: **E4LHU20D2** [ELCO 4" Architectural Frame, 120/277V, 2000 lm, Triac/ELV/0-10V Dimming]

4" Round LED Light Engines

Round Reflector	Round Wall Wash	Round Drop Glass
 E410 Series Finishes: W2, B2, C2, H2, HW2 5 1/2" O.D. - 4 1/4" I.D. - 5 3/4" H	 E411 Series Finishes: W2, B2, C2, H2, HW2 5 1/2" O.D. - 4 1/4" I.D. - 5 5/8" H	 E412 Series Finishes: W2, B2, C2, H2, HW2 5 1/2" O.D. - 4 1/4" I.D. - 5 5/8" H

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

Product	ELCO 4" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Number Builder	E410 Reflector	L	08 850 lm	27 2700K	H2 All Haze	60° (Standard)
	E411 Wall Wash		12 1250 lm	30 3000K	W2 All White	-F 36°
	E412 Drop Glass		16 1600 lm	35 3500K	B2 All Black	-N 25°
			20 2000 lm	40 4000K	C2 All Chrome	-S 10°
			30 3000 lm	50 5000K SD Sunset	HW2 Haze/White Ring	

Example: **E410L2030W2** [ELCO 4" Reflector, 2000 lm, 3000K, White Finish Trim]



4" Square LED Architectural Frames with Driver

Description		Cat. #	Specs
	4" New Construction Architectural Frame with Driver Opening: 5 1/4" x 3 1/2" H	E4SQLHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E4SQLHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLHU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	4" New Construction Plaster Frame with Driver Opening: 5 1/4" x 3 1/2" H	E4SQLFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E4SQLFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E4SQLFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV

ELCO 4" Square Frame		Voltage	Lumen	Dimming	Optional
Product Number Builder	E4SQLH Architectural	U 120/277V	08 850 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output EM2 Emergency Backup up to 1100 lm output
	E4SQLF Plaster		12 1250 lm		
			16 1600 lm		
			20 2000 lm		
			30 3000 lm		
			40 4000 lm		

Example: **E4SQLHU08S** [ELCO 4" Square Architectural Frame, 120/277V, 850 lm, Sunset Dimming]

4" Square LED Light Engines

Square Reflector		Square Wall Wash	
	E440 Series Finishes: W2, H2 6" Sq. - 4 1/2" Sq. - 6 5/8" H		E442 Series Finishes: W2, H2 6" Sq. - 4 1/2" Sq. - 7" H
		*All Sunset LED Light Engines must be used with "SD" Housings	

ELCO 4" Engines		Lume	Lumen	Color Temp	Finish	Beam Angle
Product Number Builder	E440 Reflector	L	08 850 lm	27 2700K (Up to 3000 lm)	W2 All White H2 Haze/White Ring	60° (Standard)
	E442 Wall Wash		12 1250 lm	30 3000K		-F 36°
			16 1600 lm	35 3500K		-N 25°
			20 2000 lm	40 4000K		-S 10°
			30 3000 lm	50 5000K		
			40 4000 lm	SD Sunset		

Example: **E440L2030W2** [ELCO 4" Reflector, 2000 lm, 3000K, White Finish Trim]



6" Round LED Architectural Frames with Driver

Description		Cat. #	Specs
	6" New Construction Architectural Frame with Driver Opening: 6 1/4" x 4 1/2" H	E6LHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
	6" New Construction Plaster Frame with Driver Opening: 6 1/4" x 3 1/2" H	E6LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
	6" Remodel Frame with Driver Opening: 6 1/4" x 7" H	E6LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
	6" Retrofit Kit with Driver Height: 3 1/2" Width: 5" Depth: 3"	E6LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

ELCO 6" Round Frame		Voltage	Lumen	Dimming	Optional
Product Number	Builder	U 120/277V	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm 60 6000 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output EM2 Emergency Backup up to 1100 lm output

Example: **E6LHU20S** [ELCO 6" Architectural Frame, 120/277V, 2000 lm, Sunset Dimming]

The Laurel™ System

Architectural Commercial LED Lighting



6" Round LED Light Engines

Round Reflector	Round Wall Wash	Round Drop Glass	Round Adjustable
			
E610 Series	E611 Series	E612 Series	E618 Series
Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2
7" O.D. - 6" I.D. - 6 1/8"-8 1/2" H	7" O.D. - 6" I.D. - 6 1/8"-8 1/2" H	7" O.D. - 6" I.D. - 6 1/8"-8 1/2" H	7" O.D. - 6" I.D. - 4 3/8"-6 3/4" H

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

Product	ELCO 6" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Number		L				
E610	Reflector		08 850 lm	27 2700K (Up to 3000 lm)	H2 All Haze	60° (Standard)
E611	Wall Wash		12 1250 lm	30 3000K	W2 All White	-F 36°
E612	Drop Glass		16 1600 lm	35 3500K	B2 All Black	-N 25°
E618	Adjustable		20 2000 lm	40 4000K	C2 All Chrome	-S 10°
			30 3000 lm	50 5000K	HW2 Haze/White Ring	
			40 4000 lm	SD Sunset		
			60 6000 lm			

Example: **E610L2030W2** [ELCO 6" Reflector, 2000 lm, 3000K, White Finish Trim]



8" Round LED Architectural Frames with Driver

Description		Cat. #	Specs
 8" New Construction Plaster Frame with Driver Opening: 8" x 3 1/2" H		E8LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E8LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E8LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E8LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E8LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E8LFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E8LFU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 8" Remodel Frame with Driver Opening: 8" x 7" H		E8LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E8LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E8LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E8LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E8LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E8LRU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E8LRU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 8" Retrofit Kit with Driver Height: 3 1/2" Width: 5" Depth: 3"		E8LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E8LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E8LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E8LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E8LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E8LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E8LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

ELCO 8" Round Frame		Voltage	Lumen	Dimming	Optional
Product Number	Builder				
E8LH	Architectural	U 120/277V	08 850 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output
E8LF	Plaster		12 1250 lm		
E8LR	Remodel		16 1600 lm		EM2 Emergency Backup up to 1100 lm output
E8LT	Retrofit Kit		20 2000 lm		
			30 3000 lm		
			40 4000 lm		
			60 6000 lm		

Example: **E8LRU40D2** [ELCO 8" Remodel Frame, 120/277V, 4000 lm, Triac/ELV/0-10V Dimming]

The Laurel™ System

Architectural Commercial LED Lighting



8" Round LED Light Engines

Round Reflector Round Wall Wash Round Drop Glass Round Adjustable



E810 Series

Finishes:
W2, B2, C2, H2, HW2

9" O.D. - 7 1/2" I.D. - 7 7/8"-9 1/4" H



E811 Series

Finishes:
W2, B2, C2, H2, HW2

9" O.D. - 7 1/2" I.D. - 6 7/8"-9 1/4" H



E812 Series

Finishes:
W2, B2, C2, H2, HW2

9" O.D. - 7 1/2" I.D. - 6 7/8"-9 1/4" H



E818 Series

Finishes:
W2, B2, C2, H2, HW2

9" O.D. - 7 1/2" I.D. - 5 5/8"-8" H

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

Product	ELCO 8" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
		L				
Number Builder	E810 Reflector		08 850 lm	27 2700K (Up to 3000 lm)	H2 All Haze	60° (Standard)
	E811 Wall Wash		12 1250 lm	30 3000K	W2 All White	-F 36°
	E812 Drop Glass		16 1600 lm	35 3500K	B2 All Black	-N 25°
	E818 Adjustable		20 2000 lm	40 4000K	C2 All Chrome	-S 10°
			30 3000 lm	50 5000K	HW2 Haze/White Ring	
			40 4000 lm	SD Sunset		
			60 6000 lm			

Example: **E810L2030W2** [ELCO 8" Reflector, 2000 lm, 3000K, White Finish Trim]



9" Round LED Architectural Frames with Driver



9" Retrofit Kit with Driver
Height: 3 1/2"
Width: 5"
Depth: 3"

Description	Cat. #	Specs
	E9LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E9LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

Product	ELCO 9" Round Frame	Voltage	Lumen	Dimming	Optional
Number	E9LH Architectural	U 120/277V	08 850 lm	D2 Triac/ELV/0-10V	EM1 Emergency Backup up to 700 lm output
Builder	E9LT Retrofit Kit		12 1250 lm	S Sunset	
			16 1600 lm	L2 Lutron	
			20 2000 lm		EM2 Emergency Backup up to 1100 lm output
			30 3000 lm		
			40 4000 lm		
			60 6000 lm		

Example: **E9LTU30D2** [ELCO 9" Retrofit Kit, 120/277V, 3000 lm, Triac/ELV/0-10V Dimming]

9" Round LED Light Engines

Square Reflector



E910 Series

Finishes:

W2, B2, C2, H2, HW2

11 1/2" O.D. - 9 1/2" I.D. - 13 1/4"-15 5/8" H

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

Product	ELCO 9" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Number	E910 Reflector	L	08 850 lm	27 2700K (Up to 3000 lm)	H2 All Haze	60° (Standard)
Builder			12 1250 lm	30 3000K	W2 All White	-F 36°
			16 1600 lm	35 3500K	B2 All Black	-N 25°
			20 2000 lm	40 4000K	C2 All Chrome	-S 10°
			30 3000 lm	50 5000K	HW2 Haze/White Ring	
			40 4000 lm	SD Sunset		
			60 6000 lm			

Example: **E910L6050HW2** [ELCO 9" Reflector, 6000 lm, 5000K, Haze with White Ring]

The **Alpine™** System

Recessed **Housings & Trims**

FOR LED & NON-LED MR16 LAMPS (GU5.3, GU10, PSA37)



SIZES	STYLES	FINISHES		LAMPS
3"	Round Trims	White	Haze	GU5.3
4"		Black	Copper	GU10
6"	Square Trims	Bronze	Gold	PSA37
		Nickel		

The Alpine™ System

MR16 Recessed fixtures



3" GU10 Housings

Description	CAT. #	Specs
 3" New Construction IC Airtight Housing for GU10 LED 5" Height	EL39LDICA	12W MAX. 120V
	EL39LDICA-7	12W MAX. with 277V to 120V Step-Down Transformer
 3" Remodel IC Airtight Housing for GU10 LED 5" Height	EL39LDRICA	12W MAX. 120V
 3" Double Wall Shallow IC Housing for MAX. 50W GU10 7 1/4" Height	EL39ICA	50W MAX. 120V
 3" New Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 4 7/8" Height	EL39A	50W MAX. 120V
 3" Remodel Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 5 3/8" Height	EL39RA	50W MAX. 120V

3" Dedicated LED Housings

Description	CAT. #	Specs
 3" LED New Construction IC Airtight Housing with Quick Connect terminal 5 1/2" Height	EL390ICA	14W MAX. 120V
	EL390ICA-7	14W MAX. with 277V to 120V Step-Down Transformer
 3" LED Remodel IC Airtight Housing with Quick Connect terminal 5 1/2" Height	EL390RICA	14W MAX. 120V
 LED MR16 with Quick Connect Lamp	PSA37	7W, 3000K, 500 lm, 120V
	PSA37-27	7W, 2700K, 500 lm, 120V
	PSA37-35	7W, 3500K, 500 lm, 120V
	PSA37-40	7W, 4000K, 500 lm, 120V

3" Bi-Pin MR16 LED Lamp Housings

Description	CAT. #	Specs
 3" Low Voltage Housing for LED MR16 Bi-Pin Lamp 5 1/2" Height	EL2699LDICA	12W MAX. Magnetic Transformer, 12V
	EL2699LDICEA	12W MAX. Electronic Transformer, 12V
 3" Low Voltage IC Remodel Housing for LED MR16 Bi-Pin Lamp 5 3/8" Height	EL2699LDRICA	12W, Magnetic Transformer, 12V
	E2699LDRICEA	12W, Electronic Transformer, 12V

The Alpine™ System

MR16 Recessed fixtures



3" Low Voltage IC & Non IC Housings for MR16 Bi-Pin

Description	CAT. #	Specs
 3" Low Voltage IC Housing for MR16 Bi-Pin Lamp 7 1/4" Height	EL2699ICA	50W MAX. 12V
	EL2699ICEA	50W MAX. Electronic Transformer
 3" Low Voltage Airtight Housing for MR16 Bi-Pin Lamp. Non-IC 4 3/8" Height	EL2699A	50W MAX. Magnetic Transformer
	EL2699EA	50W MAX. Electronic Transformer
 3" Low Voltage Airtight Remodel Housing for MR16 Bi-Pin Lamp. Non-IC 5 1/2" Height	EL2699RA	50W MAX.
	EL2699REA	50W MAX. Electronic Transformer

3" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description	CAT. #	Specs
 3" Die-cast Round Lensed Shower Trim with Frosted Glass Lens. 4 5/16" O.D.	 EL2612W	All White
 3" Die-cast Round Clear Lensed Shower Trim 4 5/16" O.D.	 EL2613W	All White
 3" Die-Cast Pinhole Trim with Reflector 1 7/8" I.D. - 4 5/16" O.D.	EL2619WW	All White
	EL2619BB	All Black
	EL2619WC	Chrome w/White Ring
	EL2619WB	Black w/White Ring
 3" Die-cast Round Slot Aperture Trim 4 5/16" O.D. - 45° Adjustability	EL2620W	White, 45° Adjustability
	EL2620B	Black, 45° Adjustability
 3" Die-Cast Adjustable Reflector Trim 4 5/16" O.D.	EL2621W	All White, 25° Adjustability
	EL2621B	Black w/White Ring, 25° Adjustability
	EL2621BB	All Black, 25° Adjustability
	EL2621BZ	All Bronze, 25° Adjustability
	EL2621C	Chrome w/White Ring, 25° Adjustability
	EL2621CC	All Clear, 25° Adjustability
	EL2621CN	Chrome w/Nickel Ring, 25° Adjustability
	EL2621H	Haze w/White Ring, 25° Adjustability
 3" Adjustable Wall Wash Reflector Trim 4 5/16" O.D.	EL2622W	All White, 45° Adjustability, Rotate 359°
	EL2622B	Black/White Ring, 45° Adjustability, Rotate 359°

The Alpine™ System

MR16 Recessed fixtures



3" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description		CAT. #	Specs
	3" Die-Cast Louvered Bottom Trim 4 5/16" O.D.	EL2633W	All White
		EL2633B	All Black
	3" Cross Blade Reflector Trim 4 5/16" O.D.	EL2644W	All White
		EL2644B	Black/White Ring
		EL2644C	Chrome/White Ring
		EL2644G	Gold/White Ring
	3" Die-Cast Glass Trim 4 5/16" O.D.	EL2652BL	Blue/White Ring
	3" Die-Cast Adjustable Pull Down Trim 4 5/16" O.D.	EL2688W	All White, 30° Adjustability, 358° Rotation
		EL2688B	All Black, 30° Adjustability, 358° Rotation
	3" Die-Cast Adjustable Baffle Trim 4 5/16" O.D.	EL2693W	All White, 25° Adjustability
		EL2693B	Black/White Ring, 25° Adjustability
		EL2693BB	All Black, 25° Adjustability
		EL2693BZ	All Bronze, 25° Adjustability
		EL2693BN	Black/Nickel Ring, 25° Adjustability
		EL2693WN	White/Nickel Ring, 25° Adjustability
	3" Adjustable Wall Wash Scoop with Baffle Trim 4 5/16" O.D.	EL2695W	All White
		EL2695B	All Black
	3" Die-cast Adjustable Eyeball Trim 4 5/16" O.D.	EL2698WW	All White, 30° Tilt
	3" Die-cast Square Adjustable Reflector Trim 4 5/16" Sq.	EL2321W	All White, 30° Adjustability
		EL2321C	Chrome/White Ring, 30° Adjustability
		EL2321BZ	All Bronze, 30° Adjustability
	3" Square Phenolic Trim on Baffle Trim 4 5/16" Sq.	EL2393W	All White

The Alpine™ System

MR16 Recessed fixtures



3" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description		CAT. #	Specs
	3" Die-Cast Lensed Shower Trims 4 5/16" Sq.	EL2312W	White/Frosted Lens
		EL2313W	White/Clear Lens
	3" Die-Cast Adjustable Trim 4 5/16" Sq.	EL2388W	All White, 30° Tilt
		EL2388B	All Black, 30° Tilt
		EL2388BZ	All Bronze, 30° Tilt
	3" Die-Cast Adjustable Slot Aperture Trim 4 5/16" Sq.	EL2320W	White
		EL2320B	Black
	3" Die-Cast Adjustable Wall Wash Reflector Trim 4 5/16" Sq.	EL2322W	All White, 45° Adjustability
		EL2322B	Black/White Ring, 45° Adjustability
	3" Square on Round Baffle Trim 4 5/16" Sq.	EL2393W	All White
		EL2393B	Black/White Ring
		EL2393BZ	All Bronze
		EL2393BB	All Black
	3" Die-Cast Wall Wash Baffle Trim 4 5/16" Sq.	EL2395W	All White
		EL2395B	Black/White Ring
	3" Die-Cast Reflector Trim with Square Pinhole 4 5/16" Sq.	EL2382W	All White, 30° Tilt
		EL2382C	Chrome/White Ring, 30° Tilt
		EL2382BB	All Black, 30° Tilt
		EL2382BZ	All Bronze, 30° Tilt
	3" Die-Cast Baffle Trim with Square Pinhole 4 5/16" Sq.	EL2384W	All White, 30° Tilt
		EL2384B	All Black, 30° Tilt
		EL2384BZ	All Bronze, 30° Tilt

The Alpine™ System

MR16 Recessed fixtures



4" GU10 Housings

Description	CAT. #	Specs
 4" New Construction IC Airtight Housing with Thermal Protector 5 1/8" Height	EL49LDICA	12W MAX. 120V
	EL49LDICA-7	Step-down transformer 277V to 120V
 4" New Construction Shallow IC Airtight Housing 3 1/2" Height	EL49LDICAS	12W MAX. 120V
 4" Remodel IC Airtight Housing with Thermal Protector 5 1/2" Height	EL49LDRICA	12W MAX. 120V
 4" Double Wall New Construction IC Housing with Thermal Protector for MAX. 50W GU10 - 7 1/4" Height	EL49ICA	50W MAX. 120V
 4" New Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 5 1/8" Height	EL49A	50W MAX. 120V
 4" Remodel Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 5 1/2" Height	EL49RA	50W MAX. 120V

4" Dedicated LED Housings for PSA37

Description	CAT. #	Specs
 4" IC Airtight New Construction Housing with Quick Connect Terminal 5 1/2" Height	EL490ICA	18W MAX. 120V
	EL490ICA-7	Step-down transformer 277V to 120V
	EL490ICA-EM5	Emergency Battery Back-Up
 4" Remodel IC Airtight Housing with Quick Connect Terminal 5 1/2" Height	EL490RICA	12W MAX. 120V

4" Bi-Pin MR16 LED Lamp Housings

Description	CAT. #	Specs
 4" New Construction IC Housing for Bi-Pin G5.3 LED 5 1/2" Height	EL1499LDICA	12W MAX. Magnetic Transformer, 12V
	EL1499LDICAS	Shallow
	EL1499LDICEA	12W MAX. Electronic Transformer, 12V
	EL1499LDICEAS	Shallow
 4" Remodel IC Housing for Bi-Pin G5.3 LED 5 1/2" Height	EL1499LDRICA	12W, Magnetic Transformer, 12V
	EL1499LDRICAS	Shallow
	E1499LDRICEA	12W, Electronic Transformer, 12V
	E1499LDRICEAS	Shallow

The Alpine™ System

MR16 Recessed fixtures



4" Low Voltage IC & Non IC Housings

Description	CAT. #	Specs
 4" Low Voltage Airtight IC Housing 7 1/4" Height	EL1499ICA	50W MAX. 12V
	EL1499ICEA	50W MAX. Electronic Transformer
 4" Low Voltage Airtight Housing for MR16 Bi-Pin Lamp. Non-IC 5 1/2" Height	EL1499A	50W MAX. Magnetic Transformer
	EL1499EA	50W MAX. Electronic Transformer
 4" Low Voltage Remodel Housing for MR16 Bi-Pin Lamp. Non-IC 5 1/2" Height	EL1499RA	50W MAX. 120V Magnetic Transformer
	EL1499REA	50W MAX. 120V Electronic Transformer
 4" Low Voltage Shallow Housing for MR16 Bi-Pin Lamp. Non-IC 3 1/8" Height	EL1499S	50W MAX. 120V Magnetic Transformer
	EL1499ES	50W MAX. Electronic Transformer
 4" Low Voltage Shallow Remodel Housing for MR16 Bi-Pin Lamp. Non-IC 3 5/8" Height	EL1499RS	50W MAX. 120V Magnetic Transformer
	EL1499RES	50W MAX. Electronic Transformer
 4" Double Wall New Construction ICA R-60 Foam Insulation Housing 5 1/2" Height	EL1499AJICEA	12W MAX. 12V Electronic Transformer

4" Low Voltage Housings for Remote Transformers

Description	CAT. #	Specs
 4" Thermally Protected Housing for Remote Transformer 4" Height	E400	35W MAX. 12V
 4" Thermally Protected Plaster Frame Housing for Remote Transformer 4" Height	E450	35W MAX. 120V

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description		CAT. #	Specs
 4" Adjustable Shower Trim with Clear Reflector and Lens Trim 4 3/4" O.D.		EL1411W	White, 25° Tilt
		EL1411B	Black, 25° Tilt
		EL1411N	Nickel, 25° Tilt
		EL1411BZ	Bronze, 25° Tilt
		EL1411SH	Lexan, 25° Tilt
 4" Adjustable Shower Trim with Clear Reflector and Frosted Lens Trim 4 3/4" O.D.		EL1412W	White, 45° Adjustability
		EL1412B	White, 45° Adjustability
		EL1412N	White, 45° Adjustability
		EL1412BZ	Bronze, 45° Adjustability
		EL1412CP	Copper, 45° Adjustability
 4" Adjustable Shower Trim with Clear Reflector and Frosted Glass Pinhole Trim 4 3/4" O.D.		EL1415W	White
		EL1415B	Black
		EL1415G	Gold
		EL1415N	Nickel
		EL1415BZ	Bronze
 4" Shower Trim with Round Drop Frosted Lens Trim 4 3/4" O.D.		EL1415SH	Lexan
 4" Pinhole Aperture with Baffle Trim 1 7/8" I.D. - 4 3/4" O.D.		EL1416W	White
 4" Adjustable Reflector Trim 4 3/4" O.D.		EL1419W	White
 4" Adjustable Slot Spinnable Aperture Trim 4 3/4" O.D.		EL1421W	All White, 25° Tilt
		EL1421WN	White/Nickel Ring, 25° Tilt
		EL1421WBZ	White/Bronze Ring, 25° Tilt
		EL1421B	Black/White Ring, 25° Tilt
		EL1421BB	All Black, 25° Tilt
		EL1421BN	Black/Nickel Ring, 25° Tilt
		EL1421BZ	All Bronze, 25° Tilt
		EL1421C	Chrome/White Ring, 25° Tilt
		EL1421CN	Chrome/Nickel Ring, 25° Tilt
		EL1421H	Haze/White Ring, 25° Tilt
 4" Adjustable Wall Wash Reflector Trim 4 7/8" O.D.		EL1421DC	Clear/White Die-Cast Ring, 25° Tilt
		EL1420W	White, 45° Tilt
		EL1420B	Black, 45° Tilt
		EL1420G	Gold, 45° Tilt
		EL1420BZ	Bronze, 45° Tilt
 4" Adjustable Pinhole with Baffle Trim 4 3/4" O.D.		EL1422W	All White, 359° Rotation
		EL1422B	All Black, 359° Rotation
		EL1423W	All White, 25° Tilt, 2" Aperture
		EL1423B	Black/White Ring, 25° Tilt, 2" Aperture
		EL1423BZ	All Bronze, 25° Tilt, 2" Aperture

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description		CAT. #	Specs
	4" Chrome Reflector Trim with Suspended Frosted Glass 4 7/8" O.D.	EL1426W	White Ring
		EL1426B	Black Ring
		EL1426G	Gold Ring
		EL1426N	Nickel Ring
		EL1426BZ	Bronze Ring
		EL1426CP	Copper Ring
	4" Adjustable Pinhole with Reflector Trim 2" I.D. - 4 3/4" O.D.	EL1429W	All White, 25° Tilt
		EL1429B	Black/White Ring, 25° Tilt
		EL1429C	Chrome/White Ring, 25° Tilt
		EL1429BBZ	Black/Bronze Ring, 25° Tilt
	4" Adjustable Slot Aperture One Piece Trim 4 3/4" O.D.	EL1430W	White, 25° Tilt
	4" Reflector Cross Blade Trim 4 7/8" O.D.	EL1444C	Chrome/White Ring
	4" Adjustable Reflector Wall Wash Trim 4 3/4" O.D.	EL1445W	All White, 45° Tilt
		EL1445B	Black/White Ring, 45° Tilt
		EL1445C	Chrome/White Ring, 45° Tilt
	4" Frosted Glass Trim 4 3/4" O.D.	EL1452R	Red Glass/White Ring
	4" Frosted Stepped Glass Trim 4 3/4" O.D.	EL1453BL	Blue Glass/White Ring
	4" Die-Cast Adjustable Spot Trim 4 3/4" O.D.	EL1488W	All White, 0° - 30° Tilt
		EL1488B	All Black, 0° - 30° Tilt
		EL1488BZ	All Bronze, 0° - 30° Tilt
	4" Adjustable Phenolic Step Baffle Trim 4 3/4" O.D.	EL1493W	All White, 25° Tilt
		EL1493B	Black/White Ring, 25° Tilt
		EL1493BB	All Black, 25° Tilt
		EL1493BZ	All Bronze, 25° Tilt
		EL1493BBZ	Black/Bronze Ring, 25° Tilt
		EL1493BCP	Black/Copper Ring, 25° Tilt
		EL1493BN	Black w/Nickel Ring, 25° Tilt
		EL1493WN	White w/Nickel Ring, 25° Tilt
		EL1493DW	All White Die-Cast Trim, 25° Tilt
		EL1493DB	Black/White Die-Cast Trim, 25° Tilt

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description		CAT. #	Specs
	4" Square Baffle Trim 4 3/4" Sq.	EL1491W	All White
		EL1491B	Black/White Ring
	4" Adjustable Wall Wash Baffle Trim 4 3/4" O.D.	EL1495W	All White
		EL1495B	Black/White Ring
	4" Adjustable Pull Down Trim 5 1/8" O.D.	EL1497W	All White, 0° - 90° Tilt, 359° Rotation
		EL1497B	All Black, 0° - 90° Tilt, 359° Rotation
		EL1497BZ	All Bronze, 0° - 90° Tilt, 359° Rotation
	4" Shower Trim with Clear Lens 4 3/4" Sq.	EL2411W	Chrome/White Ring
	4" Shower Trim with Frosted Lens 4 3/4" Sq.	EL2412W	White
		EL2412BZ	Bronze
	4" Shower Trim with Frosted Pinhole Lens 4 3/4" Sq.	EL2415W	White
		EL2415BZ	Bronze
	4" Round Drop Lens Shower Trim 4 3/4" Sq.	EL2416W	White
	4" Adjustable Slot Rotatable Aperture Trim 4 7/8" Sq.	EL2420W	White
		EL2420B	Black
	4" Specular Reflector Trim 4 3/4" Sq.	EL2421W	All White
		EL2421B	Black/White Ring
		EL2421C	Chrome/White Ring
		EL2421BZ	All Bronze
		EL2421WBZ	White/Bronze Ring
	4" Adjustable Pinhole with Reflector Trim 4 3/4" Sq.	EL2429B	Chrome/Black Ring

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims (For LED 2-Wire, Bi-Pin, GU10 MR16 Lamps)

Description	CAT. #	Specs
 4" Adjustable Gimbal with Baffle Trim 4 3/4" Sq.	EL2440W	White, 25° Tilt
	EL2440B	Black, 25° Tilt
 4" Adjustable Gimbal Trim 4 3/4" Sq.	EL2443W	White, 25° Tilt
	EL2443B	Black, 25° Tilt
 4" Adjustable Wall Wash Reflector Trim 4 7/8" Sq.	EL2445W	All White, 25° Tilt
	EL2445B	Black/White Ring, 25° Tilt
	EL2445C	Chrome/White Ring, 25° Tilt
	EL2445G	Gold/White Ring, 25° Tilt
 4" Frosted Glass Square Trim 4 7/8" Sq.	EL2452R	Red/White Ring
 4" Frosted Stepped Glass Trim 4 7/8" Sq.	EL2453BL	Blue/White Ring
 4" Steel Construction Adjustable Reflector Trim 5" Sq.	EL2482W	All White
 4" Die-Cast Aluminum Adjustable Baffle Trim 4 3/4" Sq.	EL2484W	White
	EL2484B	Black
 4" Die-Cast Adjustable with Square Trim 4 3/4" Sq.	EL2488W	White, 0° - 30° Tilt
	EL2488B	Black, 0° - 30° Tilt
 4" Phenolic Baffle Trim 4 3/4" Sq.	EL2493W	All White
	EL2493B	Black w/White Ring
	EL2493BB	All Black
	EL2493BZ	All Bronze
	EL2493BBZ	Black/Bronze Ring
 4" Phenolic Deep Baffle Trim 4 7/8" Sq.	EL2494W	All White
 4" Wall Wash with Baffle Trim 4 7/8" Sq.	EL2495W	All White
	EL2495B	Black/White Ring
 4" Pull Down Trim 4 3/4" Sq.	EL2497W	White
	EL2497B	Black
	EL2497BZ	Bronze

The Alpine™ System

MR16 Recessed fixtures



6" Dedicated LED Housings

Description	CAT. #	Specs
 6" Dedicated LED IC Airtight New Construction Housings with Quick Connect terminal	EL770ICA	120V, 7" Height
	EL770ICA-7	Step-down transformer 277V to 120V
	EL760ICA	Shallow, 120V, 5 1/2" Height
	EL760ICA-7	Step-down transformer 277V to 120V
 6" Dedicated LED IC Airtight Remodel Housings with Quick Connect terminal	EL770RICA	120V, 7 1/2" Height
	EL760RICA	Shallow, 120V, 5 1/2" Height
 LED MR16 with Quick Connect Lamp	PSA37	7W, 3000K, 500 lm, 120V
	PSA37-27	7W, 2700K, 500 lm, 120V
	PSA37-35	7W, 3500K, 500 lm, 120V
	PSA37-40	7W, 4000K, 500 lm, 120V

6" Low Voltage IC & Non IC Housings & MR16 Trims

Description	CAT. #	Specs
 6" Low Voltage Double Wall IC Airtight New Construction Housing 7 3/8" Height	EL7LVICA	50W MAX. 12V
 6" Low Voltage New Construction Housing 7 1/2" Height	EL7LV	75W MAX. 12V
 6" Low Voltage Remodel Housing 7 1/2" Height	EL7RLV	75W MAX. 12V
 6" Adjustable Spot with Phenolic Baffle Trim 7 1/4" O.D.	EL2510W	All White
 6" Adjustable Reflector Trim 7 5/8" O.D.	EL2516W	All White
	EL2516B	Black/White Ring
	EL2516C	Chrome/White Ring
	EL2516H	Haze/White Ring
 6" Adjustable Baffle Trim 8" O.D.	EL2530W	All White
	EL2530B	Black/White Ring

The Alpine™ System

MR16 Recessed fixtures



6" MR16 Trims

Description	CAT. #	Specs
 6" Adjustable Slot Aperture Trim 8" O.D.	EL2550W	White
	EL2550B	Black
 6" Pinhole with Baffle Trim 1 3/4" I.D. - 8" O.D.	EL2579W	White
	EL2579B	Black
 6" Adjustable Pull Down Trim 7 1/4" O.D.	EL2597W	White, 0° - 90° Tilt, 359° Rotation
	EL2597B	Black, 0° - 90° Tilt, 359° Rotation

6" Retrofit Trims (12V Magnetic Transformer Included)

Description	CAT. #	Specs
 6" Adjustable Spot with Phenolic Baffle Trim 7 1/4" O.D.	EL1510W	All White
	EL1510B	Black/White Ring
 6" Adjustable Reflector Trim 7 5/8" O.D.	EL1516W	All White
	EL1516B	Black/White Ring
	EL1516C	Chrome/White Ring
 6" Adjustable Baffle Trim 7 1/4" O.D.	EL1530W	All White
	EL1530B	Black/White Ring
 6" Adjustable Slot Aperture Trim 7 1/4" O.D.	EL1550W	White
 6" Baffle with Pinhole Trim 1 3/4" I.D. - 8" O.D.	EL1579W	White
 6" Adjustable Pull Down Trim 7 1/4" O.D.	EL1597W	White
	EL1597B	Black

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



4" Line Voltage IC & Non IC Housings

Description	CAT. #	Specs
 4" IC Airtight Housing with Adjustable Lamp Holder 5 1/2" Height	EL99ICA	50W MAX. 120V Lamp: E26 Base LED or Incandescent
 4" IC Airtight Remodel Housing with Adjustable Lamp Holder 6 1/4" Height	EL99RICA	50W MAX. 120V Lamp: E26 Base LED or Incandescent
 4" IC Airtight New Construction 2-Hour Fire Rated Housing 7 3/4" Height	EL99FICA	35W MAX. 120V Lamp: E26 Base LED or Incandescent
 R-60 Foam Insulation 4" Medium Base IC Airtight New Construction Housing (Suitable for Chicago Plenum construction) 5 1/2" Height	EL99AJICA	20W MAX. 120V Lamp: E26 Base LED or Incandescent
 4" IC Airtight New Construction Housing 5 1/2" Height	EL99LDICA	12W MAX. 120V Lamp: E26 Base LED Lamps
 4" Housing with Adjustable Lamp Holder 5 1/2" Height	EL99A	50W MAX. 120V Lamp: 55W PAR16, 50W PAR20, or R20
 4" Remodel Housing with Adjustable Lamp Holder 5 1/2" Height	EL99RA	50W MAX. 120V Lamp: 55W PAR16, 50W PAR20, or R20
 4" Airtight IC Housing with GU24 Base Socket 5 3/4" Height	EL99ICA-G24	18W MAX. 120V Lamp: GU24 LED or CFL
 4" Airtight IC Remodel Housing with GU24 Base Socket 6 1/2" Height	EL99RICA-G24	18W MAX. 120V Lamp: GU24 LED or CFL

4" Line Voltage Trims

Description	CAT. #	Specs
 4" Airtight Smooth Cone Reflector Trim 5 1/8" O.D.	EL901W	All White Lamp: 75W MAX PAR30
	EL901C	All Black
 4" Airtight Baffle Cone Trim 5 1/8" O.D.	EL902W	All White Lamp: 75W MAX PAR30
 4" Shower Trim with Clear Lens 4 3/4" O.D.	EL911W	White, Lamp: 30W R20
	EL911B	Black
	EL911SH	Lexan Ring
	EL912W	All White, Lamp: 30W R20
 4" Shower Trim with Frosted Lens 4 3/4" O.D.	EL912B	All Black
	EL912BZ	All Bronze
	EL912N	All Nickel
	EL912SH	Lexan Ring

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




4" Line Voltage Trims

Description		CAT. #	Specs
	4" Shower Trim with Fresnel Lens 4 3/4" O.D.	EL913W	White, Lamp: 30W R20
		EL913B	Black
		EL913SH	Lexan Ring
	4" Shower Trim with Frosted Pinhole Glass 4 3/4" O.D.	EL915W	White, Lamp: 30W R20
		EL915B	Black
		EL915BZ	Bronze
		EL915SH	Lexan Ring
	4" Shower Trim with Drop Opal Lens 4 3/4" O.D.	EL916W	White, Lamp: 30W R20
		EL916B	Black
		EL916SH	Lexan Ring
	4" Wall Wash with Reflector Trim 4 3/4" O.D.	EL925W	All White, Lamp: 50W PAR20 or R20
		EL925C	Chrome/White Ring
	4" Chrome Reflector with Suspended Frosted Glass Trim 4 7/8" O.D.	EL926W	White, Lamp: 50W PAR20 or R20
		EL926B	Black
		EL926BZ	Bronze
	4" Open Trim 4 3/4" O.D.	EL930W	White, Lamp: 50W PAR30
	4" Reflector with Adjustable Socket Holder Bracket 4 3/4" O.D. - 25° Adjustability	EL977W	All White, Lamp: 55W PAR16, 50W PAR20
		EL977B	Black/White Ring
		EL977C	Chrome/White Ring
		EL977G	Gold/White Ring
	4" Adjustable Gimbal Ring Trim 4 3/4" O.D.	EL985W	White, Lamp: 50W PAR20
		EL985B	Black
		EL985BZ	Bronze
	4" Adjustable Spot Trim (Not for use in IC Housings) 4 3/4" O.D.	EL988W	White Lamp: 50W JDR or MR16 with PSA28
		EL988B	Black
	4" Pinhole Trim 2" I.D. - 4 3/4" O.D.	EL990W	White, Lamp: 30W-50W R20, 50W PAR20
		EL990BB	Black
		EL990BZ	Bronze

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




4" Line Voltage Trims

Description	CAT. #	Specs
 4" Baffle Trim 4 3/4" Sq.	EL991W	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
	EL991B	Black/White Ring
 4" Wall Wash Baffle Trim 4 3/4" O.D.	EL992W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
	EL992B	Black/White Ring
	EL992KW	All White with Bracket
 4" Phenolic Step Baffle Trim 4 3/4" O.D.	EL993W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
	EL993B	Black/White Ring
	EL993N	All Nickel
	EL993BB	All Black
	EL993BZ	All Bronze
	EL993BN	Black/Nickel Ring
	EL993NB	Nickel/Black Ring
	EL993WN	White/Nickel Ring
	EL993NW	Nickel/White Ring
	EL993BBZ	Black/Bronze Ring
	EL993BZW	Bronze/White Ring
	EL993WBZ	White/Bronze Ring
	EL993MW	All Metal White
	EL993MB	Black/White Metal Ring
 4" Baffle Trim with Lampholder Bracket 4 3/4" O.D.	EL993KW	All White, Lamp: 50W PAR20 or R20
	EL993KB	Black/White Ring
	EL993KN	All Nickel
	EL993KBZ	All Bronze
	EL993KBN	Black/Nickel Ring
	EL993KNB	Nickel/Black Ring
	EL993KNW	Nickel/White Ring
 4" Stepped Phenolic Baffle Trim 4 3/4" O.D.	EL994W	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
 4" Stepped Phenolic Deep Baffle Trim 4 3/4" O.D.	EL994DW	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
 4" Baffle Trim with Socket Bracket 4 3/4" O.D.	EL995W	All White, Lamp: 55W PAR16, 50W PAR20 or R20
	EL995B	Black/White Ring
	EL995N	All Nickel
	EL995BZ	All Bronze
 4" Eyeball Trim 4 3/4" O.D.	EL998W	White, Lamp: 40W R16, 50W PAR20 or R20
	EL998C	Clear
 4" Reflector Trim with Socket Bracket 5" O.D.	EL999KW	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
	EL999KC	Chrome/White Ring
	EL999KCBZ	Chrome/Bronze Ring

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




4" Line Voltage Trims

Description		CAT. #	Specs
	4" Reflector Trim 5" O.D.	EL999W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL999B	Black/White Ring
		EL999BB	All Black
		EL999BZ	All Bronze
		EL999C	Clear/White Ring
		EL999H	Haze/White Ring
		EL999CN	Chrome/Nickel Ring
		EL999DC	Clear/White Diecast Ring
	4" Shower Reflector Trim with Clear Lens 4 3/4" O.D.	EL9111W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Frosted Lens 4 3/4" O.D.	EL9112W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Fresnel Lens 4 3/4" O.D.	EL9113W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Frosted Pinhole Glass 4 3/4" O.D.	EL9115W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Drop Opal Lens 4 3/4" O.D.	EL9116W	White, Lamp: 50W PAR20 or R20
	4" Shower Trim with Frosted Lens 4 3/4" O.D.	EL2912W	White, Lamp: 30W R20
	4" Shower Trim with Frosted Pinhole Glass 4 3/4" O.D.	EL2915W	White, Lamp: 30W R20
	4" Phenolic Baffle Trim 4 3/4" O.D.	EL2993W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL2993B	Black/White Ring
		EL2993BB	All Black

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



4" Line Voltage Trims

Description		CAT. #	Specs
	4" Deep Phenolic Baffle Trim 4 3/4" Sq.	EL2994W	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL2994B	Black/White Ring
	4" Reflector Trim 4 3/4" Sq.	EL2999W	All White, Lamp: 50W PAR20 or R20
		EL2999B	Black/White Ring
		EL2999C	Clear/White Ring
		EL2999BZ	All Bronze
		EL2999KW	All White, with Socket Bracket
	4" Metal Reflector Trim 4 7/8" Sq.	EL2982W	All White, Lamp: 50W PAR20
	4" Metal Baffle Trim 4 7/8" Sq.	EL2983W	All White, Lamp: 50W PAR20
	4" Diecast Baffle Trim 4 3/4" Sq.	EL2984W	All White, Lamp: 50W PAR20
		EL2984B	All Black
	4" Gimbal Trim 4 7/8" Sq.	EL2985W	All White, Lamp: 50W PAR20
		EL2985BZ	All Bronze
	4" Die-cast Reflector Trim 2 1/16" I.D. - 5" O.D.	ELL4810W	All White, Lamp: 50W PAR20
	4" Die-cast Lensed Reflector Trim 2 1/16" I.D. - 5" O.D.	ELL4812W	All White, Lamp: 50W PAR20
	4" Die-cast Baffle Trim 1 15/16" Sq. - 4 1/2" Sq.	ELL4816W	All White, Lamp: 50W PAR20

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



5" Line Voltage IC & Non IC Housings


Description	CAT. #	Specs
 5" Aluminum IC Airtight New Construction Housing 7 3/8" Height	EL5ICA	75W MAX. 120V with Socket Bracket
	EL5ICANB	75W MAX. 120V, Housing without socket holder bracket.
 5" Aluminum IC Airtight Remodel Housing 7 1/2" Height	EL5RICA	75W MAX. 120V, Includes gasket. Medium Base (E26),
 5" IC Airtight New Construction 2-Hour Fire Rated Housing 7 3/4" Height	EL5FICA	75W MAX. 120V, Medium Base (E26)
 5" Shallow Aluminum IC Airtight New Construction Housing 5 1/2" Height	EL55ICA	75W, 120V, Includes gasket. Medium Base (E26)
 5" Shallow Aluminum IC Airtight Remodel Housing 5 1/4" Height	EL55RICA	75W, 120V, Includes gasket. Medium Base (E26)
 5" IC Airtight New Construction Housing with GU24 Base Socket 7 3/8" Height	EL5ICA-G24	27W MAX. 120V, GU24 Base

5" Line Voltage Trims

Description	CAT. #	Specs
 5" Metal Splay Baffle with White Trim Ring 6" O.D.	EL511W	All White, Lamp: 75W PAR30 or R30
	EL511B	Black/White Ring
 5" Shower Trim with Albalite Lens 6 1/4" O.D.	EL512W	All White, Lamp: 60W A19
	EL512SH	Lexan Ring
 5" Shower Trim with Fresnel Lens 6 1/4" O.D.	EL513W	White, Lamp: 60W A19
	EL513SH	Lexan Ring
 5" Shower Trim with Diffused Dome Lens 6 1/4" O.D.	EL514SH	Lexan Ring, Lamp: 60W A19

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



5" Line Voltage Trims

Description	CAT. #	Specs
 5" Eyeball with Baffle Trim 6 1/4" O.D.	EL515W	Black/White Ring, Lamp: 75W PAR20 or R20
	EL515WW	All White
 5" Shower Trim with Drop Opal Lens 6 1/4" O.D.	EL516W	White, Lamp: 60W A19
	EL516SH	Lexan Ring
 5" Adjustable Gimbal Ring 6 1/4" O.D.	EL517W	All White, Lamp: 75W PAR30
 5" Open Trim 6 1/4" O.D.	EL530W	White, Lamp: 75W PAR30 or R30
	EL530CP	Copper
	EL530KW	White with Socket Bracket
	EL530KCP	Cooper with Socket Bracket
 5" Adjustable Gimbal Ring with Baffle Trim 6 1/4" O.D.	EL576W	All White, Lamp: 75W PAR30
 5" Reflector Trim 6 1/4" O.D.	ELA599H	Haze/White Ring Lamp: 42W CFL, 60W A19
 5" Airtight Metal Cone Baffle Trim 6 1/4" O.D.	ELM500W	All White Lamp: 75W PAR30 or R30, 90W PAR38, 60W A19
 5" Airtight Metal Smooth Cone Reflector Trim 6 1/4" O.D.	ELM501W	All White Lamp: 75W PAR30 or R30, 90W PAR38, 60W A19
 5" Wall Wash Baffle Trim with Socket Bracket 6 1/4" O.D.	ELM5045W	White, Lamp: 75W PAR30 or R30
	ELM5045B	Black
 5" Metal Stepped Baffle with Coil Springs Trim 6 1/4" O.D.	ELM530W	All White, Lamp: 75W PAR30 or R30
	ELM530B	Black/White Ring
 5" Metal Stepped Baffle with Socket Bracket and Torsion Springs Trims 6 1/4" O.D.	ELM530KW	All White, Lamp: 75W PAR30 or R30
	ELM530KB	Black/White Ring
 5" Reflector Trim 6 1/4" O.D.	ELS520W	All White, Lamp: 50W-75W PAR20 or R20
	ELS520B	Black/White Ring
 5" Reflector Cone Trim with Socket Bracket 6 1/2" O.D.	ELS5030W	All White, Lamp: 75W PAR30 or R30

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage IC & Non IC Housings

Description		CAT. #	Specs
 6" IC Airtight New Construction Housing 7" Height		EL7ICA	90W, 120V, with Socket Bracket. Medium Base (E26)
		EL7ICANB	90W, 120V, Housing without socket holder bracket. Medium Base (E26)
 6" IC Airtight New Construction 2-Hour Fire Rated Housing 7 3/4" Height		EL7FICA	90W, 120V, Medium Base (E26)
 6" Double Wall IC Airtight New Construction Housing 7 1/4" Height		EL7IC100A	100W MAX. 120V, Medium Base (E26)
 6" IC Airtight Remodel Housing 7 1/2" Height		EL7RICA	90W MAX. 120V, Includes gasket. Medium Base (E26)
 6" Shallow IC Airtight New Construction Housing 5 1/2" Height		R9ICA	75W MAX. 120V, Includes gasket. Medium Base (E26)
 6" Shallow IC Airtight Remodel Housing 5 1/2" Height		RR9ICA	75W MAX. 120V, Includes gasket. Medium Base (E26)
 6" IC Airtight New Construction Housing with GU24 Base Socket 7" Height		EL7ICA-G24	27W MAX. 120V, Medium Base (E26)
 6" Universal New Construction Housing 7 1/2" Height		R10H	150W MAX. 120V, Medium Base (E26)
 6" Universal Remodel Housing 7 1/2" Height		RR10H	150W MAX. 120V, Medium Base (E26)
 6" Shallow New Construction Housing 5 1/2" Height		R9H	75W MAX. 120V Medium Base (E26)
 6" Shallow Remodel Housing 5 1/2" Height		RR9H	75W MAX. 120V Medium Base (E26)

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage Trims

Description	CAT. #	Specs
 6" Shower Trim with Albalite Lens 8" O.D.	EL12W	White, Lamp: 60W A19
	EL12B	Black
	EL12BZ	Bronze
	EL12SH	Lexan Ring
 6" Shower Trim with Fresnel Lens 8" O.D.	EL13W	White, Lamp: 60W A19
	EL13B	Black
	EL13BZ	Bronze
	EL13SH	Lexan Ring
 6" Shower Trim with Drop Opal Lens 8" O.D.	EL16W	White, Lamp: 60W A19
	EL16SH	Lexan Ring
 6" Eyeball with Baffle Trim 8" O.D.	EL17W	White, Lamp: 75W PAR30 or R30
 6" Eyeball Trim 8" O.D.	EL18W	White, Lamp: 100W PAR30, 75W R30
	EL18B	Black
	EL18BZ	Bronze
 6" Shower Reflector Trim with Diffused Dome Lens 8" O.D.	EL114SH	Lexan Ring, Lamp: 60W A19
 6" Open Trim with Coil Springs 8" O.D.	EL30W	All White, Lamp: 75W PAR30 or R30
	EL40W	All White, Lamp: 150W PAR38 or R40
	EL40BZ	All Bronze
	EL40C	All Clear
	EL40CP	All Copper
	EL40G	All Gold
 6" Open Trim with Socket Bracket 8" O.D.	EL300W	All White, Lamp: 75W PAR30 or R30
 6" Open Splay Trim 8" O.D.	EL308W	White, Lamp: 75W PAR30 or R30
 6" Gimbal Ring Trim 8" O.D.	EL317W	White, Lamp: 50W-75W PAR30
	EL317BZ	Bronze
 6" Gimbal Ring Trim 8" O.D.	EL318W	All White, Lamp: 90W-150W PAR38
	EL318N	All Nickel
 6" Acrylic Drop Lens Trim 7 5/8" O.D.	EL319W	White, Lamp: 60W A19

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage Trims

Description	CAT. #	Specs
 6" Adjustable Gimbal with Baffle Trim 7 1/4" O.D.	EL376W	White, Lamp: 75W PAR30
	EL376B	Black/White Ring
	EL376BZ	Bronze
 6" Adjustable Gimbal with Reflector Trim 7 1/4" O.D.	EL377W	All White, Lamp: 75W PAR30
 6" Adjustable Baffle Trim with Gimbal 7 1/4" O.D.	EL476W	All White, Lamp: 90W-150W PAR38
	EL476B	Black/White Ring
	EL476BZ	Bronze
 6" Adjustable Gimbal with Baffle Trim 7 1/4" O.D.	EL477W	All White, Lamp: 90W-150W PAR38
 6" Specular Cone Reflector Trim 7 1/4" O.D.	ELA99H	Haze/White Ring Lamp: 100W A19, 150W A21
	ELA99SC	Clear/White Ring
 6" Reflector Baffle Trim 7 1/4" O.D.	ELA101W	All White, Lamp: 75W PAR30, 100W A19
	ELA101B	Black/White Ring
	ELA101BZ	Bronze
	ELA101WA	All White, Metal Baffle
 6" Metal Step Baffle Trim 7 1/4" O.D.	ELM30W	All White, Lamp: 75W PAR30 or R30
	ELM30B	Black/White Ring
	ELM30BZ	All Bronze
	ELM30N	All Nickel
	ELM30BB	All Black
	ELM30BOV	Black/White Oversized Ring
	ELM30WOV	All White Oversized Ring
	ELM40W	All White, Lamp: 150W PAR38 or R40
	ELM40B	Black/White Ring
 6" Baffle Trim with Regressed Albalite Lens 7 1/4" O.D.	ELM42W	All White, Lamp: 60W A19
	ELM42B	Black/White Ring
	ELM42BZ	All Bronze
 6" Baffle Trim with Regressed Fresnel Lens 7 1/4" O.D.	ELM43W	All White, Lamp: 60W A19
	ELM43B	Black/White Ring
	ELM43BZ	All Bronze
 6" Metal Baffle Wall Wash Trim 7 1/4" O.D.	ELM45W	All White, Lamp: 60W A19, 75W R30
	ELM45B	Black/White Ring
 6" Baffle Trim with Domed Regressed Frosted Lens 7 1/4" O.D.	ELM47W	White, Lamp: 60W A19

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



6" Line Voltage Trims

Description	CAT. #	Specs
 6" Regressed Eyeball with Baffle Trim 7 1/4" O.D.	ELM48W	All White, Lamp: 75W R30
	ELM48B	Black/White Ring
 6" Airtight Metal Baffle Self-Flanged Cone Trim with Torsion Springs 7 1/4" O.D.	ELM300W	All White, Lamp: 75W PAR30 or R30, 90W PAR38
	ELM300B	Black/White Ring
	ELM300BB	All Black
	ELM300BZ	All Bronze
 6" Airtight Smooth Metal Cone Reflector Trim with Torsion Springs 7 1/4" O.D.	ELM301W	All White, Self-Flanged Lamp: 75W PAR30 or R30, 90W PAR38
 6" Airtight Metal Cone Baffle Trim with Clips 7 1/4" O.D.	ELM302BB	All Black Lamp: 75W PAR30 or R30, 90W PAR38
 6" One Piece Self Flanged Baffle Trim with Clips 7 1/4" O.D.	ELM303W	White Lamp: 75W PAR30 or R30, 90W PAR38
 6" Shallow Self Flanged Baffle Trim with Torsion Springs 7 1/4" O.D.	ELM305W	White Lamp: 75W PAR30 or R30
 6" Phenolic Step Baffle Trim 7 1/4" O.D.	ELP40B	Black/White Ring Lamp: 150W R40
 6" Specular Reflector Trim 7 1/4" O.D.	ELS30W	All White, Lamp: 75W PAR30 or R30
	ELS30C	Chrome/White Ring
 6" Die-cast Reflector Trim 2 3/4" I.D. - 7 1/2" O.D.	ELL6810W	All White, Lamp: PAR20 or R20
	ELL6810B	All Black
	ELL6810BZ	All Bronze
 6" Die-cast Lensed Reflector Trim 2 7/8" I.D. - 7 1/2" O.D.	ELL6812W	All White, Lamp: PAR20 or R20
	ELL6812BZ	All Bronze
 6" Die-cast Baffle Trim 2 3/4" O.D. - 7 1/2" O.D.	ELL6813W	All White, Lamp: PAR20 or R20
	ELL6813BZ	All Bronze
 6" Die-cast Wall Wash Trim 7 1/2" O.D.	ELL6815W	All White, Lamp: PAR20 or R20
	ELL6815BZ	All Bronze

Line Voltage

for PAR and A19 Lamps



7" Edison Base Housings & Trims

Description	CAT. #	Specs
 7" Incandescent New Construction Architectural Housing 9 3/4" Height	ELH7T	150W MAX. 120V
 7" Incandescent Remodel Architectural Housing 9 3/4" Height	ELRH7T	150W MAX. 120V
 7" Reflector Trim 7 5/8" O.D.	EL716C	Clear/White Ring Lamp: 42W 4 Pin Triple CFL, 150W PAR30, PAR38 or A21

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



8" Incandescent Square Housings & Trims

Description	CAT. #	Specs
 8" Square Incandescent IC Single Wall Aluminum New Construction Housing 4 5/8" Height	EL8SQ	75W MAX. 120V
 8" Square Incandescent IC Double Wall Aluminum New Construction Housing 7 1/4" Height	EL8SQICA	75W MAX. 120V
 8" Square LED Retrofit 3-CCT Insert 9 3/8" Sq. - 1 1/4" H 	EL881CT5W	19W, 1460 lm - 1520 lm, 3000K / 3500K / 4000K, 120/277V, Triac/ELV
 8" Square Trim with Prismatic Glass Lens 9 3/8" Sq.	EL10W	White, Lamp: E26 PAR type
 8" Square Trim with Fresnel Lens 9 1/2" Sq.	EL11W	White, Lamp: E26 PAR type

12" LED Square Retrofit

Description	CAT. #	Specs
 12" Square LED Retrofit with 5-CCT Switch 12" Sq. - 5/8" H 	EL1212CT5W	22W, 1450 lm, 2700K - 5000K, 120V, Triac/ELV

The **Slant**[™] System



4" Dedicated LED Sloped
Ceiling IC Housings & LED Inserts 118

5" & 6" Dedicated LED Sloped
Ceiling IC Housings & LED Inserts 119

6" Dedicated LED Super Sloped
Ceiling IC Housings & LED Inserts 120

5" Line Voltage Sloped Ceiling
IC Housings & Trims 121

6" Line Voltage Sloped Ceiling
IC Housings & Trims 122

6" Line Voltage Super Sloped Ceiling
IC & Non-IC Housings & Trims 123

The Slant™ System

Sloped Ceiling Dedicated LED Lighting



4" Dedicated LED Sloped Ceiling IC Housings & Inserts

Description	CAT. #	Specs
 4" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing 6 5/8" Height	EL470ICA	14W, 120V
 4" LED IC Airtight Sloped Ceiling Remodel Housing 7 1/2" Height	EL470RICA	14W, 120V
 4" Sloped Ceiling LED Baffle Insert with 5-CCT Switch 6 1/8" O.D. - 3 5/8" I.D. - 4 1/8" H  	EL423CT5W EL423CT5BZ	White, 12W, 900 lm, 2700K - 5000K Bronze, 12W, 900 lm, 2700K - 5000K
 4" Sloped Ceiling LED Reflector Insert with 5-CCT Switch 6 1/8" O.D. - 3 5/8" I.D. - 4 1/8" H  	EL425CT5W	12W, 900 lm, 2700K - 5000K

4" Universal Sloped Ceiling Trims with Koto™ LED Module

Description	CAT. #	Specs
 4" Universal Sloped Ceiling Trims with Koto™ LED Modules 		• For use in ELK470ICA and ELK470RICA sloped housings • Designed for use in 2/12 (10°) to 12/12 (45°) sloped ceilings • O.D.: 5" - I.D.: 3 5/8"

Standard Koto™ Module Product Number Builder

Koto™ LED Module	Lumens	Color Temperature	Pex™ Sloped Trim	Finish
ELK Koto™ LED Module	07 770 lm - 860 lm 09 940 lm - 1100 lm 11 1050 lm - 1260 lm 08 825 lm 10 1000 lm	27 2700K 30 3000K 35 3500K 40 4000K SD Sunset CT5 2700K - 5000K	-ELK4357 Reflector -ELK4347 Reflector with Clear Glass -ELK4349 Reflector with Frosted Lens	W All White BB All Black BZ All Bronze B Black /White Ring H Haze /White Ring

Example: **ELK0735-ELK4357BB** [Koto™ LED Module, 770 - 860 lumens, 3500K, Pex™ Sloped Reflector Trim, All Black]

The Slant™ System


Sloped Ceiling Dedicated LED Lighting



5" Dedicated LED Sloped Ceiling IC Housings & Inserts

Description	CAT. #	Specs
 5" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing 6 3/4" Height	EL590ICA	24W, 120V
 5" LED IC Airtight Sloped Ceiling Remodel Housing 6 1/2" Height	EL590RICA	24W, 120V
 5" Sloped Ceiling LED Baffle Insert 7 5/8" O.D. - 4 5/8" I.D. - 4 3/8" H  	EL511CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL511CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL511CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
 5" Sloped Ceiling LED Reflector Insert 7 5/8" O.D. - 4 5/8" I.D. - 4 3/8" H  	EL512CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL512CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL512CT5C	Clear/White Ring, 15W, 1050 lm, 2700K - 5000K

6" Dedicated LED Sloped Ceiling IC Housings & Inserts

Description	CAT. #	Specs
 6" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing 7" Height	EL970ICA	24W, 120V
 6" LED IC Airtight Sloped Ceiling Remodel Housing 7" Height	EL970RICA	24W, 120V
 6" Sloped Ceiling LED Baffle Insert with 5-CCT Switch 7 7/8" O.D. - 7 5/8" I.D. - 5 7/8" H  	EL713CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL713CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL713CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
	EL714CT5W	All White, 18W, 1200 lm, 2700K - 5000K
	EL714CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
	EL714CT5BZ	All Bronze, 18W, 1200 lm, 2700K - 5000K
 6" Sloped Ceiling LED Reflector Insert with 5-CCT Switch 7 7/8" O.D. - 7 5/8" I.D. - 5 7/8" H  	EL715CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL715CT5BB	All Black, 15W, 1050 lm, 2700K - 5000K
	EL715CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL715CT5C	Clear/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL716CT5W	All White, 18W, 1200 lm, 2700K - 5000K
	EL716CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
	EL716CT5C	Clear/White Ring, 18W, 1200 lm, 2700K - 5000K

Sloped Ceilings Pitch Range:



The Slant™ System


Sloped Ceiling Dedicated LED Lighting



6" Dedicated LED Super Sloped Ceiling IC Housings & Inserts

Description	CAT. #	Specs
 6" LED IC Airtight Super Sloped Ceiling Single Wall New Construction Housing 7 1/4" Height	EL971ICA	24W, 120V
 6" LED IC Airtight Super Sloped Ceiling Remodel Housing 6 1/8" Height	EL971RICA	24W, 120V
 6" Super Sloped Ceiling LED Baffle Insert with 5-CCT Switch 8 1/8" O.D. - 7 1/4" I.D. - 5 7/8" H CCT SWITCH DAMP LOCATION	EL763CT5W EL763CT5B EL763CT5BZ EL764CT5W EL764CT5B EL764CT5BZ	All White, 15W, 1050 lm, 2700K - 5000K Black/White Ring, 15W, 1050 lm, 2700K - 5000K All Bronze, 15W, 1050 lm, 2700K - 5000K All White, 18W, 1200 lm, 2700K - 5000K Black/White Ring, 18W, 1200 lm, 2700K - 5000K All Bronze, 18W, 1200 lm, 2700K - 5000K
 6" Super Sloped Ceiling LED Reflector Insert with 5-CCT Switch 8 1/8" O.D. - 7 1/4" I.D. - 5 7/8" H CCT SWITCH DAMP LOCATION	EL761CT5W EL761CT5BB EL761CT5B EL761CT5C EL762CT5W EL762CT5BB EL762CT5B EL762CT5C	All White, 15W, 1050 lm, 2700K - 5000K All Black, 15W, 1050 lm, 2700K - 5000K Black/White Ring, 15W, 1050 lm, 2700K - 5000K All Bronze, 15W, 1050 lm, 2700K - 5000K All White, 18W, 1200 lm, 2700K - 5000K All Black, 18W, 1200 lm, 2700K - 5000K Black/White Ring, 18W, 1200 lm, 2700K - 5000K All Bronze, 18W, 1200 lm, 2700K - 5000K

Super Sloped Ceilings Pitch Range:



Line Voltage **Sloped Ceiling**

Sloped Housings & Trims



5" Line Voltage Sloped Ceiling IC Housings

Description	CAT. #	Specs
 5" Airtight Slope IC New Construction Housing (Pitch ranging from 2/12 to 6/12 with trim) 6 1/2" Height	EL518ICA	75W MAX. 120V

 5" Airtight Slope IC Remodel Housing (Pitch ranging from 2/12 to 6/12 with trim) 6 1/2" Height	EL518ICA	75W MAX. 120V
---	----------	---------------

5" Line Voltage Sloped Trims

Description	CAT. #	Specs
 5" Sloped Baffle Trim 7 1/2" O.D.	EL550W	All White, Lamp: 75W PAR30
	EL550B	Black/White Ring
 5" Sloped Reflector Trim 7 1/2" O.D.	EL555W	All White, Lamp: 75W PAR30
	EL555B	All Black
	EL555C	Clear/White Ring
 5" Sloped Baffle with Adjustable Gimbal Ring 7 1/4" O.D.	EL560W	All White, Lamp: 75W PAR30
	EL560B	Black/White Ring
 5" Sloped Reflector with Adjustable Gimbal Ring 7 1/4" O.D.	EL561W	All White, Lamp: 75W PAR30
	EL561C	All Clear

Line Voltage **Sloped Ceiling**

Sloped Housings & Trims



6" Line Voltage Sloped Ceiling IC Housings

Description	CAT. #	Specs
 6" Sloped Ceiling Medium Base IC Airtight Double Wall New Construction Housing 7 1/2" Height	EL936ICA	90W MAX. 120V
 6" Sloped Ceiling Medium Base IC Airtight Single Wall New Construction Housing 7" Height	EL918ICA	75W MAX. 120V
 6" Sloped Ceiling Medium Base IC Airtight Remodel Housing 7 1/8" Height	EL918RICA	75W MAX. 120V

6" Line Voltage Sloped Trims

Description	CAT. #	Specs
 6" Shower Trim with Albalite Lens 8" O.D.	EL12W	All White, Lamp: 60W A19
	EL12B	All Black
	EL12BZ	All Bronze
 6" Shower Trim with Fresnel Lens 8" O.D.	EL13W	All White, Lamp: 60W A19
	EL13B	All Black
 6" Adjustable Sloped Baffle with Reflector Trim 8" O.D.	EL601W	All White, Lamp: 75W PAR30
	EL601B	Black/White Ring
 6" Sloped Baffle Trim With PAR30 Gimbal Ring 8" O.D.	EL614W	All White, Lamp: 75W PAR30
	EL614B	Black
	EL614C	Clear/White Ring
 6" Sloped Baffle Trim With PAR38 Gimbal Ring 7 5/8" O.D.	EL615W	All White, Lamp: 150W PAR38
	EL615B	Black
	EL615C	Clear/White Ring
 6" Sloped Reflector Trim 7 5/8" O.D.	EL616W	All White Lamp: 75W PAR30, 150W PAR38
 6" Sloped Baffle Trim With Coil Springs and Metal Trim Ring 7 5/8" O.D.	EL622W	All White, Lamp: 150W PAR38
	EL622B	Black/White Ring

Line Voltage **Sloped Ceiling**


Sloped Housings & Trims




6" Line Voltage Sloped Trims

Description	CAT. #	Specs
 6" Adjustable Sloped Baffle Trim with Bracket 7 7/8" O.D.	EL622KW	All White, Lamp: 75W PAR30, 150W PAR38
	EL622KB	Black/White Ring
	EL622KBB	All Black
	EL622KBZ	All Bronze
 6" Sloped Reflector with Coil Springs Trim 7 7/8" O.D.	EL617W	All White, Lamp: 42W 4-Pin CFL, 150W PAR38
 6" Sloped Baffle with Coil Springs Trim 7 7/8" O.D.	EL623W	All White, Lamp: 42W 4-Pin CFL, 150W PAR38
 6" Adjustable Sloped Baffle with Gimbal Trim 7 7/8" O.D.	EL624W	All White Lamp: 75W PAR30 or LED
 6" Adjustable Sloped Baffle with Gimbal Trim 7 7/8" O.D.	EL626W	All White, Lamp: 150W PAR38 or LED
	EL626W	Black/White Ring

6" Line Voltage Super Sloped Ceiling IC Housings

Description	CAT. #	Specs
 6" Super Sloped IC Airtight Medium Base Double Wall New Construction Housing 7 3/4" Height	EL946ICA	90W MAX. 120V
 6" Super Sloped Ceiling Medium Base IC Airtight Single Wall New Construction Housing 7 1/2" Height	EL901ICA	75W MAX. 120V
 6" Super Sloped Ceiling Medium Base IC Airtight Remodel Housing 5 3/4" Height	EL901RICA	75W MAX. 120V

Super Sloped Ceilings Pitch Range:



Line Voltage Sloped Ceiling

Sloped Housings & Trims




6" Line Voltage Super Sloped Ceiling Non-IC Housings

Description	CAT. #	Specs
 6" Super Sloped Ceiling Medium Base Non-IC Single Wall New Construction Housing 7 1/2" Height	EL901HT	90W MAX. 120V
 6" Super Sloped Ceiling Medium Base Non-IC Remodel Housing 7 1/2" Height	EL901RT	90W MAX. 120V

6" Line Voltage Super Sloped Trims

Description	CAT. #	Specs
 6" Super Sloped Baffle Trim 9 3/8" O.D.	EL602W	All White Lamp: 90W PAR30/PAR38 or 75W BR30
 6" Super Sloped Reflector Trim 9 3/8" O.D.	EL606W	All White, Lamp: 90W PAR30/PAR38 or 75W BR30
 6" Super Sloped Baffle Trim with PAR30 Gimbal 9 3/8" O.D.	EL603W	All White Lamp: 75W PAR30
 6" Super Sloped Reflector Trim with PAR30 Gimbal 9 3/8" O.D.	EL604W	All White Lamp: 75W PAR30
 6" Super Sloped Baffle Trim with PAR38 Gimbal 9 3/8" O.D.	EL607W	All White Lamp: 90W PAR38
 6" Super Sloped Reflector Trim with PAR38 Gimbal 9 3/8" O.D.	EL608W	All White Lamp: 90W PAR38

Super Sloped Ceilings Pitch Range:



The **Sylo™** Collection



Koto Sylo™ Monopoint 127

Koto Sylo™ Track 129

Koto Sylo™ Wall Mount 131

Koto Sylo™ Surface Mount 133

Koto Sylo™ Pendant 137

Koto Sylo™ Direct Mount 141

Ply Sylo™ Surface Mount 143



Ply Sylo™ Pendant 144

The Koto Sylo™

Fixtures with Koto™ Modules

FOR STANDARD, FOCUS & LOW VOLTAGE KOTO™ MODULES

Available in a wide selection of applications

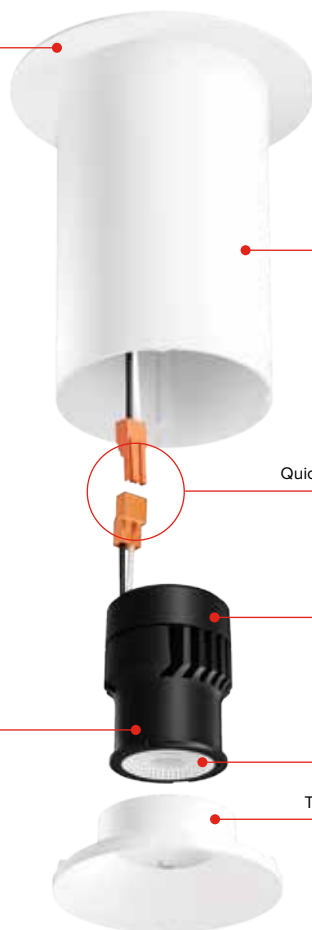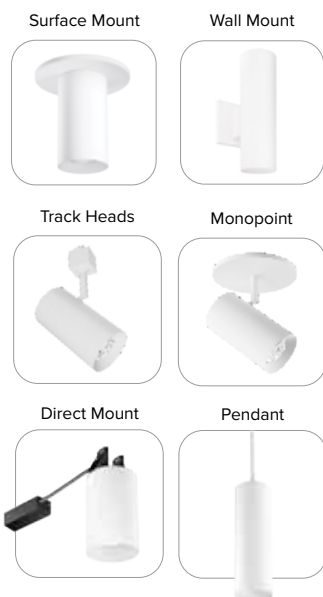

Diecast Construction

Quick Connect


Integrated driver for easy maintenance and upgrades

Field changeable lenses and reflectors available

Twist-On System



Compatible Koto Modules

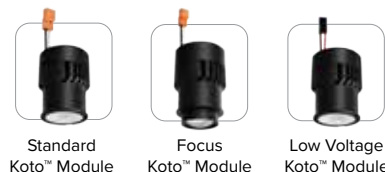

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2" 3" 4" 6"	Surface Mount Wall Mount Monopoint Track Head Pendant Direct Mount	White Black Bronze Silver	350 lm to 2000 lm	2400K - 5000K, Sunset, & Human Centric

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



2" Monopoint Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	M Monopoint	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 38° lens ⁹	(Blank) Standard
		B All Black	-07 750 lm ¹	27 2700K	-S 18° lens	-12 12" Stem ¹¹
		S All Silver	-09 950 lm ¹	30 3000K	-N 25° lens	-24 24" Stem ¹¹
			-11 1150 lm ¹	35 3500K	-W 60° lens	-36 36" Stem ¹¹
			-10DX 1000 lm (0-10V) ³	40 4000K	-T 10° lens ¹⁰	-48 48" Stem ¹¹
			-13 1350 lm ¹	SD Sunset ⁵		-60 60" Stem ¹¹
				HC Human Centric ^{1,6,7}		
			-08 825 lm ^{1,4}	CT5 2700K - 5000K ^{1,8}		
			-10 1000 lm ^{1,4}			

Example: **E25MW-0735** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³120/277V, 0-10V/Triac/ELV

⁴Available in CT5 color temperature only

⁵Available in -09 & -11 lumen output only

⁶Available with 1150 lumen (-11) outputs only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only

¹¹Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	M Monopoint	W All White	-07 750 lm	27 2400K	-FC 18°-50°	(Blank) Standard
		B All Black		30 2700K		-12 12" Stem ¹
		S All Silver		35 3500K		-24 24" Stem ¹
				40 4000K		-36 36" Stem ¹
				SD Sunset		-48 48" Stem ¹
						-60 60" Stem ¹

Example: **E25MW-0735-FC** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E25 2" Sylo	M Monopoint	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ³	(Blank) Standard
		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ⁴
		S All Silver			SD Sunset	-N 25° lens	-24 24" Stem ⁴
					(12A only) ^{1,2}	-W 60° lens	-36 36" Stem ⁴
							-48 48" Stem ⁴
							-60 60" Stem ⁴

Example: **E25MW-0812A27-W-12** [2" Koto Sylo™ Monopoint, All White, 800 lumens, 12V AC, 2700K, 60° lens, 12" Stem]

¹Available in 12A (12V AC) voltage only

²Transitions from 3000K to 1800K when dimmed

³Includes 25° & 60° lens in box

⁴Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



3" Monopoint Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle	Length
E36 3" Sylo	M Monopoint	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 120V, Triac/ELV	(Blank) 38° lens ⁹	(Blank) Standard
		B All Black	-07 750 lm	27 2700K		-S 18° lens	-12 12" Stem ¹¹
		S All Silver	-09 950 lm	30 3000K	D 120/277V, 0-10V/Triac/ELV	-N 25° lens	-24 24" Stem ¹¹
			-11 1150 lm	35 3500K		-W 60° lens	-36 36" Stem ¹¹
			-13 1350 lm	40 4000K		-T 10° lens ¹⁰	-48 48" Stem ¹¹
			-15 1500 lm	SD Sunset ^{4,5}			-60 60" Stem ¹¹
			-18 1800 lm	HC Human Centric ^{1,6,7}			
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}			
			-10 1000 lm ^{1,3}				

Example: **E36MB-0940D** [3" Koto Sylo™ Monopoint, All Black, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09, -11, & -13 lumen outputs

⁵Sunset transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only

¹¹Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle	Length
E36 3" Sylo	M Monopoint	W All White	-07 750 lm	27 2700K	(Blank) 120V, Triac/ELV	-FC 18° - 50°	(Blank) Standard
		B All Black	-09 950 lm	30 3000K			-12 12" Stem ³
		S All Silver	-12 1250 lm	35 3500K	D 120/277V, 0-10V/Triac/ELV		-24 24" Stem ³
			40 4000K				-36 36" Stem ³
			SD Sunset ^{1,2}				-48 48" Stem ³
							-60 60" Stem ³

Example: **E36MB-0940D-FC** [3" Koto Sylo™ Monopoint, All Black, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed

²Available with -07 lumen output only, 120V, Triac/ELV

³Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E36 3" Sylo	M Monopoint	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ³	(Blank) Standard
		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ⁴
		S All Silver			SD Sunset	-N 25° lens	-24 24" Stem ⁴
					(12A only) ^{1,2}	-W 60° lens	-36 36" Stem ⁴
							-48 48" Stem ⁴
							-60 60" Stem ⁴

Example: **E36MW-0812A27-W-12** [3" Koto Sylo™ Monopoint, All White, 800 lumens, 12V AC, 2700K, 60° lens, 12" Stem]

¹Available in 12A (12V AC) voltage only

²Transitions from 3000K to 1800K when dimmed

³Includes 25° and 60° lens in the box

⁴Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



2" Track Head Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Works with Single and Two Circuit Track
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	T Track Head	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 38° lens ⁹	(Blank) Standard
		B All Black	-07 750 lm	27 2700K	-S 18° lens	-12 12" Stem ¹¹
		S All Silver	-09 950 lm	30 3000K	-N 25° lens	
		BZ All Bronze	-11 1150 lm	35 3500K	-W 60° lens	
			-13 1350 lm	40 4000K	-T 10° lens ¹⁰	
				SD Sunset ^{4,5}		
				HC Human Centric ^{1,6,7}		
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}		
			-10 1000 lm ^{1,3}			

Example: **E25TW-0327-12** [2" Koto Sylo™ Track Head, All White, 350 lumens, 2700K, 38° lens, 12" stem]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09 & -11 lumen output only

⁵Transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) outputs only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only

¹¹Stem is not field cuttable, Not available in Bronze (BZ)



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	T Track Head	W All White	-07 750 lm	27 2700K	-FC 18°-50°	(Blank) Standard
		B All Black		30 3000K		-12 12" Stem ³
		S All Silver		35 3500K		
		BZ All Bronze ¹		40 4000K		
				SD Sunset ²		

Example: **E25TW-0735-FC** [2" Koto Sylo™ Track Head, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Stem not available in bronze

²Transitions from 3000K to 1800K when dimmed

³Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



3" Track Head Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Works with Single and Two Circuit Track
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E36 3" Sylo	T Track Head	W All White	-03 350 lm ¹	24 2400K	(Blank) 38° lens ⁸	(Blank) Standard
		B All Black	-07 750 lm	27 2700K	-S 18° lens	-12 12" Stem ¹⁰
		S All Silver	-09 950 lm	30 3000K	-N 25° lens	
			-11 1150 lm	35 3500K	-W 60° lens	
			-13 1350 lm	40 4000K	-T 10° lens ⁹	
			-15 1500 lm	SD Sunset ^{3,4}		
			-18 1800 lm	HC Human Centric ^{5,6}		
			-08 825 lm ²	CT5 2700K - 5000K ⁷		
			-10 1000 lm ²			

Example: **E36TW-0327-12** [3" Koto Sylo™ Track Head, All White, 350 lumens, 2700K, 38° lens, 12" stem]

¹Available in 2400K, 2700K & 3000K only

²Available in CT5 color temperature only

³Available in -09, -11, -13, & -15 lumen output only

⁴Transitions from 3000K to 1800K when dimmed

⁵Available with 1150 lumen (-11) outputs only

⁶Transitions from 4000K to 2200K when dimmed

⁷Available with -08 & -10 lumen outputs only

⁸Includes 25° and 60° lens in the box

⁹Available with 350 & 750 lumen, 2700K & 3000K only

¹⁰Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E36 3" Sylo	T Track Head	W All White	-07 750 lm	27 2700K	-FC 18°-50°	(Blank) Standard
		B All Black	-09 950 lm	30 3000K		-12 12" Stem ³
		S All Silver	-12 1250 lm	35 3500K		
				40 4000K		
				SD Sunset ^{1,2}		

Example: **E36TW-0735-FC** [3" Koto Sylo™ Track Head, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed

²Available with -07 lumen output only. 120V, Triac/ELV only

³Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



NEW!



2", 3" & 4" Wall Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- **Optional UP/DOWN lighting**
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module (Down)	Beam Angle	Koto™ Module (Up)	Beam Angle	Color Temperature	Dimming
E25 2"	A Wall Mount	W All White	03 350 lm ^{1,2}	(Blank) 38° lens ⁴	(Blank) No Module	(Blank) 38° lens ⁴	24 2400K	(Blank) 120V, Triac/ELV
		B All Black	07 750 lm	-S 18° lens	-03 350 lm ^{1,2}	-S 18° lens	27 2700K	
		BZ All Bronze	08 825 lm ^{1,3}	-N 25° lens	-07 750 lm	-N 25° lens	30 3000K	D 120/277V, 0-10V/Triac/ELV ¹¹
			09 950 lm	-W 60° lens	-08 825 lm ^{1,3}	-W 60° lens	35 3500K	
			10 1000 lm ^{1,3}	-T 10° lens ^{1,5}	-09 950 lm	-T 10° lens ^{1,5}	40 4000K	
			11 1150 lm		-10 1000 lm ^{1,3}		SD Sunset ^{6,7}	
			13 1350 lm		-11 1150 lm		HC Human Centric ^{8,9}	
					-13 1350 lm		C5 2700K - 5000K ^{1,10}	

Example: **E25ABZ09-09SD** [2" Koto Sylo™ Wall Mount, All Bronze, 950 lumens, 950 lumens, Sunset]

¹Available as 120V, Triac/ELV only
²Available in 2400K, 2700K & 3000K only
³Available in C5 color temperature only

⁴Includes 25° and 60° lens in the box
⁵Available with 350 & 750 lumen, 2700K & 3000K only
⁶Available in -09 & -11 lumen output only

⁷Transitions from 3000K to 1800K when dimmed
⁸Available with 1150 lumen (-11) outputs only
⁹Transitions from 4000K to 2200K when dimmed

¹⁰Available with -08 & -10 lumen outputs only
¹¹Available with 950lumen (-09) output only



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module (Down)	Beam Angle	Koto™ Module (Up)	Beam Angle	Color Temperature	Dimming
E36 3"	A Wall Mount	W All White	03 350 lm ^{1,2}	(Blank) 38° lens ⁴	(Blank) No Module	(Blank) 38° lens ⁴	24 2400K	(Blank) 120V, Triac/ELV
E42 4"		B All Black	07 750 lm	-S 18° lens	-03 350 lm ^{1,2}	-S 18° lens	27 2700K	
		BZ All Bronze	08 825 lm ^{1,3}	-N 25° lens	-07 750 lm	-N 25° lens	30 3000K	D 120/277V, 0-10V/Triac/ELV ¹¹
			09 950 lm	-W 60° lens	-08 825 lm ^{1,3}	-W 60° lens	35 3500K	
			10 1000 lm ^{1,3}	-T 10° lens ^{1,5}	-09 950 lm	-T 10° lens ^{1,5}	40 4000K	
			11 1150 lm		-10 1000 lm ^{1,3}		SD Sunset ^{6,7}	
			13 1350 lm		-11 1150 lm		HC Human Centric ^{8,9}	
			15 1500 lm		-13 1350 lm		C5 2700K - 5000K ^{1,10}	
					-15 1500 lm			

Example: **E36ABZ09-09SD** [2" Koto Sylo™ Wall Mount, All Bronze, 950 lumens, 950 lumens, Sunset]

¹Available as 120V, Triac/ELV only
²Available in 2400K, 2700K & 3000K only
³Available in C5 color temperature only

⁴Includes 25° and 60° lens in the box
⁵Available with 350 & 750 lumen, 2700K & 3000K only
⁶Available in -09 & -11 lumen output only

⁷Transitions from 3000K to 1800K when dimmed
⁸Available with 1150 lumen (-11) outputs only
⁹Transitions from 4000K to 2200K when dimmed

¹⁰Available with -08 & -10 lumen outputs only
¹¹Available with 950lumen (-09) output only

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



NEW!



2" & 3" Wall Mount Downlight Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- **For Downlightin use only**
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Title 24 JA8-2022 Compliant



For
DOWNLIGHTING
Only

Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Dimming
E25 2"	NY Wall Mount	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 38° lens ⁹	(Blank) 120V, Triac/ELV
E36 3"	Downlight	B All Black	-07 750 lm	27 2700K	-S 18° lens	D 120/277V, 0-10V/Triac/ELV ¹¹
			-09 950 lm	30 3000K	-N 25° lens	
			-11 1150 lm	35 3500K	-W 60° lens	
			-13 1350 lm	40 4000K	-T 10° lens ^{1,10}	
				SD Sunset ^{4,5}		
				HC Human Centric ^{6,7}		
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}		
			-10 1000 lm ^{1,3}			

Example: **E25NYB-0740** [2" Koto Sylo™ Wall Mount Downlight, All Black, 750 lumens, 4000K]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09 & -11 lumen output only

⁵Transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) outputs only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only

¹¹Available with 950 lumen (-09) output only

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



2" Surface Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle
E25 2" Fixed	F Surface Mount	W All White B All Black S All Silver	-03 350 lm ^{1,2} -07 750 lm -09 950 lm -11 1150 lm -10DX 1000 lm (0-10V) ³ -13 1350 lm	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset ^{5,6} HC Human Centric ^{7,8}	(Blank) 38° lens ¹⁰ -S 18° lens -N 25° lens -W 60° lens -T 10° lens ¹¹
			-08 825 lm ^{1,4} -10 1000 lm ^{1,4}	CT5 2700K - 5000K ^{1,9}	

Example: **E25FW-0735** [2" Koto Sylo™ Surface Mount, All White, 750 lumens, 3500K]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³120/277V, 0-10V/Triac/ELV

⁴Available in CT5 color temperature only

⁵Available in -09 & -11 lumen output only

⁶Transitions from 3000K to 1800K when dimmed

⁷Available with 1150 lumen (-11) outputs only

⁸Transitions from 4000K to 2200K when dimmed

⁹Available with -08 & -10 lumen outputs only

¹⁰Includes 25° and 60° lens in the box

¹¹Available with 350 & 750 lumen, 2700K & 3000K only



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle
E25 2" Sylo	F Surface Mount	W All White B All Black S All Silver	-07 750 lm	27 2400K 30 2700K 35 3500K 40 4000K SD Sunset ¹	-FC 18°-50°

Example: **E25FW-0735-FC** [2" Koto Sylo™ Surface Mount, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle
E25 2" Fixed	F Surface Mount	W All White B All Black S All Silver	-08 800 lm	12A 12V AC 24D 24V DC	27 2700K 30 3000K SD Sunset (12A only) ^{1,2}	(Blank) 38° lens ³ -S 18° lens -N 25° lens -W 60° lens

Example: **E25FW-0812A27** [2" Koto Sylo™ Surface Mount, All White, 800 lumens, 12V AC, 2700K]

¹Available in 12A (12V AC) voltage only

²Transitions from 3000K to 1800K when dimmed

³Includes 25° and 60° lens in the box

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



3" Surface Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle
E36 3" Fixed	F Surface Mount	W All White B All Black S All Silver	-03 350 lm ^{1,2} -07 750 lm -09 950 lm -11 1150 lm -13 1350 lm -15 1500 lm -18 1800 lm -08 825 lm ^{1,3} -10 1000 lm ^{1,3}	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset ^{4,5} HC Human Centric ^{6,7} CT5 2700K - 5000K ^{1,8}	(Blank) 120V, Triac/ELV D 120/277V, 0-10V/Triac/ELV	(Blank) 38° lens ⁹ -S 18° lens -N 25° lens -W 60° lens -T 10° lens ¹⁰

Example: **E36FB-0940D** [3" Koto Sylo™ Surface Mount, All Black, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09, -11, -13, & -15 lumen outputs

⁵Sunset transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Voltage	Beam Angle
E36 3" Sylo	F Surface Mount	W All White B All Black S All Silver	-07 750 lm	27 2400K 30 2700K 35 3500K 40 4000K SD Sunset ¹	(Blank) 120V, Triac/ELV D 120/277V, 0-10V/Triac/ELV	-FC 18°-50°

Example: **E36FS-0735-FC** [3" Koto Sylo™ Surface Mount, All Silver, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle
E36 3" Fixed	F Surface Mount	W All White B All Black S All Silver	-08 800 lm	12A 12V AC 24D 24V DC	27 2700K 30 3000K SD Sunset (12A only) ^{1,2}	(Blank) 38° lens ³ -S 18° lens -N 25° lens -W 60° lens

Example: **E36FW-0812A27** [3" Koto Sylo™ Surface Mount, All White, 800 lumens, 12V AC, 2700K]

¹Available in 12A (12V AC) voltage only

²Transitions from 3000K to 1800K when dimmed

³Includes 25° and 60° lens in the box

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



4" Surface Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle
E42 4" Fixed	F Surface	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 120V, Triac/ELV D 120/277V, 0-10V/Triac/ELV	(Blank) 38° lens ⁹
E429 4" Adjustable	Mount	B All Black	-07 750 lm	27 2700K		-S 18° lens
		S All Silver	-09 950 lm	30 3000K		-N 25° lens
			-11 1150 lm	35 3500K		-W 60° lens
			-13 1350 lm	40 4000K		-T 10° lens ¹⁰
			-15 1500 lm	SD Sunset ^{4,5}		
			-18 1800 lm	HC Human Centric ^{6,7}		
			-20 2000 lm			
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}		
			-10 1000 lm ^{1,3}			

Example: **E42FB-0940D** [4" Koto Sylo™ Surface Mount, All Black, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09, -11, -13, -15, & -18 lumen outputs

⁵Sunset transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Voltage	Beam Angle
E42 4" Sylo	F Surface	W All White	-07 750 lm	27 2400K	(Blank) 120V, Triac/ELV D 120/277V, 0-10V/Triac/ELV	-FC 18°-50°
	Mount	B All Black	-09 950 lm	30 2700K		
		S All Silver	-12 1250 lm	35 3500K		
				40 4000K		
				SD Sunset ^{1,2}		

Example: **E42FS-0735-FC** [4" Koto Sylo™ Surface Mount, All Silver, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed

²Available with 750 lumen (-07) output only



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle
E42 4" Fixed	F Surface	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ³
E429 4" Adjustable	Mount	B All Black		24D 24V DC	30 3000K	-S 18° lens
		S All Silver			SD Sunset	-N 25° lens
					(12A only) ^{1,2}	-W 60° lens

Example: **E42FW-0812A27** [4" Koto Sylo™ Surface Mount, All White, 800 lumens, 12V AC, 2700K]

¹Available in 12A (12V AC) voltage only

²Transitions from 3000K to 1800K when dimmed

³Includes 25° and 60° lens in the box

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



6" Surface Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle
E648 6" Fixed	F Surface	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 120V, Triac/ELV	(Blank) 38° lens ⁹
E629 6" Adjustable	Mount	B All Black	-07 750 lm	27 2700K	D 120/277V, 0-10V/Triac/ELV	-S 18° lens
			-09 950 lm	30 3000K		-N 25° lens
			-11 1150 lm	35 3500K		-W 60° lens
			-13 1350 lm	40 4000K		-T 10° lens ¹⁰
			-15 1500 lm	SD Sunset ^{4,5}		
			-18 1800 lm	HC Human Centric ^{6,7}		
			-20 2000 lm			
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}		
			-10 1000 lm ^{1,3}			

Example: **E629FB-0940D** [6" Koto Sylo™ Adjustable Surface Mount, All Black, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09, -11, -13, -15, & -18 lumen outputs

⁵Sunset transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle
E648 6" Fixed	F Surface Mount	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ³
E629 6" Adjustable		B All Black		24D 24V DC	30 3000K	-S 18° lens
					SD Sunset (12A only) ^{1,2}	-N 25° lens
						-W 60° lens

Example: **E648FW-0812A27** [6" Koto Sylo™ Surface Mount, All White, 800 lumens, 12V AC, 2700K]

¹Available in 12A (12V AC) voltage only

²Transitions from 3000K to 1800K when dimmed

³Includes 25° and 60° lens in the box

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



2" Pendant Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72", and 84")
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E25 2" Fixed	P Pendant	W All White B All Black S All Silver	-03 350 lm ^{1,2} -07 750 lm -09 950 lm -11 1150 lm -10DX 1000 lm (0-10V) ³ -13 1350 lm	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset ^{5,6} HC Human Centric ^{7,8} CT5 2700K - 5000K ^{1,9}	(Blank) 38° lens ¹⁰ -S 18° lens -N 25° lens -W 60° lens -T 10° lens ¹¹	(Blank) 120" Cable Mount ¹² -12 12" Stem ¹³ -24 24" Stem ¹³ -36 36" Stem ¹³ -48 48" Stem ¹³ -60 60" Stem ¹³ -72 72" Stem ¹³ -84 84" Stem ¹³
			-08 825 lm ^{1,4} -10 1000 lm			

Example: **E25PW-0735-12** [2" Koto Sylo™ Pendant, All White, 750 lumens, 3500K, 12" Stem]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³120/277V, 0-10V/Triac/ELV

⁴Available in CT5 color temperature only

⁵Available in -09, -11, & -13 lumen outputs

⁶Transitions from 3000K to 1800K when dimmed

⁷Available with 1150 lumen (-11) output only

⁸Transitions from 4000K to 2200K when dimmed

⁹Available with -08 & -10 lumen outputs only

¹⁰Includes 25° and 60° lens in the box

¹¹Available with 350 & 750 lumen, 2700K & 3000K only

¹²120" field cuttable cable

¹³Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	P Pendant	W All White B All Black S All Silver	-07 750 lm	27 2400K 30 2700K 35 3500K 40 4000K SD Sunset ¹	-FC 18°-50°	(Blank) 120" Cable Mount ² -12 12" Stem ³ -24 24" Stem ³ -36 36" Stem ³ -48 48" Stem ³ -60 60" Stem ³ -72 72" Stem ³ -84 84" Stem ³

Example: **E25PW-0735-FC** [2" Koto Sylo™ Pendant, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed

²120" field cuttable cable

³Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E25 2" Fixed	P Pendant	W All White B All Black S All Silver	-08 800 lm	12A 12V AC 24D 24V DC	27 2700K 30 3000K SD Sunset (12A only) ¹	(Blank) 38° lens ² -S 18° lens -N 25° lens -W 60° lens	(Blank) 120" Cable Mount ³ -12 12" Stem ⁴ -24 24" Stem ⁴ -36 36" Stem ⁴ -48 48" Stem ⁴ -60 60" Stem ⁴ -72 72" Stem ⁴ -84 84" Stem ⁴

Example: **E25PB-0824D27** [2" Koto Sylo™ Pendant, All Black, 800 lumens, 24V DC, 2700K, 38° lens, 120" Cable Mount]

¹Available in 12A (12V AC) voltage only

²Includes 25° and 60° lens in the box

³120" field cuttable cable

⁴Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



3" Pendant Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Available with 120" Field Cutable Cable or Stems (12", 24", 36", 48", 60", 72", and 84")
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant

Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle	Length
E36 3" Fixed	P Pendant	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 120V, Triac/ELV	(Blank) 38° lens ⁹	(Blank) 120" Cable Mount ¹¹
		B All Black	-07 750 lm	27 2700K		-S 18° lens	-12 12" Stem ¹²
		S All Silver	-09 950 lm	30 3000K	D 120/277V, 0-10V/Triac/ELV	-N 25° lens	-24 24" Stem ¹²
			-11 1150 lm	35 3500K		-W 60° lens	-36 36" Stem ¹²
			-13 1350 lm	40 4000K		-T 10° lens ¹⁰	-48 48" Stem ¹²
			-15 1500 lm	SD Sunset ^{4,5}			-60 60" Stem ¹²
			-18 1800 lm	HC Human Centric ^{6,7}			-72 72" Stem ¹²
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}			-84 84" Stem ¹²
			-10 1000 lm ^{1,3}				

Example: **E36PB-0940D** [3" Koto Sylo™ Pendant, All Black, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09, -11, -13, -15, & -18 lumen outputs

⁵Transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only

¹¹120" field cuttable cable

¹²Stem is not field cuttable

Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Voltage	Beam Angle	Length
E36 3" Sylo	P Pendant	W All White	-07 750 lm	27 2400K	(Blank) 120V, Triac/ELV	-FC 18°-50°	(Blank) 120" Cable Mount ³
		B All Black	-09 950 lm	30 2700K			-12 12" Stem ⁴
		S All Silver	-12 1250 lm	35 3500K	D 120/277V, 0-10V/Triac/ELV		-24 24" Stem ⁴
				40 4000K			-36 36" Stem ⁴
				SD Sunset ^{1,2}			-48 48" Stem ⁴
							-60 60" Stem ⁴
							-72 72" Stem ⁴
							-84 84" Stem ⁴

Example: **E36PW-0735-FC** [3" Koto Sylo™ Pendant, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed

²Available with 750 lm (-07) output only

³120" field cuttable cable

⁴Stem is not field cuttable

Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E36 3" Fixed	P Pendant	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ²	(Blank) 120" Cable Mount ³
		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ⁴
		S All Silver			SD Sunset (12A only) ¹	-N 25° lens	-24 24" Stem ⁴
						-W 60° lens	-36 36" Stem ⁴
							-48 48" Stem ⁴
							-60 60" Stem ⁴
							-72 72" Stem ⁴
							-84 84" Stem ⁴

Example: **E36PB-0824D27-S-12** [3" Koto Sylo™ Pendant, All Black, 800 lumens, 24V DC, 2700K, 18° lens, 12" Stem]

¹Available in 12A (12V AC) voltage only

²Includes 25° and 60° lens in the box

³120" field cuttable cable

⁴Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



4" Pendant Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Available with 120" Field Cutable Cable or Stems (12", 24", 36", 48", 60", 72", and 84")
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant
- 30° MAX. tilt (E429P Adjustable Pendant Series Only)



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle	Length
E42 4" Fixed	P Pendant	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 120V, Triac/ELV	(Blank) 38° lens ⁹	(Blank) 120" Cable Mount ¹¹
E429 4" Adjustable		B All Black	-07 750 lm	27 2700K	D 120/277V, 0-10V/Triac/ELV	-S 18° lens	-12 12" Stem ¹²
		S All Silver	-09 950 lm	30 3000K		-N 25° lens	-24 24" Stem ¹²
			-11 1150 lm	35 3500K		-W 60° lens	-36 36" Stem ¹²
			-13 1350 lm	40 4000K		-T 10° lens ¹⁰	-48 48" Stem ¹²
			-15 1500 lm	SD Sunset ^{4,5}			-60 60" Stem ¹²
			-18 1800 lm	HC Human Centric ^{6,7}			-72 72" Stem ¹²
			-20 2000 lm				-84 84" Stem ¹²
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}			
			-10 1000 lm ^{1,3}				

Example: **E42PS-0940D** [4" Koto Sylo™ Pendant, All Silver, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only
²Available in 2400K, 2700K & 3000K only
³Available in CT5 color temperature only

⁴Available in -09, -11, -13, -15, & -18 lumen outputs
⁵Transitions from 3000K to 1800K when dimmed
⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed
⁸Available with -08 & -10 lumen outputs only
⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only
¹¹120" field cuttable cable
¹²Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Voltage	Beam Angle	Length
E42 4" Sylo	P Pendant	W All White	-07 750 lm	27 2400K	(Blank) 120V, Triac/ELV	-FC 18°-50°	(Blank) 120" Cable Mount ³
		B All Black	-09 950 lm	30 2700K	D 120/277V, 0-10V/Triac/ELV		-12 12" Stem ⁴
		S All Silver	-12 1250 lm	35 3500K			-24 24" Stem ⁴
				40 4000K			-36 36" Stem ⁴
				SD Sunset ^{1,2}			-48 48" Stem ⁴
							-60 60" Stem ⁴
							-72 72" Stem ⁴
							-84 84" Stem ⁴

Example: **E42PW-0735-FC** [4" Koto Sylo™ Pendant, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Transitions from 3000K to 1800K when dimmed

²Available with 750 lm (-07) output only

³120" field cuttable cable

⁴Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E42 4" Fixed	P Pendant	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ²	(Blank) 120" Cable Mount ³
E429 4" Adjustable		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ⁴
		S All Silver			SD Sunset (12A only) ¹	-N 25° lens	-24 24" Stem ⁴
						-W 60° lens	-36 36" Stem ⁴
							-48 48" Stem ⁴
							-60 60" Stem ⁴
							-72 72" Stem ⁴
							-84 84" Stem ⁴

Example: **E42PB-0824D27-S-12** [4" Koto Sylo™ Pendant, All Black, 800 lumens, 24V DC, 2700K, 18° lens, 12" Stem]

¹Available in 12A (12V AC) voltage only

²Includes 25° and 60° lens in the box

³120" field cuttable cable

⁴Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



6" Pendant Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72", and 84")
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant
- 30° MAX. tilt (E629P Adjustable Pendant Series Only)

Standard Koto™ Module Product Number Builder



Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Voltage	Beam Angle	Length
E648 6" Fixed	P Pendant	W All White	-03 350 lm ^{1,2}	24 2400K	(Blank) 120V, Triac/ELV	(Blank) 38° lens ⁹	(Blank) 120" Cable Mount ¹¹
E629 6" Adjustable		B All Black	-07 750 lm	27 2700K	D 120/277V, 0-10V/Triac/ELV	-S 18° lens	-12 12" Stem ¹²
			-09 950 lm	30 3000K		-N 25° lens	-24 24" Stem ¹²
			-11 1150 lm	35 3500K		-W 60° lens	-36 36" Stem ¹²
			-13 1350 lm	40 4000K		-T 10° lens ¹⁰	-48 48" Stem ¹²
			-15 1500 lm	SD Sunset ^{4,5}			-60 60" Stem ¹²
			-18 1800 lm	HC Human Centric ^{6,7}			-72 72" Stem ¹²
			-20 2000 lm				-84 84" Stem ¹²
			-08 825 lm ^{1,3}	CT5 2700K - 5000K ^{1,8}			
			-10 1000 lm ^{1,3}				

Example: **E648PW-0324D** [6" Koto Sylo™ Pendant, All White, 350 lumens, 2400K, 120/277V, 0-10V/Triac/ELV]

¹Available as 120V, Triac/ELV only
²Available in 2400K, 2700K & 3000K only
³Available in CT5 color temperature only

⁴Available in -09, -11, -13, -15, & -18 lumen outputs
⁵Transitions from 3000K to 1800K when dimmed
⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2200K when dimmed
⁸Available with -08 & -10 lumen outputs only
⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only
¹¹120" field cuttable cable
¹²Stem is not field cuttable

Low Voltage Koto™ Module Product Number Builder



Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E648 6" Fixed	P Pendant	W All White	-08 800 lm	12A 12V AC	27 2700K	(Blank) 38° lens ²	(Blank) 120" Cable Mount ³
E629 6" Adjustable		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ⁴
					SD Sunset (12A only) ¹	-N 25° lens	-24 24" Stem ⁴
						-W 60° lens	-36 36" Stem ⁴
							-48 48" Stem ⁴
							-60 60" Stem ⁴
							-72 72" Stem ⁴
							-84 84" Stem ⁴

Example: **E626PB-0824D27-N-36** [6" Adjustable Koto Sylo™ Pendant, All Black, 800 lumens, 24V DC, 2700K, 25° lens, 36" Stem]

¹Available in 12A (12V AC) voltage only

²Includes 25° and 60° lens in the box

³120" field cuttable cable

⁴Stem is not field cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



NEW!



2" & 3" Direct Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Directly mounts into ceiling (Up to 1.5" ceiling thickness)
- Optional mounting frame (E1LF1)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant
- 120V Triac/ELV with standard module options
- 120/277V 0-10V/Triac/ELV with DX module (-10DX Series)



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle
E25 2" Sylo	D Direct Mount	W All White B All Black S All Silver	-03 350 lm ^{1,2} -07 750 lm -09 950 lm -10DX 1000 lm (0-10V) ³ -11 1150 lm -13 1350 lm	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset ^{5,6} HC Human Centric ^{7,8} CT5 2700K - 5000K ^{1,9}	(Blank) 38° lens ¹⁰ -S 18° lens -N 25° lens -W 60° lens -T 10° lens ¹¹
			-08 825 lm ^{1,4} -10 1000 lm ^{1,4}		

Example: **E25DW-0324-S** [2" Koto Sylo™ Direct Surface Mount, All White, 350 lumens, 2400K, 18° lens]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³120/277V, 0-10V/Triac/ELV only

⁴Available in CT5 color temperature only

⁵Available in -09, -11, & -13 lumen outputs

⁶Transitions from 3000K to 1800K when dimmed

⁷Available with 1150 lumen (-11) output only

⁸Transitions from 4000K to 2000K when dimmed

⁹Available with -08 & -10 lumen outputs only

¹⁰Includes 25° and 60° lens in the box

¹¹Available with 350 & 750 lumen, 2700K & 3000K only



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle
E36 3" Sylo	D Direct Mount	W All White B All Black S All Silver	-03 350 lm ^{1,2} -07 750 lm -09 950 lm -11 1150 lm -13 1350 lm -15 1500 lm -18 1800 lm	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset ^{4,5} HC Human Centric ^{6,7} CT5 2700K - 5000K ^{1,8}	(Blank) 38° lens ⁹ -S 18° lens -N 25° lens -W 60° lens -T 10° lens ¹⁰
			-08 825 lm ^{1,3} -10 1000 lm ^{1,3}		

Example: **E36DW-0324-S** [3" Koto Sylo™ Direct Surface Mount, All White, 350 lumens, 2400K, 18° lens]

¹Available as 120V, Triac/ELV only

²Available in 2400K, 2700K & 3000K only

³Available in CT5 color temperature only

⁴Available in -09, -11, -13, -15, & -18 lumen outputs

⁵Transitions from 3000K to 1800K when dimmed

⁶Available with 1150 lumen (-11) output only

⁷Transitions from 4000K to 2000K when dimmed

⁸Available with -08 & -10 lumen outputs only

⁹Includes 25° and 60° lens in the box

¹⁰Available with 350 & 750 lumen, 2700K & 3000K only

Mounting Frame

Description	CAT. #	Specs
-------------	--------	-------



Optional Mounting Frame

E1LF1

Requires transformer

The Ply Sylo™ Fixtures with Ply™ LED Inserts

WITH MANUAL COLOR TEMPERATURE & LUMEN OUTPUT SWITCH



SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4" 6"	Surface Mount Pendant	White Black Haze	800 lm to 2000 lm	2700K - 5000K

The Ply Sylo™ System

4" & 6" Surface Mount LED Fixtures



NEW!



4" & 6" Surface Mount Ply Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- 90+ CRI for extremely accurate color rendering
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Optional
ESF4 4" Surface Mount	27 120V, Triac/ELV ^{1,2} 75 120/277V 0-10V/Triac/ELV ^{3,4}	L3 Switch up to 1500 lm ⁵ 10 1000 lm ^{6,7}	CT5 2700K - 5000K ⁸	W All White BB All Black ⁹ HW White/Haze Reflector	(Blank) No Emergency Battery EM 15W MAX. Emergency Battery ¹⁰

Example: **ESF42710CT5W** [4" Ply Sylo™ Surface Mount, 1000 lumens, 2700K-5000K, All White]

¹Available as 120V, Triac/ELV

²Lumen Switch: 1000/1250/1500 lm

³Available as 120/277V, 0-10V/Triac/ELV

⁴Lumen Switch: 800/1000/1500 lm

⁵Manual lumen switch located on module

⁶Available as 120V, Triac/ELV

⁷Available in All White (W) and White/Haze (HW) only

⁸Manual CCT switch located on module

⁹All Black (BB) only available in L3 only

¹⁰Fixture becomes 120V only



Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Optional
ESF6 6" Surface Mount	37 120V, Triac/ELV ¹ 85 120/277V 0-10V/Triac/ELV ²	L3 Switch up to 2000 lm ^{3,4} 10 1000 lm ^{5,6}	CT5 2700K - 5000K ⁷	W All White BB All Black ⁸ HW White/Haze Reflector	(Blank) No Emergency Battery EM 15W MAX. Emergency Battery ⁹

Example: **ESF63710CT5W** [6" Ply Sylo™ Surface Mount, 1000 lumens, 2700K-5000K, All White]

¹Available as 120V, Triac/ELV

²Available as 120/277V, 0-10V/Triac/ELV

³Manual lumen switch located on module

⁴Lumen Switch: 1000/1500/2000 lm

⁵Available as 120V, Triac/ELV

⁶Available in All White (W) and White/Haze (HW) only

⁷Manual CCT switch located on module

⁸All Black (BB) only available in L3 only

⁹Fixture becomes 120V only

The Ply Sylo™ System

4" & 6" Surface Mount LED Fixtures



NEW!



4" & 6" Pendant Ply Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- 120" Field Cuttable Cable
- 90+ CRI for extremely accurate color rendering
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Length	Optional
EPD4 4" Pendant	27 120V, Triac/ELV ^{1,2} 75 120/277V 0-10V/Triac/ELV ^{3,4}	L3 Switch up to 1500 lm ⁵ 10 1000 lm ^{6,7}	CT5 2700K - 5000K ⁸	W All White BB All Black ⁹ HW White/Haze Reflector	(Blank) 120" Cable Mount ¹⁰ -12 12" Stem ¹¹ -24 24" Stem ¹¹ -36 36" Stem ¹¹ -48 48" Stem ¹¹ -60 60" Stem ¹¹ -72 72" Stem ¹¹ -84 84" Stem ¹¹	(Blank) No Emergency Battery EM 15W MAX. Emergency Battery ¹²

Example: **EPD42710CT5W** [4" Ply Sylo™ Pendant, 1000 lumens, 2700K-5000K, All White]

¹Available as 120V, Triac/ELV

²Lumen Switch: 1000/1250/1500 lm

³Available as 120/277V, 0-10V/Triac/ELV

⁴Lumen Switch: 800/1000/1500 lm

⁵Manual lumen switch located on module

⁶Available as 120V, Triac/ELV

⁷Available in All White (W) and White/Haze (HW) only

⁸Manual CCT switch located on module

⁹All Black (BB) only available in L3 only

¹⁰120" field cuttable cable

¹¹Stem not field cuttable

¹²Fixture becomes 120V only



Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Length	Optional
EPD6 6" Pendant	37 120V, Triac/ELV ¹ 85 120/277V 0-10V/Triac/ELV ²	L3 Switch up to 2000 lm ^{3,4} 10 1000 lm ^{5,6}	CT5 2700K - 5000K ⁷	W All White BB All Black ⁸ HW White/Haze Reflector	(Blank) 120" Cable Mount ⁹ -12 12" Stem ¹⁰ -24 24" Stem ¹⁰ -36 36" Stem ¹⁰ -48 48" Stem ¹⁰ -60 60" Stem ¹⁰ -72 72" Stem ¹⁰ -84 84" Stem ¹⁰	(Blank) No Emergency Battery EM 15W MAX. Emergency Battery ¹¹

Example: **EPD63710CT5W** [6" Ply Sylo™ Pendant, 1000 lumens, 2700K-5000K, All White]

¹Available as 120V, Triac/ELV

²Available as 120/277V, 0-10V/Triac/ELV

³Manual lumen switch located on module

⁴Lumen Switch: 1000/1500/2000 lm

⁵Available as 120V, Triac/ELV

⁶Available in All White (W) and White/Haze (HW) only

⁷Manual CCT switch located on module

⁸All Black (BB) only available in L3 only

⁹120" field cuttable cable

¹⁰Stem not field cuttable

¹¹Fixture becomes 120V only


Ceiling Mount Fixtures



120V LED SKY Panels™, LED SKY Panels™ XL & Accessories	146
0-10V LED SKY Panels™	148
LED Disk Light	148
Dustin™ & Darby™ Ceiling Mount LED Lights	149

Ceiling Mount Fixtures

Sky Panels™, Flush Mount & LED Disk Lights



Junction Box for Ceiling Mount Fixtures


Description	CAT. #	Specs
 Square New Construction Box	ELJ4S	3 ¾" Sq x 2 ⅜"
 Junction Box without Hanger Bars	ELJ332	3 ¾" Sq x 2 ⅜"
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714		
 Square Junction Box with Hanger Bars for 2-Hour Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 ½" H
 Junction Box without Hanger Bars for 2-Hour Fire Rated Ceilings	ELJ443	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 ½" H
 4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	4" O.D. x 4 1/2" H
 4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA	4" O.D. x 4 1/2" H

Sky Panels™ LED Edge Lit

Description	CAT. #	Specs
 4" Round Sky Panel™ 5 ⅜" O.D. - ⅝" H	ELSP43CT5W	White, 10W, 600 lm, 2700K - 5000K
	ELSP43CT5B	Black, 10W, 600 lm, 2700K - 5000K
 4" Square Sky Panel™ 4 ⅜" Sq. - ⅝" H	ELSP4430W	White, 10W, 600 lm, 3000K
	ELSP4430B	Black, 10W, 600 lm, 3000K
 6" Round Sky Panel™ 7 ⅞" O.D. - ⅝" H	ELSP63CT5W	White, 15W, 900 lm, 2700K - 5000K
	ELSP63CT5B	Black, 15W, 900 lm, 2700K - 5000K
 6" Square Sky Panel™ 6 ⅜" Sq. - ⅝" H	ELSP66CT5W	White, 15W, 900 lm, 2700K - 5000K
	ELSP66CT5B	Black, 15W, 900 lm, 2700K - 5000K
 8" Round Sky Panel™ 9" O.D. - ⅝" H	ELSP83CT5W	White, 18W, 1200 lm, 2700K - 5000K
	ELSP83CT5B	Black, 18W, 1200 lm, 2700K - 5000K
 8" Square SkyPanel™ 9" Sq. - ⅝" H	ELSP88CT5W	White, 18W, 1200 lm, 2700K - 5000K
	ELSP88CT5B	Black, 18W, 1200 lm, 2700K - 5000K
 12" Round SkyPanel™ 12" O.D. - ⅝" H	ELSP12CT5W	White, 22W, 1450 lm, 2700K - 5000K
	ELSP12CT5B	Black, 22W, 1450 lm, 2700K - 5000K
 12" Square SkyPanel™ 12" Sq. - ⅝" H	ELSP22CT5W	White, 22W, 1450 lm, 2700K - 5000K
	ELSP22CT5B	Black, 22W, 1450 lm, 2700K - 5000K

Ceiling Mount **Fixtures**

Sky Panels™, Flush Mount & LED Disk Lights



Accessories for 4" & 6" LED Sky™ Panels

Description	CAT. #	Specs
 Emergency Battery Back-Up (For use with 4" & 6" Round Sky Panels) 	KEM-ELSW	15W, Input: 120V, 50/60Hz, 90 minutes of emergency operation, test switch. 8" O.D. x 1 1/8" H
 Empty Emergency Battery Casing (For use with 4" & 6" Round Sky Panels)	KMTH-ELSW	Empty emergency battery casing to match emergency battery units look. <i>Emergency battery NOT included.</i>

Sky Panels™ XL LED Edge Lit


Description	CAT. #	Specs
 12" x 24" Sky Panel™ XL with 5-CCT Switch  	ELSP1224CT5W	White, 22W, 2000 lm, 3000K, 3500K, 4000K, 4500K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required) 23 3/4" L - 12" W - 1" H
 12" x 48" Sky Panel™ XL with 5-CCT Switch  	ELSP1248CT5W	White, 40W, 4000 lm, 2700K, 3000K, 3500K, 4000K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required) 47 3/4" L - 12" W - 1" H
 24" x 24" Sky Panel™ XL with 3-CCT Switch  	ELSP2424CT5W	White, 40W, 4000 lm, 2700K, 3000K, 3500K, 4000K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required) 23 3/4" Sq. - 1" H
 24" x 48" Sky Panel™ XL with 5-CCT Switch  	ELSP2448CT5W	White, 40W, 4000 lm 2700K, 3000K, 3500K, 4000K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required) 47 3/4" L - 23 3/4" W - 1" H

Accessories for LED Sky™ Panels XL

Description	CAT. #	Specs
 Recessed Mount Junction Box	ELSPRM	4" L x 3 3/8" W x 7/8" H
 Pendant Mounting Kit	ELSPPD	Installation requires ELSPRM Junction Box.

Ceiling Mount Fixtures

Sky Panels™, Flush Mount & LED Disk Lights



Junction Box for Ceiling Mount Fixtures

Description	CAT. #	Specs
 Square New Construction Box	ELJ4S	3 ¾" Sq x 2 ⅜"
 Junction Box without Hanger Bars	ELJ332	3 ¾" Sq x 2 ⅜"
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714		
 Square Junction Box with Hanger Bars for 2-Hour Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 ½" H
 Junction Box without Hanger Bars for 2-Hour Fire Rated Ceilings	ELJ443	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 ½" H
 4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	4" O.D. x 4 1/2" H
 4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA	4" O.D. x 4 1/2" H

120/277V 0-10V Sky Panels™ LED Edge Lit


Description	CAT. #	Specs
 0-10V Dimmable 6" Round Sky Panel™ 7 ⅞" O.D. - ⅝" H  	ELSP63DXCT3W	White, 14W, 1000 lm, 3000K - 4000K 120/277V, 0-10V dimmable
	ELSP63DXCT3B	Black, 14W, 1000 lm, 3000K - 4000K 120/277V, 0-10V dimmable
 0-10V Dimmable 8" Round Sky Panel™ 9" O.D. - ⅝" H  	ELSP83DXCT3W	White, 17W, 1400 lm, 3000K - 4000K 120/277V, 0-10V dimmable
	ELSP83DXCT3B	Black, 17W, 1400 lm, 3000K - 4000K 120/277V, 0-10V dimmable

LED Disk Lights

Description	CAT. #	Specs
 4" Alva™ LED Disk Light 5 ½" O.D. - 1" H  	ELSF40CT5W	White, 10W, 600 lm, 2700K - 5000K
	ELSF40CT5B	Black, 10W, 600 lm, 2700K - 5000K
 6" Alva™ LED Disk Light 7 ¼" O.D. - 1 ¼" H  	ELSF1127W	White, 13W, 900 lm, 2700K
	ELSF1130W	White, 13W, 900 lm, 3000K
	ELSF11CT5W	White, 15W, 900 lm, 2700K - 5000K
	ELSF11CT5B	Black, 15W, 900 lm, 2700K - 5000K
	ELSF11CT5BZ	Bronze, 15W, 900 lm, 2700K - 5000K

Ceiling Mount **Fixtures**

Sky Panels™, Flush Mount & LED Disk Lights



Darby™ LED Ceiling Lights



10" - 16" **HIGHLUMEN** -
Double Ring
Ceiling Light

10" - 9 7/8" O.D. - 2 3/4" H
12" - 12 1/8" O.D. - 3 3/8" H
14" - 14 1/8" O.D. - 3 3/4" H
16" - 16 1/8" O.D. - 4 3/8" H



Description	CAT. #	Specs
	ELD11030W	Nickel, 10", 14W, 980 lm, 3000K
	ELD11040W	Nickel, 10", 14W, 1010 lm, 4000K
	ELD21030W	Nickel, 10", 18W, 1170 lm, 3000K
	ELD21030BZ	Bronze, 10", 18W, 1170 lm, 3000K
	ELD21040W	Nickel, 10", 18W, 1260 lm, 4000K
	ELD21040BZ	Bronze, 10", 18W, 1260 lm, 4000K
	ELD21230BZ	Bronze, 12", 22W, 1430 lm, 3000K
	ELD21240BZ	Bronze, 12", 22W, 1550 lm, 4000K
	ELD14CT5W	Nickel, 14", 18W, 1800 lm, 2700K - 5000K
	ELD16CT5W	Nickel, 16", 22W, 2200 lm, 2700K - 5000K

Dustin™ LED Ceiling Lights



12" - 16" **HIGHLUMEN** -
Ceiling Light

12" - 12 1/8" O.D. - 3 3/8" H
14" - 14 1/8" O.D. - 3 3/4" H
16" - 16 1/8" O.D. - 4 3/8" H



Description	CAT. #	Specs
	ELD32230W	12", 22W, 1540 lm, 3000K
	ELD32240W	12", 22W, 1540 lm, 4000K
	ELD31430W	14", 18W, 1260 lm, 3000K
	ELD31440W	14", 18W, 1260 lm, 4000K
	ELD32630W	16", 30W, 2100 lm, 3000K
	ELD32640W	16", 30W, 2100 lm, 4000K

Track & Pendant Lighting



Integrated LED Track Heads	151
Integrated LED Wall Wash	154
MR16 Low Voltage Track Heads for LED or Halogen Lamps	155
MR16 GU10 Line Voltage Track Heads	158
120V Line Voltage Track Fixtures	159
Single & Two Circuit Track and Accessories	162
LED Pendants	167
Line and Low Voltage Pendants & Accessories	168

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip



Integrated LED Track Heads

Description	CAT. #	Specs
 LED Albright™ 4 3/4" L - 2 1/2" W 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET580DW	White, 10W, 800 lm, 3000K. 90° tilt, 358° rotation
 LED Clove II™ 4 1/2" L - 2 1/4" W - 5 1/4" H 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET578L30W ET578L30B	White, 14W, 1075 lm, 3000K. 90° tilt, 358° rotation Black, 14W, 1075 lm, 3000K
 LED Halter™ 5 3/8" L - 3 3/8" W - 6 5/8" H 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET597B	Black, 40W, 2000 lm, 3000K 90° tilt, 358° rotation
 LED Transom™ 3 3/8" L - 2 1/2" W - 4 3/4" H 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET612DW ET612DB	White, 10W, 800 lm, 3000K, 180° tilt, 358° rotation Black, 10W, 800 lm, 3000K
 HIGHLUMEN LED Transom 4 5/8" L - 3 1/4" W - 6 1/8" H 38° Beam angle standard. Optional lenses: EP722C (15°) or EP723C (24°) available	ET613DW ET613DB ET613-35DB	White, 17W, 1500 lm, 3000K 180° tilt, 358° rotation Black, 17W, 1500 lm, 3000K Black, 17W, 1500 lm, 3500K
 LED Trilene™ 3 7/8" L - 4 3/8" H 38° Beam angle standard. Optional lenses: EP726C (15°) or EP727C (24°) available	ET615CT5DW ET615CT5DB	White, 17W, 1300 lm, 2700K - 5000K 180° tilt, 358° rotation Black, 17W, 1300 lm, 2700K - 5000K
 LED Stein™ 3 3/4" L - 2 1/4" W - 4 3/4" H 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET616-27DW ET616-27DB ET616CT5DW ET616CT5DB	White, 10W, 800 lm, 2700K Black, 10W, 800 lm, 2700K White, 10W, 800 lm, 2700K - 5000K Black, 10W, 800 lm, 2700K - 5000K
 HIGHLUMEN LED Stein™ 4 1/8" L - 2 7/8" W - 5 5/8" H 38° Beam angle standard. Optional lenses: EP722C (15°) or EP723C (24°) available	ET617CT5DW ET617CT5DB	White, 20W, 1500 lm, 2700K - 5000K Black, 20W, 1500 lm, 2700K - 5000K
 LED Stein™ with 5-CCT & 3-Wattage Switch 5 3/8" L - 2 3/8" W - 8 1/4" H Includes 38° standard beam angle, and field changeable 60° lens	ET843CT5W ET843CT5B	White, 20W - 36W, 2050 lm - 3050 lm, 2700K, 3000K, 3500K, 4000K, 5000K Black, 20W - 36W, 2050 lm - 3050 lm, 2700K, 3000K, 3500K, 4000K, 5000K
 LED Celtic™ 5 1/8" L - 2 3/4" W - 4 3/8" H	ET750DB ET752DB ET752-35DW ET752-40DW	25°, Black, 15W, 1000 lm, 3000K 35°, Black, 15W, 1000 lm, 3000K 35°, White, 15W, 1050 lm, 3500K 35°, White, 15W, 1100 lm, 4000K

For our full line of Track and Track accessories visit elcolighting.com

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip



Integrated LED Track Heads

Description		CAT. #	Specs	
	LED Magnus™ 3" L - 2 ¼" W - 6 ⅜" H	ET743DW	15°, White, 15W, 1000 lm, 3000K, 180° tilt, 358° rotation	
		ET743DB	15°, Black, 15W, 1000 lm, 3000K	
		ET743-35DW	15°, White, 15W, 1050 lm, 3500K	
		ET744DW	25°, White, 15W, 1000 lm, 3000K	
		ET744DB	25°, Black, 15W, 1000 lm, 3000K	
		ET744-35DW	25°, White, 15W, 1050 lm, 3500K	
		ET745DW	38°, White, 15W, 1000 lm, 3000K	
		ET745DB	38°, Black, 15W, 1000 lm, 3000K	
		ET745-35DW	38°, White, 15W, 1050 lm, 3500K	
		ET746DW	60°, White, 15W, 1100 lm, 3000K	
ET746DB	60°, Black, 15W, 1100 lm, 3000K			
ET746-35DW	60°, White, 15W, 1100 lm, 3500K			
	LED Packer™ with 5-CCT & 3-Watt Switch (S) 3 ¾" L - 2 ⅝" W - 6 ⅜" H	Includes 36° standard beam angle, and field changeable 24° lens   NEW!	ET830CT5W	White, 7W - 14W, 650 lm - 1250 lm, 2700K - 5000K, 90° tilt, 358° rotation
	ET830CT5B		Black, 7W - 14W, 650 lm - 1250 lm, 2700K - 5000K	
	LED Packer™ with 5-CCT & 3-Watt Switch (M) 4 ⅛" L - 3" W - 6 ⅞" H	Includes 36° standard beam angle, and field changeable 24° lens   NEW!	ET831CT5W	White, 10W - 20W, 925 lm - 1750 lm, 2700K - 5000K, 90° tilt, 358° rotation
	ET831CT5B		Black, 10W - 20W, 925 lm - 1750 lm, 2700K - 5000K	
	LED Packer™ with 5-CCT & 3-Watt Switch (L) 4 ¾" L - 3 ⅜" W - 7 ¾" H	Includes 36° standard beam angle, and field changeable 60° lens   NEW!	ET832CT5W	White, 20W - 28W, 1750 lm - 2375 lm, 2700K - 5000K, 90° tilt, 358° rotation
	ET832CT5B		Black, 20W - 28W, 1750 lm - 2375 lm, 2700K - 5000K	
	LED Packer™ with 5-CCT & 3-Watt Switch (XL) 5 ⅜" L - 3 ⅜" W - 8 ¼" H	Includes 36° standard beam angle, and field changeable 60° lens   NEW!	ET833CT5W	White, 24W - 36W, 2075 lm - 3075 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET833CT5B	Black, 24W - 36W, 2075 lm - 3075 lm, 2700K - 5000K
	24°-46° Field Adjustable Beam Angle LED Angler™ 3 ⅞" L - 2 ⅛" W - 5 ⅝" H	HIGHLUMEN	ET756DW	White, 15W, 1000 lm, 3000K, 90° tilt, 358° rotation
			ET757DW	White, 30W, 2000 lm, 3000K
			ET757DB	Black, 30W, 2000 lm, 3000K
	18°-50° Field Adjustable Beam Angle LED Bachman™ 3 ⅞" L - 3 ½" W - 6 ⅜" H	ET75830DW	20W Adjustable Beam, 1600 lm, 180° tilt, 358° rotation	
		ET75830DB	20W Adjustable Beam, 1600 lm	
	LED Cleat™ 3 ⅞" L - 2 ¼" W - 4 ⅞" H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET62530DW	White, 10W, 700 lm, 3000K, 180° tilt, 358° rotation
			ET62530DB	Black, 10W, 700 lm, 3000K
			ET62630DW	White, 13W, 1000 lm, 3000K
			ET62630DB	Black, 13W, 1000 lm, 3000K

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



Integrated LED Track Heads

Description	CAT. #	Specs
 LED Cleat™ Monopoint 1 5/8" L - 2 1/4" W - 2 5/8" H 5" O.D. 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET579L30W	White, 10W, 730 lm, 3000K, 180° tilt, 358° rotation
	ET579L30B	Black, 10W, 730 lm, 3000K
	ET579L35W	White, 10W, 760 lm, 3500K
	ET579L35B	Black, 10W, 760 lm, 3500K
 LED Gordian™ (Mini) 1 1/2" L - 1 1/2" W - 3 7/16" H 38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available	ET618CT3DW	White, 10W, 750 lm, 3000K, 3500K, 4000K 180° tilt, 358° rotation
	ET618CT3DB	Black, 10W, 750 lm, 3000K, 3500K, 4000K
	ET618CT5DW	White, 10W, 750 lm, 2700K - 5000K
	ET618CT5DB	Black, 10W, 750 lm, 2700K - 5000K
 LED Gordian™ (S) 2 1/4" L - 2 1/4" W - 4 3/4" H 38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available	ET619CT3DW	White, 20W, 1150 lm, 3000K, 3500K, 4000K 180° tilt, 358° rotation
	ET619CT3DB	Black, 20W, 1150 lm, 3000K, 3500K, 4000K
	ET619CT5DW	White, 20W, 1150 lm, 2700K - 5000K
	ET619CT5DB	Black, 20W, 1150 lm, 2700K - 5000K
 HIGHLUMEN™ LED Gordian™ (M) 3 1/4" L - 3 3/16" W - 5 3/8" H 38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available	ET620CT3DW	White, 30W, 2200 lm, 3000K, 3500K, 4000K 180° tilt, 358° rotation
	ET620CT3DB	Black, 30W, 2200 lm, 3000K, 3500K, 4000K
	ET620CT5DW	White, 30W, 2200 lm, 2700K - 5000K
	ET620CT5DB	Black, 30W, 2200 lm, 2700K - 5000K
 HIGHLUMEN™ LED Gordian™ (L) 3 5/8" L - 3 3/8" W - 6 1/4" H 38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available	ET621CT5DW	White, 40W, 3050 lm, 2700K - 5000K 180° tilt, 358° rotation
	ET621CT5DB	Black, 40W, 3050 lm, 2700K - 5000K
 LED Uni™ 3 5/16" L - 2 1/2" W - 4 1/4" H	ET62730DB	Black, 8W, 600 lm, 3000K 90° tilt, 358° rotation
 LED Tiggap™ 3 3/16" L - 2 1/2" W - 4 1/4" H 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET62830DW	White, 13W, 1000 lm, 3000K 90° tilt, 358° rotation

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



Integrated LED Wall Wash Track Fixtures

Description	CAT. #	Specs
 LED Pipe™ (6") 6" L - 3" W - 4 3/4" H CCT SWITCH NEW!	ETW46CT3W	White, 14W, 1000 lm, 3000K, 3500K, 4000K 180° tilt, 358° rotation
	ETW46CT3B	Black, 14W, 1000 lm, 3000K, 3500K, 4000K
 LED Pipe™ (12") 11 5/8" L - 3" W - 4 3/4" H CCT SWITCH	ETW42CT5B	Black, 20W, 1550 lm, 2700K - 5000K 180° tilt, 358° rotation
	ETW42CT5B-J	Black, 20W, 1550 lm, With Junto Tip, 2700K - 5000K
 LED Pipe™ (21") 20 1/4" L - 3" W - 4 3/4" H CCT SWITCH	ETW43CT5W	White, 40W, 2500 lm, 2700K - 5000K 180° tilt, 358° rotation
	ETW43CT5B	Black, 40W, 2500 lm, 2700K - 5000K
 LED Pipe™ (27") 26 1/8" L - 3" W - 4 3/4" H CCT SWITCH	ETW44CT5W	White, 58W, 4000 lm, 2700K - 5000K 180° tilt, 358° rotation
	ETW44CT5B	Black, 58W, 4000 lm, 2700K - 5000K
 LED Boom™ with 5-CCT & 3-Wattage Switch 5 7/8" L - 2 3/4" W - 5 7/8" H CCT SWITCH NEW! 3 WATTAGE SWITCH	ETW663CT5W	White, 24W - 36W, 2275 lm - 3350 lm, 2700K - 5000K, 180° tilt, 358° rotation
	ETW663CT5B	Black, 24W - 36W, 2275 lm - 3350 lm, 2700K - 5000K

Integrated LED Linear Track Fixtures

Description	CAT. #	Specs
 LED Tarbuck™ 22 1/2" L x 1/2" H x 1/2" W CCT SWITCH	ETL2130W	White, 18W, 1400 lm, 3000K
	ETL21CT3B	Black, 18W, 1400 lm, 3000K, 3500K, 4000K
	ETL2140W	White, 18W, 1500 lm, 4000K


Integrated LED Wall Wash Track Fixtures Accessories

Description	CAT. #	Specs
 Front Louver (12") for ETW4030 & ETW4040	EP555W	
	EP555B	
 Front Louver (24") for ETW4130 & ETW4140	EP666W	
	EP666B	

For our full line of Track and Track accessories visit elcolighting.com

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



Architectural Flood/Wall Wash Biax Series Track Fixtures

Description	CAT. #	Specs
 Flood Wall Wash 17 5/8" L - 5 5/8" W - 8 1/4" H	ET226B	Black, 3600 lm, 24/27W biax lamps


MR16 Low Voltage Track Heads for LED or Halogen Lamps

Description	CAT. #	Specs
 Low Voltage Zeppelin™ for LED or Halogen MR16 BiPin 2 1/8" L - 2" W - 5 1/8" H	ETLD526W	White, 120V - 50W MAX. 90° tilt, 358° rotation
	ETLD526B	Black, 120V - 50W MAX.
 Low Voltage Cylinder for LED or Halogen MR16 BiPin 3 1/8" L - 2 1/4" W - 5 3/4" H	ETLD528W	White, 120V - 50W MAX. 90° tilt, 358° rotation
	ETLD528B	Black, 120V - 50W MAX.
	ETLD528BZ	Bronze, 120V - 50W MAX.
 Low Voltage Anchor™ for LED or Halogen MR16 BiPin 4" L - 2 1/2" W - 5 3/4" H	ETLD530WW	All White, 120V, 3W - 50W MAX. 90° tilt, 358° rotation
	ETLD530W	White/Black, 120V, 3W - 50W MAX.
	ETLD530B	Black, 120V, 3W - 50W MAX.
 Low Voltage Icicle™ for LED or Halogen MR16 BiPin 3" L - 2 1/8" W - 7 1/4" H	ETLD534W	White, 120V, 50W MAX. 90° tilt, 358° rotation

For our full line of Track and Track accessories visit elcolighting.com

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip




MR16 Low Voltage Track Heads for Halogen Lamps

Description	CAT. #	Specs
 Art Deco Gimbal Ring for Halogen MR16 BiPin 2 3/4" L - 3 1/8" W - 7 3/8" H	ET502W	White, 12V, 50W MAX.
	ET502B	Black, 12V, 50W MAX.
 Gimbal Ring for Halogen MR16 BiPin 2 3/4" L - 2 1/8" W - 5 1/4" H	ET507B	Black, 12V, 50W MAX.
 Low Voltage Zeppelin™ MR16 BiPin 2" L - 2 1/8" W - 4 3/8" H	ET526W	White, 12V, 50W MAX.
	ET526B	Black, 12V, 50W MAX.
	ET526-75W	White, 12V, 75W MAX.
	ET526-75B	Black, 12V, 75W MAX.
 Low Voltage Cylinder MR16 BiPin 3" L - 2 1/4" W - 5" H	ET528W	White, 12V, 50W MAX.
	ET528B	Black, 12V, 50W MAX.
	ET528G	Gold, 12V, 50W MAX.
	ET528N	Nickel, 12V, 50W MAX.
 Low Voltage Anchor™ MR16 BiPin 3" L - 2 1/2" W - 5" H	ET530W	White/Black Baffle, 120V, 50W MAX.
	ET530B	Black, 120V, 50W MAX.
	ET530WW	All White, 120V, 50W MAX.
 Low Voltage Step Cylinder MR16 BiPin 3 1/2" L - 2 1/2" W - 6" H	ET531B	Black, 12V, 42/50W MAX.
 Low Voltage Hoxton™ MR16 BiPin 3 1/8" L - 2 1/4" W - 5" H	ET532W	White, 12V, 50W MAX.
	ET532B	Black, 12V, 50W MAX.
 Low Voltage Clasp MR16 BiPin 2 5/8" L - 3 1/8" W - 6 7/8" H	ET534W	White, 12V, 50W MAX.
	ET534B	Black, 12V, 50W MAX.
 Low Voltage Louver MR16 BiPin 3 1/8" L - 2 3/4" W - 5 1/4" H	ET537B	Black, 12V, 50W MAX.

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



MR16 Low Voltage Track Heads for Halogen Lamps

Description	CAT. #	Specs
 Low Voltage Contempo MR16 BiPin 3 5/8" L - 2 1/4" W - 5 1/4" H	ET549B	Black, 12V, 42W/50W MAX.
 Low Voltage Clasp Globe MR16 BiPin 3 3/4" L - 3 1/4" W - 5 3/8" H	ET551W-YL	White/Yellow Glass, 12V, 50W MAX.
	ET551B-BL	Black/Blue Glass, 12V, 75W MAX.
 Low Voltage Micro Style MR16 BiPin 3 1/2" L - 2 3/8" W - 6 3/4" H	ET559B	Black, 12V, 50W MAX.
 Low Voltage Vertical Gimbal MR16 BiPin 5" L - 2 1/4" W - 5 1/4" H	ET562W	White, 12V, 50W MAX.
	ET562B	Black, 12V, 50W MAX.
 Low Voltage High Tech Gimbal PAR36 2 1/2" L - 4 5/8" W - 7 1/2" H	ET565W	White, 12V, 50W MAX.
 Low Voltage Monopoint MR16 BiPin 3" L - 2 1/4" W - 4 1/2" H	ET1528W	White, 12V, 50W MAX.
	ET1528B	Black, 12V, 50W MAX.
	ET1528N	Nickel, 12V, 75W MAX.

MR16 Low Voltage Track Heads with Stem Extensions

Description	CAT. #	Specs
 Low Voltage Cylinder MR16 BiPin	ET528-12W	12", White, 12V, 50W
	ET528-12B	12", Black, 12V, 50W
	ET528-18W	18", White, 12V, 50W
	ET528-18B	18", Black, 12V, 50W
	ET528-24W	24", White, 12V, 50W
	ET528-24B	24", Black, 12V, 50W
	ET528-36W	36", White, 12V, 50W
	ET528-36B	36", Black, 12V, 50W
	ET528-48W	48", White, 12V, 50W
	ET528-48B	48", Black, 12V, 50W

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip




MR16 GU10 Line Voltage Track Heads

Description	CAT. #	Specs
 Bowen™ GU10 MR16 3 1/8" L - 2 1/8" W - 5 1/8" H	ET1626W	White
	ET1626B	Black
	ET1626N	Nickel
 Garda™ GU10 MR16 3" L - 2 1/4" W - 5" H	ET1628W	White
	ET1628B	Black
	ET1628BZ	Bronze
	ET1628N	Nickel
 Arbor™ GU10 MR16 3" L - 2 1/4" W - 5" H	ET1630W	White/ Black Baffle
	ET1630B	Black
	ET1630WW	All White
 Crown™ GU10 MR16 3 1/8" L - 2 1/4" W - 5 1/8" H	ET1632W	White
	ET1632B	Black
 Monopoint GU10 MR16 2 3/8" L - 2 1/4" W - 4 1/2" H	ET1728W	White
	ET1728B	Black
 120V 50W Halogen MR16 GU10 Lamp	MR120-GU10	50W
LED 120V 7W Halogen MR16 GU10 Lamp	MR120-GU10LD	7W, 500 lm, 3000K

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



120V Line Voltage Track Fixtures

Description		CAT. #	Specs
 Gimbal Ring 5 1/2" L - 3" W - 6 3/4" H		ET629W	White, 120V, 50W PAR20
		ET629B	Black, 120V, 50W PAR20
 Gimbal Ring 4 3/4" L - 4 1/8" W - 7 1/4" H		ET630W	White, 120V, 75W PAR30
		ET630B	Black, 120V, 75W PAR30
 Gimbal Ring PAR38 5 3/4" L - 5" W - 9 1/2" H		ET631W	White, 120V, 150W PAR38
		ET631B	Black, 120V, 150W PAR38
 Flat Back Cylinder with Baffle 5" L - 3 1/2" W - 7 1/2" H		ET634W	All White, 120V, 50W R20/PAR20
		ET634B	All Black, 120V, 50W R20/PAR20
		ET634WW	White/Black Baffle, 120V, 50W R20/PAR20
 Flat Back Cylinder with Baffle 7" L - 4 1/4" W - 9 3/4" H		ET635W	All White, 120V, 75W R30/PAR30
		ET635B	All Black, 120V, 75W R30/PAR30
		ET635WW	White/Black Baffle, 120V, 75W R30/PAR30
 Step Cylinder with Baffle 3 3/8" L - 6" W - 8 3/4" H		ET636W	White/Black Baffle, 120V, 50W R20/PAR20
		ET636B	All Black, 120V, 50W R20/PAR20
		ET636WW	All White, 120V, 50W R20/PAR20
 Step Cylinder with Baffle 6 1/2" L - 4 3/8" W - 9 1/2" H		ET637W	White/Black Baffle, 120V, 75W R30/PAR30
		ET637B	All Black, 120V, 75W R30/PAR30
		ET637WW	All White, 120V, 75W R30/PAR30

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip




120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 Roundback Cylinder with Baffle 5" L - 7 1/4" W - 8 3/4" H	ET639W	White/Black Baffle, 120V, 75W R30/PAR30
	ET639WW	All White, 120V, 75W R30/PAR30
 Universal Track Fixture 5 3/4" L - 2" W - 7 1/2" H	ET641W	White, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
	ET641B	Black, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
 Universal Track Fixture 4 1/2" L - 2" W - 8 1/4" H	ET642W	White, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
	ET642B	Black, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
 Mini Universal 2 3/8" L - 2" W - 5 1/4" H	ET647W	White, 120V, 75W R or PAR
	ET647B	Black, 120V, 75W R or PAR
	ET647BZ	Bronze, 120V, 75W R or PAR
 Flat Back Cylinder with Black or White Coilex Baffle 8" L - 5 7/8" W - 9 7/8" H	ET650W	White w/Black Baffle, 120V, 150W R40 PAR38
	ET650B	All Black, 120V, 150W R40 PAR38
	ET650WW	All White, 120V, 150W R40 PAR38
 Solid PAR20 Classic 4" L - 3 1/2" W - 5 1/2" H	ET657W	White, 120V, 50W PAR20
	ET657B	Black, 120V, 50W PAR20
 Solid PAR30 Classic 4 3/8" L - 4 7/8" W - 6 1/2" H	ET658W	White, 120V, 75W PAR30
	ET658B	Black, 120V, 75W PAR30
	ET658BZ	Bronze, 120V, 75W PAR30

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 Solid PAR Classic 6 1/4" L - 5 7/8" W - 7 1/2" H	ET659W	White, 120V, 150W PAR38
	ET659B	Black, 120V, 150W PAR38
 Wall Wash with Louver 7 1/4" L - 3 3/4" W - 6 1/4" H	ET660B	Black, 120V, 300W T3 double end quartz 150W T4 ETF Halogen 150W R40/PAR38
 Yoke mounted Roundback Cylinder PAR30 4 1/2" L - 4 3/8" W - 6 1/4" H	ET662B	Black, 120V, 75W PAR30
 Front Loading Adjustable Gimbal PAR30 4 3/4" L - 4 1/8" W - 8" H	ET686W	White, 120V, 75W PAR30
	ET686B	Black, 120V, 75W PAR30
 Front Loading Adjustable Gimbal PAR38 5 1/8" L - 5" W - 9 1/2" H	ET687W	White, 120V, 150W PAR38
	ET687B	Black, 120V, 150W PAR38
 Mini Universal 1/2" Yoke 2 3/8"-3 1/2" L - 2 1/8" W - 4 1/2"-4 7/8" H	ET690W	White, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
	ET690B	Black, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
 Par Classic PAR38 6 3/4" L - 5 3/8" W - 9" H	ET696C	Clear, 120V, 150W PAR38
	ET696G	Gold, 120V, 150W PAR38


For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Single & Two **Circuit Track and Accessories**

Full line of Accessories for Track Heads



Single Circuit Track *supplied with dead end and mounting hardware*

Description	CAT. #	Specs
 Single Circuit Track Available in White (W), Black (B), Bronze (BZ) & Nickel (N) 12' available only in White and Black	EP002 (W) (B) (BZ) (N)	2', 120V
	EP004 (W) (B) (BZ) (N)	4', 120V
	EP006 (W) (B) (BZ) (N)	6', 120V
	EP008 (W) (B) (BZ) (N)	8', 120V
	EP012 (W) (B)	12', 120V
 12' Track Kit Kit Includes: (2) Single Track (EP006) & Mini Connector Track (EP808) Available in White (W), Black (B), Bronze (BZ) & Nickel (N)	EP12X (W) (B) (BZ) (N)	(2) 6' Single Tracks, (1) Mini Connector, 120V

Single Circuit Track Accessories

Description	CAT. #	Specs
 Live End Connector Used for direct wiring.	EP801W	White
	EP801B	Black
	EP801BZ	Bronze
	EP801N	Nickel
 Flexible Connector To join two track sections at an angle up to 90°. Can be used as a feed point	EP802W	White
	EP802B	Black
	EP802BZ	Bronze
	EP802N	Nickel
 Straight Connector Power feedable connector to join two track sections	EP803W	White
	EP803B	Black
	EP803BZ	Bronze
	EP803N	Nickel
 L Connector/Straight Connector Power feedable connector to join two track sections at a 90° or 180°	EP804W	White
	EP804B	Black
	EP804BZ	Bronze
	EP804N	Nickel
 T Connector Power feedable connector to join three track sections	EP805W	White
	EP805B	Black
	EP805BZ	Bronze
	EP805N	Nickel
 X Connector Power feedable connector to join four track sections	EP806W	White
	EP806B	Black
	EP806BZ	Bronze
	EP806N	Nickel
 Mini Connector To join two track sections. Cannot be used as a feed point	EP808W	White
	EP808B	Black
	EP808BZ	Bronze
	EP808N	Nickel
 Floating Canopy Can be used anywhere along length of track to supply power. Includes end cap	EP809W	White
	EP809B	Black
	EP809BZ	Bronze
	EP809N	Nickel
 End Feed Kit Includes live end feed and canopy to mount on outlet box	EP810W	White
	EP810B	Black
	EP810BZ	Bronze
	EP810N	Nickel
 Dead End Dead end cap for single and two circuit track	EP812W	White
	EP812B	Black
	EP812BZ	Bronze
	EP812N	Nickel
 T-Bar Ceiling Feed Live feed with outlet box for use with T-bar ceilings	EP817W	White
	EP817B	Black
	EP817BZ	Bronze
	EP817N	Nickel

Single & Two **Circuit Track and Accessories**

Full line of Accessories for Track Heads



Single Circuit Track Accessories

Description		CAT. #	Specs
	Dead Mini Connector Dead Mini Connector to join two track sections without passing the power	EP825W	White
		EP825B	Black
		EP825BZ	Bronze
		EP825N	Nickel
	T-Bar Ceiling Feed In-line T-bar ceiling feed. Available in White and Black Only	EP827W	White
		EP827B	Black
	Cord and Plug Connector For single circuit track. 10 Amp MAX. or 1200W. 12 ft. long	EP850W	White
		EP850B	Black
		EP850BZ	Bronze
		EP850N	Nickel
	Conduit Connector To start a surface run	EP880W	White
		EP880B	Black
		EP880BZ	Bronze
	Conduit Continuation Kit Kit includes: (1) left and (1) right feed, to continue around obstructions with 1/2" surface conduit	EP979W	White
		EP979B	Black
	Live Feed with Current Limiter For single circuit track. 1A to 12A available	EP840W-1A	White, 1 Amp
		EP840B-1A	Black, 1 Amp
		EP840BZ-1A	Bronze, 1 Amp
		EP840W-2A	White, 2.5 Amp
		EP840B-2A	Black, 2.5 Amp
		EP840BZ-2A	Bronze, 2.5 Amp
		EP840W-3A	White, 3 Amp
		EP840B-3A	Black, 3 Amp
		EP840BZ-3A	Bronze, 3 Amp
		EP840W-4A	White, 4 Amp
		EP840B-4A	Black, 4 Amp
		EP840BZ-4A	Bronze, 4 Amp
		EP840W-5A	White, 5 Amp
		EP840B-5A	Black, 5 Amp
		EP840BZ-5A	Bronze, 5 Amp
		EP840W-7A	White, 7 Amp
		EP840B-7A	Black, 7 Amp
		EP840BZ-7A	Bronze, 7 Amp
		EP840W-10A	White, 10 Amp
		EP840B-10A	Black, 10 Amp
		EP840BZ-10A	Bronze, 10 Amp
		EP840W-12A	White, 12 Amp
		EP840B-12A	Black, 12 Amp
		EP840BZ-12A	Bronze, 12 Amp
	In-Line Feed Connector with Current Limiter For single circuit track. 1A to 12A available. Available in White & Black	EP841W-1A	White, 1 Amp
		EP841B-1A	Black, 1 Amp
		EP841W-2A	White, 2.5 Amp
		EP841B-2A	Black, 2.5 Amp
		EP841W-3A	White, 3 Amp
		EP841B-3A	Black, 3 Amp
		EP841W-4A	White, 4 Amp
		EP841B-4A	Black, 4 Amp
		EP841W-5A	White, 5 Amp
		EP841B-5A	Black, 5 Amp
		EP841W-7A	White, 7 Amp
		EP841B-7A	Black, 7 Amp
		EP841W-10A	White, 10 Amp
		EP841B-10A	Black, 10 Amp
		EP841B-12A	White, 12 Amp
		EP841BZ-12A	Black, 12 Amp

Single & Two **Circuit Track and Accessories**

Full line of Accessories for Track Heads



Two Circuit Track Accessories

Description	CAT. #	Specs
 Two Circuit Track Track supplied with dead end and mounting hardware	EC004W	White, 4'
	EC004B	Black, 4'
	EC006W	White, 6'
	EC006B	Black, 6'
	EC008W	White, 8'
	EC008B	Black, 8'
 Live End Connector Two Circuit live end connector to start a run	EC801W	White
	EC801B	Black
 Flexible Connector Power feedable connector to join two track sections up to 90° angle	EC802W	White
	EC802B	Black
 Straight Connector Power feedable connector to join two track sections	EC803W	White
	EC803B	Black
 L Connector Power feedable connector to join two track sections at a 90° angle	EC804W	White
	EC804B	Black
 T Connector Power feedable connector to join three track sections	EC805W	White
	EC805B	Black
 X Connector Power feedable connector to join four track sections	EC806W	White
	EC806B	Black
 Mini Connector To join two track sections. Cannot be used as a feed point	EC808W	White
	EC808B	Black
 Floating Canopy Can be used anywhere along length of track to supply power. Includes end cap.	EC809W	White
	EC809B	Black
 Dead End Dead End Cap for single and two circuit track.	EP812W	White
	EP812B	Black
 Conduit Connector To start a surface run.	EC880W	White
	EC880B	Black
 T-Bar Ceiling Feed Live feed with outlet box for use with T-bar ceilings.	EC817W	White
	EC817B	Black
 Two Circuit Live-End Feed Connector with Current Limiter 1A to 12A available. Separate circuit breaker for each circuit.	EC840W	See PNB Below
	EC840B	See PNB Below
 Two Circuit In-Line Feed Connector with Current Limiter 1A to 12A available. Separate circuit breaker for each circuit.	EC841W	See PNB Below
	EC841B	See PNB Below

	ELCO 2 Circuit	Feed	Finish	Circuit 1	Circuit 2
Product	EC				
Number	840	Live-End Feed	W White	1A 1 Amp	1A 1 Amp
Builder	841	In-Line Feed	B Black	2A 2.5 Amp	2A 2.5 Amp
				3A 3 Amp	3A 3 Amp
				4A 4 Amp	4A 4 Amp
				5A 5 Amp	5A 5 Amp
				7A 7 Amp	7A 7 Amp
				10A 10 Amp	10A 10 Amp
				12A 12.5 Amp	12A 12.5 Amp

Example: **EC841B2A12A** [ELCO 2 Circuit In-Line Feed, Black, 2.5 Amp, 12.5 Amp]


Custom Current Rating available upon request. Separate Circuit Breaker for each circuit.

Track **Accessories**

Full line of Accessories for Track Heads



General Track Accessories

Description	CAT. #	Specs
 Louver For Par30 ET630	EP222B	Black
 Accessory Baffle	EP300W	White
	EP300B	Black
 Honey Comb for ET622, ET623 & ET624	EP322W	White, for ET622
	EP322B	Black, for ET622
	EP323W	White, for ET623
	EP323B	Black, for ET623
	EP324W	White, for ET624
	EP324B	Black, for ET624
 Louver for ET616 & EDL80 Series	EP325B	Black, for ET616 & EDL80
 Louver for ET640 & ET650	EP444W	White
	EP444B	Black
 Barn Door Shutter	EP422W	White, for ET640 & ET650
	EP820W	White, for ET547 & ET62830
	EP820B	Black, for ET547 & ET62830
	EP822W	White, for ET631, ET635, ET637, ET639 & ET644
 Monopoint with with Low Voltage Transformer For use with TRACK 22 low voltage track heads	EP702W	White, 75W, 12V
	EP702B	Black, 75W, 12V
 Outlet Box Cover	EP800W	White
	EP800B	Black
	EP800BZ	Bronze
 Monopoint Canopy For Line Voltage fixtures	EP811W	White
	EP811B	Black
	EP811BZ	Bronze
 Outlet Adapter	EP814W	White
	EP814B	Black
	EP814BZ	Bronze
 Pendant Fixture Adapter Holds up to 35lbs	EP815W	White
	EP815B	Black
	EP815N	Nickel
 Monopoint Canopy For Low Voltage With transformer box	EP816W	White
	EP816B	Black
	EP816BZ	Bronze
	EP816N	Nickel
 Round Monopoint Canopy For Line Voltage Fixtures	EP819W	White
	EP819B	Black
	EP819BZ	Bronze

Track Accessories

Full line of Accessories for Track Heads




General Track Accessories

Description	CAT. #	Specs
 Straight Channel	EP844W	White
	EP844B	Black
 "L" Channel	EP845W	White
	EP845B	Black
 Clamp with 6' Cord and Plug	EP903W	White
 48" Steel Stem	EP904W	White
	EP904B	Black
 Sloped Ceiling Pendant Adapter For Use with EP918, EP924, EP936 & EP948	EP905W	White
	EP905B	Black
 T-Bar Attachment Clip	EP989B	Nickel / Steel
 Sloped Ceiling Pendant Adapter	EP906W	White
	EP906B	Black
 Track Pendant Kit with 60" stainless steel cable	EP960W	White
	EP960B	Black
 Pendant Assembly	EP918W	White, 18"
	EP918B	Black, 18"
	EP924W	White, 24"
	EP924B	Black, 24"
	EP936W	White, 36"
	EP936B	Black, 36"
	EP948W	White, 48"
	EP948B	Black, 48"
 Wire Cover Power feed-through with Pendant Assembly	EP807W	White
	EP807B	Black
 Extension Stem Track Accessory	EP882B	Black, 12"
	EP818B	Black, 18"
	EP824W	White, 24"
	EP824B	Black, 24"
	EP836W	White, 36"
	EP836B	Black, 36"
	EP848W	White, 48"
	EP848B	Black, 48"

Pendant Lighting

Flat Canopy included




LED Pendants

Description		CAT. #	Specs
	LED Bale™ Glass Pendants 3 7/8" O.D. - 6 1/2" H	EDL60N-FR	Frost, 5W, 300 lm, 3000K
		EDL60N-MA	Mars, 5W, 300 lm, 3000K
		EDL60N-AU	Autum, 5W, 300 lm, 3000K
	LED Blake™ Glass Pendants 4 7/8" O.D. - 6 1/8" H	EDL61N-AT	Athena, 5W, 300 lm, 3000K
		EDL61N-FR	Frost, 5W, 300 lm, 3000K
		EDL61N-MA	Mars, 5W, 300 lm, 3000K
	LED Becket™ Glass Pendants 4 1/2" O.D. - 6" H	EDL62N-AT	Athena, 5W, 300 lm, 3000K
		EDL62N-AU	Autum, 5W, 300 lm, 3000K
	LED Barrel™ Glass Pendants 3 3/4" O.D. - 9 3/4" H	EDL63N-CO	Cobalt, 5W, 300 lm, 3000K
		EDL63N-AU	Autum, 5W, 300 lm, 3000K
	LED Bait™ (2" x 8") Die-Cast Aluminum Pendants 2 1/4" O.D. - 8" H	EDL8030W	White, 10W, 700 lm, 3000K
		EDL8030B	Black, 10W 700 lm, 3000K
	LED Bait™ (3" x 8") Die-Cast Aluminum Pendants 3" O.D. - 8" H	EDL81CT3W	White, 18W, 1490 lm, 3000K, 3500K, 4000K
		EDL81CT3B	Black, 18W, 1490 lm, 3000K, 3500K, 4000K
	LED Bait™ (3" x 10") Die-Cast Aluminum Pendants 3" O.D. - 10" H	EDL82CT3W	White, 30W, 1920 lm, 3000K, 3500K, 4000K
		EDL82CT3B	Black, 30W, 1920 lm, 3000K, 3500K, 4000K
	LED Bait™ (4" x 10") Die-Cast Aluminum Pendants 3 3/8" O.D. - 10" H	EDL83CT3W	White, 40W, 2690 lm, 3000K, 3500K, 4000K
		EDL83CT3B	Black, 40W, 2690 lm, 3000K, 3500K, 4000K
	Optional Steel Wire Cover for LED Die-Cast Pendants	EP883W	White, 24" L x 3/8" O.D.
		EP883B	Black, 24" L x 3/8" O.D.
		EP884W	White, 48" L x 3/8" O.D.
		EP884B	Black, 48" L x 3/8" O.D.
		EP885W	White, 72" L x 3/8" O.D.
		EP885B	Black, 72" L x 3/8" O.D.

Pendant Lighting

Combine with Line Voltage Monopoint Canopy or Track Connector




Line Voltage Pendants & Accessories

Description	CAT. #	Specs
 Line Voltage Bale™ Glass Pendants 3 7/8" O.D. - 7 1/2" H	E10FR	Frost, 60W, 120V
	E10MA	Mars, 60W, 120V
	E10AU	Autum, 60W, 120V
 Line Voltage Blake™ Glass Pendants 3 3/8" O.D. - 6 1/8" H	E11AT	Athena, 60W, 120V
	E11MA	Mars, 60W, 120V
	E11AU	Autum, 60W, 120V
 Line Voltage Becket™ Glass Pendants 3 3/4" O.D. - 6" H	E12AT	Athena, 60W, 120V
	E12AU	Autum, 60W, 120V
 Line Voltage Barrel™ Glass Pendants 2 1/8" O.D. - 9 3/4" H	E13CO	Cobalt, 60W, Candelabra lamp
	E13AU	Autum, 60W, Candelabra lamp
 Line Voltage Monopoint Canopy for Pendants 5" O.D.	ECTW	White
	ECTB	Black
	ECTN	Nickel
 Line Voltage 1 or 2 Circuit Track Connector	ETTW	White
	ETTB	Black
	ETTN	Nickel

Low Voltage Pendants & Accessories

Description	CAT. #	Specs	Dist. Net
 Low Voltage Bale™ Glass Pendants 3 1/2" O.D. - 6" H	E20FR	Frost, 50W, 12V	
	E20MA	Mars, 50W, 12V	
	E20AU	Autum, 50W, 12V	
 Low Voltage Blake™ Glass Pendants 3 1/8" O.D. - 6 1/8" H	E21AT	Athena, 50W, 12V	
	E21FR	Frost, 50W, 12V	
	E21MA	Mars, 50W, 12V	
	E21AU	Autum, 50W, 12V	
 Low Voltage Becket™ Glass Pendants 3 1/4" O.D. - 6" H	E22AT	Athena, 50W, 12V	
	E22AU	Autum, 50W, 12V	
 Low Voltage Barrel™ Glass Pendants 2 1/8" O.D. - 9 3/4" H	E23CO	Cobalt, 50W, 12V	
	E23FR	Frost, 50W, 12V	
	E23AU	Autum, 50W, 12V	
 50W Vertical Track Transformer	ETVW	White	
	ETVB	Black	
	ETVN	Nickel	
 50W Semicircular Canopy	ECLW	White	
	ECLB	Black	
	ECLN	Nickel	

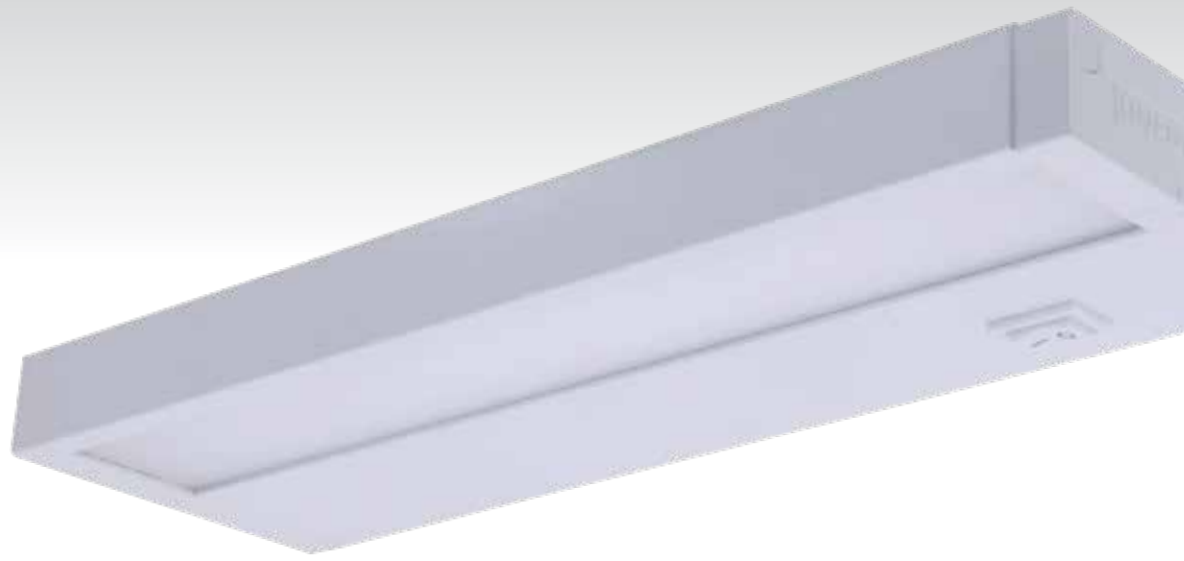


LED Undercabinet & Puck Lights

Lotus™ LED Undercabinet	170
Zinnia™ LED Undercabinet	171
Sage™ LED Undercabinet Lightbar	172
Flax™ LED Adjustable Undercabinet	172
Azalea™ LED Undercabinet	173

Tansy™ LED Undercabinet	173
Ixia™ 24V DC LED Undercabinet	173
LED Undercabinet Lightbars	174
12V Puck Lights & Accessories	175
24V Dimmers, 12V & 24V DC Drivers	176

LED Undercabinet and Pucks




Lotus™ LED Undercabinet

Description	CAT. #	Specs
 120V LED Undercabinet with CCT Switch 	EUB11CT5W	White, 11", 5.5W, 350 lm, 2700K - 5000K
	EUB12L30W	White, 12", 6W, 400 lm, 3-CCT
	EUB12CT5W	White, 12", 6W, 400 lm, 2700K - 5000K
	EUB14L30W	White, 14", 7W, 480 lm, 3-CCT
	EUB18CT5W	White, 18", 9.2W, 650 lm, 2700K - 5000K
	EUB22CT5W	White, 22", 10.5W, 700 lm, 2700K - 5000K
	EUB29CT5W	White, 29", 12.2W, 900 lm, 2700K - 5000K
	EUB32CT5W	White, 32", 14W, 1000 lm, 2700K - 5000K
	EUB36CT5W	White, 36", 15.3W, 1150 lm, 2700K - 5000K
	EUB48CT5W	White, 48", 19.5W, 1450 lm, 2700K - 5000K
 120V LED Undercabinet	EUB11L30BZ	Bronze, 11", 5.5W, 350 lm, 3000K
	EUB11L40BZ	Bronze, 11", 5.5W, 350 lm, 4000K
	EUB12L30BZ	Bronze, 12", 6W, 400 lm, 3000K
	EUB14L30BZ	Bronze, 14", 7W, 480 lm, 3000K
	EUB14L40BZ	Bronze, 14", 7W, 480 lm, 4000K
	EUB18L30BZ	Bronze, 18", 9.2W, 650 lm, 3000K
	EUB22L40BZ	Bronze, 22", 9.6W, 700 lm, 4000K
	EUB29L40BZ	Bronze, 29", 12.2W, 900 lm, 4000K
	EUB36L30BZ	Bronze, 36", 15.3W, 1150 lm, 3000K
	EUB36L40BZ	Bronze, 36", 15.3W, 1150 lm, 4000K
 Linking Connectors	EUBC03	3" Length
	EUBC06	6" Length
	EUBC12	12" Length
	EUBC24	24" Length
 5' Power Cord	EUBCRD	5' Length
 Jbox for hard wire connection	EUBJBX	White
	EUBJBXBZ	Bronze

Lotus II™ G2 LED Undercabinet Light

Description	CAT. #	Specs
 120V LED Undercabinet Individually switch with pass-through power. 2700K/3000K/3500K (CCT Switch) 	EU3T08W	8", 6W, 360 lm, 2700K, 3000K, 3500K
	EU3T12W	12", 8W, 485 lm, 2700K, 3000K, 3500K
	EU3T16W	16", 10W, 610 lm, 2700K, 3000K, 3500K
	EU3T24W	24", 14W, 850 lm, 2700K, 3000K, 3500K
	EU3T32W	32", 18W, 1100 lm, 2700K, 3000K, 3500K
 6" Extension Cable	EU3TC6	6" Length
 5' Power Cable	EU3TPC	5' Length

LED Undercabinet and Pucks




Zinnia™ LED Undercabinet Bar

Description	CAT. #	Specs
 120V Zinnia™ LED Undercabinet Bar White (W) and Bronze (BZ)	EUM41W	White, 12 ¼", 5W, 450 lm, 3000K
	EUM42W	White, 21", 9W, 800 lm, 3000K
	EUM43W	White, 24 ¼", 10W, 900 lm, 3000K
	EUM44W	White, 33 ¼", 15W, 1350 lm, 3000K
	EUM45W	White, 42 ¼", 20W, 1800 lm, 3000K
	EUM41BZ	Bronze, 12 ¼", 5W, 450 lm, 3000K
	EUM42BZ	Bronze, 21", 9W, 800 lm, 3000K
	EUM43BZ	Bronze, 24 ¼", 10W, 900 lm, 3000K
	EUM44BZ	Bronze, 33 ¼", 15W, 1350 lm, 3000K
	EUM45BZ	Bronze, 42 ¼", 20W, 1800 lm, 3000K

0-10V Zinnia™ LED Undercabinet Bar

Description	CAT. #	Specs
 0-10V 120V Zinnia™ LED Undercabinet Bar White (W) and Bronze (BZ)	EUM41DXW	White, 12 ¼", 5W, 450 lm, 3000K, 120V
	EUM42DXW	White, 21", 9W, 800 lm, 3000K, 120V
	EUM43DXW	White, 24 ¼", 10W, 900 lm, 3000K, 120V
	EUM44DXW	White, 33 ¼", 15W, 1350 lm, 3000K, 120V
	EUM45DXW	White, 42 ¼", 20W, 1800 lm, 3000K, 120V
	EUM41DXBZ	Bronze, 12 ¼", 5W, 450 lm, 3000K, 120V
	EUM42DXBZ	Bronze, 21", 9W, 800 lm, 3000K, 120V
	EUM43DXBZ	Bronze, 24 ¼", 10W, 900 lm, 3000K, 120V
	EUM44DXBZ	Bronze, 33 ¼", 15W, 1350 lm, 3000K, 120V
	EUM45DXBZ	Bronze, 42 ¼", 20W, 1800 lm, 3000K, 120V
0-10V 277V Zinnia™ LED Undercabinet Bar White (W) and Bronze (BZ)	EUM41DXW-7	White, 12 ¼", 5W, 450 lm, 3000K, 277V
	EUM42DXW-7	White, 21", 9W, 800 lm, 3000K, 277V
	EUM43DXW-7	White, 24 ¼", 10W, 900 lm, 3000K, 277V
	EUM44DXW-7	White, 33 ¼", 15W, 1350 lm, 3000K, 277V
	EUM45DXW-7	White, 42 ¼", 20W, 1800 lm, 3000K, 277V
	EUM41DXBZ-7	Bronze, 12 ¼", 5W, 450 lm, 3000K, 277V
	EUM42DXBZ-7	Bronze, 21", 9W, 800 lm, 3000K, 277V
	EUM43DXBZ-7	Bronze, 24 ¼", 10W, 900 lm, 3000K, 277V
	EUM44DXBZ-7	Bronze, 33 ¼", 15W, 1350 lm, 3000K, 277V
	EUM45DXBZ-7	Bronze, 42 ¼", 20W, 1800 lm, 3000K, 277V

LED Undercabinet and Pucks




Sage™ LED Showcase Lightbar

Description	CAT. #	Specs
120V LED Light Bar (1" Square)	EUD32CT5W	12", 5W, 300 lm, 2700K - 5000K
	EUD3330W	18", 8W, 500 lm, 3000K
	EUD34CT5W	24", 10W, 600 lm, 2700K - 5000K
	EUD35CT5W	30", 12W, 720 lm, 2700K - 5000K
	EUD36CT5W	36", 15W, 900 lm, 2700K - 5000K
	EUD3730W	48", 20W, 1200 lm, 3000K
Power Cord	EUDCRD	6' Length
End-to-End Connector	EUDCS31	
Linking Cable	EUDC31	6" Length
Jbox for hard wire connection	EUDJBX	White

Flax™ LED Adjustable Undercabinet

Description	CAT. #	Specs
24V LED Undercabinet (90 ° Angle Tilt)	EUM21W	8", 4.5W, 200 lm, 3000K
	EUM22W	16", 8.9W, 400 lm, 3000K
18W Adaptor	EUDRV18	18W, 24 DC, 120V, 72" Power Cord. For EUD21-24
Adaptor	EUDRV72	72W, 72" output wires. For EUD21-24
Mini Connector	EUMCS1	For EUM21-24
Inline Switch	EUMS1	12" wire, for EUM21-24
Linking Cable Wire	EUMC24	24" wire, for EUM21-24
	EUMC36	36" wire, for EUM21-24
Inline Dimmer Switch	DIMU1	72W, for EUM21-24

LED Undercabinet and Pucks



Azalea™ LED Undercabinet Bar

Description	CAT. #	Specs
 120V LED Undercabinet	EUS41W	13 1/2", 5W, 370 lm, 4000K
	EUS43W	22 1/2", 8W, 640 lm, 4000K
	EUS45W	35 1/2", 12W, 1200 lm, 4000K
	EUS47W	47 1/2", 17W, 1600 lm, 4000K
 Linking Cable	EUSC6	6" Length
	EUSC12	12" Length
	EUSC24	24" Length
	EUSC36	36" Length
 Power Cord	EUSPC	5' Length


Tansy™ LED Undercabinet

Description	CAT. #	Specs
 120V LED Undercabinet	EUM31W	8", 3.6W, 220 lm, 3000K
	EUM32BZ	16", 7.2W, 450 lm, 3000K
	EUM33BZ	24", 10.8W, 670 lm, 3000K
	EUM34W	32" 14.4W, 890 lm, 3000K
	EUM34BZ	32" 14.4W, 890 lm, 3000K

Ixia™ 24V DC LED Slim Undercabinet/Showcase

Description	CAT. #	Specs
 24V DC LED Undercabinet Bar CCT Tunable with EUDCCT (3000K - 6500K)	EUN51W	8", 3W, 160 lm, 3000K-6500K
	EUN52W	12", 4.5W, 260 lm, 3000K-6500K
	EUN53W	20", 7.5W, 420 lm, 3000K-6500K
 CCT Controller/Dimmer	EUDCCT	
 Linking Cable	EUDC51	
 Dimmer Switch	EUDS1	
 PIR Sensor	EUDPH1	
 Motion Sensor	EUDMS1	
 Input Connector	EUDPC	
 24V LED Driver	DRV24V30W	


LED Undercabinet and Pucks



LED Undercabinet Lightbars & Accessories

Description	CAT. #	Specs
 LED Lightbar Aluminum finish with Clear Polycarbonate Lens	EUD11CW	6", 1.6W, 4000K
	EUD14WW	35 1/2", 9.9W, 3000K
	EUD14CW	35 1/2", 9.9W, 4000K
 Lightbar Mounting Brackets	EUDCL1	(0°) Mounting bracket for EUD11-15
	EUDCL2	(45°) Mounting bracket for EUD11-15
 Mini Straight Connector	EUDCS1	Mini Straight Connector for EUD11-15
 Power Connector	EUDP1	12", for EUD11-15
 Linking Cable Male connector on both ends	EUDC2	12", for EUD11-15
	EUDC3	24", for EUD11-15
	EUDC4	36", for EUD11-15
 18W Adaptor	EUDRV18	18W, 72" Power Cord. For EUD11-15
 LED Lightbar Aluminum Finish with White Polycarbonate Lens Linkable up to 10 ft.	EUD24WW	47 1/4", 18W, 3000K
	EUD24CW	47 1/4", 18W, 4000K
 Desktop Driver with 40" AC Power Cord	EUDRV18-2	18W, for EUD21-24
	EUDRV60-2	60W, for EUD21-24
 Mini Linking Connector	EUDCS21	For EUD21-24
 Linking Cable	EUDC21	12", for EUD21-24
	EUDC22	24", for EUD21-24

LED Undercabinet and Pucks




Aster™ 12V Slim Puck Lights (Dimmable with 12V DC dimmable driver)

Description	CAT. #	Specs
 Recessed & Surface Mount Mini Slim Round LED Puck Light 2 3/8" O.D. x 1/2" H NEW!	E250N	Nickel, 3.5W, 280 lm, 3000K
	E250-27W	White, 3.5W, 300 lm, 2700K
	E250-27B	Black, 3.5W, 300 lm, 2700K
 Plug-in Driver with 6' Cord and Plug. 6-Outlet Distributor	DRV12V30W	30W, 12V DC
 6-Way Distributor	EDIS6	6-way distributor to be used with 12V drivers.

Sedum™ 12V DC Super Slim Puck Lights (Dimmable with 12V DC dimmable driver)

Description	CAT. #	Specs
 Sedum™ Super Slim Mini Magnetic LED Puck Lights 3" O.D. x 1/4" H	E261-27W	White, 2.2, 170 lm, 2700K
	E261W	White, 2.2, 170 lm, 3000K
	E261-35W	White, 2.2, 170 lm, 3500K
 LED Puck Lights Driver	DRV12V12W	12W, 12V DC, for Sedum™ Mini LED Puck Light
 Sedum™ Super Slim Mini Magnetic LED Puck Lights Kits Kit Includes: (3) LED Puck Lights with Driver included	E363-27W	White, 2.2, 170 lm, 2700K
	E363W	White, 2.2, 170 lm, 3000K
	E363-35W	White, 2.2, 170 lm, 3500K
 Sedum™ Super Slim Mini Magnetic LED Puck Lights Kits Kit Includes: (6) LED Puck Lights with Driver included	E366-27W	White, 2.2, 170 lm, 2700K
	E366W	White, 2.2, 170 lm, 3000K
	E366-35W	White, 2.2, 170 lm, 3500K

Undercabinet and Pucks



24V DC Dimmers

Description	CAT. #	Specs
 Dimmer with Built-In Driver with On/Off Switch	DIMTP2	60W, 120V Input
	DIMTP3	100W, 120V Input

12V & 24V DC Drivers

Description	CAT. #	Specs
 Electronic Driver ELV Dimmable	DRVE24V60W	24V, 60W
 Electronic Dimmable LED Driver	DRVE12V48DW	12V DC, 48W, 4A
	DRVE12V96DW	12V DC, 96W, 8A
 Universal Dimmable LED Driver/Transformer (Small)	DRVU12V24WD	12V DC, 24W, 2A
	DRVU12V60WD	12V DC, 60W, 5A
	DRVU24V24WD	24V DC, 24W, 1A
	DRVU24V60WD	24V DC, 60W, 2.5A
 Universal Dimmable LED Driver/Transformer (Medium)	DRVU12V100WD	12V DC, 100W, 8A
	DRVU24V100WD	24V DC, 100W, 4A
 Universal Dimmable LED Driver/Transformer (Large)	DRVU24V200WD	24V DC, 200W, 8A
 Universal Dimmable LED Driver/Transformer (X-Large)	DRVU24V300WD	24V DC, 300W, 12A



Exit & Emergency Lighting

Exit and Emergency Lighting	178
-----------------------------	-----

Accessories for Exit & Emergency Lights	178
---	-----

Exit and Emergency Lighting



Self illuminating Signs



Exit and Emergency

Description	CAT. #	Specs
 LED Exit Sign with Battery Back Up 	EELEDRG	Red & Green Letters
	EELE1	Red Letters
	EELEDBRG	Red & Green Letters/Black Housing
	EELE1B	Red Letters/Black Housing
 Self Illuminating Exit Sign 13" L - 7" H - 1/8" W 	EE80S	Green Letters
	EE81S	Red Letters
 LED Exit Sign with LED Emergency Lights 11 13/16" L - 7 1/4" H - 1 13/16" W 	EE86HRG	Red & Green Letters
 LED Exit Sign and LED Emergency Lights 13" L - 8 1/2" H - 2 3/16" W 	EE94HG	Green Letters
	EE94HRG	Red & Green Letters
 Single & Double Face LED Edge Lit Exit Sign with Battery Backup 11 1/4" L - 9 7/8" H - 1 1/2" W 	EDGLIT1RG	Red & Green Letters, Single Face
	EDGLIT2RG	Red & Green Letters, Double Face
 Single & Double Face LED Recessed Edge Lit Exit Sign with Battery Backup 12 3/4" L - 7 1/2" H - 1/2" W 	EDGREC1RG	Red & Green Letters, Single Face
	EDGREC2G	Green Letters, Double Face
	EDGREC2RG	Red & Green Letters, Double Face
 Outdoor LED Diecast Emergency & Path Light with Battery Backup 6 1/2" L - 10 1/2" H - 3 3/4" W 	EE91LW	White
	EE91LBZ	Bronze
 LED Emergency Light 7 15/16" L - 4 1/4" H - 2 13/16" W 	EE80L	Two 2W light heads, 250 lm total.
 LED Adjustable Emergency Light 8 7/8" L - 4 1/2" H - 2 7/8" W 	EE22L	Two Adjustable 1.5W LED light heads

Accessories for Exit & Emergency Lights

Description	CAT. #	Specs
 Battery Backup	EEP3A	2 3/4" - 1 7/8" - 4" 4.8 V, 700mA hour
 Battery Backup	EEP9A	6V Ni-Cad Battery Pack for EE90L
 Lamp	L4	5W, for EE20L & EE70L
 Clear Shield for Exit Signs	EEPS60	12 3/4" W - 10 3/8" H - 2 1/2" D
 Clear Shield for Emergency Heads	EEPS65	15 3/8" W - 7 3/4" H - 5 3/4" D
 Wire Guards	EEWG11	15" W - 13 1/2" H - 6" D
	EEWG22	30" W - 13 1/2" H - 6" D

LED **Wallpacks & Floodlights**



LED Wall Pack & Wall Mount	180
LED Floodlights & Accessories	181

LED Wall Packs and Floodlights

Energy efficient performance



LED Wall Packs

Description	CAT. #	Specs
 Small LED Wall Pack 120/277V DLC (150W MH Equivalent) 8 1/4" L - 8 7/8" H - 7 1/4" W	EWP30S40	30W, 3800 lm, 4000K
	EWP45M50	45W, 4500 lm, 5000K
 Medium LED Wall Pack 120/277V DLC (175W MH Equivalent) 14 1/4" L - 9 1/4" H - 7 3/8" W	EWP70M50	70W, 6800 lm, 5000K
	EWP90M40	90W, 9300 lm, 4000K
	EWP90M50	90W, 9500 lm, 5000K
 Large LED Wall Pack 120/277V DLC (250W MH Equivalent) 18" L - 9 3/4" H - 8 3/4" W	EWP90L40	90W, 10900 lm, 4000K
	EWP90L50	90W, 11200 lm, 5000K

* Dimmable Wall Packs Available. Visit www.elcolighting.com *

LED Wall Mount

Description	CAT. #	Specs
 LED Wall Mount with 120V Photocell DLC (70W MH Equivalent) 5 1/2" L - 8 3/8" H - 3 1/2" W *Add U at end of item# for 120/277V	EWM25W30	25W, 2000 lm, 3000K

LED Wall Packs and Floodlights

Energy efficient performance



LED Floodlights

	Description	CAT. #	Specs
	Small LED Floodlight 6 3/8" L - 3 7/8" H - 2 1/2" W	EFL1550S	15W, 2000 lm, 120/277V
		EFL2740S	27W, 3400 lm, 120/277V
		EFL2750S	27W, 3600 lm, 120/277V
	Medium LED Floodlight 8" L - 4 7/8" H - 3 1/8" W	EFL4550M	45W, 6000 lm, 120/277V
		EFL6050M	60W, 8000 lm, 120/277V
	Knuckle Mount Mini Floodlight DLC (70W MH Equivalent) - 4 3/4" L - 3" H - 1 1/4" W	EFL15S40WFK	15W, 1500 lm, 4000K
		EFL15S50WFK	15W, 1600 lm, 5000K
	Trunnion Mount Mini Floodlight DLC (70W MH Equivalent) - 4 3/4" L - 3" H - 1 1/4" W	EFL15S40WFT	15W, 1500 lm, 4000K
		EFL15S50WFT	15W, 1600 lm, 5000K
	Knuckle Mount Mini Floodlight DLC (100W MH Equivalent) - 7" L - 4 1/2" H - 1 5/8" W	EFL30S40WFK	30W, 3000 lm, 4000K
		EFL30S50WFK	30W, 3100 lm, 5000K
	Trunnion Mount Mini Floodlight DLC (100W MH Equivalent) - 7" L - 4 1/2" H - 1 5/8" W	EFL30S40WFT	30W, 3000 lm, 4000K
		EFL30S50WFT	30W, 3100 lm, 5000K
	Medium Flood Spread LED Floodlight DLC (100W MH Equivalent) - 9 5/8" L - 6 15/16" H - 4 9/16" W	EFL35M40FL	35W, 2800 lm, 4000K
		EFL35M50FL	35W, 3000 lm, 5000K
	Medium Flood Spread LED Floodlight DLC (150W MH Equivalent)	EFL45M40FL	45W, 4000 lm, 4000K
		EFL45M50FL	45W, 4500 lm, 5000K
	Wide Flood Spread LED Floodlight DLC (100W MH Equivalent)	EFL35M40WF	35W, 2800 lm, 4000K
		EFL35M50WF	35W, 3000 lm, 5000K
	Large LED Floodlight DLC (200W MH Equivalent) 12 15/16" L - 10 15/16" H - 5 1/2" W	EFL45M40WF	45W, 4000 lm, 4000K
		EFL45M50WF	45W, 4500 lm, 5000K
		EFL70L40WF	70W, 6750 lm, 4000K
		EFL70L50WF	70W, 7500 lm, 5000K
		EFL90L40WF	90W, 9000 lm, 4000K

* Large Dimmable LED Floodlight Available. Visit www.elcolighting.com *

Accessories

	Description	CAT. #	Specs
	120/277V Button Photocell	EWPPHB1	120/277V
		EWPPHB1	120V
	120/277V Swivel Photocell	EWPPHSU	
	Wireguard for Medium Size (35W/45W) Floodlight	EFLMWG	
	Wireguard for Large Size (75W/90W) Floodlight	EFLLLWG	
	Slipfitter for Large Floodlights. Field Changeable	EFLLSF	
	Floodlight Adjustable Trunnion Bracket	EFLLTB	
	Knuckle	EFLMKW	For medium Floodlights only

LED **Pathway** Lighting



In-Ground LED Lighting	183
Trogon™ LED Brick Lights	184
Incandescent Diecast Brick Lights	184
Mini Moa™ LED Step Lights	185
Ibis™ Diecast LED Step Lights	185
Incandescent Step Lights	188

LED Pathway Lighting

In-Ground, Brick and Step Lights



INTEGRATED LED



DIMMABLE



WET LOCATION




RATED



IN TODAY
OUT TODAY

In-Ground LED Lighting

Energy efficient LED Lighting fixtures designed to be install in-ground. Our in-ground applications are water and weather resistant making it the perfect lighting solution for virtually any application. Suitable for installation in concrete, soft dirt and turf applications. The in-ground lighting is ideal as a safety/accent lighting in patios, gardens, decks, docks, building entrances, pathways, and many other locations.

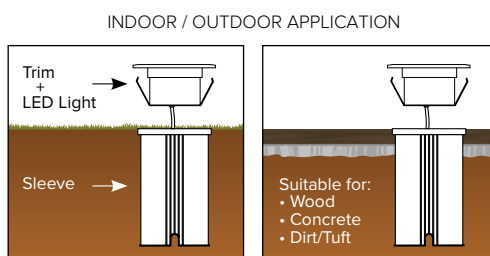

In-Ground
LED Light Fixtures

- Dimmable Triac/ELV
- 45° beam angle
- Weather resistant clear glass lens
- Weather resistant in-ground sleeve
- ETL listed for wet locations



ELIG330250N	3W, 275 lm, 3000K, 12V DC, Nickel
ELIG330250B	3W, 275 lm, 3000K, 12V DC, Black
ELIG330250BZ	3W, 275 lm, 3000K, 12V DC, Bronze
ELIG330250CP	3W, 275 lm, 3000K, 12V DC, Copper



In-Ground LED Light



ELIG330

3W, 3000K, 12 V DC, Dimmable Triac/ELV, Stainless steel body, water-resistant glass lens with silicon gasketed seal, ETL listed for wet location.
1 1/2" O.D. - 1 1/8" H



In-Ground Sleeve

ELIGRH

Weather resistant in-ground sleeve for concrete or soil installation.
2 1/8" O.D. - 1 3/4" I.D. - 3 3/8" H



In-Ground Stainless Steel
Screw-On Trims

ELIG250N	Nickel, 2 1/2" O.D.
ELIG250B	Black, 2 1/2" O.D.
ELIG250BZ	Bronze, 2 1/2" O.D.
ELIG250CP	Copper, 2 3/4" O.D.

LED Pathway Lighting

In-Ground, Brick and Step Lights



Trogon™ LED Brick Lights



Description	CAT. #	Specs
 Trogon™ LED Brick Light with Angled Louver 8" L - 2 7/16" H - 3 3/4" W	ELST81W	White, 5.4W, 340 lm, 3000K
	ELST81B	Black, 5.4W, 340 lm, 3000K
	ELST81BZ	Bronze, 5.4W, 340 lm, 3000K
 Trogon™ LED Brick Light with Grill Faceplate 8" L - 2 7/16" H - 3 3/4" W	ELST82W	White, 5.4W, 340 lm, 3000K
	ELST82B	Black, 5.4W, 340 lm, 3000K
	ELST82BZ	Bronze, 5.4W, 340 lm, 3000K
 Trogon™ LED Brick Light with Open Faceplate 8" L - 2 7/16" H - 3 3/4" W	ELST83W	White, 5.4W, 340 lm, 3000K
	ELST83B	Black, 5.4W, 340 lm, 3000K
	ELST83BZ	Bronze, 5.4W, 340 lm, 3000K
 HIGHLUMEN - Trogon™ LED Brick Light with Open Faceplate - 8" L - 2 7/16" H - 3 3/4" W	ELST84W	White, 12W, 1000 lm, 3000K
	ELST84B	Black, 12W, 1000 lm, 3000K
	ELST84BZ	Bronze, 12W, 1000 lm, 3000K
 HIGHTECH - Directional LED Brick Light with Open Faceplate - 8" L - 2 7/16" H - 3 3/4" W	ELST85W	White, 12W, 1000 lm, 3000K
	ELST85B	Black, 12W, 1000 lm, 3000K
	ELST85BZ	Bronze, 12W, 1000 lm, 3000K

Accessories for Brick Lights

Description	CAT. #	Specs
 Grill Faceplate Replacement 9 3/4" L - 3 5/8" H	PST1W	White, for ELST82
	PST1B	Black, for ELST82
	PST1BZ	Bronze, for ELST82
 Louver Faceplate Replacement 9 3/4" L - 3 5/8" H	PST4W	White, for ELST81
	PST4B	Black, for ELST81
	PST4BZ	Bronze, for ELST81
 Open Faceplate Replacement 9 3/4" L - 3 5/8" H	PST5W	White, for ELST83 & ELST84
	PST5B	Black, for ELST83 & ELST84
	PST5BZ	Bronze, for ELST83 & ELST84
 Replacement Lens for Brick Lights	PST2L	For ELST81, ELST82, ELST83 & ELST84
	PST80	5.4W, 340 lm, 3000K, for ELST81, ELST82, ELST83
 LED Module Replacement Driver included	PST84	12W, 1000 lm, 3000K, for ELST84

Incandescent Diecast Brick Lights



Description	CAT. #	Specs
 Incandescent Brick Light with Angled Louver 8 1/2" L - 3" H - 4 1/8" W	ELST31BZ	Bronze, 40W, 120V
 Incandescent Brick Light with Open Faceplate 8 1/2" L - 3" H - 4 1/8" W	ELST32W	White, 40W, 120V
	ELST32B	Black, 40W, 120V
	ELST32BZ	Bronze, 40W, 120V
 Incandescent Brick Light with Grill Faceplate 8 1/2" L - 3" H - 4 1/8" W	ELST37W	White, 40W, 120V
	ELST37B	Black, 40W, 120V
	ELST37BZ	Bronze, 40W, 120V

LED Pathway Lighting

In-Ground, Brick and Step Lights



Mini Moa™ LED Step Lights



Description	CAT. #	Specs
 120V Mini Moa™ LED Step Light with Angled Louver (Vertical) 2 3/4" L - 4 1/2" H - 1 1/4" W	ELST64W	120V, White, 0.8W, 3000K
	ELST64B	120V, Black, 0.8W, 3000K
	ELST64BZ	120V, Bronze, 0.8W, 3000K
 12V Mini Moa™ LED Step Light with Angled Louver (Vertical) 2 3/4" L - 4 1/2" H - 1 1/4" W	ELST74W	12V, White, 0.8W, 3000K
	ELST74B	12V, Black, 0.8W, 3000K
	ELST74BZ	12V, Bronze, 0.8W, 3000K
 120V Mini Moa™ LED Step Light with Angled Louver (Horizontal) 4 1/2" L - 2 3/4" H - 1 1/4" W	ELST65W	120V, White, 0.8W, 3000K
	ELST65B	120V, Black, 0.8W, 3000K
	ELST65BZ	120V, Bronze, 0.8W, 3000K
 12V Mini Moa™ LED Step Light with Angled Louver (Horizontal) 4 1/2" L - 2 3/4" H - 1 1/4" W	ELST75W	12V, White, 0.8W, 3000K
	ELST75B	12V, Black, 0.8W, 3000K
	ELST75BZ	12V, Bronze, 0.8W, 3000K
 120V Mini Moa™ LED Step Light with Frosted Acrylic Lens 4 1/2" L - 2 3/4" H - 1 1/4" W	ELST66W	120V, White, 0.8W, 3000K
	ELST66B	120V, Black, 0.8W, 3000K
	ELST66BZ	120V, Bronze, 0.8W, 3000K
 12V Mini Moa™ LED Step Light with Frosted Acrylic Lens 4 1/2" L - 2 3/4" H - 1 1/4" W	ELST76W	12V, White, 0.8W, 3000K
	ELST76B	12V, Black, 0.8W, 3000K
	ELST76BZ	12V, Bronze, 0.8W, 3000K
 Photocell 120V Mini Moa™ LED Step Light with Frosted Acrylic Lens 2 3/4" L - 4 1/2" H - 1 1/4" W	ELST69W	120V, White, 0.8W, 3000K
	ELST69B	120V, Black, 0.8W, 3000K
	ELST69N	120V, Nickel, 0.8W, 3000K
	ELST69BZ	120V, Bronze, 0.8W, 3000K

Ibis™ Diecast LED Step Lights with 3-CCT Switch



Description	CAT. #	Specs
 120V Ibis™ Embedded Mini LED Step Light with 3-CCT Switch 4 3/4" L - 2 7/8" H - 1 1/4" W	ELST27CT3W	120V, White, 5W, 250 lm, 3000K - 5000K
	ELST27CT3B	120V, Black, 5W, 250 lm, 3000K - 5000K
	ELST27CT3BZ	120V, Bronze, 5W, 250 lm, 3000K - 5000K
 120V Ibis™ Angled Louver Mini LED Step Light with 3-CCT Switch 4 3/4" L - 2 7/8" H - 1 1/4" W	ELST28CT3W	120V, White, 3W, 100 lm, 3000K - 5000K
	ELST28CT3B	120V, Black, 3W, 100 lm, 3000K - 5000K
	ELST28CT3BZ	120V, Bronze, 3W, 100 lm, 3000K - 5000K
 120V Ibis™ Frosted Lens Mini LED Step Light with 3-CCT Switch 4 3/4" L - 2 7/8" H - 1 1/4" W	ELST29CT3W	120V, White, 3W, 200 lm, 3000K - 5000K
	ELST29CT3B	120V, Black, 3W, 200 lm, 3000K - 5000K
	ELST29CT3BZ	120V, Bronze, 3W, 200 lm, 3000K - 5000K

LED Pathway Lighting

In-Ground, Brick and Step Lights



Ibis™ Diecast LED Step Lights



Description	CAT. #	Specs
 12V Ibis™ Round LED Step Light with Open Faceplate 4 3/4" O.D. - 2 1/8" I.D. - 1 3/16" W	ELST8430W	12V, White, 3W, 3000K
	ELST8430B	12V, Black, 3W, 3000K
	ELST8430N	12V, Nickel, 3W, 3000K
	ELST8430BZ	12V, Bronze, 3W, 3000K
	ELST8430CP	12V, Copper, 3W, 3000K
	ELST8440W	12V, White, 3W, 4000K
	ELST8440B	12V, Black, 3W, 4000K
	ELST8440N	12V, Nickel, 3W, 4000K
	ELST8440BZ	12V, Bronze, 3W, 4000K
	ELST8440CP	12V, Copper, 3W, 4000K
 120V Ibis™ Round LED Step Light with Open Faceplate 4 3/4" O.D. - 2 1/8" I.D. - 1 3/16" W	ELST8630W	120V, White, 3W, 3000K
	ELST8630B	120V, Black, 3W, 3000K
	ELST8630N	120V, Nickel, 3W, 3000K
	ELST8630BZ	120V, Bronze, 3W, 3000K
	ELST8630CP	120V, Copper, 3W, 3000K
	ELST8640W	120V, White, 3W, 4000K
	ELST8640B	120V, Black, 3W, 4000K
	ELST8640N	120V, Nickel, 3W, 4000K
	ELST8640BZ	120V, Bronze, 3W, 4000K
	ELST8640CP	120V, Copper, 3W, 4000K
 12V Ibis™ Round LED Step Light with Louver Faceplate 4 3/4" O.D. - 2 1/8" I.D. - 1 3/16" W	ELST8530W	12V, White, 3W, 3000K
	ELST8530B	12V, Black, 3W, 3000K
	ELST8530N	12V, Nickel, 3W, 3000K
	ELST8530BZ	12V, Bronze, 3W, 3000K
	ELST8530CP	12V, Copper, 3W, 3000K
	ELST8540W	12V, White, 3W, 4000K
	ELST8540B	12V, Black, 3W, 4000K
	ELST8540N	12V, Nickel, 3W, 4000K
	ELST8540BZ	12V, Bronze, 3W, 4000K
	ELST8540CP	12V, Copper, 3W, 4000K
 120V Ibis™ Round LED Step Light with Louver Faceplate 4 3/4" O.D. - 2 1/8" I.D. - 1 3/16" W	ELST8730W	120V, White, 3W, 3000K
	ELST8730B	120V, Black, 3W, 3000K
	ELST8730BZ	120V, Bronze, 3W, 3000K
	ELST8730BZ	120V, Bronze, 3W, 3000K
	ELST8730CP	120V, Copper, 3W, 3000K
	ELST8740W	120V, White, 3W, 4000K
	ELST8740B	120V, Black, 3W, 4000K
	ELST8740BZ	120V, Bronze, 3W, 4000K
	ELST8740BZ	120V, Bronze, 3W, 4000K
	ELST8740CP	120V, Copper, 3W, 4000K
 120V Ibis™ Mini LED Step Light 4 1/2" L - 2 3/4" H - 2" W	ELST9930W	120V, White, 2.5W, 3000K
 12V Ibis™ LED Step Light with Open Faceplate 5 1/4" L - 3 3/8" H - 1 1/8" W	ELST9130W	12V, White, 2W, 3000K
	ELST9130B	12V, Black, 2W, 3000K
	ELST9130N	12V, Nickel, 2W, 3000K
	ELST9130BZ	12V, Bronze, 2W, 3000K
	ELST9130CP	12V, Copper, 2W, 3000K
	ELST9140W	12V, White, 2W, 4000K
	ELST9140B	12V, Black, 2W, 4000K
	ELST9140N	12V, Nickel, 2W, 4000K
	ELST9140BZ	12V, Bronze, 2W, 4000K
	ELST9140CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Open Faceplate 5 1/4" L - 3 3/8" H - 1 1/8" W	ELST9530W	120V, White, 2W, 3000K
	ELST9530B	120V, Black, 2W, 3000K
	ELST9530N	120V, Nickel, 2W, 3000K
	ELST9530BZ	120V, Bronze, 2W, 3000K
	ELST9530CP	120V, Copper, 2W, 3000K
	ELST9540W	120V, White, 2W, 4000K
	ELST9540B	120V, Black, 2W, 4000K
	ELST9540N	120V, Nickel, 2W, 4000K
	ELST9540BZ	120V, Bronze, 2W, 4000K
	ELST9540CP	120V, Copper, 2W, 4000K

LED Pathway Lighting

In-Ground, Brick and Step Lights



Ibis™ Diecast LED Step Lights



Description	CAT. #	Specs
 12V Ibis™ LED Step Light with Angled Louver 3 3/8" L - 5 1/4" H - 1 7/8" W	ELST9230W	12V, White, 2W, 3000K
	ELST9230B	12V, Black, 2W, 3000K
	ELST9230N	12V, Nickel, 2W, 3000K
	ELST9230BZ	12V, Bronze, 2W, 3000K
	ELST9230CP	12V, Copper, 2W, 3000K
	ELST9240W	12V, White, 2W, 4000K
	ELST9240B	12V, Black, 2W, 4000K
	ELST9240N	12V, Nickel, 2W, 4000K
	ELST9240BZ	12V, Bronze, 2W, 4000K
	ELST9240CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Angled Louver 3 3/8" L - 5 1/4" H - 1 7/8" W	ELST9630W	120V, White, 2W, 3000K
	ELST9630B	120V, Black, 2W, 3000K
	ELST9630N	120V, Nickel, 2W, 3000K
	ELST9630BZ	120V, Bronze, 2W, 3000K
	ELST9630CP	120V, Copper, 2W, 3000K
	ELST9640W	120V, White, 2W, 4000K
	ELST9640B	120V, Black, 2W, 4000K
	ELST9640N	120V, Nickel, 2W, 4000K
	ELST9640BZ	120V, Bronze, 2W, 4000K
	ELST9640CP	120V, Copper, 2W, 4000K
 12V Ibis™ LED Step Light with Angled Louver 5 1/4" L - 3 3/8" H - 1 7/8" W	ELST9330W	12V, White, 2W, 3000K
	ELST9330B	12V, Black, 2W, 3000K
	ELST9330N	12V, Nickel, 2W, 3000K
	ELST9330BZ	12V, Bronze, 2W, 3000K
	ELST9330CP	12V, Copper, 2W, 3000K
	ELST9340W	12V, White, 2W, 4000K
	ELST9340B	12V, Black, 2W, 4000K
	ELST9340N	12V, Nickel, 2W, 4000K
	ELST9340BZ	12V, Bronze, 2W, 4000K
	ELST9340CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Angled Louver 5 1/4" L - 3 3/8" H - 1 7/8" W	ELST9730W	120V, White, 2W, 3000K
	ELST9730B	120V, Black, 2W, 3000K
	ELST9730N	120V, Nickel, 2W, 3000K
	ELST9730BZ	120V, Bronze, 2W, 3000K
	ELST9730CP	120V, Copper, 2W, 3000K
	ELST9740W	120V, White, 2W, 4000K
	ELST9740B	120V, Black, 2W, 4000K
	ELST9740N	120V, Nickel, 2W, 4000K
	ELST9740BZ	120V, Bronze, 2W, 4000K
	ELST9740CP	120V, Copper, 2W, 4000K
 12V Ibis™ LED Step Light with Scoop 3 1/8" L - 5 1/8" H - 1 1/8" W	ELST9430W	12V, White, 2W, 3000K
	ELST9430B	12V, Black, 2W, 3000K
	ELST9430N	12V, Nickel, 2W, 3000K
	ELST9430BZ	12V, Bronze, 2W, 3000K
	ELST9430CP	12V, Copper, 2W, 3000K
	ELST9440W	12V, White, 2W, 4000K
	ELST9440B	12V, Black, 2W, 4000K
	ELST9440N	12V, Nickel, 2W, 4000K
	ELST9440BZ	12V, Bronze, 2W, 4000K
	ELST9440CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Scoop 3 1/8" L - 5 1/8" H - 1 1/8" W	ELST9830W	120V, White, 2W, 3000K
	ELST9830B	120V, Black, 2W, 3000K
	ELST9830N	120V, Nickel, 2W, 3000K
	ELST9830BZ	120V, Bronze, 2W, 3000K
	ELST9830CP	120V, Copper, 2W, 3000K
	ELST9840W	120V, White, 2W, 4000K
	ELST9840B	120V, Black, 2W, 4000K
	ELST9840N	120V, Nickel, 2W, 4000K
	ELST9840BZ	120V, Bronze, 2W, 4000K
	ELST9840CP	120V, Copper, 2W, 4000K

LED Pathway Lighting

In-Ground, Brick and Step Lights



Incandescent Step Lights



Description		CAT. #	Specs
	Incandescent Step Light with Louvered Faceplate 8 3/8" L - 3 5/8" H - 3 1/2" W	ELST42W	120V, White, 40W
		ELST42B	120V, Black, 40W
		ELST42BZ	120V, Bronze, 40W
	Louvered Faceplate Replacements 9 1/2" L - 5" H	ELST10W, B, BZ	For ELST42 Series
	Incandescent Step Light with Frosted Glass Lens 8 3/8" L - 3 5/8" H - 3 1/2" W	ELST43W	120V, White, 40W
		ELST43B	120V, Black, 40W
		ELST43BZ	120V, Bronze, 40W
	Open Faceplate Replacements 9 1/2" L - 5" H	ELST1W, B, BZ	For ELST43 Series

For our full line of Brick, Step Lights & Accessories visit elcolighting.com

The **Ambio™** Collection



24V Indoor LED Tape Light	190
24V Super Flexible Indoor LED Tape Light	191
24V Sunset Dimming LED Tape Light	191
Indoor LED Tape Light Accessories	191
24V Indoor Continuous LED Tape Light	192
RGB Indoor LED Tape Light & Accessories	193
24V Outdoor LED Tape Lights	193
Sectional LED Tape Lights & Accessories	194

Aluminum Channels for LED Tape Lights	195
24V DC Drivers	196
LED Duralight™ & Accessories	197
LED Flat Rope Light & Accessories	198
Magnetic & Electronic Transformers	198

The Ambio™ Collection

Architectural Grade LED TAPE Light



24V Indoor LED Tape Light

	Description	CAT. #	Specs
 1.5W/ft	Custom Cut of 1.5W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 23ft. Strip width of 5/16" (8mm)	E15-2427-CC	1.5W/ft, 124 lm/ft, 2700K
		E15-2430-CC	1.5W/ft, 124 lm/ft, 3000K
		E15-2440-CC	1.5W/ft, 124 lm/ft, 4000K
	16 foot roll of 1.5W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 23ft.	E15-2427-16	1.5W/ft, 124 lm/ft, 2700K
		E15-2430-16	1.5W/ft, 124 lm/ft, 3000K
		E15-2440-16	1.5W/ft, 124 lm/ft, 4000K
	100 foot roll of 1.5W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 23ft.	E15-2427-100	1.5W/ft, 124 lm/ft, 2700K
		E15-2430-100	1.5W/ft, 124 lm/ft, 3000K
		E15-2440-100	1.5W/ft, 124 lm/ft, 4000K
 2.2W/ft	Custom Cut of 2.2W/ft LED Tape. 24V. Cuttable every 8". 9 LED/ft. MAX. run 39ft. Strip width of 25/64" (10mm)	E22-2427-CC	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-CC	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-CC	2.2W/ft, 185 lm/ft, 4000K
	16 foot roll of 2.2W/ft LED Tape. 24V. Cuttable every 8". 9 LED/ft. MAX. run 39ft.	E22-2427-16	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-16	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-16	2.2W/ft, 185 lm/ft, 4000K
	100 foot roll of 2.2W/ft LED Tape. 24V. Cuttable every 8". 9 LED/ft. MAX. run 39ft.	E22-2427-100	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-100	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-100	2.2W/ft, 185 lm/ft, 4000K
 3W/ft	Custom Cut of 3W/ft LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 18ft. Strip width of 5/16" (8mm)	E30-2427-CC	3W/ft, 250 lm/ft, 2700K
		E30-2430-CC	3W/ft, 250 lm/ft, 3000K
		E30-2440-CC	3W/ft, 250 lm/ft, 4000K
	16 foot roll of 3W/ft LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 18ft.	E30-2427-16	3W/ft, 250 lm/ft, 2700K
		E30-2430-16	3W/ft, 250 lm/ft, 3000K
		E30-2440-16	3W/ft, 250 lm/ft, 4000K
	100 foot roll of 3W/ft LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX run 18ft.	E30-2427-100	3W/ft, 250 lm/ft, 2700K
		E30-2430-100	3W/ft, 250 lm/ft, 3000K
		E30-2440-100	3W/ft, 250 lm/ft, 4000K
 4.4W/ft	Custom Cut of 4.4W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 26ft. Strip width of 25/64" (10mm)	E44-2427-CC	4.4W/ft, 360 lm/ft, 2700K
		E44-2430-CC	4.4W/ft, 360 lm/ft, 3000K
		E44-2440-CC	4.4W/ft, 360 lm/ft, 4000K
	16 foot roll of 4.4W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 26ft.	E44-2427-16	4.4W/ft, 360 lm/ft, 2700K
		E44-2430-16	4.4W/ft, 360 lm/ft, 3000K
		E44-2440-16	4.4W/ft, 360 lm/ft, 4000K
	100 foot roll of 4.4W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 26ft.	E44-2427-100	4.4W/ft, 360 lm/ft, 2700K
		E44-2430-100	4.4W/ft, 360 lm/ft, 3000K
		E44-2440-100	4.4W/ft, 360 lm/ft, 4000K
 4.4W/ft	Custom Cut of 4.4W/ft. HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft. Strip width of 25/64" (10mm)	E45-2427-CC	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-CC	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-CC	4.4W/ft, 450 lm/ft, 4000K
	16 foot roll of 4.4W/ft. HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft.	E45-2427-16	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-16	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-16	4.4W/ft, 450 lm/ft, 4000K
	100 foot roll of 4.4W/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft. Strip width of 25/64" (10mm)	E45-2427-100	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-100	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-100	4.4w/ft, 450 lm/ft, 4000K
 5W/ft	Custom Cut of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft. Strip width of 25/64" (10mm)	E50-2427-CC	5W/ft, 500 lm/ft, 2700K
		E50-2430-CC	5W/ft, 500 lm/ft, 3000K
		E50-2440-CC	5W/ft, 500 lm/ft, 4000K
	16 foot roll of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft.	E50-2427-16	5W/ft, 500 lm/ft, 2700K
		E50-2430-16	5W/ft, 500 lm/ft, 3000K
		E50-2440-16	5W/ft, 500 lm/ft, 4000K
	100 foot roll of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft.	E50-2427-100	5W/ft, 500 lm/ft, 2700K
		E50-2430-100	5W/ft, 500 lm/ft, 3000K
		E50-2440-100	5W/ft, 500 lm/ft, 4000K



24V Indoor LED Tape Light

	Description	CAT. #	Specs
 6W/ft	Custom Cut of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft. Strip width of 2 ⁵ / ₆₄ " (10mm)	E60-2427-CC	6W/ft, 550 lm/ft, 2700K
		E60-2430-CC	6W/ft, 550 lm/ft, 3000K
		E60-2440-CC	6W/ft, 550 lm/ft, 4000K
	16 foot roll of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-16	6W/ft, 550 lm/ft, 2700K
		E60-2430-16	6W/ft, 550 lm/ft, 3000K
		E60-2440-16	6W/ft, 550 lm/ft, 4000K
	100 foot roll of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-100	6W/ft, 550 lm/ft, 2700K
		E60-2430-100	6W/ft, 550 lm/ft, 3000K
		E60-2440-100	6W/ft, 550 lm/ft, 4000K
 8.8W/ft	Custom Cut of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft. Strip width of 3 ⁵ / ₆₄ " (14mm)	E80-2427-CC	8.8W/ft, 800 lm/ft, 2700K
		E80-2430-CC	8.8W/ft, 800 lm/ft, 3000K
		E80-2440-CC	8.8W/ft, 800 lm/ft, 4000K
	16 foot roll of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-16	8.8W/ft, 800 lm/ft, 2700K
		E80-2430-16	8.8W/ft, 800 lm/ft, 3000K
		E80-2440-16	8.8W/ft, 800 lm/ft, 4000K
	100 foot roll of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-100	8.8W/ft, 800 lm/ft, 2700K
		E80-2430-100	8.8W/ft, 800 lm/ft, 3000K
		E80-2440-100	8.8W/ft, 800 lm/ft, 4000K

24V Super Flexible Indoor LED Tape Lights

	Description	CAT. #	Specs
 1.8W/ft	Custom Cut. Strip width of 8mm (5/16"). Cuttable every 4". 18 LED/ft. MAX. run 26 ft.	EF26-24WW-CC	1.8W/ft, 200 lm/ft, 3000K
		EF26-24CW-CC	1.8W/ft, 200 lm/ft, 6500K
	16 foot rolls. Strip width of 8mm (5/16"). Cuttable every 4". 18 LED/ft. MAX. run 26 ft.	EF26-24WW-16	1.8W/ft, 200 lm/ft, 3000K
		EF26-24CW-16	1.8W/ft, 200 lm/ft, 6500K

24V Sunset Dimming Indoor LED Tape Lights DIMS TO WARM SUNSET DIMMING TECHNOLOGY

	Description	CAT. #	Specs
 3.5W/ft	Custom Cut 3.5W/ft LED Tape Light. 24V Cuttable every 2.5" or every 14 LED's MAX. run 13ft. Strip width of 2 ⁵ / ₆₄ " (10mm)	E36-24SD	Warm White, 3.5W/ft, Sunset
	16 foot roll of 3.5W/ft LED Tape Light. 24V. Cuttable every 2.5" or every 14 LED's MAX. run 13ft.	E36-24SD-16	Warm White, 3.5W/ft, Sunset

Indoor LED Tape Light Accessories

	Description	CAT. #	Specs
	Strip to Strip Connector	EPD21	2-conductor end-to-end for single color tape light. For connecting two tape lights together
	10" Hardwire Connector	EPD22	10" wire leads for single color tape lights, for connecting tape lights to LED driver
	120" Hardwire Connector	EPD22-120	120" wire leads for single color tape lights, for connecting tape lights to LED driver
	10" Extension Connector	EPD23	10" wire leads for single color tape lights, for connecting two tape lights at a 10" distance

The Ambio™ Collection

Architectural Grade LED TAPE Light



Indoor LED Tape Light Accessories

Description	CAT. #	Specs
 2" Extension Connector for Connecting 2-Tape Lights	EPSD23-2	2" wire leads for single color tape lights
 24" Extension Connector for Connecting 2-Tape Lights	EPSD24	24" wire leads for single color tape lights
 DC Power Adapter	EPSD25	6" wire for single color tape lights, for connecting tape light to plug-in power supplies
 Tape to Wire Block Connector	EPSD19	Screw down connector for connecting tape light to wire
 Diamond Screw Down Connector	EPSD20	For connecting two tape lights together without any soldering
	For use as a lead wire to tape light connector. Screwdriver included to tighten screws to secure tape light	
	EPSD26	6" wire with connector
	EPSD26-60	60" wire with connector
	EPSD26-72	72" wire with connector
	NEW! EPSD27L	For 10MM tape lights

24V Indoor Continuous COB LED Tape Light

Description	CAT. #	Specs
 3W/ft Custom Cut. Strip width of 8mm (5/16"). Cuttable every 1 25/32". MAX. run 16 ft.	E30CB-2427	3W/ft, 245 lm/ft, 2700K
	E30CB-2430	3W/ft, 260 lm/ft, 3000K
	E30CB-2440	3W/ft, 275 lm/ft, 4000K
 4.5W/ft Custom Cut. Strip width of 10mm (25/64"). Cuttable every 1 25/32". MAX. run 16 ft.	E30CB2427100	3W/ft, 245 lm/ft, 2700K
	E30CB2430100	3W/ft, 260 lm/ft, 3000K
	E30CB2440100	3W/ft, 275 lm/ft, 4000K
 4.5W/ft Custom Cut. Strip width of 10mm (25/64"). Cuttable every 1 25/32". MAX. run 16 ft.	E44CB-2427	4.5W/ft, 365 lm/ft, 2700K
	E44CB-2430	4.5W/ft, 385 lm/ft, 3000K
	E44CB-2440	4.5W/ft, 425 lm/ft, 4000K
 4.5W/ft Custom Cut. Strip width of 10mm (25/64"). Cuttable every 1 25/32". MAX. run 16 ft.	E44CB2427100	4.5W/ft, 365 lm/ft, 2700K
	E44CB2430100	4.5W/ft, 385 lm/ft, 3000K
	E44CB2440100	4.5W/ft, 425 lm/ft, 4000K

Indoor Continuous COB LED Tape Light Accessories

Description	CAT. #	Specs
 Tape-to-Tape Light Mini Connector	EPSD21CB8	For E30CB Tape Light Series
	EPSD21CB10	For E44CB Tape Light Series
 10" Hardwire Connector	EPSD22CB8	For E30CB Tape Light Series
	EPSD22CB10	For E44CB Tape Light Series
 Tape-to-Tape with 10" Wire	EPSD23CB8	For E30CB Tape Light Series
	EPSD23CB10	For E44CB Tape Light Series
 Tape-to-Tape Light L-Connector	EPSD27LCB8	For E30CB Tape Light Series
	EPSD27LCB10	For E44CB Tape Light Series
 Tape-to-Tape Light X-Connector	EPSD28XCB8	For E30CB Tape Light Series
	EPSD28XCB10	For E44CB Tape Light Series

The Ambio™ Collection

Architectural Grade LED TAPE Light



RGB Indoor LED Tape Light

Description	CAT. #	Specs
Custom Cut RGB Tape Strip width of 25/64" (10mm)	E44-24M-CC	4.4w/ft, 165 lm/ft, RGB
 16 ft. roll RGB Tape	E44-24M-16	4.4w/ft, 165 lm/ft, RGB
100 ft. roll RGB Tape	E44-24M-100	4.4w/ft, 165 lm/ft, RGB

RGB Indoor LED Tape Light Accessories

Description	CAT. #	Specs
 Touch Wall Panel RGB Controller	ECN12	24V DC Input
 Wireless signal receiver	ECN14-1	24V DC Input, Maximum load of 216W
 RGB Remote Controller	ECN14-2	Infrared (IR) remote controller
 Hardwire Connector for connecting multi-color (RGB) tape lights to LED Driver	EPS26	Fits RGB tape lights with 10" wire leads
	EPS29	Fits RGB tape lights with 24" wire leads
 Extension Connector for connecting two multi-color (RGB) tape lights at a distance	EPS27	Fits RGB tape lights with 10" wire leads
	EPS28	Fits RGB tape lights with 24" wire leads

24V Damp Location LED Tape Light

Description	CAT. #	Specs
Custom Cut of Outdoor 4.4w/ft LED Tape 24V. Cuttable every 4". 18 LED/ft. MAX. run 16ft. Strip width of 25/64" (10mm)	 EW44-2427-CC	4.4w/ft, 360 lm/ft, 2700K
	 EW44-2430-CC	4.4w/ft, 360 lm/ft, 3000K
	 EW44-2440-CC	4.4w/ft, 360 lm/ft, 4000K
16 foot roll of Outdoor 4.4w/ft LED Tape 24V. Cuttable every 4". 18 LED/ft. MAX. run 16ft.	 EW44-2427-16	4.4w/ft, 360 lm/ft, 2700K
	 EW44-2430-16	4.4w/ft, 360 lm/ft, 3000K
	 EW44-2440-16	4.4w/ft, 360 lm/ft, 4000K
Custom Cut of Outdoor 4.4w/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 16ft.	 EW45-2427-CC	4.4w/ft, 450 lm/ft, 2700K
	 EW45-2430-CC	4.4w/ft, 450 lm/ft, 3000K
	 EW45-2440-CC	4.4w/ft, 450 lm/ft, 4000K
16 foot roll of Outdoor 4.4w/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 16ft.	 EW45-2427-16	4.4w/ft, 450 lm/ft, 2700K
	 EW45-2430-16	4.4w/ft, 450 lm/ft, 3000K
	 EW45-2440-16	4.4w/ft, 450 lm/ft, 4000K

The Ambio™ Collection


Architectural Grade LED TAPE Light



Sectional LED Tape Lights

Description	CAT. #	Specs
 Non-Waterproof LED Tape Light Strip width of 5/16" (8mm)	E460-24WW	Warm White, 1.5W/ft, 3000K
	E460-24CW	Cool White, 1.5W/ft, 6500K
	E1460-24WW	Warm White, 4.4W/ft, 3000K
	E1460-24CW	Cool White, 4.4W/ft, 6500K

Sectional LED Tape Light Accessories

Description	CAT. #	Specs
 LED Dimmer Unit	DIMTP1	For use in between driver and Tape Light, not for use with RGB tapes
 Cord and Plug	EUCRD	8' Power cord and plug for LED Tape Light
 Power Connector	EPN11	6' Power connector for WW and CW Tape Lights only
 Tape Light Connector for WW and CW types only	EPS12	20" Cut tape connector for E460 and EWP460 tapes
	EPS13	20" Cut tape connector for E1460 and EWP1460 tapes
 Tape Light Connector for RGB (M) type only	EPS14	15" Cut tape connector for E1460 and EWP1460
 Tape Light Linking Cable for WW and CW types only	EPSD1	1' Linking Cable for E460 & EWP460 tapes
	EPSD2	1' Linking Cable for E1460 & EWP1460 tapes
 Tape Light Linking Cable for RGB (M) type only	EPSD3	1' Linking Cable for E1460 & EWP1460 RGB tapes



Aluminum Channels for LED Tape

	Description	CAT. #	Specs
	Custom Cut Shallow Mount LED Aluminum Channel	EUD31	Custom Cut Channel
	8' Shallow Mount LED Aluminum Channel	EUD31-8	8' Channel w/lens & connectors
	Custom Cut Deep Mount LED Aluminum Channel	EUD32	Custom Cut Channel
	8' Deep Mount LED Aluminum Channel	EUD32-8	8' Channel w/lens & connectors
	Custom Cut Recessed Mount LED Aluminum Channel	EUD33	Custom Cut Channel
	8' Recessed Mount LED Aluminum Channel	EUD33-8	8' Channel w/lens & connectors
	Custom Cut Square Corner Mount LED Aluminum Channel	EUD34	Custom Cut Channel
	8' Square Corner Mount LED Aluminum Channel	EUD34-8	8' Channel w/lens & connectors
	Custom Cut Surface Mount LED Aluminum Channel	EUD35	Custom Cut Channel
	8' Surface Mount LED Aluminum Channel	EUD35-8	8' Channel w/lens & connectors
	Custom Cut Round Corner Mount LED Aluminum Channel	EUD36	Custom Cut Channel
	8' Round Corner Mount LED Aluminum Channel	EUD36-8	8' Channel w/lens & connectors
	Custom Cut Shallow Recessed Mount LED Aluminum Channel	EUD37	Custom Cut Channel
	8' Shallow Recessed Mount LED Aluminum Channel	EUD37-8	8' Channel w/lens & connectors
	Custom Cut Trimless Recessed Aluminum Channel NEW!	EUD38	Custom Cut Channel
	8' Trimless Recessed Aluminum Channel	EUD38-8	8' Channel w/lens & connectors

8' Channel are approximately 7'8"

Aluminum Channels Accessories

	Description	CAT. #	Specs
	End Caps for Aluminum Channels (Set of 2)	EUDEN31	For EUD31
		EUDEN32	For EUD32
		EUDEN33	For EUD33
		EUDEN34	For EUD34
		EUDEN35	For EUD35
		EUDEN36	For EUD36
		EUDEN37	For EUD37
	8 Ft. Frosted Lens for Aluminum Channels	EUDL31	For EUD31, 32, 37
		EUDL33	For EUD33
		EUDL34	For EUD34
		EUDL35	For EUD35
		EUDL36	For EUD36
		EUDL31C	For EUD31, 32, 37
		EUDL33C	For EUD33
	8 Ft. Clear Lens for Aluminum Channels	EUDL34C	For EUD34
		EUDL35C	For EUD35
		EUDL36C	For EUD36
	Mounting Clips for Aluminum Channels (Set of 2)	EUDMT31	For EUD31
		EUDMT32	For EUD32
		EUDMT33	For EUD33
		EUDMT34	For EUD34
		EUDMT35	For EUD35
		EUDMT36	For EUD36
		EUDMT37	For EUD37

The Ambio™ Collection

Architectural Grade LED TAPE Light



24V DC Drivers

Description	CAT. #	Specs
 24V DC Electronic Driver ELV Dimmable 3" L - 1" H - 1" W	DRVE24V60W	60W
 24V Electronic Driver NON-Dimmable	DRV30W	30W, 120/277V
	DRV100W	100W, 120/277V
 0-10V Dimmable Driver	DRV30W-10	30W, 0-10V, 120/277V
	DRV60W-10	60W, 0-10V, 120/277V
	DRV96W-10	96W, 0-10V, 120/277V
 Universal Dimmable LED Driver/Transformer (Small) 6 1/2" L - 1 3/4" H - 3 1/2" W	DRVU24V24WD	24W, 24V DC, 1A
	DRVU24V60WD	60W, 24V DC, 2.5A
 Universal Dimmable LED Driver/Transformer (Medium) 8 3/4" L - 1 3/4" H - 3 1/2" W	DRVU24V100WD	100W, 24V DC, 4A
 Universal Dimmable LED Driver/Transformer (Large) 9 7/8" L - 1 3/4" H - 4 1/8" W	DRVU24V200WD	200W, 24V DC, 8A
 Universal Dimmable LED Driver/Transformer (X-Large) 10 7/8" L - 1 3/4" H - 4 1/8" W	DRVU24V300WD	300W, 24V DC, 12A

The Ambio™ Collection

Architectural Grade LED TAPE Light



Duralight™ & Accessories

Description		CAT. #	Specs
 	2 Wire 110/120V Duralight™ Connectable up to 150 feet. Cutable at 36" increments (every 24 bulbs only)	EDU2	Custom Cut, Clear
		EDU2BL	Blue
		EDU2GR	Green
		EDU2RD	Red
		EDU2-150	150 ft per roll (Max run), Clear
	150' Reel OUTDOOR 120V LED Rope Light	EDU2LEDWW-CC	Custom Cut, 0.96W/ft, 76 lm/ft, Warm White
		EDU2LEDWW150	150' Reel, 0.96W/ft, 76 lm/ft, Warm White
		EDU2LEDCW-CC	Custom Cut, 0.96W/ft, 76 lm/ft, Cool White
		EDU2LEDCW150	150' Reel, 0.96W/ft, 76 lm/ft, Cool White
	Mini Controller with power cord and rope light connector	ECN6	8 functions, 95 ft. MAX. for LED Duralights
	Power Cord	EPC2	6 ft. Power Cord for EDU2
	Power Cord	EPCLED	Power Cord for EDU2LED
	Power Connector	EPN2	For EPCLED
	Splice Connector	EPS2	
	Plastic Mounting Clips	EPMT	
	End Cap	EPEN	
	6 ft. Channel	EPCH	
	Invisible Splice	EPIN	
	Channel	EPCH	6 ft. Channel
	Terminal Block	EPD-2	

The Ambio™ Collection



Architectural Grade LED TAPE Light



LED Flat Rope Light & Accessories

Description	CAT. #	Specs
 120V Flat LED Rope Light Strip width of 1/2" (12mm)	EDF12WW-90	90', 0.5W/ft, 76 lm/ft, Warm White
	EDF11WW-90	90', 1W/ft, 100 lm/ft, Warm White
	EDF21WW-30	30', 3W/ft, 150 lm/ft, Warm White
 Power Cord	EFPC61	6' Power Cord & Driver for EDF11 & EDF12
	EFPC62	6' Power Cord & Driver for EDF21
 Splice Connector	EFPS21	Splice connector for EDF11 & EDF12
	EFPS22	Splice connector for EDF21
 End Cap	EFPE1	End Cap for EDF11 & EDF12
	EFPE2	End Cap for EDF21
 Glue Tube	EFPGL	For end caps, power cord and splice connector
 Mounting Clip	EPD-4	For EDF11 & EDF12
	EPD-7	For EDF21
 Open Mounting Clip	EPD-8	For EDF11 & EDF12

Transformers

Description	CAT. #	Specs
 Miniature Electronic Transformer	LET-75	12V AC, 75W. 2 1/8" L - 3/4" H - 1 1/4" W
 Electronic Transformer (No Minimum Load)	LET-60	120V, 60W. 2 1/4" L - 3/4" H - 1 1/4" W
	LET-60-277	277V, 60W
 Electronic Transformer (Bottom Load)	LET-60H	120V, 60W. 2 3/4" L - 3/4" H - 1 1/4" W
 0-10V Dimmable Electronic Transformer	LET-60DX	0-10V, 120V, 60W
	LET-60DX-277	0-10V, 277V, 60W

Magnetic & Electronic Transformers 120V & 277V to 12V or 277V to 120V

Description	CAT. #	Specs
 Low Voltage Magnetic Transformer	ETR12	120/12V, 50W, for EL1499 & EL2699. 1 7/8" L - 3" H - 2 1/4" W
	ETR12-20	120/12V, 20W, for EL1499LD
	ETR-277	Steps 277V Line Voltage Down to 120V, 250W
 Low Voltage Magnetic Transformer for Retrofit Kit	ETRK50	120V/12V, 50W, Medium Screw Base
	ETRK20	120V/12V, 20W
 Electronic Transformer	ETRK60E	for Retrofit Kit 120V/12V, 60W, Low load (3W-50W)

Lamps, Socket Adapters, & General Accessories



Accessories for Recessed Fixtures	200
-----------------------------------	-----

LED Lamps	202
-----------	-----

JC & Wedge Lamps	203
------------------	-----

Metal & Plastic Rings	203
-----------------------	-----

Ballast	204
---------	-----

Adjustable Hole Cutter	204
------------------------	-----

2" x4" Junction Box & Cover	204
-----------------------------	-----

Fire Rated Products	205
---------------------	-----

Emergency Battery Backups	206
---------------------------	-----

ELCO LED Ceiling Displays	207
---------------------------	-----

ELCO Countertop Mats	208
----------------------	-----

ELCO Travel Cases	209
-------------------	-----

ELCO Countertop Displays	209
--------------------------	-----

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Accessories for Recessed Fixtures

Description		CAT. #	Specs
 Lens for MR16 Units		L28	Clear Lens, 1 15/16" D, 49 mm
		L38	Honey Comb Louver
		L39	Honeycomb Louver Lens, Mill Brite
		L40	Clear UV Filter, 49 mm
		L41	Frosted UV Filter, 49 mm
		L42	3 5/8" Diffused Spread Lens for PAR30
		L44	3 5/8" Soft Focus Lens for PAR30
 Lens Retainer Ring		RTNRTRK1	For ET528, ET532 & ET547
 Retainer Ring & Lens		RTNRTRK2	For MR11 Track Heads
 Lampholder Clip		CLIP200	For ET226, ET239
 GU24 Socket Adapter		PSA21	Socket Adapter Medium Screw into GU-24
 Socket Adapter		PSA25	Socket Adapter for HALO 5" Trims to fit Elco Housings
 Socket Extender		PSE26	
 Socket Adapter		PSA27	For 4" Eyeball to fit HALO Housing
 GU10 Socket		PSA29	Med. screw-in to GU10 with Lamp (50W, 120V, MR16, GU10 Base)
 E26 Medium Base Adapter		PSA30	Med. base to LED Quick Connect
 GU10 Base Adapter		PSA31	GU10 to LED Quick Connect
 Socket Adapter		PSA32	Med. screw into GU10 without lamp
 Socket Adapter		PSA33	Med. screw into GU10 with lamp

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Accessories for Recessed Fixtures

Description	CAT. #	Specs
 Dimmable MR16 Sized Lamp with Quick Connect and medium base adapter, For use in Medium Base Housings with MR16 Trims. See elcolighting.com for full trim and housing selection	PSA34-27	7W, 530 lm, 2700K
	PSA34	7W, 500 lm, 3000K
	PSA34-35	7W, 530 lm, 3500K
	PSA34-40	7W, 550 lm, 4000K
 GU10 Socket	P010S	GU10 Socket with Wire
 E26 Socket	P011S	E26 Base phenolic socket with 6" wire
 Socket Assembly	P012S	Socket, wire and thermal protector for EL71C & R10H
 GU24 Socket	P024S	GU-24 Socket with 18" wire
 Socket for MR16	P016S	for MR16 with 24" wires
	P006S	for MR16 W/6" wires, no disk
 Screw Base Adapter	P010T	Phenolic Screw Base Adapter with 8" Pigtail Wires
 Coil Spring	SPRING	Coil Spring for ELM30
 Torsion Spring for Trims	V-SPRING	
 Flat Hanger Bars	FB27	Set of two 27" flat hanger bars for commercial frames. For wood construction
 Hanger Bars	HB24	Set of two Hanger Bars for Plaster Frames. Extend to 24", perforated easy cut at 8" & 10"
 Hanger Bars	CH26	Set of two 26" C-Channel Hanger Bars for Commercial Housings. For T-Bar ceiling
 J-Box Cover	JBOXCV	J-Box cover for housings
 Insulation Sensor	RP-1B	For 120V Only
 Clip-R	CLIP-R	Set of 3 Clips for Remodel Housings
 Clip-C	CLIP-C	Set of Clips for Torsion Springs
 Socket Plate with screw and wing nut	L-BRCKT	for 6" Housings
	L-BRCKT4	for 4" Housings
	L-BRCKT5	for 5" Housings

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Accessories for T5 Fluorescent Undercabinet Lights

Description	CAT. #	Specs
 Ballast Universal	EBA12E	For 8W T5 Lamp
	EBA21E	For 13W T5 Lamp
 Lens	EUL12-3	Lens for 3 1/2" wide EUN12E
	EUL21-3	Lens for 3 1/2" wide EUN21E
	EUL24-3	Lens for 3 1/2" wide EUN24E
	EUL32-3	Lens for 3 1/2" wide EUN32E
	EUL42-3	Lens for 3 1/2" wide EUN42E
 Cord / Plug	EUCRD	8 ft. Cord and Plug

LED Lamps

Description	CAT. #	Specs
 Dimmable MR16 Sized Lamp with Quick Connect, For use in LED Quick Connect Housings with MR16 Trims. See elcolighting.com for full trim and housing selection	PSA37-27	7W, 500 lm, 2700K
	PSA37	7W, 500 lm, 3000K
	PSA37-35	7W, 530 lm, 3500K
	PSA37-40	7W, 550 lm, 4000K
 Quick Connect A-Lamp	PSA41-40	12W, 1000 lm, 4000K
 12V LED Low Voltage Bi-Pin Lamp	MR16LD	7W, 500 lm, 3000K
 120V GU10 LED Lamp	MR120-GU10LD	7W, 500 lm, 3000K
 120V Short Neck PAR30 LED Lamp E26	PAR30FSLD	10W, 800 lm, 3000K
 120V PAR38 LED Lamp E26	PAR38FLD	17W, 1200 lm, 3000K

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Wedge Base Lamps

Description	CAT. #	Specs
	WB-5-Z	5W, 12V, Clear
	WB-10-Z	10W, 12V, Clear
	WB-18-Z	18W, 12V, Clear
	L4	5W, 6V, for Exit Sign and Emergency (for EE20L, EE40L, EE50L, & EE70L)

JC & Wedge Base Lamps

Description	CAT. #	Specs
	JC-25	25W, 12V, Bi-Pin Lam, for EUC22
	JC-50	50W, 120V, JC Lamp G8
	JC-50-12V	50W, 12V, JC Lamp

Metal & Plastic Rings

Description	CAT. #	Specs
	RM3W	White, 4 1/4" O.D.
	RM3B	Black, 4 1/4" O.D.
	RM3C	Clear, 4 1/4" O.D.
	RM3G	Gold, 4 1/4" O.D.
	RM3N	Nickel, 4 1/4" O.D.
	RM3BZ	Bronze, 4 1/4" O.D.
	RM3CP	Copper, 4 1/4" O.D.
	RM4W	White, 4 3/4" O.D.
	RM4B	Black, 4 3/4" O.D.
	RM4G	Gold, 4 3/4" O.D.
	RM4N	Nickel, 4 3/4" O.D.
	RM4BZ	Bronze, 4 3/4" O.D.
	RM4CP	Copper, 4 3/4" O.D.
	RP4SH	Plastic Ring, 4 3/4" O.D.
	OM4W	White, 4 3/4" O.D.
	OM4B	Black, 4 3/4" O.D.
	RM5W	White, 6 1/4" O.D.
	RM5B	Black, 6 1/4" O.D.
	RM5C	Clear, 6 1/4" O.D.
	RM5G	Gold, 6 1/4" O.D.
	RM5N	Nickel, 6 1/4" O.D.
	RM5BZ	Bronze, 6 1/4" O.D.
	RM5CP	Copper, 6 1/4" O.D.
	OM5W	White, 7 1/4" O.D.
	OM5B	Black, 7 1/4" O.D.
	RM7W	White, 7 1/4" O.D.
	RM7B	Black, 7 1/4" O.D.
	RM7C	Clear, 7 1/4" O.D.
	RM7N	Nickel, 7 1/4" O.D.
	RM7BZ	Bronze, 7 1/4" O.D.
	RM7CP	Copper, 7 1/4" O.D.
	RP7W	White Plastic Ring, 7 1/4" O.D.
	RP7B	Black Plastic Ring, 7 1/4" O.D.
	OVP7W	White Plastic, 8" O.D.
	OVP7B	Black Plastic, 8" O.D.
	OVM7W	White Metal, 8" O.D.
	OVM7B	Black Metal, 8" O.D.
	OVM7BZ	Bronze Metal, 8" O.D.

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Metal & Plastic Rings

Description	CAT. #	Specs
 7" Plastic Ring	RP8W	White, 7 1/2" O.D.

 8" Plastic Ring	RP9W	White, 8 1/4" O.D.
---	------	--------------------

Ballast

Description	CAT. #	Specs
 Electronic Ballast	P113E1	13W, 120V
	P126E1	26W, 120V
	P142EU	26W - 42W, 120/277V

 Electronic Ballast	PWH2E1	32/26/18/13W, 120V
--	--------	--------------------

 Biax Ballast	P240E1	40W, 120V for ET240 & ET239
	P255E1	55W, 120V for ET255

Adjustable Hole Cutter

Description	CAT. #	Specs
 Adjustable Hole Saw	EL5000	1 1/4" to 6 1/2"
	EL6000	2" to 8 1/4"
Drill	EL5001	
Upright Axle	EL5002	
Traverse Axle for EL5000	EL5003	
Blade A	EL5004A	
Blade B	EL5004B	
Adjusting Rod	EL5007	
Protection Cowl	EL5013	
Compression Spring	EL5016	
Set of Balance Bars	EL5018	
Allen Wrench	EL5019	
Traverse Axle for EL6000	EL6003	
Protection Cowl for EL6000	EL6013	
Set of Balance Bars for EL6000	EL6018	

2" x 4" Junction Box and Cover

Description	CAT. #	Specs
 2"x4" Junction Box	NEW! ELJ242	Galvanized steel corrosion resistant, (11) 7/8" knockouts 4" L x 2 1/8" W x 1 3/8" H

 2"x4" Junction Box Cover	NEW! ELJ242CVR	4 1/4" L x 1 3/8" W
--	----------------	---------------------

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Fire Products

Description		CAT. #	Specs
	1-Hour Fire Enclosure	FIREENCL	20 3/8" L - 14 3/8" W - 9" H
		FIREENCL-S	Shallow 16" L - 14 3/8" W - 7 1/4" H
	Mica Fire tape for use with FIREENCL	FIRETAPE	16' Roll
	Recessed Fixture 2-Hour Fire Rated Cover	FIRECVR	Made of heat activated intumescent material. 17" O.D. - 13" I.D. - 9 3/4" H
	2-Hour Fire Rated LED Housings with Quick Connect	EL39FICA	3" LED Housing. 7 3/4" Height
		EL48FICA	4" LED Housing. 6 7/8" Height
		EL56FICA	5" LED Housing. 7 3/4" Height
		EL76FICA	6" LED Housing. 7 3/4" Height
	2-Hour Fire Rated Medium Base Housing with E26 Base Socket	EL99FICA	4" LED Housing. 7 3/4" Height
		EL5FICA	5" LED Housing. 7 3/4" Height
		EL7FICA	6" LED Housing. 7 3/4" Height
	2-Hour Fire Rated Housing with GU10 Socket	EL39FICA-GU10	3" LED Housing. 7 3/4" Height
		EL49FICA-GU10	4" LED Housing. 7 3/4" Height
	2-Hour Fire Rated Shallow Housing	EL492FICAS	4" LED Shallow Housing 4 13/16" Height
	2-Hour Fire Rated Shallow Housing	EL75FICAS	6" LED, Shallow Housing 6 3/16" Height
	4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	4" New Construction Housing with quick connector for 2-Hour Fire Rated Ceilings. 4" O.D. x 4 1/2" H
	4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs 4" O.D. x 4 1/2" H
		ELJ4OV	For use with EJB4RICA to cover tabs

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Emergency Battery Backups

Description	CAT. #	Specs
 Emergency Battery Backup (Single Whip - 90 Min. of Emergency Light)	KEM-LD1	8W, Up to 750 lm EM output. Bottom lead
	KEM-LD2	12W, Up to 1100 lm EM output. Bottom lead
 Emergency Battery Backup (Double Whip - 90 Min. of Emergency Light)	KEM-LD3	8W, Up to 750 lm EM output
	KEM-LD4	12W, Up to 1100 lm EM output
 Emergency Battery Backup (90 Min. of Emergency Light)	KEM-LD5	25W, 120/277V, 50/60 Hz. Compatible with EL390, EL490, EL492, EL560, EL570, EL760, EL770 Series
 Emergency Battery Backup (90 Min. of Emergency Light)	KEM-LD7	15W, 120V, 50/60 Hz. Compatible with EL386, EL485, EL770, EL570 Series, Ply Sylo™, and 4" Koto Sylo™ Systems
 Emergency Battery Backup (90 Min. of Emergency Light)	KEM-ERT	25W, 100/277V AC, 50/60 Hz. Compatible to all 3"-8" Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto System

Accessories for Emergency Battery Backups

Description	CAT. #	Specs
 Test Switch	T-SWITCH	for KEM Battery Backups. for CFL
 Test Switch for KEM-LD1/2/3	T-SWITCH-LD1	for KEM-LD1, KEM-LD2, and KEM-LD3
 Test Switch for KEM-LD5	T-SWITCH-LD5	for KEM-LD5

ELCO Marketing Products

ELCO LED Ceiling Displays

Hanging Oak™ & Teak™ System Display

DISP-F12LD

Flat Hanging Panel

DISP-D12LD

Box Hanging Panel



Hanging 2" & 3" Alder™ System Insert Display

(Inserts order separately)

DISP-F2LD2

Flat Hanging Panel

DISP-D2LD2

Box Hanging Panel



Hanging 4" LED Cans Display

(Inserts order separately)

DISP-F4LD4

Flat Hanging Panel

DISP-D4LD4

Box Hanging Panel



Hanging 6" LED Cans Display

(Inserts order separately)

DISP-F6LD3

Flat Hanging Panel

DISP-D6LD3

Box Hanging Panel



Hanging 4" Cedar™ System Display


(Inserts order separately)

DISP-F4LD5

Flat Hanging Panel

DISP-D4LD5

Box Hanging Panel

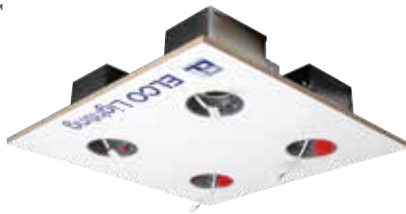

Hanging Elm™ System Display

DISP-F4LD1

Flat Hanging Panel

DISP-D4LD1

Box Hanging Panel



Hanging Undercabinet Bar Display

DISP-FULD1

Flat Hanging Panel

DISP-DULD1

Box Hanging Panel



Hanging Track Fixtures Display

(Fixtures order separately)

DISP-FT

Flat Hanging Panel

DISP-DT

Box Hanging Panel



Hanging Undercabinet Puck Display

DISP-F2LD1

Flat Hanging Panel



Hanging Recessed Box Display

(Trims not included)

DISP-F6

Flat 6" Line Voltage Housing

DISP-D6

Box Hanging Panel

DISP-F5

Flat 5" Line Voltage Housing

DISP-D5

Box Hanging Panel



ELCO Marketing Products

ELCO LED Ceiling Displays

Hanging Flush Mount Fixture Display

DISP-FDLD1
Flat Drooping Panel



Hanging Flush Mount Display

DISP-FDLD2
Flat Drooping Panel



Hanging 4" Line Voltage Display

DISP-F4
Flat Display for T-BAR ceiling
DISP-D4
Box Hanging Display



Hanging 3" Low Voltage Display

(Trims order separately)

DISP-F3
Flat Display
DISP-D3
Box Hanging Display



Hanging Halogen Display

DISP-F2
Flat Display for T-BAR ceiling
DISP-D2
Box Hanging Display




Hanging CFL Display

DISP-F7
Flat Display for CFL Lamps
DISP-D7
Box Display for CFL Lamps
DISP-F6CF
6" CFL Drop-in Flat Display
DISP-F5CF
5" CFL Drop-in Flat Display




ELCO Countertop Mats



ELMAT001
LED Inserts & Housings



ELMAT002
LED Undercabinet & Tape Lights



ELMAT003
LED Track Lighting



ELMAT004
Koto™/Oak™/Teak™ System

ELCO Marketing Products

ELCO Ready Made Travel Cases



Ambio™ Travel Case

Includes: 1-EUDM31, 1-EUDM32,
1-EUDM33, 1-EUDM34, 1-EUDM35,
1-EUDM36, 1-EUDM37

ELTRV1051



Koto™ Travel Case

Includes: 1-ELK09SD, 1-ELK0735,
1-ELK4118W, 1-ELK3629BB

ELTRV1060-A



Oak™ Travel Case

Includes: 1-E1L02F, 1-E1L12F,
1-E1L32F, 1-E1L22F,
1-E1LDRV60, 1-E1LF1

ELTRV1055



Teak™ Travel Case

Includes: 1-E2LF2, 1-E2L11RICD, 1-E2L14F30B,
1-F2L13F30W, 1-E2L18F327BZ

ELTRV1059-A



Koto™ Master Travel Case

Includes: 4-Koto LED Modules,
5-Accessories, 10-Twist-On Trims,
1-Trimless Reflector, 1-Flush Mount
Trim Adaptor, 4-Koto Sylo Fixtures,
1-Plug-In Dimmer

ELTRV1060-MSTR

ELCO Countertop Displays



DISP-KOTO

Koto™ System



DISP-TEAK

Teak™ System



DISP-OAK

Oak™ System



DISP-TAPE

LED Tape Lights

ELCO Catalogs



Order your Catalog today! - Email us at: orderdesk@elcolighting.com

Index

CH26	67, 201	E1DWN08AJIC	9	E2L97F27	13	E4LC16D2	75	E6LC08D2	79
CLIP200	200	E1DWN08AJICDX	9	E2L97F30	13	E4LC16ICA2	75	E6LC08ICA2	78
CLIP-C	201	E1DWN08IC	9	E2LAJ08ICA	11	E4LC16ICAD2	75	E6LC08ICAD2	78
CLIP-R	201	E1DWN08ICDX	9	E2LAJ08ICAD	11	E4LC16ICASD	75	E6LC08ICASD	78
DIMTP1	194	E1L02F27	6	E2LAJ11ICA	11	E4LC16SD	75	E6LC08SD	79
DIMTP2	176	E1L02F30	6	E2LAJ11ICAD	11	E4LC082	75	E6LC12D2	79
DIMTP3	176	E1L02F35	6	E2LC106	43	E4LC122	75	E6LC12ICA2	78
DIMU1	172	E1L02F40	6	E2LC106ICA	43	E4LC162	75	E6LC12ICAD2	78
DISP-D2	208	E1L02FSD	6	E2LC175ICA	43	E4LF1	31, 59	E6LC12ICASD	78
DISP-D2LD2	207	E1L12F27	6	E2LC175RICA	43	E4LFU08D2	84	E6LC12SD	79
DISP-D3	208	E1L12F30	6	E2LC185ICA	44	E4LFU12D2	84	E6LC16D2	79
DISP-D4	208	E1L12F35	6	E2LC185RICA	44	E4LFU16D2	84	E6LC16ICA2	78
DISP-D4LD1	207	E1L12F40	6	E2LCU86ICA	44	E4LFU20D2	84	E6LC16ICAD2	78
DISP-D4LD4	207	E1L12FSD	6	E2LCU86RICA	44	E4LFU30D2	84	E6LC16ICASD	78
DISP-D4LD5	207	E1L22F27	6	E2LF1	9, 11, 59	E4LHU08D2	84	E6LC16SD	79
DISP-D5	207	E1L22F30	6	E2LF1-M2	11	E4LHU12D2	84	E6LC20D2	79
DISP-D6	207	E1L22F40	6	E2LF1-M3	11	E4LHU16D2	84	E6LC20ICA2	78
DISP-D6LD3	207	E1L32F27	6	E2LF1-M4	11	E4LHU20D2	84	E6LC20ICAD2	78
DISP-D7	208	E1L32F30	6	E2LF1-M5	11	E4LHU30D2	84	E6LC20ICASD	78
DISP-D12LD	207	E1L32F35	6	E2LF2	7, 11	E4LK47ICA	18	E6LC20SD	79
DISP-DT	207	E1L32F40	6	E2LF2-M2	9	E4LK48ICAD	18	E6LC082	79
DISP-DULD1	207	E1L61F27	6	E2LF2-M3	9	E4LK78ICA	18	E6LC122	79
DISP-F2	208	E1L61F30	6	E2LF2-M4	9	E4LK79ICAD	18	E6LC162	79
DISP-F2LD1	207	E1L61F35	6	E2LF2-M5	9	E4LK87ICA	19	E6LC202	79
DISP-F2LD2	207	E1L61F40	6	E2LK34ICA	18	E4LK87ICA-EM1	19	E6LF1	31, 59
DISP-F3	208	E1L61FSD	6	E2LK35ICAD	18	E4LK87RICA	19	E6LFU08D2	86
DISP-F4	208	E1LDRV60	7	E2LK41ICA	18	E4LK88ICAD	19	E6LFU12D2	86
DISP-F4LD1	207	E1LF1	7, 9, 141	E2LK42ICAD	18	E4LK88ICAD-EM1	19	E6LFU16D2	86
DISP-F4LD4	207	E1LF1CAJ	7	E2LK57RICA	19	E4LK88RICA	19	E6LFU20D2	86
DISP-F4LD5	207	E1LF1CAJ-7	7	E2LK94ICA	18	E4LK98ICA	18	E6LFU30D2	86
DISP-F5	207	E1LF1CAJDX	7	E2LK95ICAD	18	E4LK99ICAD	18	E6LFU40D2	86
DISP-F5CF	208	E1LF1CAJDX-7	7	E2LKF1	31	E4LRC08D2	75	E6LFU60D2	86
DISP-F6	207	E1LF1-M2	7, 9	E2LRC106	43	E4LRC08ICA2	75	E6LHU08D2	86
DISP-F6CF	208	E1LF1-M3	7, 9	E3FH08ICA2	73	E4LRC08ICAD2	75	E6LHU12D2	86
DISP-F6LD3	207	E1LF1-M4	7, 9	E3FH08ICAD2	73	E4LRC08ICASD	75	E6LHU16D2	86
DISP-F7	208	E1LF1-M5	7, 9	E3FH08ICASD	73	E4LRC08SD	75	E6LHU20D2	86
DISP-F12LD	207	E1LF2	7, 9	E3KCL10	31	E4LRC12D2	75	E6LHU30D2	86
DISP-FDLD1	208	E1LF2ICAJ	7	E3LC08D2	73	E4LRC12SD	75	E6LHU40D2	86
DISP-FDLD2	208	E1LF2ICAJ-7	7	E3LC08ICA2	73	E4LRC16D2	75	E6LHU60D2	86
DISP-FT	207	E1LF2ICAJDX	7	E3LC08ICAD2	73	E4LRC16SD	75	E6LK37ICA	19
DISP-FULD1	207	E1LF2ICAJDX-7	7	E3LC08ICASD	73	E4LRC082	75	E6LK38ICAD	19
DISP-KOTO	209	E1LF2-M2	7, 9	E3LC08SD	73	E4LRC122	75	E6LK43ICA	18
DISP-OAK	209	E1LF2-M3	7, 9	E3LC10D2	73	E4LRC162	75	E6LK44ICAD	18
DISP-TAPE	209	E1LF2-M4	7, 9	E3LC10ICA2	73	E4LRU08D2	84	E6LK56ICA	18
DISP-TEAK	209	E1LF2-M5	7, 9	E3LC10ICAD2	73	E4LRU12D2	84	E6LK57ICAD	18
DRV12V12W	175	E1RLA08IC	9	E3LC10ICASD	73	E4LRU16D2	84	E6LRC08D2	79
DRV12V30W	175	E1RLA08ICDX	9	E3LC10SD	73	E4LRU20D2	84	E6LRC08ICA2	78
DRV24V30W	173	E1TRL08AJIC	9	E3LC082	73	E4LRU30D2	84	E6LRC08ICAD2	78
DRV30W	196	E1TRL08AJICDX	9	E3LC102	73	E4LTU08D2	84	E6LRC08ICASD	78
DRV30W-10	196	E1TRL08IC	9	E3LK53ICA	18	E4LTU12D2	84	E6LRC08SD	79
DRV60W-10	196	E1TRL08ICDX	9	E3LK54ICAD	18	E4LTU16D2	84	E6LRC12D2	79
DRV96W-10	196	E2AJU12ICA	44	E3LK65ICA	19	E4LTU20D2	84	E6LRC12ICA2	78
DRV100W	196	E2KCL10	31	E3LK65ICA-EM1	19	E4LTU30D2	84	E6LRC12ICAD2	78
DRVE12V48DW	176	E2L08ICA	11	E3LK65RICA	19	E4SQLF08D2	85	E6LRC12ICASD	78
DRVE12V96DW	176	E2L08ICAD	11	E3LK66ICAD	19	E4SQLF12D2	85	E6LRC12SD	79
DRVE24V60W	176, 196	E2L08RIC	11	E3LK66ICAD-EM1	19	E4SQLF16D2	85	E6LRC16D2	79
DRVU12V24WD	176	E2L08RICD	11	E3LK66RICAD	19	E4SQLF20D2	85	E6LRC16SD	79
DRVU12V60WD	176	E2L10F27	12	E3LK76ICA	18	E4SQLF30D2	85	E6LRC20D2	79
DRVU12V100WD	176	E2L10F30	12	E3LK77ICAD	18	E4SQLF40D2	85	E6LRC20SD	79
DRVU24V24WD	176, 196	E2L10F35	12	E3LK84ICA	18	E4SQLHU08D2	85	E6LRC082	79
DRVU24V60WD	176, 196	E2L10F40	12	E3LK85ICAD	18	E4SQLHU12D2	85	E6LRC122	79
DRVU24V100WD	176, 196	E2L10FSD	12	E3LKF1	31	E4SQLHU16D2	85	E6LRC162	79
DRVU24V200WD	176, 196	E2L11ICA	11	E3LRC08D2	73	E4SQLHU20D2	85	E6LRC202	79
DRVU24V300WD	176, 196	E2L11ICAD	11	E3LRC08ICA2	73	E4SQLHU30D2	85	E6LRU08D2	86
E1AK02F27	8	E2L11RIC	11	E3LRC08ICAD2	73	E4SQLHU40D2	85	E6LRU12D2	86
E1AK02F30	8	E2L11RICD	11	E3LRC08ICASD	73	E4TL08ICA2	77	E6LRU16D2	86
E1AK02F35	8	E2L13F27	12	E3LRC08SD	73	E4TL08ICAD2	77	E6LRU20D2	86
E1AK02F40	8	E2L13F30	12	E3LRC10D2	73	E4TL08ICASD	77	E6LRU30D2	86
E1AK02FSD	8	E2L13F35	12	E3LRC10SD	73	E4TL12ICA2	77	E6LRU40D2	86
E1AK12F27	8	E2L13F40	12	E3LRC082	73	E4TL12ICAD2	77	E6LRU60D2	86
E1AK12F30	8	E2L13FSD	12	E3LRC102	73	E4TL12ICASD	77	E6LTU08D2	86
E1AK12F35	8	E2L14F27	12	E4AJ08ICAD2	75	E4TL16ICA2	77	E6LTU12D2	86
E1AK12F40	8	E2L14F30	12	E4AJ12ICAD2	75	E4TL16ICAD2	77	E6LTU16D2	86
E1AK12FSD	8	E2L14F35	12	E4FH08ICA2	75	E4TL16ICASD	77	E6LTU20D2	86
E1AK22F27	8	E2L14F40	12	E4FH08ICAD2	75	E5SQLFU11	71	E6LTU30D2	86
E1AK22F30	8	E2L14FSD	12	E4FH08ICASD	75	E5SQLFU11EM1	71	E6LTU40D2	86
E1AK32F27	8	E2L15F27	12	E4KCL10	31	E5SQLFU11EM2	71	E6LTU60D2	86
E1AK32F30	8	E2L15F30	12	E4LC08D2	75	E5SQLFU20	71	E8LF1	59
E1AK61F27	8	E2L15F35	12	E4LC08ICA2	75	E5SQLFU20EM1	71	E8LFU08D2	88
E1AK61F30	8	E2L15F40	12	E4LC08ICAD2	75	E5SQLFU20EM2	71	E8LFU12D2	88
E1AK61F35	8	E2L15FSD	12	E4LC08ICASD	75	E6FH08ICA2	78	E8LFU16D2	88
E1AK61F40	8	E2L18F27	12	E4LC08SD	75	E6FH08ICAD2	78	E8LFU20D2	88
E1AK61FSD	8	E2L18F30	12	E4LC12D2	75	E6FH08ICASD	78	E8LFU30D2	88
E1ATB08AJIC	9	E2L18F35	12	E4LC12ICA2	75	E6FH12ICA2	78	E8LFU40D2	88
E1ATB08AJICDX	9	E2L18F40	12	E4LC12ICAD2	75	E6FH12ICAD2	78	E8LFU60D2	88
E1ATB08IC	9	E2L19F27	12	E4LC12ICASD	75	E6FH12ICASD	78	E8LRU08D2	88
E1ATB08ICDX	9	E2L19F30	12	E4LC12SD	75	E6KCL10	31	E8LRU12D2	88

Index

E8LRU16D2	88	E210C0630	43	E411R	81	ECNE11	62	EKCL2818	32
E8LRU20D2	88	E210C0727	43	E412	84	ECT	168	EKCL2827	32
E8LRU30D2	88	E210C0730	43	E412C	76	EDGLIT1	178	EKCL2829	32
E8LRU40D2	88	E210C0735	43	E412R	81	EDGLIT2	178	EKCL2863	32
E8LRU60D2	88	E210C0740	43	E414C	76	EDGREC1R	178	EKCL2872	32
E8LTU08D2	88	E210C1827	44	E414R	81	EDGREC2G	178	EKCL2888	32
E8LTU12D2	88	E210C1830	44	E415C	76	EDGREC2RG	178	EKCL3318	34
E8LTU16D2	88	E210C1835	44	E415R	81	EDIS6	175	EKCL3322	34
E8LTU20D2	88	E210C1840	44	E417C	76	EDL60N	167	EKCL3327	34
E8LTU30D2	88	E213C185D	44	E417R	81	EDL61N	167	EKCL3329	34
E8LTU40D2	88	E213C0627	43	E418C	76	EDL62N	167	EKCL3341	34
E8LTU60D2	88	E213C0630	43	E418R	81	EDL63N	167	EKCL3353	34
E9LTU08D2	90	E213C0727	43	E420C	76	EDL81CT3	167	EKCL3393	34
E9LTU12D2	90	E213C0730	43	E420R	81	EDL83CT3	167	EKCL3618	33
E9LTU16D2	90	E213C0735	43	E424C	76	EDL8030	167	EKCL3620	33
E9LTU20D2	90	E213C0740	43	E424R	81	EDL8230	167	EKCL3622	33
E9LTU30D2	90	E213C1827	44	E428C	76	EDU2	197	EKCL3627	33
E9LTU40D2	90	E213C1830	44	E428R	81	EDU2-150	197	EKCL3629	33
E9LTU60D2	90	E213C1835	44	E429C	76	EDU2LEDCW	197	EKCL3653	33
E10	168	E213C1840	44	E429F	133, 134, 135, 136	EDU2LEDWW	197	EKCL3663	33
E11	168	E214C185D	44	E429P	137, 138, 139, 140	EE22L	178	EKCL3672	33
E12	168	E214C0627	43	E430C	77	EE80L	178	EKCL3679	33
E13	168	E214C0630	43	E434C	77	EE80S	178	EKCL3693	33
E15-2427	190	E214C0727	43	E440	85	EE81S	178	EKCL4111	36
E15-2430	190	E214C0730	43	E442	85	EE86HG	178	EKCL4112	36
E15-2440	190	E214C0735	43	E444C	77	EE91LBZ	178	EKCL4116	36
E20	168	E214C0740	43	E450	97	EE94HG	178	EKCL4118	36
E21	168	E214C1827	44	E460-24	194	EELE1	178	EKCL4122	36
E22	168	E214C1830	44	E520L2030	71	EELE1B	178	EKCL4125	36
E22-2427	190	E214C1835	44	E521L2030	71	EELEDBRG	178	EKCL4127	36
E22-2430	190	E214C1840	44	E521L2040	71	EELEDRG	178	EKCL4129	36
E22-2440	190	E215C185D	44	E523L1130	71	EEP3A	178	EKCL4130	36
E23	168	E215C0627	43	E523L1140	71	EEP9A	178	EKCL4153	36
E23DMF	141	E215C0630	43	E524L2030	71	EEPS60	178	EKCL4163	37
E24V39FICA	20	E215C0727	43	E610	87	EEPS65	178	EKCL4172	37
E24V48FICA	20	E215C0730	43	E610C	80	EEWG11	178	EKCL4179	37
E24V75FICAS	20	E215C0735	43	E610R	82	EEWG22	178	EKCL4188	37
E24V76FICA	20	E215C0740	43	E611	87	EF26-24CW	191	EKCL4193	37
E24V276ICA	20	E215C1827	44	E612	87	EF26-24WW	191	EKCL4216	37
E24V386ICA	20	E215C1830	44	E612C	80	EFL15S40WFK	181	EKCL4218	37
E24V390ICA	20	E215C1835	44	E612R	82	EFL15S40WFT	181	EKCL4222	38
E24V390RICA	20	E215C1840	44	E614C	80	EFL15S50WFK	181	EKCL4227	37
E24V485ICA	20	E218C185D	44	E614R	82	EFL15S50WFT	181	EKCL4229	37
E24V490AJICA	20	E218C0627	43	E616C	80	EFL30S40WFK	181	EKCL4253	38
E24V490ICA	20	E218C0630	43	E616R	82	EFL30S40WFT	181	EKCL4282	38
E24V490RICA	20	E218C0727	43	E617C	80	EFL30S50WFK	181	EKCL4284	38
E24V760ICA	20	E218C0730	43	E617R	82	EFL30S50WFT	181	EKCL4347	40
E24V760RICA	20	E218C0735	43	E618	87	EFL35M40FL	181	EKCL4357	40
E24V770ICA	20	E218C0740	43	E629F	133, 134, 135, 136	EFL35M40WF	181	EKCL4710	39
E24V770RICA	20	E218C1827	44	E629P	137, 138, 139, 140	EFL35M50FL	181	EKCL4713	39
E25F	133, 134, 135, 136	E218C1830	44	E648F	133, 134, 135, 136	EFL35M50WF	181	EKCL4714	39
E25M	127, 128	E218C1835	44	E648P	137, 138, 139, 140	EFL45M40FL	181	EKCL4715	39
E25P	137, 138, 139, 140	E218C1840	44	E810	89	EFL45M40WF	181	EKCL4716	39
E25T	129, 130	E219C185D	44	E811	89	EFL45M50FL	181	EKCL4717	39
E30-2427	190	E219C0627	43	E812	89	EFL45M50WF	181	EKCL4721	39
E30-2430	190	E219C0630	43	E818	89	EFL70L40WF	181	EKCL4723	39
E30-2440	190	E219C0727	43	E910	90	EFL70L50WF	181	EKCL4741	39
E30CB-24	192	E219C0730	43	E1460-24	194	EFL90L40WF	181	EKCL4743	39
E30CB24	192	E219C0735	43	E1499LDRICEA	96	EFL1550S	181	EKCL4759	39
E36-24SD	191	E219C0740	43	E1499LDRICEAS	96	EFL2740S	181	EKCL6418	40
E36-24SD-16	191	E219C1827	44	E2699LDRICEA	92	EFL2750S	181	EKCL6420	40
E36DMF	141	E219C1830	44	EBA12E	202	EFL4550M	181	EKCL6427	40
E36F	133, 134, 135, 136	E219C1835	44	EBA21E	202	EFL6050M	181	EKCL6429	40
E36M	127, 128	E219C1840	44	EC004	164	EFLLSF	181	EKCL6829	40
E36P	137, 138, 139, 140	E246LF1	59	EC006	164	EFLLTB	181	EL01SFR	6
E36T	129, 130	E250-27	175	EC008	164	EFLWLG	181	EL2SFR	21, 32
E42F	133, 134, 135, 136	E250N	175	EC801	164	EFLMKW	181	EL3FMR	23, 34
E42P	137, 138, 139, 140	E261	175	EC802	164	EFLMWG	181	EL3FMS	23, 34
E44-2427	190	E261-27	175	EC803	164	FFPC61	198	EL3SFR	23, 35
E44-2430	190	E261-35	175	EC804	164	FFPC62	198	EL03SFS	23, 35
E44-2440	190	E310C	74	EC805	164	FFPEN1	198	EL3WCR	23, 35
E44CB-24	192	E314C	74	EC806	164	FFPEN2	198	EL4FMR	26, 38
E44CB24	192	E315C	74	EC808	164	FFPGL	198	EL4FMS	26, 38
E45-2427	190	E320C	74	EC809	164	FFPS21	198	EL4SFR	27, 38
E45-2430	190	E329C	74	EC817	164	FFPS22	198	EL4SFS	27, 38
E45-2440	190	E363	175	EC840	164	EJB4ICA	16, 47, 55, 146, 148, 205	EL5FICA	56, 109, 205
E50-2427	190	E363-27	175	EC841	164	EJB4ICDXA	17, 64	EL5ICA	109
E50-2430	190	E363-35	175	EC880	164	EJB4RICA	16, 47, 55, 146, 148, 205	EL5ICA-G24	109
E50-2440	190	E366	175	ECF41527	53	EJB4RICDXA	17, 64	EL5ICANB	109
E60-2427	191	E366-27	175	ECF41530	53	EJB44ICA	55, 146, 148	EL5RICA	109
E60-2430	191	E366-35	175	ECF41535	53	EKCL10RIC	31	EL7FICA	56, 111, 205
E60-2440	191	E400	97	ECL	168	EKCL21	31	EL7IC100A	111
E80-2427	191	E410	84	ECN6	197	EKCL2518	32	EL7ICA	111
E80-2430	191	E410C	76	ECN12	193	EKCL2527	32	EL7ICA-G24	111
E80-2440	191	E410R	81	ECN14-1	193	EKCL2529	32	EL7ICANB	111
E210C185D	44	E411	84	ECN14-2	193	EKCL2541	32	EL7LV	102
E210C0627	43	E411C	76	ECNE10	62	EKCL2588	32	EL7LVICA	102

Index

EL7RICA	111	EL423CT5	118	EL625CT5	51	EL1488	99	EL2983	108
EL7RLV	102	EL425CT5	118	EL626	123	EL1491	100	EL2984	108
EL85Q	116	EL427CT5	48	EL627CT5	51	EL1493	99	EL2985	108
EL85QICA	116	EL431CT5	48	EL637CT5	51	EL1495	100	EL2993	107
EL10	116	EL434CT5	49	EL655CT5	50	EL1497	100	EL2994	108
EL11	116	EL439CT5	48	EL661CT5	52	EL1499A	97	EL2999	108
EL12	112, 122	EL441CT5	49	EL662CT5	52	EL1499AJICEA	97	EL5000	204
EL13	112, 122	EL442CT5	49	EL670CT5	51	EL1499EA	97	EL5001	204
EL16	112	EL446CT5	49	EL685CT5D	65	EL1499ES	97	EL5002	204
EL17	112	EL446HLCT5	49	EL713CT5	119	EL1499ICA	97	EL5003	204
EL18	112	EL455CT5	47	EL714CT5	119	EL1499ICEA	97	EL5004A	204
EL30	112	EL456CT5	49	EL715CT5	119	EL1499LDICA	96	EL5004B	204
EL39A	92	EL460CT5	48	EL716	115	EL1499LDICAS	96	EL5007	204
EL39FICA	16, 46, 56, 205	EL470ICA	118	EL716CT5	119	EL1499LDICEA	96	EL5013	204
EL39FICA-7	46	EL470RICA	118	EL760ICA	16, 50, 102	EL1499LDICEAS	96	EL5016	204
EL39FICA-GU10	56, 205	EL475CT5D	64	EL760ICA-7	50, 102	EL1499LDRICA	96	EL5018	204
EL39FICDXA	17	EL476	113	EL760ICDXA	17, 65	EL1499LDRICAS	96	EL5019	204
EL39ICA	92	EL476CT5	52	EL760ICDXAEM	65	EL1499RA	97	EL6000	204
EL39LDICA	92	EL477	113	EL760RICA	16, 50, 102	EL1499RES	97	EL6003	204
EL39LDICA-7	92	EL477CT5	52	EL760RICDXA	17, 65	EL1499RS	97	EL6013	204
EL39LDRICA	92	EL485ICA	16	EL761CT5	120	EL1499S	97	EL6018	204
EL39RA	92	EL485ICDXA	17	EL762CT5	120	EL1510	103	EL9111	107
EL40	112	EL487CT5	64	EL763CT5	120	EL1516	103	EL9112	107
EL48FICA	16, 47, 56, 205	EL490AJICA	16, 47	EL764CT5	120	EL1530	103	EL9113	107
EL49A	96	EL490AJICDXA	17	EL770ICA	16, 50, 82, 102	EL1550	103	EL9115	107
EL49FICA-GU10	56, 205	EL490ICA	16, 47, 81, 96	EL770ICA-7	50, 82, 102	EL1579	103	EL9116	107
EL49FICDXA	17, 64	EL490ICA-7	47, 81, 96	EL770ICA-EM5	50	EL1597	103	EL39727	46
EL49ICA	96	EL490ICA-EM5	16, 47, 96	EL770ICDXA	17, 65	EL2312	95	EL39730	46
EL49LDICA	96	EL490ICDXA	17, 64	EL770ICDXAEM	65	EL2313	95	EL41027	48
EL49LDICA-7	96	EL490ICDXA-EM5	64	EL770RICA	16, 50, 82, 102	EL2320	95	EL41030	48
EL49LDICAS	96	EL490RICA	16, 47, 81, 96	EL770RICA-7	82	EL2321	94	EL41035	48
EL49LDRICA	96	EL490RICDXA	17, 64	EL770RICDXA	17, 65	EL2322	95	EL41040	48
EL49RA	96	EL492FICAS	47, 56, 205	EL881CT5	53	EL2382	95	EL41427DX	64
EL55ICA	109	EL492ICA	16, 47	EL881CT5W	116	EL2384	95	EL41430DX	64
EL55RICA	109	EL492ICA-7	47	EL901	104	EL2388	95	EL41435DX	64
EL56FICA	16, 50, 56, 205	EL492RICA	47	EL901HT	124	EL2393	94	EL41527	47
EL75FICAS	16, 50, 56, 205	EL497SDW2	49	EL901ICA	123	EL2395	95	EL41530	47
EL75FICDXAS	17, 65	EL511	109	EL901RICA	123	EL2411	100	EL41535	47
EL76FICA	16, 50, 56, 82, 205	EL511CT5	119	EL901RT	124	EL2412	100	EL41540	47
EL76FICA-7	50, 82	EL512	109	EL911	104	EL2415	100	EL41550	47
EL76FICDXA	17, 65	EL512CT5	119	EL912	104	EL2416	100	EL41727	48
EL99A	104	EL513	109	EL913	105	EL2420	100	EL41735	48
EL99AJICA	104	EL514	109	EL915	105	EL2421	100	EL41740	48
EL99FICA	56, 104, 205	EL515	110	EL916	105	EL2429	100	EL44127	49
EL99ICA	104	EL516	110	EL918ICA	122	EL2440	101	EL44727DX	64
EL99ICA-G24	104	EL517	110	EL918RICA	122	EL2443	101	EL44730	49
EL99LDICA	104	EL518ICA	121	EL925	105	EL2445	101	EL44730DX	64
EL99RA	104	EL518RICA	121	EL926	105	EL2452	101	EL49530D	64
EL99RICA	104	EL530	110	EL930	105	EL2453	101	EL49540D	64
EL99RICA-G24	104	EL550	121	EL936ICA	122	EL2482	101	EL49727	49
EL114	112	EL552CT5	52	EL946ICA	123	EL2484	101	EL49727BZ2	49
EL140CT5	53	EL555	121	EL970ICA	119	EL2488	101	EL49727DX	64
EL141CT5	53	EL560	121	EL970RICA	119	EL2493	101	EL49727W2	49
EL276ICA	16	EL560ICA	16, 50	EL971ICA	120	EL2494	101	EL49730	49
EL276ICDXA	17	EL560RICA	16, 50	EL971RICA	120	EL2495	101	EL49730BZ2	49
EL300	112	EL561	121	EL977	105	EL2497	101	EL49730DX	64
EL308	112	EL570ICA	16, 50	EL985	105	EL2510	102	EL49730W2	49
EL311CT3	46	EL570ICA-7	50	EL988	105	EL2516	102	EL59727	52
EL311CT5	46	EL570RICA	16, 50	EL990	105	EL2530	102	EL59730	52
EL312CT5	46	EL576	110	EL991	106	EL2550	103	EL61027	51
EL313CT5	46	EL590ICA	119	EL992	106	EL2579	103	EL61030	51
EL317	112	EL590RICA	119	EL993	106	EL2597	103	EL61140	51
EL318	112	EL601	122	EL993K	106	EL2612	93	EL61527	50
EL319	112	EL602	124	EL994	106	EL2613	93	EL61530	50
EL331CT5	46	EL603	124	EL994D	106	EL2620	93	EL61535	50
EL332CT5	46	EL604	124	EL995	106	EL2621	93	EL61540	50
EL376	113	EL606	124	EL998	106	EL2622	93	EL61550	50
EL376CT5	52	EL607	124	EL999	107	EL2633	94	EL61740	50
EL377	113	EL608	124	EL999K	106	EL2644	94	EL62527	51
EL377CT5	52	EL610CT5	51	EL1212CT5	53, 116	EL2652	94	EL62535	51
EL386ICA	16	EL610SD	51	EL1411	98	EL2688	94	EL62540	51
EL386ICDXA	17	EL611CT5	51	EL1412	98	EL2693	94	EL62727	51
EL390ICA	16, 46, 92	EL612CT5	51	EL1415	98	EL2695	94	EL69535DC	65
EL390ICA-7	46, 92	EL613CT5	52	EL1416	98	EL2698	94	EL69727	52
EL390ICA-EM5	16, 46	EL614	122	EL1419	98	EL2699A	93	EL69727DX	65
EL390ICDXA	17	EL615	122	EL1420	98	EL2699EA	93	EL69730	52
EL390RICA	16, 46, 92	EL615CT5	50	EL1421	98	EL2699ICA	93	EL69730DX	65
EL390RICDXA	17	EL615SD	51	EL1422	98	EL2699ICEA	93	ELA99	113
EL410CT5	48	EL616	122	EL1423	98	EL2699LDICA	92	ELA101	113
EL410SD	48	EL616CT5	52	EL1426	99	EL2699LDICEA	92	ELA599	110
EL412CT5	48	EL617	123	EL1429	99	EL2699LDRICA	92	ELB4EH	67
EL414CT5	48	EL617CT5	50	EL1430	99	EL2699RA	93	ELB4EH-EM5	67
EL415CT5	47	EL621CT5	52	EL1444	99	EL2699REA	93	ELB4PF	67
EL415SD	47	EL622	122	EL1445	99	EL2912	107	ELB4PF-EM5	67
EL416CT5	49	EL622K	123	EL1452	99	EL2915	107	ELB6EH	67
EL416HLCT5	49	EL623	123	EL1453	99	EL2982	108	ELB6EH-EM5	67
EL417CT5	48	EL624	123						

Index

ELB6PF	67	ELK0827-24	20	ELK4284	26	ELST43	188	EP808	162
ELB6PF-EM5	67	ELK0827-NSP	15	ELK4293	26	ELST64	185	EP809	162
ELB8PF	67	ELK0830-12	20	ELK4347	28	ELST65	185	EP810	162
ELB8PF-EM5	67	ELK0830-24	20	ELK4349	28	ELST66	185	EP811	165
ELB15RCT5ICA	69	ELK0830-NSP	15	ELK4357	28	ELST69	185	EP812	162, 164
ELB25RCT5	69	ELK0924	15	ELK4710	27	ELST74	185	EP814	165
ELB44SQEH	67	ELK0927	15	ELK4713	27	ELST75	185	EP815	165
ELB44SQEH-EM5	67	ELK0930	15	ELK4714	27	ELST76	185	EP816	165
ELB44SQPF	67	ELK0935	15	ELK4715	27	ELST81	184	EP817	162
ELB44SQPF-EM5	67	ELK0940	15	ELK4716	27	ELST82	184	EP818	166
ELB50R35	69	ELK1124	15	ELK4717	27	ELST83	184	EP819	165
ELB410	69	ELK1127	15	ELK4719	27	ELST84	184	EP820	165
ELB440	69	ELK1130	15	ELK4721	28	ELST85	184	EP822	165
ELB610	69	ELK1135	15	ELK4723	28	ELST8430	186	EP824	166
ELB629	69	ELK1140	15	ELK4741	28	ELST8440	186	EP825	163
ELB810	69	ELK1327	15	ELK4743	28	ELST8530	186	EP827	163
ELBRMD	68	ELK1330	15	ELK4759	28	ELST8540	186	EP836	166
ELBRMD-EM5	68	ELK1335	15	ELK5421	29	ELST8630	186	EP840	163
ELBRT	68	ELK1340	15	ELK5493	29	ELST8640	186	EP841	163
ELD14CT5	149	ELK1927D	18	ELK6418	29	ELST8730	186	EP844	166
ELD16CT5	149	ELK1930D	18	ELK6420	29	ELST8740	186	EP845	166
ELD11030	149	ELK1935D	18	ELK6429	29	ELST9130	186	EP848	166
ELD11040	149	ELK1940D	18	ELK6710	29	ELST9140	186	EP850	163
ELD21030	149	ELK2127D	18	ELK6713	29	ELST9230	187	EP880	163
ELD21040	149	ELK2127D-FC	18	ELK6715	29	ELST9240	187	EP882	166
ELD21230	149	ELK2130D	18	ELK6829	29	ELST9330	187	EP883	167
ELD21240	149	ELK2130D-FC	18	ELL4810	108	ELST9340	187	EP884	167
ELD31430	149	ELK2135D	18	ELL4812	108	ELST9430	187	EP885	167
ELD31440	149	ELK2135D-FC	18	ELL4816	108	ELST9440	187	EP903	166
ELD32230	149	ELK2140D	18	ELL6810	114	ELST9530	186	EP904	166
ELD32240	149	ELK2140D-FC	18	ELL6812	114	ELST9540	186	EP905	166
ELD32630	149	ELK2427D	18	ELL6813	114	ELST9630	187	EP906	166
ELD32640	149	ELK2430D	18	ELL6815	114	ELST9640	187	EP918	166
ELH7T	115	ELK2435D	18	ELM30	113	ELST9730	187	EP924	166
ELIG250	183	ELK2440D	18	ELM40	113	ELST9740	187	EP936	166
ELIG330	183	ELK2518	21	ELM42	113	ELST9830	187	EP948	166
ELIG330250	183	ELK2527	21	ELM43	113	ELST9840	187	EP960	166
ELIGRH	183	ELK2529	21	ELM45	113	ELST9930	186	EP979	163
ELJ40V	16, 17, 19, 47, 55, 64, 205	ELK2541	21	ELM47	113	ELTRV1051	209	EP989	166
ELJ45	146, 148	ELK2588	21	ELM48	114	ELTRV1055	209	EP997	197
ELJ242	204	ELK2818	21	ELM300	114	ELTRV1059-A	209	EPCH	197
ELJ242CVR	204	ELK2827	21	ELM301	114	ELTRV1060-A	209	EPCLD	197
ELJ332	146, 148	ELK2829	21	ELM302	114	ELTRV1060-MSTR	209	EPD-2	197
ELJ443	55, 146, 148	ELK2863	21	ELM303	114	EMP4	59	EPD-4	198
ELJ42230	55	ELK2872	21	ELM305	114	EMP6	59	EPD-7	198
ELK08CT5	15	ELK2888	21	ELM500	110	EMP8	59	EPD-8	198
ELK08SD-12	20	ELK3318	22	ELM501	110	EP002	162	EPEN	197
ELK09SD	15	ELK3322	22	ELM530	110	EP004	162	EPIN	197
ELK10CT5	15	ELK3327	23	ELM530K	110	EP006	162	EPMT	197
ELK10DX27	17	ELK3329	22	ELM5045	110	EP008	162	EPN2	197
ELK10DX30	17	ELK3341	23	ELMAT001	208	EP012	162	EPN11	194
ELK10DX35	17	ELK3353	23	ELMAT002	208	EP12X	162	EPS2	197
ELK10DX40	17	ELK3393	23	ELMAT003	208	EP300	165	EPS12	194
ELK10DXSD	17	ELK3618	22	ELMAT004	208	EP322	165	EPS13	194
ELK11HC	15	ELK3620	22	ELP40	114	EP323	165	EPS14	194
ELK11SD	15	ELK3622	22	ELR68530	62	EP324	165	EPS26	193
ELK13SD	15	ELK3627	22	ELRH7T	115	EP333	165	EPS27	193
ELK19SD	18	ELK3629	22	ELS30	114	EP422	165	EPS28	193
ELK72FICA	19	ELK3653	22	ELS520	110	EP444	165	EPS29	193
ELK73FICAD	19	ELK3663	22	ELS5030	110	EP555	154	EPSD1	194
ELK93FICA	19	ELK3672	22	ELSF11CT5	148	EP666	154	EPSD2	194
ELK94FICAD	19	ELK3679	22	ELSF40CT5	148	EP702	165	EPSD3	194
ELK215	21, 32	ELK3693	22	ELSF1127	148	EP710	49	EPSD19	192
ELK308	23, 35	ELK4111	24	ELSP12CT5	146	EP711	49	EPSD20	192
ELK315	23, 35	ELK4112	24	ELSP22CT5	146	EP712	49	EPSD21	191
ELK0327	15	ELK4116	24	ELSP43CT5	146	EP713C	7, 9	EPSD21CB	192
ELK0330	15	ELK4118	24	ELSP63CT5	146	EP714C	9	EPSD22	191
ELK370	23, 35	ELK4120	24	ELSP63DXCT3	148	EP715C	7, 9	EPSD22-120	191
ELK381	23, 35	ELK4122	24	ELSP66CT5	146	EP716	13	EPSD22CB	192
ELK408	27, 38	ELK4125	24	ELSP83DXCT3	148	EP717	13	EPSD23	191
ELK415	27, 38	ELK4127	24	ELSP1224CT5	147	EP718	13	EPSD23-2	192
ELK430	27	ELK4129	24	ELSP1248CT3	147	EP731C	41	EPSD23CB	192
ELK434	27	ELK4130	25	ELSP2448CT3	147	EP732C	41	EPSD24	192
ELK445	27, 38	ELK4153	25	ELSP4430	146	EP733C	41	EPSD25	192
ELK459	27, 38	ELK4163	25	ELSP8830	146	EP734C	41	EPSD26	192
ELK629	29	ELK4172	25	ELSP8840	146	EP735C	41	EPSD27L	192
ELK693	29	ELK4179	25	ELSPPD	147	EP736C	41	EPSD27LCB	192
ELK0724	15	ELK4193	25	ELSPRM	147	EP737C	41	EPSD28XCB	192
ELK0727	15	ELK4212	26	ELST1	188	EP738C	41	ERT2HL08CT5	58
ELK0727-FC	15	ELK4216	25	ELST10	188	EP800	165	ERT2HL10CT5	58
ELK0730	15	ELK4218	25	ELST27CT3	185	EP801	162	ERT2L06CT5	58
ELK0730-FC	15	ELK4220	26	ELST28CT3	185	EP802	162	ERT2R	58
ELK0735	15	ELK4222	26	ELST29CT3	185	EP803	162	ERT4L10CT5	58
ELK0735-FC	15	ELK4227	26	ELST31	184	EP804	162	ERT22SQ	58
ELK0740	15	ELK4229	25	ELST32	184	EP805	162	ERT41DXCT5	60
ELK0740-FC	15	ELK4253	26	ELST37	184	EP806	162	ERT61DXCT5	61
ELK0827-12	20	ELK4282	26	ELST42	188	EP807	166	ERT81DXCT5	62

Index

ERT210	58	ET657	160	EUBC24	170	EUM43DXW	65, 171	MR16LD	202
ERT210CT5	59	ET658	160	EUBCRD	170	EUM43DXW-7	65	MR120-GU10	158
ERT213CT5	59	ET659	161	EUBJBX	170	EUM44	171	MR120-GU10LD	158, 202
ERT214	58	ET660	161	EUCRD	194, 202	EUM44DXW	65, 171	OM4	203
ERT214CT5	59	ET662	161	EUD11CW	174	EUM44DXW-7	65	OM5	203
ERT215CT5	59	ET686	161	EUD14CW	174	EUM45	171	OVMT	203
ERT218CT5	59	ET687	161	EUD14WW	174	EUM45DXW	65, 171	OVPT	203
ERT311CT5	59	ET690	161	EUD24CW	174	EUM45DXW-7	65	P006S	201
ERT317CT5	59	ET696	161	EUD24WW	174	EUMC24	172	P010S	201
ERT318CT5	59	ET743-35D	152	EUD31	195	EUMC36	172	P010T	201
ERT411CT5	59	ET743D	152	EUD32	195	EUMCS1	172	P011S	201
ERT412CT5	59	ET744-35D	152	EUD33	195	EUMS1	172	P012S	201
ERT413CT5	60	ET744D	152	EUD34	195	EUN51	173	P016S	201
ERT413CT5DX	60	ET745-35D	152	EUD35	195	EUN52	173	P024S	201
ERT415	58	ET745D	152	EUD36	195	EUN53	173	P113E1	204
ERT415CT5	60	ET746-35D	152	EUD37	195	EUS41	173	P126E1	204
ERT416CT5	60	ET746D	152	EUD38	195	EUS43	173	P142EU	204
ERT425CT5	60	ET750D	151	EUD3230	172	EUS45	173	P240E1	204
ERT434CT5	60	ET752D	151	EUD3330	172	EUS47	173	P255E1	204
ERT441CT5	60	ET756D	152	EUD3430	172	EUSC6	173	PAR30FSLD	202
ERT445	58	ET757D	152	EUD3530	172	EUSC12	173	PAR38FLD	202
ERT475CT5D	60	ET830CT5	152	EUD3630	172	EUSC24	173	PR2	13
ERT487CT5	60	ET831CT5	152	EUD3730	172	EUSC36	173	PR22	13
ERT495CT5DX	60	ET832CT5	152	EUDC2	174	EUSPC	173	PSA21	200
ERT611CT5	61	ET833CT5	152	EUDC3	174	EW44-2427	193	PSA25	200
ERT612CT5	61	ET843CT5	151	EUDC4	174	EW44-2430	193	PSA27	200
ERT613CT5	61	ET1528	157	EUDC21	174	EW44-2440	193	PSA29	200
ERT613CT5DX	61	ET1626	158	EUDC22	174	EW45-2427	193	PSA30	200
ERT615CT5	61	ET1628	158	EUDC31	172	EW45-2430	193	PSA31	200
ERT625CT5	61	ET1630	158	EUDC51	173	EW45-2440	193	PSA32	200
ERT661CT5	61	ET1632	158	EUDCCT	173	EW25W30	180	PSA33	200
ERT685CT5D	61	ET1728	158	EUDCL1	174	EW30S40	180	PSA34	201
ERT695CT5DX	61	ET62530D	152	EUDCL2	174	EW45M50	180	PSA37	92, 102, 202
ERT812CT5	62	ET62630D	152	EUDCRD	172	EW70M50	180	PSA37-27	92, 102
ERT44130	60	ET62730	153	EUDCS1	174	EW90L40	180	PSA37-35	92, 102
ERT44140	60	ET62830D	153	EUDCS21	174	EW90L50	180	PSA37-40	92, 102
ERT66130	61	ET75830D	152	EUDCS31	172	EWPPHB1	181	PSA38	41
ERT66140	61	ETL21CT3	154	EUDEN31	195	EWPPHBU	181	PSA38-4	41
ESF4271	143, 144	ETL2130	154	EUDEN32	195	EWPPHSU	181	PSA38-22	41
ET226	155	ETL2140	154	EUDEN33	195	FB27	67, 201	PSA41-40	202
ET502	156	ETLD526	155	EUDEN34	195	FIRECVR	56, 205	PSE26	200
ET507	156	ETLD528	155	EUDEN35	195	FIREENCL	56, 205	PST1	184
ET526	156	ETLD530	155	EUDEN36	195	FIREENCL-S	56, 205	PST2L	184
ET526-75	156	ETLD534	155	EUDEN37	195	FIRETAPE	56, 205	PST4	184
ET528	156	ETR12	7, 198	EUDJBX	172	HB24	201	PST5	184
ET528-12	157	ETR12-20	7, 198	EUDL31	195	JBOXCV	201	PST80	184
ET528-18	157	ETR-277	198	EUDL31C	195	JC-25	203	PWH2E1	204
ET528-24	157	ETRK20	198	EUDL33	195	JC-50	203	R9H	111
ET528-36	157	ETRK50	198	EUDL33C	195	JC-50-12V	203	R9ICA	111
ET528-48	157	ETRK60E	198	EUDL34	195	KEM-ELSW	147	R10H	111
ET530	156	ETT	168	EUDL34C	195	KEM-ERT	31, 56, 62, 206	RM1	7, 9
ET531	156	ETV	168	EUDL35	195	KEM-LD1	56, 206	RM1TL	9
ET532	156	ETW43CT3	154	EUDL35C	195	KEM-LD2	56, 206	RM2	13
ET534	156	ETW44CT5	154	EUDL36	195	KEM-LD3	56, 206	RM3	203
ET537	156	ETW46CT3	154	EUDL36C	195	KEM-LD4	56, 206	RM4	203
ET549	157	ETW663CT5	154	EUDMS1	173	KEM-LD5	56, 206	RM5	203
ET551	157	ETW4240	154	EUDMT31	195	KEM-LD7	206	RM7	203
ET559	157	EU3T08	170	EUDMT32	195	L4	178, 203	RM11	7, 9
ET562	157	EU3T12	170	EUDMT33	195	L28	200	RM22	13
ET565	157	EU3T16	170	EUDMT34	195	L38	200	RP-1B	201
ET578L30	151	EU3T24	170	EUDMT35	195	L39	200	RP7	203
ET579L30	153	EU3T32	170	EUDMT36	195	L40	200	RP8W	204
ET579L35	153	EU3TC6	170	EUDMT37	195	L41	200	RP9W	204
ET580D	151	EU3TPC	170	EUDP1	174	L42	200	RR9H	111
ET597	151	EUB11CT5	170	EUDPC	173	L44	200	RR9ICA	111
ET612D	151	EUB11L30	170	EUDPH1	173	L45	41	RR10H	111
ET613D	151	EUB11L40	170	EUDRV18	172, 174	L46	41	RTNTRK1	200
ET615CT3D	151	EUB12CT5	170	EUDRV18-2	174	L47	41	RTNTRK2	200
ET616-27D	151	EUB12L30	170	EUDRV60-2	174	L49	41	SPRING	201
ET616CT5D	151	EUB14L30	170	EUDRV72	172	L50	41	T-SWITCH	56, 206
ET617CT5D	151	EUB14L40	170	EUDS1	173	L51	41	T-SWITCH-LD1	56, 206
ET618CT	153	EUB18CT5	170	EUL12-3	202	L52	41	T-SWITCH-LD5	56, 206
ET619CT	153	EUB18L30	170	EUL21-3	202	L53	41	WB-5-Z	203
ET620CT	153	EUB22CT5	170	EUL24-3	202	L54	41	WB-10-Z	203
ET621CT	153	EUB22L40	170	EUL32-3	202	L55	41	WB-18-Z	203
ET629	159	EUB29CT5	170	EUL42-3	202	L57	41		
ET630	159	EUB29L40	170	EUM21	172	L60	9		
ET631	159	EUB32CT5	170	EUM22	172	L61	9		
ET634	159	EUB36CT5	170	EUM31	173	L-BRCKT	201		
ET635	159	EUB36L30	170	EUM33	173	L-BRCKT4	201		
ET636	159	EUB36L40	170	EUM34	173	L-BRCKT5	201		
ET637	159	EUB48CT5	170	EUM41	171	LET-60	7, 198		
ET639	160	EUB48L30	170	EUM41DXW	65, 171	LET-60-277	7, 198		
ET641	160	EUB48L40	170	EUM42	171	LET-60DX	7, 198		
ET642	160	EUBC03	170	EUM42DXW	65, 171	LET-60DX-277	7, 198		
ET647	160	EUBC06	170	EUM42DXW-7	65	LET-60H	7, 198		
ET650	160	EUBC12	170	EUM43	171	LET-75	198		

The **Quality** Choice



The **Leading** Choice



The **Timely** Choice



The **Contractor's** Choice



The **Trusted** Choice

Over two and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable

us to continually prosper in a highly competitive and unpredictable industry. With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.



Corporate Headquarters

2042 E. Vernon Ave.
Vernon, CA 90058
Tel: 323.231.2600
Fax: 323.231.3200
elcolighting.com

Customer Service

Tel: 800.522.2626
Fax: 800.644.2626
orderdesk@elcolighting.com
customerservice@elcolighting.com
sales@elcolighting.com

Printed in the U.S.A.
\$20.00

RV. 01/25

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies. Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.