

The logo for MaxLite, featuring a stylized green 'M' followed by 'axLite' in black. The 'M' is composed of two overlapping shapes, and the 'ax' is in a bold, sans-serif font. The 'Lite' is in a regular, sans-serif font. A registered trademark symbol (®) is located at the top right of the 'e'.

A NEW WAVE OF LIGHT

LED PRODUCT CATALOG

Updated: 02/05/20

NOV 2019

Our Vision:

Transform the way people experience light

MaxLite has provided certified energy-efficient lighting solutions to the commercial building, industrial, residential and OEM markets since 1993. One of the first movers into LED technology in the industry, MaxLite offers an extensive line of state-of-the-art indoor and outdoor LED lamps and luminaires. We are a five-time recipient of the prestigious ENERGY STAR® Partner of the Year Award for our industry leadership and continue to be at the forefront of energy efficient technologies through innovative product research and development.



(HQ) West Caldwell, NJ

Our Products:

MaxLite supports its products with the highest standards of quality assurance and customer support. Most MaxLite LED products are certified by ENERGY STAR® and listed by DesignLights Consortium® (DLC), rendering them eligible for utility rebate programs. MaxLite also offers a large selection of lamps and luminaires that meet Title 20 requirements and are Title 24 JA8-2016/2019-E listed. We keep our products in stock and available for immediate purchase and delivery, shipping within the United States in two business days on standard orders.



Greenwood, IN

Our Services:

We work with our customers to ensure that our products meet the needs of their installation by providing a full range of complimentary services, including:

- Facility audits
- ROI calculations
- Local representation
- Lighting layouts
- Utility rebate assistance
- Lifetime product support



Anaheim, CA



10-Year Warranty - Labor Included!

MaxLite offers a 10-year limited warranty on most LED indoor and outdoor fixtures.

Go to MaxLite.com/warranties for applicable terms and conditions.



Design Innovation



Our products have received numerous awards, including:



Key Distribution Segments & Strengths

STOCK & FLOW
Counter Business MRO



PROJECT SALES
Quick Ship



DESIGN-BUILD
Value Engineered



ENERGY SERVICES
ESCO



NATIONAL ACCOUNTS
National Chains



WARRANTY

.....2-3

RESIDENTIAL FIXTURES

LED Wall Sconces4
 LED Vanity Bars5
 LED Flush Mounts6-7
 LED Disc Light7
 LED Light Engines/Retrofit Kits7
 Bulb in Box Indoor Fixtures8
 Bulb in Box Outdoor Fixtures9
 LED Outdoor Lanterns9-10

INDOOR LED FIXTURES

LED Exit Signs11
 LED Emergency Lights11
 BayMAX™ LED HL Linear High Bays12
 LED Linear High Bays - ECO Series12
 LED High Bay Round Pendants13
 LED High Bay Round ECO Pendants13
 High Temperature LED Round High Bay13
 LED Round Pendant14
 LED Direct/Indirect Pendant Panels14
 LED LiteBar™15
 TriMAX™ LED Vapor Tight Fixtures16
 LED Vapor Tight Fixtures16
 LED ECO Vapor Tight Fixtures16
 LED Utility Wrap Fixtures17
 LED Wide Body Utility Wrap Fixtures17
 LED ECO Utility Wrap Fixtures17
 L-Max™ Linear LED Luminaire18
 LED Linear Strips18
 LED Linear Retrofit Strips18
 LED Shop Lights19
 LED Cooler and Freezer Lamps19
 LED Lamp Ready Fixtures20-21
 FlatMAX® Edge Lit LED Flat Panels22
 FlatMAX® Edge Lit LED Flat Panels w/ Selectable CCT23
 ArcMAX™ LED Single Basket Volumetric Panels24
 LED Lensed Retrofit Kits25
 LED Flat Panel Retrofit Kits25
 LED Troffer Retrofit Kits25
 RRC LED Light Engines & Reflectors26
 LED Commercial Downlight Retrofits Economical Series27
 LED Universal Downlights w/ Selectable CCT27
 LED 120-277V Downlight Retrofits28
 LED 120V Residential Retrofits28-29
 Slim Downlights w/ Selectable CCT29

OUTDOOR LED FIXTURES

MPulse™ Bollards30
 MPulse™ Flood Lights30
 MPulse™ Wall Mount Luminaire31
 MPulse™ Canopy Series31
 MPulse™ Area Light31
 MPulse™ High Output Flood Lights32
 FieldMax™ High Output Flood Lights33
 QuadroMAX® Plus Modular Lighting Fixtures34
 LED Slim Area Lights34
 LED Small Flood Lights34
 LED Bullet Flood Lights35
 FloodMax™ LED Flood Lights35
 Square Poles36
 Round Poles37
 Mounting Accessories38
 PathMax™ Classic Series Round Bollards39
 LED Large Architectural Wall Packs40
 WallMAX™ LED Open Face Wall Packs40
 WallMAX™ LED Thin Cut Off Wall Packs40
 LED Barn Lights41
 GuardMAX™ LED Entry Wall Packs41
 GuardMAX™ LED Emergency Wall Packs41
 LED Integrated Vaporproof Jelly Jars42
 LED Lamp Ready Vaporproof Jelly Jars42
 Polygon™ LED Linear Fixtures43
 LED Low-Profile Canopy Luminaires43
 LED Low-Profile Parking Garage Canopy Luminaires43

HARSH & HAZARDOUS

Flood Class I Division 144
 Flood Class I Division 244
 High Output Flood Class I Division 244
 Linear Class I Division 245
 Linear Class I Division 145
 Wall Pack Class I Division 245
 High Bay Class I Division 246
 Low Bay/Jelly Jar Class I Division 246

GENERAL PURPOSE LAMPS

LED Filament Lamps47-49
 LED Omni-Directional A-Lamps50
 LED High Output Omni-Directional A-Lamps51
 LED Rough Service Omni-Directional A-Lamps51
 LED Value Omni-Directional A-Lamps52
 LED Omni-Directional 3-Way A-Lamps52
 LED Globe Lamps53
 LED G4 & Wedge Retrofit Lamps54
 LED G9 Retrofit Lamps54
 LED MR16 Lamps54-55
 LED PAR Lamps56
 LED 277V PAR Lamps56
 LED High Output PAR Lamps57
 LED Value PAR Lamps57
 LED BR Lamps58
 LED Value BR Lamps58
 LED PL Retrofit Lamps59
 LED PL DirectFit Retrofit Lamps59
 LED DirectFit T8 U-Bend Lamps60
 LED DirectFit T8 Linear Lamps60-61
 LED DirectFit T5 Linear Lamps61
 LED Internal Driver T8 U-Bend Lamps62
 LED Internal Driver T8 Single-Ended/Double-Ended62-63
 Power Ballast Bypass63
 LED Internal Driver T8 Double-Ended63
 Power Ballast Bypass63
 LED Internal Driver T5 Linear Lamps Ballast Bypass63
 LED External Driver Dimmable T8 Linear Lamps64-65
 External Drivers64-65
 LED Dual-Mode/Hybrid Series T8 Linear Lamps66
 Wiring Harnesses66
 Non-Shunted Lamp Holders66
 LED PLL Lamps67
 LED Post Tops68
 LED Area Lamps68
 LED High Bay DirectFit Lamps68

HORTICULTURE

PhotonMAX® Horticulture Ceramic Metal Halide69
 Single Lamp Fixtures69
 Two Lamp Fixtures69
 PhotonMAX® Horticulture Doubled-Ended69
 High Pressure Sodium Fixtures69
 PhotonMAX® Horticulture Ceramic Metal Halide Lamp69
 PhotonMAX® Horticulture Doubled-Ended69
 High Pressure Sodium Lamp69
 PhotonMAX® Horticulture LED Spot Lights70
 PhotonMAX® Horticulture LED Linear Lights71

CONTROLS

.....72

MaxLite Makes It!

Don't see what you need? Additional wattages and specifications available upon request - contact your MaxLite rep!

WarrantyMax™ 10-Year Warranty

Key Features & Improvements

It's automatic!

Our new WarrantyMax program is easier to take advantage of, and coverage is even more comprehensive than before. Customers receive automatic 10-Year warranty coverage of most commercial and industrial LED fixtures - no registration or minimum product purchase required!

| | NEW AND IMPROVED! |
|-------------------------------|--|
| Eligibility | Automatic with purchase |
| Start Date | Actual installation date, or 90 days after the original date of purchase (whichever comes first) |
| Minimum Purchase | No |
| Labor Allowance | \$25 / Unit on eligible models; Higher levels available for purchase |
| Operating Hours | 16 hours/day maximum |
| Operating Temperature | -29°F to 104°F all products |
| Additional Coverage Available | YES! |

Additional Coverage Available for:



Products with a 5-year warranty



Operating hours that exceed 16 hours/day



Operating temperatures that fall outside of -29°F to 104°F



Higher Labor Allowance (Up to \$500/unit)

Extended coverage must be added within 90 days of original purchase. All warranties are in effect only if the products are installed for and used in an application and operating temperature range for which it is rated, per the applicable product data sheet.

Warranty registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at:

www.maxlite.com/warranties

Go to MaxLite.com for complete Standard Product Warranty Terms and Conditions.

Standard Product Warranty Coverage

| CATEGORY | DESCRIPTION | YEARS* |
|--|--|--------|
| LAMPS & TUBES | Value Series Lamps (Types A, PAR, & BR) | 1 |
| | Decorative Lamps (Candelabra & Filament Lamp) | 3 |
| | All other screw base & GU base lamps | 5 |
| | 2' to 8' LED tubes | 5 |
| RESIDENTIAL APPLICATIONS | Residential Downlights | 5 |
| | Retrofit Kits (Residential Downlight & Flush Mount) | 5 |
| | Sconces & Flush Mount Residential Fixtures | 5 |
| | Vanity Bars & Lanterns | 5 |
| | Desk Lamps and Torchieres | 5 |
| COMMERCIAL & INDUSTRIAL APPLICATIONS | Light Bars | 5 |
| | Shop Lights | 5 |
| | Harsh & Hazardous | 5 |
| | Horticulture | 5 |
| | GuardMAX Security | 5 |
| | Vaporproof Jelly Jars | 5 |
| | Barn Lights | 5 |
| | Polygon LSP Series LowBay/Parking Garage Fixtures | 5 |
| | Universal Commercial Downlight | 5 |
| | High Temperature High Bay | 5 |
| | MPulse and QuadroMAX fixtures | 10 |
| | Area and Flood Lights (AR, FL, FLS, FML, FMM, FMS, FMX, & BF Series) | 10 |
| | WallMAX Wallpacks | 10 |
| | Canopy and LowBay/Parking Garage Fixtures (CPL Series) | 10 |
| | Bollards | 10 |
| | Panels & Troffers | 10 |
| | Downlights (non-J-box mounted) | 10 |
| | Retrofit Kits (TRK, LRK, RS) | 10 |
| | High Bays (excludes HPH) | 10 |
| Linear Fixtures (VT, LF, LS, LSU, LSUECO, LSV, & LSVECO) | 10 | |
| Pendants (Commercial Round & Direct/Indirect) | 10 | |
| OTHER | Mounting Accessories | 1 |
| | Poles | 3 |
| | Exit & Emergency Lighting | 5 |
| | Motion and/Or Daylight Sensors | 5 |
| | LED Sign Modules | 5 |
| | Magnetic Ballast | 5 |
| | Non-LED Lamps | 5 |

NOTES:

- For any product not listed above, contact MaxLite for warranty information.
- Any products marked as Clearance shall carry the lesser of a 5 Year warranty, or the warranty period stated on the product data sheet.
- All 10 Year warranties are based on a maximum 16 hrs/day operation, and ambient temperature of -29°F to 104°F, and include up to a \$25 labor allowance per item.
- Extended warranty coverage may be purchased for products with a 5-year warranty, those with operating hours that exceed 16 hrs/day, or that will operate in temperatures exceeding the range covered under the Standard Warranty, but fall within the minimum/maximum range listed for the product. Extended coverage must be added within 90 days of original purchase. All warranties are in effect only if the products are installed for and used in an application for which it is rated, per the applicable product data sheet.
- Warranty start date is the earlier of the actual installation date, or 90 after the original purchase (whichever comes first).
- It is not a requirement to register the warranty to receive product replacement warranty coverage; however, you must register the warranty if you want to be eligible to receive the labor allowance associated with the 10 Year Warranty.
- Warranty claim and registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at: www.maxlite.com/warranties



LED Architectural Wall Sconce



10.5" (BRUSHED NICKEL FINISH)



CCTs Available:

3000K

| MODEL NUMBER | ML9LARBN23830 |
|-----------------------------|--|
| ORDER CODE | 1409631 |
| Input Wattage | 23W |
| Voltage | 120V |
| Delivered Lumens (lm) | 1,891 lm |
| Efficacy (lm/W) | 83 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 3000K |
| Replacement | 100W |
| Dimming Compatible | Triac |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, ENERGY STAR® |

LED Fleming Wall Sconce



12"



CCTs Available:

2700K

| MODEL NUMBER | ML9LAFBN09827 |
|-----------------------------|---------------------------|
| ORDER CODE | 14099634 |
| Input Wattage | 9W |
| Voltage | 120V |
| Delivered Lumens (lm) | 690 lm |
| Efficacy (lm/W) | 71 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 2700K |
| Replacement | 40W INC |
| Dimming Compatible | Triac |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | ENERGY STAR®, cETLus, FCC |

LED Wall Sconce



13.375" x 7.875" (BRUSHED NICKEL FINISH)

16.5" x 9.8" (BRUSHED NICKEL FINISH)



CCTs Available:

2700K

| MODEL NUMBER | ML9LA17LCNBNI927 | ML9LA23LCNBNI927 |
|-----------------------------|--|--|
| ORDER CODE | 77655 | 77656 |
| Input Wattage | 17W | 24W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,550 lm | 2,075 lm |
| Efficacy (lm/W) | 88 lm/W | 85 lm/W |
| Color Rendering Index (CRI) | ≥90 | ≥90 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 75W | 125W |
| Dimming Compatible | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, ENERGY STAR® | cULus (Damp Listed), FCC, ENERGY STAR® |

LED Architectural Vanity Bar



25" (BRUSHED NICKEL FINISH)



CCTs Available:

3000K

| | |
|-----------------------------|------------------------|
| MODEL NUMBER | ML8LARBN30830 |
| ORDER CODE | 1410172 |
| Input Wattage | 30W |
| Voltage | 120V |
| Delivered Lumens (lm) | 2,100 lm |
| Efficacy (lm/W) | 70 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 3000K |
| Replacement | 100W INC |
| Dimming Compatible | Triac |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | ETL, FCC, ENERGY STAR® |

LED Fleming Vanity Bar



24"



CCTs Available:

2700K

| | |
|-----------------------------|---------------------------|
| MODEL NUMBER | ML8LAFBN23827 |
| ORDER CODE | 14099635 |
| Input Wattage | 23W |
| Voltage | 120V |
| Delivered Lumens (lm) | 1,385 lm |
| Efficacy (lm/W) | 65 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 2700K |
| Replacement | 75W INC |
| Dimming Compatible | Triac |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | ENERGY STAR®, cETLus, FCC |

LED Tulip Vanity Bar



24"



CCTs Available:

3000K

| | |
|-----------------------------|---------------------------|
| MODEL NUMBER | ML8LATUN30930 |
| ORDER CODE | 102822 |
| Input Wattage | 30W |
| Voltage | 120V |
| Delivered Lumens (lm) | 2,315 lm |
| Efficacy (lm/W) | 85 lm/W |
| Color Rendering Index (CRI) | 90 |
| Color Temperature (CCT) | 3000K |
| Replacement | 3 x 60W INC |
| Dimming Compatible | Triac |
| Lumen Maintenance (L70) | 25,000 hours |
| LISTINGS | ENERGY STAR®, cETLus, FCC |

LED Flush Mounts - Traditional Series



CCTs Available:



| | 13" (WHITE FINISH) | 15" (WHITE FINISH) |
|-----------------------------|------------------------|------------------------|
| MODEL NUMBER | ML2LAMTRWH18830 | ML2LALTRWH24830 |
| ORDER CODE | 1409610 | 1409609 |
| Input Wattage | 18W | 24W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 1,260 lm | 1,650 lm |
| Efficacy (lm/W) | 70 lm/W | 68 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K |
| Replacement | 60W INC | 100W INC |
| Dimming Compatible | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | ENERGY STAR®, ETL, FCC | ENERGY STAR®, ETL, FCC |

LED Flush Mounts - Architectural Series



CCTs Available:



| | 12" (BRUSHED NICKEL FINISH) | 14" (BRUSHED NICKEL FINISH) | 16" (BRUSHED NICKEL FINISH) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | ML2LASABN16830 | ML2LAMABN22830 | ML2LALABN24830 |
| ORDER CODE | 1409627 | 1410232 | 1409612 |
| Input Wattage | 16W | 22W | 24W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 1,250 lm | 1,898 lm | 1,950 lm |
| Efficacy (lm/W) | 78 lm/W | 87 lm/W | 81 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K |
| Replacement | 75W INC | 100W INC | 100W INC |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | ENERGY STAR®, ETL, FCC | ENERGY STAR®, ETL, FCC | ENERGY STAR®, ETL, FCC |

LED Flush Mounts - Pearl Series



CCTs Available:




| | 11" (BRUSHED NICKEL FINISH) | 11" (DARK BRONZE FINISH) |
|-----------------------------|-----------------------------|--------------------------|
| MODEL NUMBER | ML2LASPRBN14827 | ML2LASPRBZ14827 |
| ORDER CODE | 1408699 | 1408735 |
| Input Wattage | 14W | 14W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 980 lm | 996 lm |
| Efficacy (lm/W) | 70 lm/W | 72 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 60W INC | 60W INC |
| Dimming Compatible | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | ENERGY STAR®, ETL, FCC | ENERGY STAR®, ETL, FCC |

LED Flush Mounts - Puff Series



CCTs Available:



| MODEL NUMBER | 13" | 16" |
|-----------------------------|------------------------|------------------------|
| | ML2LAMPWH18827 | ML2LALPWH24830 |
| ORDER CODE | 1408691 | 100703 |
| Input Wattage | 18W | 24W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 1,440 lm | 1,950 lm |
| Efficacy (lm/W) | 80 lm/W | 81 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 3000K |
| Replacement | 60W INC | 100W INC |
| Dimming Compatible | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | ENERGY STAR®, ETL, FCC | ENERGY STAR®, ETL, FCC |

LED Flush Mounts - Slim Series



CCTs Available:



| MODEL NUMBER | 11" (BRUSHED NICKEL FINISH) | 13" (BRUSHED NICKEL FINISH) | 15" (BRUSHED NICKEL FINISH) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| | ML2L11SLNI1230 | ML2L13SLNI1530 | ML2L15SLNI2430 |
| ORDER CODE | 1410130 | 1410132 | 1410134 |
| Input Wattage | 12W | 15W | 24W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 845 lm | 1,050 | 1,680 |
| Efficacy (lm/W) | 70 lm/W | 70 lm/W | 70 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K |
| Replacement | 60W INC | 60W INC | 100W INC |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, FCC, ENERGY STAR® | cULus, FCC, ENERGY STAR® | cULus, FCC, ENERGY STAR® |

LED Disc Light



CCTs Available:



| MODEL NUMBER | 4" | 6" | 7" |
|-----------------------------|---------------------------|---------------------------|---------------------------|
| | DL409827WH | DL615827WH | DL715827WH |
| ORDER CODE | 14099585 | 14099588 | 14101759 |
| Input Wattage | 9W | 15W | 15W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 630 lm | 1,275 lm | 1,275 lm |
| Efficacy (lm/W) | 69 lm/W | 86 lm/W | 86 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 75W INC | 75W INC |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 36,000 hours | 36,000 hours | 36,000 hours |
| LISTINGS | cETLus, FCC, ENERGY STAR® | cETLus, FCC, ENERGY STAR® | cETLus, FCC, ENERGY STAR® |

LED Light Engines/ Retrofit Kits



CCTs Available:



| MODEL NUMBER | 3" | 4" | 5.5" | 7" |
|-----------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| | FRK10X3-930/V3 | FRK17X4-930/V3 | FRK23X5.5-930/V3 | FRK28X7-930/V3 |
| ORDER CODE | 102614 | 14099917 | 14099920 | 14099923 |
| Input Wattage | 10W | 16W | 23W | 28W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 800 lm | 1,200 lm | 1,750 lm | 2,240 lm |
| Efficacy (lm/W) | 77 | 74 | 75 | 80 |
| Color Rendering Index (CRI) | ≥90 | ≥90 | ≥90 | ≥90 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K | 3000K |
| Replacement | 60W INC | 75W INC | 100W INC | 125W INC |
| Dimming Compatible | Triac | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 40,000 hours | 40,000 hours | 40,000 hours | 40,000 hours |
| LISTINGS | cULs Classified, FCC, ENERGY STAR® | cULs Classified, FCC, ENERGY STAR® | cULs Classified, FCC, ENERGY STAR® | cULs Classified, FCC, ENERGY STAR® |

Bulb in Box - Traditional Ceiling Fixture



Finishes Available:



| | |
|------------------------------------|---|
| | NICKEL FINISH |
| MODEL NUMBER | ML2E242TRNI27 |
| ORDER CODE | 1408622 |
| Number of Lamps | 2 x 12W 2700K JAB COMPLIANT E26 SOCKET LED LAMP |
| Voltage | 120V |
| Source Lumens (lm) | 2,200 lm |
| Source Color Rendering Index (CRI) | ≥90 |
| Max Wattage | 24W |
| LISTINGS | cULus, FCC, ENERGY STAR® |

Bulb in Box - Tulip Vanity Bar



Finishes Available:



| | |
|------------------------------------|---|
| | NICKEL FINISH |
| MODEL NUMBER | ML8E303TUNI27 |
| ORDER CODE | 1408625 |
| Number of Lamps | 3 x 10W 2700K JAB COMPLIANT E26 SOCKET LED LAMP |
| Voltage | 120V |
| Source Lumens (lm) | 2,400 lm |
| Source Color Rendering Index (CRI) | ≥90 |
| Max Wattage | 30W |
| LISTINGS | cULus, FCC, ENERGY STAR® |

Bulb in Box - Architectural Torchiere



Finishes Available:



| | |
|------------------------------------|---|
| | BLACK FINISH |
| MODEL NUMBER | ML1E242DARBK27-V2 |
| ORDER CODE | 1410154 |
| Number of Lamps | 2 x 12W 2700K JAB COMPLIANT E26 SOCKET LED LAMP |
| Voltage | 120V |
| Source Lumens (lm) | 2,200 lm |
| Source Color Rendering Index (CRI) | ≥90 |
| Max Wattage | 24W |
| LISTINGS | ENERGY STAR®, ETL, FCC |

Bulb in Box - Contemporary Wall Sconce



Finishes Available:



| | |
|------------------------------------|---|
| | NICKEL FINISH |
| MODEL NUMBER | ML9E101CCNI27 |
| ORDER CODE | 1408633 |
| Number of Lamps | 1 x 10W 2700K JAB COMPLIANT E26 SOCKET LED LAMP |
| Voltage | 120V |
| Source Lumens (lm) | 800 lm |
| Source Color Rendering Index (CRI) | ≥90 |
| Max Wattage | 10W |
| LISTINGS | cULus, FCC, ENERGY STAR® |

Bulb in Box - Traditional Outdoor Lantern



CCTs Available:

2700K

| | W/ DLH MOTION SENSOR | |
|--------------------|----------------------------------|---|
| MODEL NUMBER | ML4LE109SPLBK2 | ML4LE171RLBK27MSC-V3 |
| ORDER CODE | 101309 | 1408640 |
| Number of Lamps | 1 x 9W 2700K E26 SOCKETLED LAMP | 1 x 17W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP |
| Voltage | 120V | 120V |
| Source Lumens (lm) | 551 lm | 1,600 lm |
| Housing | Die Casting | Formed Steel |
| Lens | Frosted Glass | Glass |
| Max Wattage | 9W | 17W |
| LISTINGS | ENERGY STAR®, cETLus (Damp), FCC | ENERGY STAR®, cETLus (Damp), FCC, JA8 |

Bulb in Box - Pagoda Outdoor Lantern



CCTs Available:

2700K

| MODEL NUMBER | ML4E121PLBK27 |
|--------------------|---|
| ORDER CODE | 101077 |
| Number of Lamps | 1 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP |
| Voltage | 120V |
| Source Lumens (lm) | 1,1150 lm |
| Housing | Die Casting |
| Lens | Plastic |
| Max Wattage | 12W |
| LISTINGS | ENERGY STAR®, cULus (Wet), FCC, JA8 |

LED Coach Lantern



CCTs Available:

2700K

| | W/ PHOTOCELL AND PHOTOCELL COVER CAP |
|-----------------------------|--------------------------------------|
| MODEL NUMBER | ML4LS10MCLBK827 |
| ORDER CODE | 97868 |
| Input Wattage | 10W |
| Voltage | 120V |
| Delivered Lumens (lm) | 500 lm |
| Efficacy (lm/W) | 50 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 2700K |
| Replacement | 25W Inc. |
| Lumen Maintenance (L70) | 35,000 hours |
| LISTINGS | ENERGY STAR®, cULus, FCC |

LED Ranch Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

| | |
|-----------------------------|---------------------------------------|
| MODEL NUMBER | ML4LS12SRLBK827 |
| ORDER CODE | 96974 |
| Input Wattage | 12W |
| Voltage | 120V |
| Delivered Lumens (lm) | 990 lm |
| Efficacy (lm/W) | 79 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 2700K |
| Replacement | 40W |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cULus (Wet Listed), FCC, ENERGY STAR® |

LED Mission Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

| | |
|-----------------------------|-------------------------|
| MODEL NUMBER | ML4LASMSB14827PC |
| ORDER CODE | 1408707 |
| Input Wattage | 14W |
| Voltage | 120V |
| Delivered Lumens (lm) | 980 lm |
| Efficacy (lm/W) | 70 lm/W |
| Color Rendering Index (CRI) | >80 |
| Color Temperature (CCT) | 2700K |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | ETL, FCC, ENERGY STAR® |

LED Traditional Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP


| | |
|-----------------------------|---------------------------|
| MODEL NUMBER | ML4LS14SOLBPC |
| ORDER CODE | 101444 |
| Input Wattage | 14W |
| Voltage | 120V |
| Delivered Lumens (lm) | 1,165 lm |
| Efficacy (lm/W) | 86 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 2700K |
| Replacement | 100W INC |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | ENERGY STAR®, cETLus, FCC |

LED Emergency Lights



| MODEL NUMBER | EML-2HW | EML-2HWHORC |
|-------------------|-----------------|-----------------------------|
| ORDER CODE | 14101480 | 14101481 |
| Voltage | 120 or 277V | 120 or 277V |
| Finish | White | White |
| Mounting | Ceiling or Wall | Ceiling or Wall |
| Options | n/a | High Output, Remote Capable |
| LISTINGS | UL924 DL | UL924 DL |

LED Remote Heads

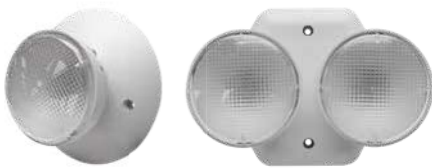

| MODEL NUMBER | ERI-SW | ERI-2HW | ERO-SW | ERO-2HW |
|-------------------|---------------------|---------------------|----------------------|----------------------|
| ORDER CODE | 14101482 | 14101483 | 14101484 | 14101485 |
| Voltage | LV | LV | LV | LV |
| Finish | White | White | White | White |
| Mounting | Ceiling or Wall | Ceiling or Wall | Ceiling or Wall | Ceiling or Wall |
| Options | Single Head, Indoor | Double Head, Indoor | Single Head, Outdoor | Double Head, Outdoor |
| LISTINGS | cUL DL | cUL DL | cUL WL | cUL WL |

Connect to Remote Capable fixtures

LED Exit Signs



| MODEL NUMBER | EX-RW | EX-GW | EX-RWRC | EX-GWRC |
|-------------------|-----------------|-----------------|-----------------------------|-----------------------------|
| ORDER CODE | 14101486 | 14101487 | 103369 | 103368 |
| Voltage | 120 or 277V | 120 or 277V | 120 or 277V | 120 or 277V |
| Finish | White | White | White | White |
| Mounting | Ceiling or Wall | Ceiling or Wall | Ceiling or Wall | Ceiling or Wall |
| Options | Red Letters | Green Letters | Red Letters, Remote Capable | Red Letters, Remote Capable |
| LISTINGS | UL924 DL | UL924 DL | UL924 DL | UL924 DL |

LED Exit Sign Combos



| MODEL NUMBER | EXC-RW | EXC-GW | EXC-RWRC | EXC-GWRC |
|-------------------|-----------------|-----------------|-----------------------------|-----------------------------|
| ORDER CODE | 14101488 | 14101489 | 103370 | 103371 |
| Voltage | 120 or 277V | 120 or 277V | 120 or 277V | 120 or 277V |
| Finish | White | White | White | White |
| Mounting | Ceiling or Wall | Ceiling or Wall | Ceiling or Wall | Ceiling or Wall |
| Options | Red Letters | Green Letters | Red Letters, Remote Capable | Red Letters, Remote Capable |
| LISTINGS | UL924 DL | UL924 DL | UL924 DL | UL924 DL |

BayMAX™ LED HL Linear High Bays - Gen 2



CCTs Available:



| MODEL NUMBER | HL-090UF-50 | HL-130UF-50 | HL-160UF-50 | HL-185UF-50 |
|-----------------------------|--|--|--|--|
| ORDER CODE | 14099568 | 14099570 | 14099572 | 14099574 |
| Input Wattage | 90W | 130W | 160W | 185W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 11,800 lm | 16,770 lm | 20,990 lm | 24,250 lm |
| Efficacy (lm/W) | 129 lm/W | 131 lm/W | 133 lm/W | 137 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Replacement | 4 Lamp T5HO/250W | 6 Lamp T5HO/400W | 6+ Lamp T5HO/400W | 8 Lamp T5HO/600W |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours | 100,000 hours |
| LISTINGS | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC |

Surface mount and stem mount kits available.

LED 2' Linear High Bays - ECO Series Gen 2



CCTs Available:



| MODEL NUMBER | BLHE2-090DUF-40 | BLHE2-135DUF-40 | BLHE2-178DUF-40 | BLHE2-223DUF-40 |
|-----------------------------|--|--|--|--|
| ORDER CODE | 102407 | 102599 | 102612 | 14099935 |
| Input Wattage | 90W | 135W | 178W | 223W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 11,264 lm | 17,024 lm | 22,077 lm | 27,763 lm |
| Efficacy (lm/W) | 130 lm/W | 130 lm/W | 130 lm/W | 131 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K | 4000K |
| Replacement | 4 Lamp T5HO/250W | 6 Lamp T5HO/400W | 6+ Lamps T5HO/400W | 8 Lamp T5HO/600W |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC |

Surface mount and stem mount kits available.

LED 4' Linear High Bays - ECO Series Gen 2



CCTs Available:




| MODEL NUMBER | BLHE2-265DUF-40 | BLHE2-321DUF-40 | BLHE2-425DUF-40 |
|-----------------------------|--|--|--|
| ORDER CODE | 102618 | 102619 | 14100563 |
| Input Wattage | 265W | 321W | 425W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 33,747 lm | 40,389 lm | 55,181 lm |
| Efficacy (lm/W) | 130 lm/W | 130 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K |
| Replacement | 8+ Lamps T5HO/600+W | 8+ Lamps T5HO/1000W | 8+ Lamps T5HO/1000+W |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC |

Surface mount and stem mount kits available.

LED High Bay Round Pendants - Gen 2



CCTs Available:



| MODEL NUMBER | HP-09OUF-50 | HP-13OUF-50 | HP-16OUF-50 | HP-185UF-50 |
|-----------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| ORDER CODE | 1410223 | 1410225 | 1410227 | 1410229 |
| Input Wattage | 90W | 130W | 160W | 185W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 12,100 lm | 17,900 lm | 22,260 lm | 25,770 lm |
| Efficacy (lm/W) | 137 lm/W | 138 lm/W | 140 lm/W | 143 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Replacement | 4 Lamp T5HO/250W | 6 Lamp T5HO/400W | 6+ Lamp T5HO/400W | 8 Lamp T5HO/600W |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours | 100,000 hours |
| LISTINGS | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium |

Pipe and surface mount options available. Polycarbonate shade and drop lens available.

LED High Bay Round ECO Pendants



CCTs Available:



| MODEL NUMBER | BPHE-100UW-40 | BPHE-150UW-40 | BPHE-180UW-40 | BPHE-240UW-40 |
|-----------------------------|------------------|------------------|-------------------|------------------|
| ORDER CODE | 14100743 | 14100744 | 14100745 | 14100746 |
| Input Wattage | 100W | 150W | 180W | 240W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 13,000 lm | 19,500 lm | 23,400 lm | 31,200 lm |
| Efficacy (lm/W) | 130 lm/W | 130 lm/W | 130 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K | 4000K |
| Replacement | 4 Lamp T5HO/250W | 6 Lamp T5HO/400W | 6+ Lamp T5HO/400W | 8 Lamp T5HO/600W |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours | 100,000 hours |
| LISTINGS | cULus, IP65 | cULus, IP65 | cULus, IP65 | cULus, IP65 |

High Temperature LED Round High Bay



CCTs Available:



| MODEL NUMBER | HPH240UC-40 | HPH240UC-50 |
|-----------------------------|---|---|
| ORDER CODE | 14100209 | 14100213 |
| Input Wattage | 240W | 240W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 31,098 lm | 31,200 lm |
| Efficacy (lm/W) | 130 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 5000K |
| Replacement | 600W MH | 600W MH |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | DLC Premium, FCC, Wet Rated cULus, IP66 | DLC Premium, FCC, Wet Rated cULus, IP66 |

LED 24" Round Pendant



CCTs Available:



| | DIRECT LIGHT | INDIRECT/DIRECT LIGHT |
|-----------------------------|---------------------|-----------------------|
| MODEL NUMBER | MLRP24E4035D | MLRP24E4035I |
| ORDER CODE | 1410239 | 1410240 |
| Input Wattage | 40W | 40W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,200 lm | 3,200 lm |
| Efficacy (lm/W) | 89 lm/W | 89 lm/W |
| Color Rendering Index (CRI) | >80 | >80 |
| Color Temperature (CCT) | 3500K | 3500K |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | FCC, cETLus | FCC, cETLus |

Direct is surface mounted only, Indirect/Direct is pendant mounted only.

LED 1x4 Direct/Indirect Pendant Panels



CCTs Available:



| | WHITE LENS | TRANSPARENT LENS |
|-----------------------------|----------------------|------------------------|
| MODEL NUMBER | MLFP14DI3635I | MLFP14DI3640ICL |
| ORDER CODE | 14098821 | 14098822 |
| Input Wattage | 36W | 36W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 4,396 lm | 4,721 lm |
| Efficacy (lm/W) | 112 lm/W | 120 lm/W |
| Color Rendering Index (CRI) | 80 | 80 |
| Color Temperature (CCT) | 3500K | 4000K |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | DLC, FCC, cETLus | DLC, FCC, cETLus |

LED LiteBar™



CCTs Available:



| | 6" | 12" | 24" |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | LB0627 | LB1227 | LB2427 |
| ORDER CODE | 1409841 | 1409846 | 1409851 |
| Input Wattage | 2W | 4W | 8W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 148 lm | 341 lm | 657 lm |
| Efficacy (lm/W) | 70 lm/W | 79 lm/W | 84 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Dimming Compatible | Triac, ELV | Triac, ELV | Triac, ELV |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | ENERGY STAR®, cULus, FCC | ENERGY STAR®, cULus, FCC | ENERGY STAR®, cULus, FCC |

LED LiteBar™



CCTs Available:



| | 36" | 48" |
|-----------------------------|--------------------------|--------------------------|
| MODEL NUMBER | LB3627 | LB4827 |
| ORDER CODE | 1409866 | 1409856 |
| Input Wattage | 12W | 16W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 987 lm | 1,330 lm |
| Efficacy (lm/W) | 81 lm/W | 83 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K |
| Dimming Compatible | Triac, ELV | Triac, ELV |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | ENERGY STAR®, cULus, FCC | ENERGY STAR®, cULus, FCC |

Optional Accessories:



LB-BBC - 14098894
Bar-Bar Connector



LB-BBCF4 - 14098897
Bar-Bar Connector, Flexible 4"



LB-BBCF12 - 14098898
Bar-Bar Connector, Flexible 12"



LB-BBCF40 - 14098899
Bar-Bar Connector, Flexible 40"



LB-BBCR - 14098896
Bar-Bar Connector, 90 deg right



LB-BBCL - 14098895
Bar-Bar Connector, 90 deg left



LB-MB - 14098902
Mounting Bracket (2pcs per)



LB-PMB - 14098903
Pivot Mounting Bracket (2pcs per)



LB-MMB - 14098904
Magnetic Mounting Bracket (2pcs per)



LB-CBOX - 14098906
Connector Box



LB-DBOX - 14098905
Distribution Box



LB-HWC70 - 14098900
70" Hardwire Cord



LB-PC48 - 14098901
40" Plug Cord

TriMAX™ LED Vapor Tight Fixtures - Gen 2



CCTs Available:



| MODEL NUMBER | 4' | 4' |
|-----------------------------|--|--|
| | VT-V4830U-40 | VT-V4850U-40 |
| ORDER CODE | 14099648 | 14099650 |
| Input Wattage | 30W | 50W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,790 lm | 6,480 lm |
| Efficacy (lm/W) | 127 lm/W | 126 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K |
| Replacement | 2 x 32W T8 | 3 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours |
| LISTINGS | cETLus, FCC, DLC Premium, ETL Sanitization | cETLus, FCC, DLC Premium, ETL Sanitization |

Connector kit available. EM and MS options also available.

LED Vapor Tight Fixtures



CCTs Available:



| MODEL NUMBER | 2' | 4' | 4' | 4' |
|-----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| | LSV2U2540 | LSV4U2540 | LSV4U3540 | LSV4U4540 |
| ORDER CODE | 14099611 | 14099613 | 14099615 | 14099617 |
| Input Wattage | 25W | 25W | 35W | 45W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,040 lm | 3,215 lm | 4,715 lm | 6,250 lm |
| Efficacy (lm/W) | 134 lm/W | 137 lm/W | 138 lm/W | 138 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K | 4000K |
| Replacement | 2 x 17W T8 | 2 x 32W T8 | 2 x 32W T8 or 1 x 54W T5HO | 4 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours | 100,000 hours |
| LISTINGS | cULus, FCC, DLC Premium, NSF | cULus, FCC, DLC Premium, NSF | cULus, FCC, DLC Premium, NSF | cULus, FCC, DLC Premium, NSF |

LSV4U2540 DLC Qualified at 120V only.

LED ECO Vapor Tight Fixtures



CCTs Available:



| MODEL NUMBER | 4' | 4' |
|-----------------------------|-----------------|-----------------|
| | LSVECO-4DU4040 | LSVECO-4DU4050 |
| ORDER CODE | 14099111 | 14099112 |
| Input Wattage | 40W | 38W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 4,400 lm | 4,480 lm |
| Efficacy (lm/W) | 110 lm/W | 112 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 5000K |
| Replacement | 3 x 32W T8 | 3 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, FCC, DLC | cULus, FCC, DLC |

LED Utility Wrap Fixtures



CCTs Available:



| | 2' | 4' | 4' | 4' |
|-----------------------------|----------------------------|---------------------------------|---------------------------------|---------------------------------|
| MODEL NUMBER | LSU2U2540 | LSU4U2540 | LSU4U3540 | LSU4U4540 |
| ORDER CODE | 14099619 | 14099621 | 14099623 | 14099625 |
| Input Wattage | 25W | 25W | 35W | 45W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,960 lm | 3,100 lm | 4,460 lm | 6,060 lm |
| Efficacy (lm/W) | 128 lm/W | 130 lm/W | 130 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K | 4000K |
| Replacement | 2 x 17W T8 | 2 x 32W T8 | 3 x 32W T8 or 1 x 54W T5HO | 4 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours | 100,000 hours |
| LISTINGS | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium, NSF | cULus, FCC, DLC Premium, NSF | cULus, FCC, DLC Premium, NSF |

LED Wide Body Utility Wrap Fixtures



CCTs Available:



| | 4' |
|-----------------------------|----------------------------|
| MODEL NUMBER | LSUW4U6240 |
| ORDER CODE | 102930 |
| Input Wattage | 62W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 8,060 lm |
| Efficacy (lm/W) | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 4000K |
| Replacement | 4 x 32W T8 or 2 x 54W T5HO |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours |
| LISTINGS | cULus, DLC Premium |

LED ECO Utility Wrap Fixtures



CCTs Available:



| | 4' |
|-----------------------------|-----------------|
| MODEL NUMBER | LSUECO-4DU4040 |
| ORDER CODE | 14099110 |
| Input Wattage | 41W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 4,289 lm |
| Efficacy (lm/W) | 104 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 4000K |
| Replacement | 3 x 32W T8 |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cULus, FCC, DLC |

L-Max™ Linear LED Luminaire



EM and MS options are not available together in any CCT.

CCTs Available:



| MODEL NUMBER | 2' | 4' | 4' |
|-----------------------------|--|--|--|
| | LM-2420UF-40 | LM-4840UF-40 | LM-4860UF-40 |
| ORDER CODE | 14100472 | 14099780 | 14099783 |
| Input Wattage | 20W | 40W | 60W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,569 lm | 5,261 lm | 7,923 lm |
| Efficacy (lm/W) | 133 lm/W | 132 lm/W | 133 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K |
| Replacement | 2 x 17W T8 | 3 x 32W T8 | 4 x 32W T8, 2x54W T5 |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | DLC Premium, ETL Listed, FCC, Damp Rated | DLC Premium, ETL Listed, FCC, Damp Rated | DLC Premium, ETL Listed, FCC, Damp Rated |

LED 4' Linear Strip



CCTs Available:




| MODEL NUMBER | 4' | 4' | 4' |
|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| | LS-4823U-50 | LS-4835U-50 | LS-4846U-50 |
| ORDER CODE | 101516 | 1409690 | 1410113 |
| Input Wattage | 23W | 35W | 46W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,989 lm | 4,690 lm | 6,118 lm |
| Efficacy (lm/W) | 135 lm/W | 134 lm/W | 133 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 82 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K |
| Replacement | 1 x 32W T8 | 2 x 32W T8 | 2 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), DLC, FCC | cULus (Damp Listed), DLC, FCC | cULus (Damp Listed), DLC, FCC |

LED 8' Linear Strip



CCTs Available:



| MODEL NUMBER | 8' | 8' |
|-----------------------------|----------------------------------|----------------------------------|
| | LS2-9665U-50 | LS2-9690U-50 |
| ORDER CODE | 14100442 | 14100444 |
| Input Wattage | 65W | 90W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 8,580 lm | 11,995 lm |
| Efficacy (lm/W) | 133 lm/W | 134 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 2 x F96W T12HO or 2 x 110W T12HO | 2 x F96W T12HO or 2 x 110W T12HO |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours |
| LISTINGS | cULus (Damp Listed), DLC, FCC | cULus (Damp Listed), DLC, FCC |

LED Linear Retrofit Strip



CCTs Available:



| MODEL NUMBER | 4' | 4' |
|-----------------------------|---------------------------------------|---------------------------------------|
| | RS-4835U-50 | RS-4846U-50 |
| ORDER CODE | 1409412 | 1410111 |
| Input Wattage | 35W | 46W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 4,620 lm | 5,980 lm |
| Efficacy (lm/W) | 132 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 2 x 32W T8 | 2 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), DLC Premium, FCC | cULus (Damp Listed), DLC Premium, FCC |

LED Shop Light



CCTs Available:

5000K

| 4' | |
|-----------------------------|--------------------------|
| MODEL NUMBER | SL-48231-50 |
| ORDER CODE | 14101698 |
| Input Wattage | 23W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 2,400 lm |
| Efficacy (lm/W) | 104 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 5000K |
| Replacement | 1x 32WT8 |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cETLus, FCC, ENERGY STAR |

LED Shop Light



CCTs Available:

5000K

| 4' | |
|-----------------------------|--------------------------|
| MODEL NUMBER | SL-48421-50 |
| ORDER CODE | 14099808 |
| Input Wattage | 42W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 4,890 lm |
| Efficacy (lm/W) | 122 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | 5000K |
| Replacement | 2 x 32W T8 |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cETLus, FCC, ENERGY STAR |

LED Cooler and Freezer Lamps



CCTs Available:

4000K

| | 48" | 60" | 72" |
|-------------------------|-------------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | RL-4818U-40 | RL-6022U-40 | RL-7226U-40 |
| ORDER CODE | 107990 | 107991 | 107992 |
| Input Wattage | 18W | 22W | 26W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 1,440 lm | 1,810 lm | 2,170 lm |
| Efficacy (lm/W) | 85 lm/W | 82 lm/W | 84 lm/W |
| Color Temperature (CCT) | 4000K | 4000K | 4000K |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC | cULus (Damp Listed), FCC, DLC | cULus (Damp Listed), FCC, DLC |

LED T8 Lamp Ready 4' High Bays



| MODEL NUMBER | BLHT4XT8USE4810 | BLHT6XT8USE4815 | BLHT8XT8USE4820 |
|-----------------|---------------------|---------------------|---------------------|
| ORDER CODE | 75428 | 75429 | 75430 |
| Number of Lamps | 4 x T8 LED | 6 x T8 LED | 8 x T8 LED |
| Voltage | 120-277V | 120-277V | 120-277V |
| Max Wattage | 22W Per Lamp | 22W Per Lamp | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) | cULus (Damp Listed) | cULus (Damp Listed) |

See Pages 60-61 for compatible T8 lamps.

LED T8 Lamp Ready 4' Vapor Tights



| MODEL NUMBER | LSV2XT8USE4806 | LSV3XT8USE4806 |
|-----------------|---------------------|---------------------|
| ORDER CODE | 74850 | 74851 |
| Number of Lamps | 2 x T8 LED | 3 x T8 LED |
| Voltage | 120-277V | 120-277V |
| Max Wattage | 22W Per Lamp | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) | cULus (Damp Listed) |

See Pages 60-61 for compatible T8 lamps.

LED T8 Lamp Ready 4' Utility Wraps



| MODEL NUMBER | LSU2XT8USE4806 | LSU3XT8USE4806 | LSU4XT8USE4812 |
|-----------------|---------------------|---------------------|---------------------|
| ORDER CODE | 75304 | 75305 | 14098811 |
| Number of Lamps | 2 x T8 LED | 3 x T8 LED | 4 x T8 LED |
| Voltage | 120-277V | 120-277V | 120-277V |
| Max Wattage | 22W Per Lamp | 22W Per Lamp | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) | cULus (Damp Listed) | cULus (Damp Listed) |

See Pages 60-61 for compatible T8 lamps.

LED T8 Lamp Ready 4' Linear Utility Strips



| MODEL NUMBER | LSS1XT8USE4802 | LSS2XT8USE4803 |
|-----------------|---------------------|---------------------|
| ORDER CODE | 75302 | 75303 |
| Number of Lamps | 1 x T8 LED | 2 x T8 LED |
| Voltage | 120-277V | 120-277V |
| Max Wattage | 22W Per Lamp | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) | cULus (Damp Listed) |

See Pages 60-61 for compatible T8 lamps.

LED T8 Lamp Ready 4' Retrofit Strip



| | |
|---------------------|---------------------|
| MODEL NUMBER | RS-482XT8 |
| ORDER CODE | 107768 |
| Number of Lamps | 2 x T8 LED |
| Voltage | 120-277V |
| Max Wattage | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) |

Links to make 8' fixture. Lamps not included. See Pages 60-61 for compatible T8 lamps.

LED T5 Lamp Ready 4' High Bays



| MODEL NUMBER | BLHT4XT5USE4810 | BLHT6XT5USE4815 | RS-BLHT8XT5USE4820 |
|---------------------|------------------------|------------------------|---------------------------|
| ORDER CODE | 14099836 | 14099837 | 14099838 |
| Number of Lamps | 4 x T5 LED | 6 x T5 LED | 8 x T5 LED |
| Voltage | 120-277V | 120-277V | 120-277V |
| Max Wattage | 22W Per Lamp | 22W Per Lamp | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) | cULus (Damp Listed) | cULus (Damp Listed) |

See Pages 61 for compatible T5 lamps.

LED T5 Lamp Ready 4' Utility Strip



| MODEL NUMBER | LSS1XT5USE4802 | LSS2XT5USE4803 |
|---------------------|-----------------------|-----------------------|
| ORDER CODE | 14100561 | 14100562 |
| Number of Lamps | 1 x T5 LED | 2 x T5 LED |
| Voltage | 120-277V | 120-277V |
| Max Wattage | 22W Per Lamp | 22W Per Lamp |
| LISTINGS | cULus (Damp Listed) | cULus (Damp Listed) |

See Pages 61 for compatible T5 lamps.

FlatMAX® Edge Lit LED 1x4 Flat Panels - Version 3



CCTs Available:



| | 1' x 4' | 1' x 4' |
|-----------------------------|---------------------------------------|-------------------------------|
| MODEL NUMBER | MLFP14EP2035 | MLFP14EP4035/V3 |
| ORDER CODE | 14099563 | 14100218 |
| Input Wattage | 20W | 40W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,383 lm | 4,612 lm |
| Efficacy (lm/W) | 126 lm/W | 108 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 3500K | 3500K |
| Replacement | 1 x 32W T8 | 2 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC Premium | cULus (Damp Listed), FCC, DLC |

Surface mount and flange kits available.

FlatMAX® Edge Lit LED 2x2 Flat Panels - Version 3



CCTs Available:



| | 2' x 2' | 2' x 2' | 2' x 2' |
|-----------------------------|--|-------------------------------|-------------------------------|
| MODEL NUMBER | MLFP22EP2035 | MLFP22EP3035/V3 | MLFP22EP5035/V3 |
| ORDER CODE | 14099016 | 14100222 | 14100230 |
| Input Wattage | 20W | 30W | 50W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,337 lm | 3,349 lm | 5,131 lm |
| Efficacy (lm/W) | 126 lm/W | 103 lm/W | 100 lm/W |
| Color Rendering Index (CRI) | >80 | >80 | ≥80 |
| Color Temperature (CCT) | 3500K | 3500K | 3500K |
| Replacement | 2 x 17W T8 | 3 x 17W T8 | 4 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC Premium | cULus (Damp Listed), FCC, DLC | cULus (Damp Listed), FCC, DLC |

Surface mount and flange kits available.

FlatMAX® Edge Lit LED 2x4 Flat Panels - Version 3



CCTs Available:



| | 2' x 4' | 2' x 4' | 2' x 4' |
|-----------------------------|--|-------------------------------|-------------------------------|
| MODEL NUMBER | MLFP24EP3035 | MLFP24EP4035/V3 | MLFP24EP6035/V3 |
| ORDER CODE | 14099019 | 14100234 | 14100238 |
| Input Wattage | 30W | 40W | 60W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,433 lm | 4,422 lm | 6,365 lm |
| Efficacy (lm/W) | 126 lm/W | 103 lm/W | 104 lm/W |
| Color Rendering Index (CRI) | >80 | >80 | ≥80 |
| Color Temperature (CCT) | 3500K | 3500K | 3500K |
| Replacement | 2 x 32W T8 | 3 x 32W T8 | 4 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC Premium | cULus (Damp Listed), FCC, DLC | cULus (Damp Listed), FCC, DLC |

Surface mount and flange kits available.

FlatMAX® Edge Lit LED 1x4 Flat Panels w/ Selectable CCT



CCTs Available:



| 1' x 4' | |
|-----------------------------|--|
| MODEL NUMBER | MLFP14EP30CS |
| ORDER CODE | 102960 |
| Input Wattage | 30W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 3,081 lm |
| Efficacy (lm/W) | 106 lm/W |
| Color Rendering Index (CRI) | ≥80 |
| Color Temperature (CCT) | Color Selectable (3500K, 4000K, 5000K) |
| Replacement | 1 x 32W T8 |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 110,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC |

Surface mount and flange kits available.

FlatMAX® Edge Lit LED 2x2 Flat Panels w/ Selectable CCT




CCTs Available:



| 2' x 2' | |
|-----------------------------|--|
| MODEL NUMBER | MLFP22EP30CS |
| ORDER CODE | 102961 |
| Input Wattage | 30W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 3,286 lm |
| Efficacy (lm/W) | 105 lm/W |
| Color Rendering Index (CRI) | >80 |
| Color Temperature (CCT) | Color Selectable (3500K, 4000K, 5000K) |
| Replacement | 3 x 17W T8 |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC |

Surface mount and flange kits available.

FlatMAX® Edge Lit LED 2x4 Flat Panels w/ Selectable CCT



CCTs Available:



| 2' x 4' | |
|-----------------------------|--|
| MODEL NUMBER | MLFP24EP40CS |
| ORDER CODE | 102962 |
| Input Wattage | 40W |
| Voltage | 120-277V |
| Delivered Lumens (lm) | 4,254 lm |
| Efficacy (lm/W) | 107 lm/W |
| Color Rendering Index (CRI) | >80 |
| Color Temperature (CCT) | Color Selectable (3500K, 4000K, 5000K) |
| Replacement | 3 x 32W T8 |
| Dimming Compatible | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cULus (Damp Listed), FCC, DLC |

Surface mount and flange kits available.

ArcMAX™ LED 1x4 Single Basket Volumetric Panels



CCTs Available:



| | 1' x 4' | 1' x 4' |
|-----------------------------|--------------------------|-----------------|
| MODEL NUMBER | MLVT14D2040/SB | MLVT14D4040/SB |
| ORDER CODE | 14099897 | 1409941 |
| Input Wattage | 20W | 36W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,600 lm | 3,960 lm |
| Efficacy (lm/W) | 130 lm/W | 110 lm/W |
| Color Rendering Index (CRI) | 80 | 80 |
| Color Temperature (CCT) | 4000K | 4000K |
| Replacement | 1 x 32W T8 | 2 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cETLus, DLC Premium, FCC | cULus, DLC, FCC |

Surface mount and flange kits available.

ArcMAX™ LED 2x2 Single Basket Volumetric Panels



CCTs Available:



| | 2' x 2' | 2' x 2' |
|-----------------------------|-----------------------|-----------------|
| MODEL NUMBER | MLVT22D2040/SB | MLVT22D3640/SB |
| ORDER CODE | 14099885 | 108141 |
| Input Wattage | 20W | 36W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,500 lm | 3,890 lm |
| Efficacy (lm/W) | 125 lm/W | 108 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K |
| Replacement | 3 x 17W T8 | 3 x 17W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | ETL, FCC, DLC Premium | cULus, FCC, DLC |

Surface mount and flange kits available.

ArcMAX™ LED 2x4 Single Basket Volumetric Panels



CCTs Available:



| | 2' x 4' | 2' x 4' |
|-----------------------------|----------------|-----------------|
| MODEL NUMBER | MLVT24D3040/SB | MLVT24D4540/SB |
| ORDER CODE | 14099891 | 108143 |
| Input Wattage | 30W | 45W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,750 lm | 5,265 lm |
| Efficacy (lm/W) | 125 lm/W | 117 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 4000K |
| Replacement | 3 x 32W T8 | 3 x 32W T8 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | ETL, FCC, DLC | cULus, FCC, DLC |

Surface mount and flange kits available.

LED Lensed Retrofit Kits



CCTs Available:



| | 2' x 2' | 2' x 4' |
|-----------------------------|-----------------|-----------------|
| MODEL NUMBER | LRK22D3041 | LRK24D4041 |
| ORDER CODE | 107798 | 75422 |
| Input Wattage | 30W | 40W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,740 lm | 4,130 lm |
| Efficacy (lm/W) | 99 lm/w | 113 lm/w |
| Color Rendering Index (CRI) | >80 | >80 |
| Color Temperature (CCT) | 4100K | 4100K |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, DLC, FCC | cULus, DLC, FCC |

LED Flat Panel Retrofit Kits



CCTs Available:



| | 1' x 4' | 2' x 2' | 2' x 4' |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | FPR14EP3040 | FPR22EP3040 | FPR24EP4040 |
| ORDER CODE | 102855 | 102863 | 102871 |
| Input Wattage | 30W | 30W | 40W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,003 lm | 3,077 lm | 4,129 lm |
| Efficacy (lm/W) | 102 lm/w | 102 lm/w | 102 lm/w |
| Color Rendering Index (CRI) | >80 | >80 | >80 |
| Color Temperature (CCT) | 4000K | 4000K | 4000K |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours |
| LISTINGS | ETL Classified, DLC, FCC | ETL Classified, DLC, FCC | ETL Classified, DLC, FCC |

LED Troffer Retrofit Kits



CCTs Available:



| | 2' x 2' | 2' x 4' |
|-----------------------------|-------------------------|-------------------------|
| MODEL NUMBER | TRK22D2335 | TRK24D3335 |
| ORDER CODE | 14098888 | 14098891 |
| Input Wattage | 23W | 33W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,940 lm | 4,300 lm |
| Efficacy (lm/W) | 130 lm/W | 132 lm/W |
| Color Rendering Index (CRI) | >80 | >80 |
| Color Temperature (CCT) | 3500K | 3500K |
| Replacement | 3 Lamp F17T8 | 3 Lamp F32T8 |
| Dimming Compatible | 0-10V | 0-01V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium |

RRC LED Light Engines



Triac dimming models also available.

CCTs Available:



| MODEL NUMBER | RRXC10U30Z | RRXC15U30Z | RRXC20U30Z |
|-----------------------------|--|--|------------------------------|
| ORDER CODE | 1410046 | 1410055 | 1410064 |
| Input Wattage | 10W | 15W | 20W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 900 lm | 1,275 lm | 1,900 lm |
| Efficacy (lm/W) | 90 lm/W | 85 lm/W | 95 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K |
| Replacement | 18W CFL | 26W CFL | 42W CFL |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | FCC, cULus, ENERGY STAR* | FCC, cULus, ENERGY STAR* | FCC, cULus, ENERGY STAR* |
| Reflector Options: | RRC4-RFL, RRC6-RFL, RRC8-RFL, RRC9-RFL | RRC4-RFL, RRC6-RFL, RRC8-RFL, RRC9-RFL | RRC6-RFL, RRC8-RFL, RRC9-RFL |

Reflectors for RRC Downlight Series



| MODEL NUMBER | RRC4-RFL | RRC6-RFL | RRC8-RFL | RRC9-RFL |
|-------------------|----------------|----------------|----------------|----------------|
| ORDER CODE | 1410090 | 1410091 | 1410092 | 1410093 |
| Size | 4" | 6" | 8" | 9" |
| Reflector Color | Silver | Silver | Silver | Silver |

Only Pair Reflectors with qualified engine wattages

| MODEL NUMBER | RRC4-RFLW | RRC6-RFLW | RRC8-RFLW | RRC9-RFLW |
|-------------------|-----------------|-----------------|-----------------|-----------------|
| ORDER CODE | 14099425 | 14099426 | 14099427 | 14099806 |
| Size | 4" | 6" | 8" | 9" |
| Reflector Color | White | White | White | White |

Only Pair Reflectors with qualified engine wattages

| LED ENGINE | DESCRIPTION | 4" (RRC4-RFL) | 6" (RRC6-RFL) | 8" (RRC8-RFL) | 9" (RRC9-RFL) |
|--------------|---|---------------|---------------|---------------|---------------|
| RRXC10Uyy | RRC LIGHT ENGINE 1000LM 120V, TRIAC DIMMING | X | X | X | X |
| RRXC10UyyZ | RRC LIGHT ENGINE 1000LM 120-277V, 0-10V DIMMING | X | X | X | X |
| RRXC12UyyZEM | RRC LIGHT ENGINE 1000LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP | X | X | X | X |
| RRXC15Uyy | RRC LIGHT ENGINE 1500LM 120V, TRIAC DIMMING | X | X | X | X |
| RRXC15UyyZ | RRC LIGHT ENGINE 1500LM 120-277V, 0-10V DIMMING | X | X | X | X |
| RRXC15UyyZEM | RRC LIGHT ENGINE 1500LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP | X | X | X | X |
| RRXC20Uyy | RRC LIGHT ENGINE 2000LM 120V, TRIAC DIMMING | | X | X | X |
| RRXC20UyyZ | RRC LIGHT ENGINE 2000LM 120-277V, 0-10V DIMMING | | X | X | X |
| RRXC20UyyZEM | RRC LIGHT ENGINE 2000LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP | | X | X | X |
| RRXC30UyyZ | RRC LIGHT ENGINE 3000LM 120-277V, 0-10V DIMMING | | | X | X |
| RRXC30UyyZEM | RRC LIGHT ENGINE 3000LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP | | | X | X |
| RRXC50UyyZ | RRC LIGHT ENGINE 5000LM 120-277V, 0-10V DIMMING | | | X | X |

CAUTION: A light engine should only be used with a reflector that is listed as compatible. Any other engine/reflector pairing is not covered by this product's UL Listing, and could be hazardous! EM models are not ENERGY STAR® qualified.

LED Commercial 6" Downlight Retrofits Economical Series



CCTs Available:




| | 6" | 6" | 6" |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | RRECO61230W/V2 | RRECO61830W/V2 | RRECO62730W/V2 |
| ORDER CODE | 1408678 | 1408679 | 1408680 |
| Input Wattage | 11W | 17W | 26W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 940 lm | 1,334 lm | 2,229 lm |
| Efficacy (lm/W) | 88 lm/W | 81 lm/W | 86 lm/W |
| Color Rendering Index (CRI) | >80 | >80 | >80 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, FCC, ENERGY STAR* | cULus, FCC, ENERGY STAR* | cULus, FCC, ENERGY STAR* |

LED Commercial 8" Downlight Retrofits Economical Series



CCTs Available:



| | 8" | 8" | 8" | 8" |
|-----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | RRECO81230W/V2 | RRECO81830W/V2 | RRECO82430W/V2 | RRECO84030W/V2 |
| ORDER CODE | 1408681 | 1409589 | 1408682 | 1408683 |
| Input Wattage | 11W | 17W | 23W | 38W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,030 lm | 1,542 lm | 2,064 lm | 3,254 lm |
| Efficacy (lm/W) | 96 lm/W | 93 lm/W | 89 lm/W | 85 lm/W |
| Color Rendering Index (CRI) | >80 | >80 | >80 | >80 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K | 3000K |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, FCC, ENERGY STAR* | cULus, FCC, ENERGY STAR* | cULus, FCC, ENERGY STAR* | cULus, FCC, ENERGY STAR* |

LED Universal Downlights w/ Selectable CCT



CCTs Available:



| | 4" | 6" | 6" | 8" | 8" | 8" |
|-----------------------------|--|--|--|--|--|--|
| MODEL NUMBER | RCF409CSW | RCF613CSW | RCF618CSW | RCF813CSW | RCF818CSW | RCF822CSW |
| ORDER CODE | 14099876 | 14099877 | 14099878 | 14099879 | 14099880 | 14099881 |
| Input Wattage | 9W | 13W | 18W | 13W | 18W | 22W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 750 lm | 1,100 lm | 1,650 lm | 1,115 lm | 1,650 lm | 2,120 lm |
| Efficacy (lm/W) | 87 lm/W | 88 lm/W | 94 lm/W | 87 lm/W | 94 lm/W | 97 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | Color Selectable (3000K, 3500K, 4000K) | Color Selectable (3000K, 3500K, 4000K) | Color Selectable (3000K, 3500K, 4000K) | Color Selectable (3000K, 3500K, 4000K) | Color Selectable (3000K, 3500K, 4000K) | Color Selectable (3000K, 3500K, 4000K) |
| Dimming Compatible | Triac | Triac | Triac | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | FCC, cETLus, ENERGY STAR* | FCC, cETLus, ENERGY STAR* | FCC, cETLus, ENERGY STAR* | FCC, cETLus, ENERGY STAR* | FCC, cETLus, ENERGY STAR* | FCC, cETLus, ENERGY STAR* |

LED 4" 120-277V Downlight Retrofits



CCTs Available:



| | 4" | 4" | 4" |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | RR-409U-30W | RR-409U-40W | RR-409U-50W |
| ORDER CODE | 102382 | 107285 | 107287 |
| Input Wattage | 9W | 9W | 9W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 680 lm | 720 lm | 760 lm |
| Efficacy (lm/W) | 85 lm/W | 86 lm/W | 86 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 4000K | 5000K |
| Replacement | 60W INC | 60W INC | 60W INC |
| Dimming Compatible | Triac (120V only) | Triac (120V only) | Triac (120V only) |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, ENERGY STAR®, FCC | cULus, ENERGY STAR®, FCC | cULus, ENERGY STAR®, FCC |

LED 6" 120-277V Downlight Retrofits



CCTs Available:



| | 6" | 6" | 6" |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | RR-613U-30W | RR-613U-40W | RR-613U-50W |
| ORDER CODE | 102383 | 107286 | 107288 |
| Input Wattage | 13W | 13W | 13W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,110 lm | 1,180 lm | 1,250 lm |
| Efficacy (lm/W) | 97 lm/W | 98 lm/W | 99 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 4000K | 5000K |
| Replacement | 120W INC | 120W INC | 120W INC |
| Dimming Compatible | Triac (120V only) | Triac (120V only) | Triac (120V only) |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, ENERGY STAR®, FCC | cULus, ENERGY STAR®, FCC | cULus, ENERGY STAR®, FCC |

LED 4" 120V Residential Retrofits



CCTs Available:



| | 4" | 4" | 4" |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | RR41027W-L9 | RR41030W-L9 | RR41040W-L9 |
| ORDER CODE | 14099591 | 14099592 | 14099593 |
| Input Wattage | 10W | 10W | 10W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 720 lm | 720 lm | 720 lm |
| Efficacy (lm/W) | 75 lm/W | 75 lm/W | 75 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 3000K | 4000K |
| Replacement | 60W INC | 60W INC | 60W INC |
| Dimming Compatible | Triac Dimmable | Triac Dimmable | Triac Dimmable |
| Lumen Maintenance (L70) | 36,000 hours | 36,000 hours | 36,000 hours |
| LISTINGS | cULus, ENERGY STAR®, FCC | cULus, ENERGY STAR®, FCC | cULus, ENERGY STAR®, FCC |

High CRI versions also available.

LED 6" 120V Residential Retrofits



CCTs Available:



| | 6" | 6" | 6" | 6" | 6" |
|-----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | RR61127W-L9 | RR61130W-L9 | RR61140W-L9 | RR61827W-L9 | RR61830W-L9 |
| ORDER CODE | 14099599 | 14099600 | 14099601 | 14099607 | 14099608 |
| Input Wattage | 11W | 11W | 18W | 18W | 18W |
| Voltage | 120V | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 850 lm | 850 lm | 1,390 lm | 1,390 lm | 1,390 lm |
| Efficacy (lm/W) | 80 lm/W | 80 lm/W | 81 lm/W | 81 lm/W | 81 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 3000K | 4000K | 2700K | 3000K |
| Replacement | 65W INC | 65W INC | 75W INC | 75W INC | 75W INC |
| Dimming Compatible | Triac Dimmable | Triac Dimmable | Triac Dimmable | Triac Dimmable | Triac Dimmable |
| Lumen Maintenance (L70) | 36,000 hours | 36,000 hours | 36,000 hours | 36,000 hours | 36,000 hours |
| LISTINGS | cULus, FCC, ENERGY STAR® | cULus, FCC, ENERGY STAR® | cULus, FCC, ENERGY STAR® | cULus, FCC, ENERGY STAR® | cULus, FCC, ENERGY STAR® |

High CRI versions also available.

Round Slim Downlight w/ Selectable CCT



CCTs Available:



| | 4" | 6" | 8" |
|-----------------------------|---|---|---|
| MODEL NUMBER | SDLR413CSWJ | SDLR616CSWJ | SDLR820CSWJ |
| ORDER CODE | 102887 | 102888 | 102889 |
| Input Wattage | 13W | 16W | 20W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 796 lm | 1,126 lm | 1,520 lm |
| Efficacy (lm/W) | 66 lm/W | 71 lm/W | 77 lm/W |
| Color Rendering Index (CRI) | >90 | >90 | >90 |
| Color Temperature (CCT) | Color Selectable (2700K, 3000K, 4000K, 5000K) | Color Selectable (2700K, 3000K, 4000K, 5000K) | Color Selectable (2700K, 3000K, 4000K, 5000K) |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | FCC, ENERGY STAR®, ETL, T24 JA8 | FCC, ENERGY STAR®, ETL, T24 JA8 | FCC, ENERGY STAR®, ETL, T24 JA8 |

Square Slim Downlight w/ Selectable CCT



CCTs Available:



| | 4" | 6" | 8" |
|-----------------------------|---|---|---|
| MODEL NUMBER | SDLS413CSWJ | SDLS616CSWJ | SDLS820CSWJ |
| ORDER CODE | 102890 | 102891 | 102892 |
| Input Wattage | 13W | 16W | 20W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 836 lm | 1,126 lm | 1,516 lm |
| Efficacy (lm/W) | 66 lm/W | 71 lm/W | 76 lm/W |
| Color Rendering Index (CRI) | >90 | >90 | >90 |
| Color Temperature (CCT) | Color Selectable (2700K, 3000K, 4000K, 5000K) | Color Selectable (2700K, 3000K, 4000K, 5000K) | Color Selectable (2700K, 3000K, 4000K, 5000K) |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | FCC, ENERGY STAR®, ETL, T24 JA8 | FCC, ENERGY STAR®, ETL, T24 JA8 | FCC, ENERGY STAR®, ETL, T24 JA8 |

MPulse™

Bollards



CCTs Available:



| MODEL NUMBER | MP-BL12UT5-840B | MP-BL12UT5-850B | MP-BL25UT5-840B | MP-BL25UT5-850B |
|-----------------------------|-----------------|-----------------|-----------------|-----------------|
| ORDER CODE | 102506 | 102521 | 102523 | 102525 |
| Input Wattage | 12W | 12W | 25W | 25W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 889 lm | 893 lm | 1,603 lm | 1,606 lm |
| Efficacy (lm/W) | 68 lm/W | 68 lm/W | 68 lm/W | 68 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 | 80 |
| Optic Distribution | Visual Comfort | Visual Comfort | Visual Comfort | Visual Comfort |
| Color Temperature (CCT) | 4000K | 5000K | 4000K | 5000K |
| Replacement | 50W MH | 50W MH | 70W MH | 70W MH |
| Dimming Compatible | N/A | N/A | 0-10V | 0-10V |
| Lumen Maintenance (L80) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | IP66, cULus | IP66, cULus | IP66, cULus | IP66, cULus |

Available with glare shield accessory.

MPulse™

Flood Lights



Photo/motion sensor, 120V-277V button photocontrol and 347-480V options available. Narrow, Medium, Rectangular and Visual Comfort (VC) optics available.

CCTs Available:



| MODEL NUMBER | MP-FL28UW-40BTS | MP-FL28UW-50BTS | MP-FL55UW-40BTS | MP-FL55UW-50BTS |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 101261 | 101272 | 101274 | 101276 |
| Input Wattage | 28W | 28W | 55W | 55W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,200 lm | 3,200 lm | 6,700 lm | 6,700 lm |
| Efficacy (lm/W) | 115 lm/W | 115 lm/W | 123 lm/W | 123 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 | >70 |
| Color Temperature (CCT) | 4000K | 5000K | 4000K | 5000K |
| Beam Spread | Wide | Wide | Wide | Wide |
| Replacement | 100W PSMH | 100W PSMH | 150W PSMH | 150W PSMH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| Mounting | Trunnion w/ Threaded Nipple | Trunnion w/ Threaded Nipple | Trunnion w/ Threaded Nipple | Trunnion w/ Threaded Nipple |
| LISTINGS | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium |

MPulse™

Flood Lights



Photo/motion sensor, NEMA twist lock photocontrol receptacle and 347V-480V options available. Narrow, Medium, and Rectangular optics available.

CCTs Available:



| MODEL NUMBER | MP-FL100UW-50BTS | MP-FL100UW-50BSK | MP-FL130UW-50BTS | MP-FL130UW-50BSK |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 101546 | 101786 | 101240 | 101248 |
| Input Wattage | 100W | 100W | 130W | 130W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 12,800 lm | 12,800 lm | 15,200 lm | 15,200 lm |
| Efficacy (lm/W) | 128 lm/W | 128 lm/W | 122 lm/W | 122 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 | >70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Beam Spread | Wide | Wide | Wide | Wide |
| Replacement | 250W PSMH | 250W PSMH | 400W PSMH | 400W PSMH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| Mounting | Trunnion | Slipfitter Knuckle | Trunnion | Slipfitter Knuckle |
| LISTINGS | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium |

MPulse™

Wall Mount Luminaire



CCTs Available:



| MODEL NUMBER | MP-SM28UT4-50B | MP-SM55UT4-50B | MP-SM100UT4-50B |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 1409471 | 1409473 | 1408979 |
| Input Wattage | 28W | 55W | 100W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,230 lm | 6,250 lm | 11,730 lm |
| Efficacy (lm/W) | 115 lm/W | 114 lm/W | 123 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 |
| Optic Distribution | Type IV | Type IV | Type IV |
| Color Temperature (CCT) | 5000K | 5000K | 5000K |
| Replacement | 175W MH | 250W MH | 400W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | cULus, DLC Premium, IP66 | cULus, DLC Premium, IP66 | cULus, DLC Premium, IP66 |

Type III, IV and Visual Comfort (VC) optics available.
Motion sensor, photocell and emergency battery backup options available. 347-480V available.

MPulse™

Canopy Series



CCTs Available:



| MODEL NUMBER | MP-CP28UC-50B | MP-CP55UC-50B |
|-----------------------------|--------------------|--------------------|
| ORDER CODE | 100546 | 14098923 |
| Input Wattage | 28W | 55W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,945 lm | 6,920 lm |
| Efficacy (lm/W) | 147 lm/W | 122 lm/W |
| Color Rendering Index (CRI) | >70 | >70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 150W MH | 250W MH |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours |
| LISTINGS | cULus, DLC Premium | cULus, DLC Premium |

Canopy, parking garage, asymmetric and Visual Comfort (VC) distributions available.
120-277V, 347V-480V, motion sensor, photocell and emergency battery backup options available.

MPulse™

Area Light



CCTs Available:



| MODEL NUMBER | MP-AR100UT3-50B | MP-AR150UT3-50B | MP-AR200UT3-50B | MP-AR250UT3-50B | MP-AR300UT3-50B |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 1409997 | 14098824 | 1409999 | 14098825 | 1409995 |
| Input Wattage | 100W | 150W | 200W | 250W | 300W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 11,975 lm | 19,450 lm | 25,335 lm | 31,525 lm | 36,440 lm |
| Efficacy (lm/W) | >120 lm/W | >120 lm/W | >120 lm/W | >120 lm/W | >120 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 | >70 | >70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K | 5000K |
| Replacement | 250W MH | 320W PSMH | 400W MH | 400W PSMH | 750W PSMH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium |

Photo/motion sensor, photocontrol receptacle and 347-480V options available.
Type II, III, IV and V optics available. Arm, Knuckle Slipfitter, Trunnion and Wall Mounts available.

MPulse™

High Output Flood Lights



Silver finish, high voltage (347-480V), Slipfitter mounting option, 3-Pin and 7-Pin photocontrol receptacles optional.

CCTs Available:



| MODEL NUMBER | MP-HO220UM-50BTS | MP-HO220UN-50BTS | MP-HO220UR-50BTS | MP-HO220UW-50BTS |
|-----------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| ORDER CODE | 14100812 | 14100816 | 14100820 | 14100824 |
| Input Wattage | 220W | 220W | 220W | 220W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 27,856 lm | 29,075 lm | 27,910 lm | 27,383 lm |
| Efficacy (lm/W) | 127 lm/W | 133 lm/W | 128 lm/W | 126 lm/W |
| Color Rendering Index (CRI) | 70 | 70 | 70 | 70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Beam Spread | Medium | Narrow | Rectangular | Wide |
| Replacement | 400W MH | 400W MH | 400W MH | 400W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| Mounting | Trunnion | Trunnion | Trunnion | Trunnion |
| LISTINGS | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium |

MPulse™

High Output Flood Lights



Silver finish, high voltage (347-480V), Slipfitter mounting option, 3-Pin and 7-Pin photocontrol receptacles optional.

CCTs Available:



| MODEL NUMBER | MP-HO440UM-50BTS | MP-HO440UN-50BTS | MP-HO440UR-50BTS | MP-HO440UW-50BTS |
|-----------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| ORDER CODE | 14100844 | 14100848 | 14100852 | 14100856 |
| Input Wattage | 440W | 440W | 440W | 440W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 55,021 lm | 57,430 lm | 55,127 lm | 54,086 lm |
| Efficacy (lm/W) | 126 lm/W | 131 lm/W | 126 lm/W | 124 lm/W |
| Color Rendering Index (CRI) | 70 | 70 | 70 | 70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Beam Spread | Medium | Narrow | Rectangular | Wide |
| Replacement | 1,000W MH | 1,000W MH | 1,000W MH | 1,000W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| Mounting | Trunnion | Trunnion | Trunnion | Trunnion |
| LISTINGS | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium |

MPulse™

High Output Flood Lights



Silver finish, high voltage (347-480V), Slipfitter mounting option, 3-Pin and 7-Pin photocontrol receptacles optional.

CCTs Available:



| MODEL NUMBER | MP-HO660UM-50BTS | MP-HO660UN-50BTS | MP-HO660UR-50BTS | MP-HO660UW-50BTS |
|-----------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| ORDER CODE | 14100876 | 14100880 | 14100884 | 14100888 |
| Input Wattage | 660W | 660W | 660W | 660W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 81,830 lm | 85,413 lm | 81,989 lm | 80,441 lm |
| Efficacy (lm/W) | 126 lm/W | 132 lm/W | 127 lm/W | 125 lm/W |
| Color Rendering Index (CRI) | 70 | 70 | 70 | 70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Beam Spread | Medium | Narrow | Rectangular | Wide |
| Replacement | 1,500W MH | 1,500W MH | 1,500W MH | 1,500W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| Mounting | Trunnion | Trunnion | Trunnion | Trunnion |
| LISTINGS | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium | cULus, FCC, DLC Premium |

FieldMax™ High Output Flood Lights



Threaded bolt available standard with the fixture. High voltage (347-480V) and glare visor optional.

CCTs Available:




| MODEL NUMBER | FL-SR360U3357BYK | FL-SR360U5557BYK | FL-SR360U7757BYK |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 103715 | 103716 | 103717 |
| Input Wattage | 360W | 360W | 360W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 65,002 lm | 63,314 lm | 61,121 lm |
| Efficacy (lm/W) | 180 lm/W | 175 lm/W | 170 lm/W |
| Color Rendering Index (CRI) | 77 | 77 | 77 |
| Color Temperature (CCT) | 5700K | 5700K | 5700K |
| Beam Type | NEMA 3X3 | NEMA 5X5 | NEMA 7X7 |
| Replacement | 750W MH | 750W MH | 750W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours | >50,000 hours |
| Mounting | Yoke Bracket | Yoke Bracket | Yoke Bracket |
| LISTINGS | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium |

FieldMax™ High Output Flood Lights



Threaded bolt available standard with the fixture. High voltage (347-480V) and glare visor optional.

CCTs Available:




| MODEL NUMBER | FL-SR430U3357BYK | FL-SR430U5557BYK | FL-SR430U7757BYK |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 103718 | 103719 | 103720 |
| Input Wattage | 435W | 435W | 435W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 76,439 lm | 74,570 lm | 72,000 lm |
| Efficacy (lm/W) | 177 lm/W | 172 lm/W | 167 lm/W |
| Color Rendering Index (CRI) | 77 | 77 | 77 |
| Color Temperature (CCT) | 5700K | 5700K | 5700K |
| Beam Type | NEMA 3X3 | NEMA 5X5 | NEMA 7X7 |
| Replacement | 1,000W MH | 1,000W MH | 1,000W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours | >50,000 hours |
| Mounting | Yoke Bracket | Yoke Bracket | Yoke Bracket |
| LISTINGS | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium |

FieldMax™ High Output Flood Lights



Threaded bolt available standard with the fixture. High voltage (347-480V) and glare visor optional.

CCTs Available:



| MODEL NUMBER | FL-SR515U3357BYK | FL-SR515U5557BYK | FL-SR515U7757BYK |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 103645 | 103644 | 103647 |
| Input Wattage | 515W | 515W | 515W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 90,853 lm | 88,623 lm | 87,005 lm |
| Efficacy (lm/W) | 178 lm/W | 173 lm/W | 170 lm/W |
| Color Rendering Index (CRI) | 77 | 77 | 77 |
| Color Temperature (CCT) | 5700K | 5700K | 5700K |
| Beam Type | NEMA 3X3 | NEMA 5X5 | NEMA 7X7 |
| Replacement | 15,000W MH | 15,000W MH | 15,000W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours | >50,000 hours |
| Mounting | Yoke Bracket | Yoke Bracket | Yoke Bracket |
| LISTINGS | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium |

QuadroMAX® Plus Modular Lighting Fixtures



CCTs Available:

5000K

| MODEL NUMBER | GMP-50UTS-50B | GMP-100UTS-50B | GMP-150UTS-50B | GMP-200UTS-50B | GMP-250UTS-50B | GMP-300UTS-50B |
|-----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 1408849 | 1408857 | 1408817 | 1408872 | 1408833 | 1408841 |
| Input Wattage | 50W | 100W | 150W | 200W | 250W | 300W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 5,900 lm | 12,275 lm | 18,135 lm | 23,340 lm | 33,485 lm | 39,505 lm |
| Efficacy (lm/W) | up to 131 lm/W | up to 131 lm/W | up to 131 lm/W | up to 131 lm/W | up to 131 lm/W | up to 131 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 | >70 | >70 | >70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K | 5000K | 5000K |
| Replacement | 150W MH | 250W MH | 320W PSMH | 400W MH | 400W PSMH | 750W PSMH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L90) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | IP66, cULus, DLC Premium | IP66, cULus, DLC Premium | IP66, cULus, DLC Premium | IP66, cULus, DLC Premium | IP66, cULus, DLC Premium | IP66, cULus, DLC Premium |

Type II, III, IV, V optics available. 347-480V available. 10kV surge suppression standard.

LED Slim Area Lights



CCTs Available:

4000K

5000K

| MODEL NUMBER | AR60UT3-50BA | AR100UT3-50BA | AR140UT3-50BA | AR210UT3-50BA | AR280UT3-50BA |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 14099279 | 14099303 | 14099327 | 14099351 | 14099375 |
| Input Wattage | 60W | 100W | 140W | 210W | 280W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 7,900 lm | 12,355 lm | 17,250 lm | 25,810 lm | 34,370 lm |
| Efficacy (lm/W) | Up to 130 lm/W | Up to 130 lm/W | Up to 130 lm/W | Up to 130 lm/W | Up to 130 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 | >70 | >70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K | 5000K |
| Replacement | 150W PSMH | 250W PSMH | 400MH | 400W PSMH | 750W PSMH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| Mounting | Straight Arm | Straight Arm | Straight Arm | Straight Arm | Straight Arm |
| LISTINGS | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium |

Type II, III, IV, V optics; 347-480V, photocell receptacle and photo/motion sensor options available. Straight arm, trunnion swivel, and slipfitter knuckle mountings available.

LED Small Flood Lights



CCTs Available:

4000K

5000K


| MODEL NUMBER | FLS15U50B/G2 | FLS20U50B/G2 | FLS40U50BP1/G2 | FLS50U50BP1/G2 |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 14098953 | 14098954 | 14098959 | 14098960 |
| Input Wattage | 14W | 19W | 40W | 49W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,475 lm | 2,180 lm | 4,460 lm | 5,750 lm |
| Efficacy (lm/W) | 117 | 111 | 112 | 118 |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Beam Spread | Wide | Wide | Wide | Wide |
| Replacement | 100W QH | 150W MH | 125W MH | 175W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | 54,000 hours | >100,000 hours |
| LISTINGS | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium | cULus, DLC Premium |

Narrow lens option available. Visor and vandal shield accessories also available. 40W and 50W include 120V-277V button photocell with removable cap.

LED Bullet Flood Lights



CCTs Available:



| MODEL NUMBER | BF12AUDW30B | BF12AUDW50B0 | BF30AUDW30B | BF30AUDW30B |
|-----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 100060 | 100062 | 100076 | 100078 |
| Input Wattage | 11W | 11W | 28W | 28W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,200 lm | 1,223 lm | 3,120 lm | 3,185 lm |
| Efficacy (lm/W) | 111 lm/W | 114 lm/W | 114 lm/W | 116 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 3000K | 5000K | 3000K | 5000K |
| Beam Angle | 60° Wide | 60° Wide | 60° Wide | 60° Wide |
| Replacement | 50W QH | 50W QH | 150W MH | 150W MH |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium | IP65, cULus, DLC Premium |

Shroud Accessory available(Sold separately). Narrow optics options also available.

FloodMax™ LED Flood Lights



20W & 30W



50W & 80W

CCTs Available:



120V-277V button photocell included with removable cap, Narrow optics and visors available. Multiple mounting options available.

| MODEL NUMBER | FMS20UW-40BKTPC | FMS30UW-50BKTPC | FMM50UW-50BTSPC | FMM80UW-40BKTPC |
|-----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 14100143 | 14100146 | 102801 | 14100149 |
| Input Wattage | 20W | 29W | 53W | 75W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,600 lm | 3,900 lm | 6,900 lm | 9,900 lm |
| Efficacy (lm/W) | 130 lm/W | 130 lm/W | 130 lm/W | 132 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 | >70 |
| Beam Spread | Wide (7x7) | Wide (7x7) | Wide (6x6) | Wide (6x6) |
| Color Temperature (CCT) | 4000K | 5000K | 5000K | 4000K |
| Replacement | 70W MH | 100W MH | 175W MH | 250W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours | 100,000 hours |
| Mounting | Knuckle 1/2" Thread | Knuckle 1/2" Thread | Trunnion | Knuckle 1/2" Thread |
| LISTINGS | cULus, IP65, DLC Premium | cULus, IP65, DLC Premium | cULus, IP65, DLC Premium | cULus, IP65, DLC Premium |

FloodMax™ LED Flood Lights



120W



200W & 310W

CCTs Available:



3 pin NEMA twist lock receptacle with removable shorting cap included, Narrow optics and visors available. Multiple mounting options available.

| MODEL NUMBER | FML120UW-40BTSRPC | FMX200UW-50BSKRPC | FMX310UW-40BTSRPC |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| ORDER CODE | 14100157 | 14100160 | 14100165 |
| Input Wattage | 110W | 218W | 307W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 14,300 lm | 29,500 lm | 39,600 lm |
| Efficacy (lm/W) | 130 lm/W | 135 lm/W | 129 lm/W |
| Color Rendering Index (CRI) | >70 | >70 | >70 |
| Beam Spread | Wide (6x6) | Wide (6x6) | Wide (6x6) |
| Color Temperature (CCT) | 4000K | 5000K | 4000K |
| Replacement | 400W MH | 750W MH | 1000 MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 100,000 hours | 100,000 hours | 100,000 hours |
| Mounting | Trunnion | Knuckle Slipfitter | Trunnion |
| LISTINGS | cULus, IP65, DLC Premium | cULus, IP65, DLC Premium | cULus, IP65, DLC Premium |

Steel 4" Straight Square Poles



| MODEL NUMBER | PL-SQ4-15T11-BQ | PL-SQ4-20T11-BQ | PL-SQ4-25T11-BQ |
|--------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 14100934 | 14100935 | 14100936 |
| Height | 15' | 20' | 25' |
| Shaft Size | 4" Square | 4" Square | 4" Square |
| Gauge | 11 | 11 | 11 |
| Finish | Bronze | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 5" Straight Square Poles



| MODEL NUMBER | PL-SQ5-25T11-BQ | PL-SQ5-30T11-BQ | PL-SQ5-30T07-BQ |
|--------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 14100937 | 14100938 | 14100939 |
| Height | 25' | 30' | 30' |
| Shaft Size | 5" Square | 5" Square | 5" Square |
| Gauge | 11 | 11 | 7 |
| Finish | Bronze | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Aluminum 4" Straight Square Poles



| MODEL NUMBER | PL-SA4-12T1-B | PL-SA4-15T1-B | PL-SA4-16T3-B | PL-SA4-20T3-B |
|----------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 14102083 | 14102085 | 14102087 | 14102089 |
| Height | 12' | 15' | 16' | 20' |
| Shaft Size | 4" Square | 4" Square | 4" Square | 4" Square |
| Wall Thickness | 0.125" | 0.125" | 0.188" | 0.188" |
| Finish | Bronze | Bronze | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Aluminum 5" Straight Square Poles



| MODEL NUMBER | PL-SA5-20T3-B | PL-SA5-25T3-B |
|----------------|-----------------------------|-----------------------------|
| ORDER CODE | 14102091 | 14102093 |
| Height | 20' | 25' |
| Shaft Size | 5" Square | 5" Square |
| Wall Thickness | 0.188" | 0.188" |
| Finish | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 3" Straight Round Poles



| MODEL NUMBER | PL-RS3-08T11-B | PL-RS3-10T11-B | PL-RS3-12T11-B |
|--------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 14101881 | 14101885 | 14101889 |
| Height | 8' | 10' | 12' |
| Shaft Size | 3" Round | 3" Round | 3" Round |
| Gauge | 11 | 11 | 11 |
| Finish | Bronze | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 4" Straight Round Poles



| MODEL NUMBER | PL-RS4-15T11-B | PL-RS4-20T11-B |
|--------------|-----------------------------|-----------------------------|
| ORDER CODE | 14101860 | 14101864 |
| Height | 15' | 20' |
| Shaft Size | 4" Round | 4" Round |
| Gauge | 11 | 11 |
| Finish | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 5" Straight Round Poles



| MODEL NUMBER | PL-RS5-25T11-B | PL-RS5-30T11-B | PL-RS5-30T07-B |
|--------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 14101869 | 14101877 | 14101875 |
| Height | 25' | 30' | 30' |
| Shaft Size | 5" Round | 5" Round | 5" Round |
| Gauge | 11 | 11 | 7 |
| Finish | Bronze | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Aluminum 5" Straight Round Poles




| MODEL NUMBER | PL-RA5-12T3-B | PL-RA5-16T3-B | PL-RA5-20T3-B |
|----------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 14102076 | 14102078 | 14102080 |
| Height | 12' | 16' | 20' |
| Shaft Size | 5" Round | 5" Round | 5" Round |
| Wall Thickness | 0.188" | 0.188" | 0.188" |
| Finish | Bronze | Bronze | Bronze |
| Mounting | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon | 2.375" O.D. x 4" Tall Tenon |

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Mounting Accessories

BULLHORN - 2.375" wide x 4" tall Tenon Top




PL-BB218-B




PL-BB318L-B




PL-BB318-B



PL-BB312-B



PL-BB490-B




PL-BB418-B

SPOKE BRACKETS - 2.375" wide x 4" tall Tenon Top



R4HT1S00BZ



R4HT218BZ



R4HT290BZ



R4HT312BZ



R4HT390BZ



R4HT490BZ

POLES FITTER



S4VT1S00BZ (4" SQUARE POLE)
S5VT1S00BZ (5" SQUARE POLE)



S4HT218BZ (4" SQUARE POLE)
S5HT218BZ (5" SQUARE POLE)



S4HT290BZ (4" SQUARE POLE)
S5HT290BZ (5" SQUARE POLE)




S4HT390BZ (4" SQUARE POLE)




S4HT490BZ (4" SQUARE POLE)

SQUARE BRACKET



S4VT1S00BZ (4" SQUARE POLE)
S5VT1S00BZ (5" SQUARE POLE)



S4HT218BZ (4" SQUARE POLE)
S5HT218BZ (5" SQUARE POLE)



S4HT290BZ (4" SQUARE POLE)
S5HT290BZ (5" SQUARE POLE)

AR/GMP/MP-AR POLE ADAPTOR



S4HT390BZ (4" SQUARE POLE)



S4HT490BZ (4" SQUARE POLE)

TENON REDUCER



TR2.37BZ (2-3/8" TO 1/2")




TR3BZ (3" TO 2-3/8")



R4VT1S00BZ (4" TO 2-3/8")

WALL MOUNT BRACKET



WMB1HBZ



WMB1VBZ

SWIVEL BRACKET



SB2BZ (RATED FOR 18LBS. MAX)


WOOD POLES COLLAR BULLHORN



PL-CB190-90B (POLE Ø 5"-9")
PL-CB190-13B (POLE Ø 10"-13")



PL-CB218-9B (POLE Ø 5"-9")
PL-CB218-13B (POLE Ø 10"-13")




PL-CB390-9B (POLE Ø 5"-9")
PL-CB390-13B (POLE Ø 10"-13")



PL-CB490-9B (POLE Ø 5"-9")
PL-CB490-13B (POLE Ø 10"-13")


* 50 lbs max / arm for poles ø 5"-9" applicable brackets | 90 lbs max/arm for poles ø 10"-13" applicable brackets

WOOD POLES ANGLE CROSSARM




PL-XAB2-B (2 FIXTURES)
PL-XAB3-B (3 FIXTURES)
PL-XAB4-B (4 FIXTURES)
PL-XAB5-B (5 FIXTURES)

STEEL POLES COLLAR CROSSARM



PL-XCB2-B (2 FIXTURES)
PL-XCB3-B (3 FIXTURES)
PL-XCB4-B (4 FIXTURES)

STEEL POLES SIDE CROSSARM



PL-XSB2-B (2 FIXTURES)
PL-XSB3-B (3 FIXTURES)
PL-XSB4-B (4 FIXTURES)
PL-XSB5-B (5 FIXTURES)
PL-XSB6-B (6 FIXTURES)

* Review product specs on our website for dimensions or contact us for a detailed drawing

PathMax™ Classic Series Round Flat Top Bollards



CCTs Available:



| | 36" | 42" | 42" | 42" |
|-----------------------------|---------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | BL-CLRF38U-40B36 | BL-CLRF17U-40B | BL-CLRF17U-40BT3 | BL-CLRF17U-40BLR |
| ORDER CODE | 14101675 | 14100775 | 14100776 | 14100777 |
| Input Wattage | 38W | 17W | 17W | 17W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,610 lm | 1,458 lm | 989 lm | 747 lm |
| Efficacy (lm/W) | 95 lm/W | 86 lm/W | 58 lm/W | 44 lm/W |
| Color Rendering Index (CRI) | >80 | >80 | >80 | >80 |
| Distribution | Wide Beam | Wide Beam | Type 3 | Louver |
| Color Temperature (CCT) | 4000K | 4000K | 4000K | 4000K |
| Replacement | 150W MH | 70W MH | 70W MH | 70W MH |
| Dimming Compatible | N/A | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | cULus, IP65, DLC Standard | CSA Group Listed, IP65, BAA | CSA Group Listed, IP65, BAA | CSA Group Listed, IP65, BAA |

Available in different finishes and custom heights; and with accessories such as GFCI receptacle, and glare shield.

PathMax™ Classic Series Round Dome Top Bollards



CCTs Available:



| | 36" | 42" | 42" | 42" |
|-----------------------------|---------------------------|------------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | BL-CLRD38U-40B36 | BL-CL2RD18U-40B | BL-CLRD17U-40BT3 | BL-CLRD17U-40BLR |
| ORDER CODE | 14101671 | 103775 | 14100979 | 14100980 |
| Input Wattage | 38W | 18W | 17W | 17W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,610 lm | 2,200 lm | 989 lm | 733 lm |
| Efficacy (lm/W) | 95 lm/W | 118 lm/W | 58 lm/W | 43 lm/W |
| Color Rendering Index (CRI) | >80 | >80 | >80 | >80 |
| Distribution | Wide Beam | Wide Beam | Type 3 | Louver |
| Color Temperature (CCT) | 4000K | 4000K | 4000K | 4000K |
| Replacement | 150W MH | 70W MH | 70W MH | 70W MH |
| Dimming Compatible | N/A | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours | >50,000 hours | >50,000 hours |
| LISTINGS | cULus, IP65, DLC Standard | UL Listed, IP65, DLC Premium | CSA Group listed, IP65, BAA | CSA Group listed, IP65, BAA |

Available in different finishes and custom heights; and with accessories such as GFCI receptacle, and glare shield.

LED Large Architectural Wall Packs



CCTs Available:

5000K

| MODEL NUMBER | WP-WMP3OUT2-50B | WP-WMP9OUT2-50B |
|-----------------------------|---------------------|---------------------|
| ORDER CODE | 101373 | 101375 |
| Input Wattage | 30W | 90W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,035 lm | 8,600 lm |
| Efficacy (lm/W) | 97 lm/W | 102 lm/W |
| Color Rendering Index (CRI) | ≥75 | ≥75 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 175W MH | 400W MH |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours |
| LISTINGS | cULus, DLC Standard | cULus, DLC Standard |

Photo/motion sensor and photo control options available.

WallIMAX™ LED Open Face Wall Packs



CCTs Available:

4000K

5000K

| MODEL NUMBER | WP-OP28U-50B | WP-OP40U-50B | WP-OP50U-50B | WP-OP80U-50B | WP-OP120U-50B |
|-----------------------------|------------------|------------------|------------------|------------------|------------------|
| ORDER CODE | 100192 | 100197 | 100198 | 100199 | 100200 |
| Input Wattage | 28W | 40W | 50W | 80W | 120W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,640 lm | 5,540 lm | 7,065 lm | 11,375 lm | 16,945 lm |
| Efficacy (lm/W) | 130 lm/W | 135 lm/W | 135 lm/W | 140 lm/W | 140 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K | 5000K |
| Replacement | 150W MH | 175W MH | 250W MH | 400W MH | 400W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | ETL, DLC Premium | ETL, DLC Premium | ETL, DLC Premium | ETL, DLC Premium | ETL, DLC Premium |

Photo/motion sensor, photocell, 347-480V, and battery backup options available.

WallIMAX™ LED Thin Cut Off Wall Packs



CCTs Available:

4000K

5000K

| MODEL NUMBER | WP-ADS15U-50B | WP-ADS20U-50B | WP-ADS29U-50B | WP-ADL50U-50B | WP-ADL70U-50B |
|-----------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| ORDER CODE | 1409969 | 107999 | 108000 | 1409972 | 108001 |
| Input Wattage | 15W | 20W | 29W | 50W | 70W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,575 lm | 2,100 lm | 3,100 lm | 5,800 lm | 8,200 lm |
| Efficacy (lm/W) | 105 lm/W | 105 lm/W | 105 lm/W | 131 lm/W | 116 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K | 5000K |
| Replacement | 100W MH | 150W MH | 175W MH | 250W MH | 250W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | ETL, DLC Standard | ETL, DLC Standard | ETL, DLC Standard | ETL, DLC Standard | ETL, DLC Standard |

Photocell Option available, fixture adjustable up to 90 degrees.

LED Barn Lights



CCTs Available:

5000K

| MODEL NUMBER | BP35AUT550BPM0 | BP45AUT550BPM0 |
|-----------------------------|---------------------|---------------------|
| ORDER CODE | 99918 | 99921 |
| Input Wattage | 34W | 45W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,325 lm | 5,005 lm |
| Efficacy (lm/W) | 99 lm/W | 113 lm/W |
| Color Rendering Index (CRI) | 78 | 70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Distribution | Type V | Type V |
| Replacement | 150W HPS | 175W MH |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours |
| LISTINGS | cULus, DLC Standard | cULus, DLC Standard |

Product standard with 3-pin photo control and mounting arm.

GuardMAX™ LED Entry Wall Packs



CCTs Available:

4000K

5000K

| MODEL NUMBER | SEC15U40BPC | SEC15U50BPC |
|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 101550 | 101552 |
| Input Wattage | 15W | 15W |
| Voltage | 120V-277V | 120V-277V |
| Delivered Lumens (lm) | 1,850 lm | 1,920 lm |
| Efficacy (lm/W) | 124 lm/W | 128 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 5000K |
| Replacement | 100W | 100W |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | >120,000 hours | >120,000 hours |
| LISTINGS | ETL, DLC Premium, FCC, IP65 | ETL, DLC Premium, FCC, IP65 |

120-277V photocontrol with removable cap standard. White finish option also available.

GuardMAX™ LED Emergency Wall Packs



CCTs Available:

5000K

| | 0°C DEGREE BATTERY BACKUP | -30°C DEGREE BATTERY BACKUP |
|-----------------------------|---------------------------|-----------------------------|
| MODEL NUMBER | SECR12U-50BPCEM0 | SECR12U-50BPCEM2 |
| ORDER CODE | 103275 | 103276 |
| Input Wattage | 12W | 12W |
| Voltage | 120V-277V | 120V-277V |
| Delivered Lumens (lm) | 1,275 lm | 1,275 lm |
| Efficacy (lm/W) | 86 lm/W | 86 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 42W CFL | 42W CFL |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | xx hours | xx hours |
| LISTINGS | cULus, FCC | cULus, FCC |

LED Integrated Vaporproof Wall Mount Jelly Jar



CCTs Available:



Colored PC Lens Available:



| MODEL NUMBER | JJW14130 | JJW14150 | JJW23U30 | JJW23U50 |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 14100453 | 14100454 | 14100457 | 14100458 |
| Input Wattage | 14.5W | 14.5W | 24W | 24W |
| Voltage | 120V | 120V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,020 lm | 1,100 lm | 1,890 lm | 1,890 lm |
| Efficacy (lm/W) | 72 lm/W | 78 lm/W | 79 lm/W | 79 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 70 | 70 |
| Color Temperature (CCT) | 3000K | 5000K | 3000K | 5000K |
| Replacement | 100W INC | 100W INC | 150W INC | 150W INC |
| Dimming Compatible | N/A | N/A | N/A | N/A |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours | >50,000 hours | >50,000 hours |
| Mounting | Wall Mount | Wall Mount | Wall Mount | Wall Mount |
| LISTINGS | IP65, ENERGY STAR* | IP65, ENERGY STAR* | IP65, ENERGY STAR* | IP65, ENERGY STAR* |

LED Integrated Vaporproof Ceiling/Pendant Mount Jelly Jar



CCTs Available:



Colored PC Lens Available:



| MODEL NUMBER | JJC14130 | JJC14150 | JJC23U30 | JJC23U50 |
|-----------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| ORDER CODE | 14100455 | 14100456 | 14100459 | 14100460 |
| Input Wattage | 14.5W | 14.5W | 24W | 24W |
| Voltage | 120V | 120V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,020 lm | 1,100 lm | 1,890 lm | 1,890 lm |
| Efficacy (lm/W) | 72 lm/W | 78 lm/W | 79 lm/W | 79 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 70 | 70 |
| Color Temperature (CCT) | 3000K | 5000K | 3000K | 5000K |
| Replacement | 100W INC | 100W INC | 150W INC | 150W INC |
| Dimming Compatible | N/A | N/A | N/A | N/A |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours | >50,000 hours | >50,000 hours |
| Mounting | Ceiling/Pendant Mount | Ceiling/Pendant Mount | Ceiling/Pendant Mount | Ceiling/Pendant Mount |
| LISTINGS | IP65, ENERGY STAR* | IP65, ENERGY STAR* | IP65, ENERGY STAR* | IP65, ENERGY STAR* |

LED Lamp Ready Vaporproof Jelly Jars



CCTs Available:



| | WALL MOUNT | CEILING MOUNT |
|-----------------|---------------------|---------------------|
| MODEL NUMBER | JJW12001 | JJC12001 |
| ORDER CODE | 101439 | 101443 |
| Number of Lamps | 1 x A19 E26 Base | 1 x A19 E26 Base |
| Voltage | 120V | 120V |
| Max Wattage | 100W INC | 100W INC |
| LISTINGS | cULus, ENERGY STAR* | cULus, ENERGY STAR* |

JAB and ENERGY STAR* certified lamp included. Optional dusk to dawn lamp with integrated photocell available.

Polygon™ LED Linear Fixtures



CCTs Available:



| | 4' | 8' |
|-----------------------------|---------------------|-----------------------|
| MODEL NUMBER | LSP4805UU44DV35 | LSP9605UU55DV50 |
| ORDER CODE | 101697 | 99990 |
| Input Wattage | 40W | 60W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 4,670 lm | 7,859 lm |
| Efficacy (lm/W) | 119 lm/W | 128-132 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 3500K | 5000K |
| Distribution | Type V Batwing | Type V Batwing |
| Replacement | (2) F32T8 | (3) F32T8, (1) F96T12 |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours |
| LISTINGS | cULus, DLC Standard | cULus, DLC Standard |

Programmable On/Off and dimmable motion sensors available.

LED Low-Profile Canopy Luminaires



CCTs Available:



| MODEL NUMBER | CPL20BUC50B | CPL30AUC50B | CPL40BUC50B | CPL52BUC50B |
|-----------------------------|------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 1408347 | 102005 | 102010 | 102335 |
| Input Wattage | 20W | 30W | 40W | 53W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,415 lm | 3,525 lm | 5,150 lm | 6,510 lm |
| Efficacy (lm/W) | 120 lm/W | 118 lm/W | 123 lm/W | 125 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Replacement | 100W MH | 150W MH | 175W MH | 250W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | DLC Premium, ETL | DLC Premium, cULus | DLC Premium, cULus | DLC Premium, cULus |

Photo/motion sensor and photocell options also available. Please contact your MaxLite representative for battery backup 480V options.

LED Low-Profile Parking Garage Canopy Luminaires



CCTs Available:



| MODEL NUMBER | CPL20BUP50B | CPL30BUP50B | CPL40AUP50B | CPL58AUP50B |
|-----------------------------|------------------|--------------------|--------------------|--------------------|
| ORDER CODE | 1408349 | 102001 | 101024 | 102339 |
| Input Wattage | 20W | 30W | 40W | 53W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,200 lm | 3,320 lm | 4,645 lm | 6,095 lm |
| Efficacy (lm/W) | 116 lm/W | 111 lm/W | 113 lm/W | 115 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Replacement | 100W MH | 150W MH | 175W MH | 250W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | DLC Premium, ETL | DLC Premium, cULus | DLC Premium, cULus | DLC Premium, cULus |

Photo/motion sensor and photocell options also available. Please contact your MaxLite representative for battery backup 480V options.

Flood Class I Division 1 HL-AR-D1 Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K

| MODEL NUMBER | HL-AR80UW-50G-D1 | HL-AR100UW-50G-D1 | HL-AR150UW-50G-D1 |
|-----------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| ORDER CODE | 1409541 | 1409543 | 1409545 |
| Input Wattage | 80W | 100W | 150W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 9,600 lm | 12,000 lm | 18,245 lm |
| Efficacy (lm/W) | 120 lm/W | 120 lm/W | 120 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K |
| Distribution | 120° | 120° | 120° |
| Replacement | 175W MH | 400W MH | 400W PSMH |
| Temperature Rating | T6 | T6 | T6 |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | UL844, UL1598, UL1598A, DLC Premium | UL844, UL1598, UL1598A, DLC Premium | UL844, UL1598, UL1598A, DLC Premium |

Flood Class I Division 2 HL-AR Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K

| MODEL NUMBER | HL-AR80UW-50G | HL-AR100UW-50G | HL-AR150UW-50G |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 107618 | 1409413 | 107620 |
| Input Wattage | 80W | 100W | 150W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 9,600 lm | 12,000 lm | 18,245 lm |
| Efficacy (lm/W) | 120 lm/W | 120 lm/W | 120 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K |
| Distribution | 120° | 120° | 120° |
| Replacement | 175W MH | 400W MH | 400W PSMH |
| Temperature Rating | T4A | T4A | T4A |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours | >100,000 hours |
| LISTINGS | UL1598A, UL844, DLC Premium | UL1598A, UL844, DLC Premium | UL1598A, UL844, DLC Premium |

High Output Flood Class I Division 2 HL-ELLF Series



Available in 18° & 58° beam angles.
Available with 347-480V.

CCTs Available:

5000K

| MODEL NUMBER | ELLF135UW50AGSH12 | ELLF270UW50AGSH12 | ELLF405UW50AGSH12 |
|-----------------------------|-------------------|-------------------|-------------------|
| ORDER CODE | 74450 | 74819 | 74793 |
| Input Wattage | 135W | 270W | 405W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 15,830 lm | 31,660 lm | 47,490 lm |
| Efficacy (lm/W) | 112 lm/W | 112 lm/W | 112 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K |
| Distribution | 120° | 120° | 120° |
| Replacement | 320W PSMH | 750W PSMH | 1000W MH |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Temperature Rating | T4 | T4 | T4 |
| Lumen Maintenance (L70) | >75,000 hours | >75,000 hours | >75,000 hours |
| LISTINGS | UL1598, UL844 | UL1598, UL844 | UL1598, UL844 |

Linear Class I Division 2 HL-LI Series



CCTs Available:

5000K

| MODEL NUMBER | HL-LI2440 | HL-LI4880 |
|-----------------------------|-------------------------------------|-------------------------------------|
| ORDER CODE | 1409547 | 1409549 |
| Input Wattage | 40W | 80W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 5,480 lm | 10,960 lm |
| Efficacy (lm/W) | 130 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Temperature Rating | T3C | T3C |
| Lumen Maintenance (L70) | >100,000 hours | >100,000 hours |
| LISTINGS | UL844, UL8750, UL1598A, DLC Premium | UL844, UL8750, UL1598A, DLC Premium |

40W = 2-FT, 80W = 4-FT
347-480V options also available.
Available in 110° beam angles.

Linear Class I Division 1 HL-LI Series



CCTs Available:

3000K

4000K

5000K

| MODEL NUMBER | HL-LI2440UP-D1 | HL-LI4880UP-D1 |
|-----------------------------|---|---|
| ORDER CODE | 103013 | 103014 |
| Input Wattage | 38W | 80W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 4,500 lm | 9,200 lm |
| Efficacy (lm/W) | 118 lm/W | 115 lm/W |
| Color Rendering Index (CRI) | > 70 | > 70 |
| Color Temperature (CCT) | 4000K | 4000K |
| Replacement | 150W MH | 250W MH |
| Dimming Compatible | 0-10V | 0-10V |
| Lumen Maintenance (L70) | >50,000 hours | >50,000 hours |
| Mounting | Pendant Mount | Pendant Mount |
| LISTINGS | DLC Standard, UL844, UL8750, UL1598A, UL1598, FCC | DLC Standard, UL844, UL8750, UL1598A, UL1598, FCC |

Available with yoke mount; secondary retention point, safety cable (rated for 250lbs), and EM option.

Wall Pack Class I Division 2 HL-WP Series



CCTs Available:

4000K

5000K

| MODEL NUMBER | HL-WP26U40 | HL-WP26U50 | HL-WP43U40 | HL-WP43U50 |
|-----------------------------|-----------------|-----------------|-----------------|-----------------|
| ORDER CODE | 14101835 | 14101734 | 14101837 | 14101836 |
| Input Wattage | 26W | 26W | 43W | 43W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 3,199 lm | 3,332 lm | 5,316 lm | 5,538 lm |
| Efficacy (lm/W) | 121 lm/W | 126 lm/W | 123 lm/W | 128 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 4000K | 5000K | 4000K | 5000K |
| Distribution | 110° | 110° | 110° | 110° |
| Replacement | 70W HID | 70W HID | 150W HID | 150W HID |
| Dimming Compatible | 0-10V | 0-10V | 0-10V | 0-10V |
| Temperature Rating | T4 | T4 | T4 | T4 |
| Lumen Maintenance (L70) | 147,000 hours | 147,000 hours | 147,000 hours | 147,000 hours |
| LISTINGS | IP66, BAA, ETL | IP66, BAA, ETL | IP66, BAA, ETL | IP66, BAA, ETL |

High Bay Class I Division 2 HLRS Series



CCTs Available:



| MODEL NUMBER | HLRS45UP | HLRS65UP |
|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 103299 | 103300 |
| Input Wattage | 42W | 65W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 6,685 lm | 10,136 lm |
| Efficacy (lm/W) | 158 lm/W | 156 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Beam Angle | 110° | 110° |
| Replacement | 100W MH | 175W MH |
| Temperature Rating | T4A-T5 | T4A-T5 |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | UL1598, UL1598A, UL844, FCC | UL1598, UL1598A, UL844, FCC |

347-480V options also available. Pendant, Swivel, Ceiling, Wall and Stanchion mount options available.

Low Bay/Jelly Jar Class I Division 2 HLRS Series



CCTs Available:



| MODEL NUMBER | HLRS45ULP | HLRS65ULP |
|-----------------------------|-----------------------------|-----------------------------|
| ORDER CODE | 103301 | 103302 |
| Input Wattage | 45W | 65W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 5,760 lm | 8,900 lm |
| Efficacy (lm/W) | 136 lm/W | 137 lm/W |
| Color Rendering Index (CRI) | ≥70 | ≥70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Distribution | 130° | 130° |
| Replacement | 100W MH | 175W MH |
| Temperature Rating | T4A-T5 | T4A-T5 |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | UL1598, UL1598A, UL844, FCC | UL1598, UL1598A, UL844, FCC |

347-480V options also available. Pendant, Swivel, Ceiling, Wall and Stanchion mount options available.

LED Filament Lamps



CCTs Available:

2700K

| | B10 (E12 BASE) | FLAMETIP BA10 (E12 BASE) |
|-----------------------------|---------------------|--------------------------|
| MODEL NUMBER | F4B10D27 | F4BA10D27/G2 |
| ORDER CODE | 14099267 | 102293 |
| Input Wattage | 4W | 4W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 300 lm | 330 lm |
| Efficacy (lm/W) | 75 lm/W | 82 lm/W |
| Color Rendering Index (CRI) | 82 | 82 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 40W INC | 40W INC |
| Dimming Compatible | Yes | Yes |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED Filament Lamps



CCTs Available:

2700K

| | G25 (E26 BASE) | A19 (E26 BASE) |
|-----------------------------|---------------------|---------------------|
| MODEL NUMBER | EF5G25D27 | F7A19DLED27/G3 |
| ORDER CODE | 103744 | 1409420 |
| Input Wattage | 5W | 7W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 500 lm | 800 lm |
| Efficacy (lm/W) | 100 lm/W | 114 lm/W |
| Color Rendering Index (CRI) | 82 | 84 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 60W INC | 60W INC |
| Dimming Compatible | Yes | Yes |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED JA8 Certified Filament Lamps



CCTs Available:

2200K 2700K

| | B10 (E12 BASE) | T10 (E26 BASE) | ST19 (E26 BASE) | A19 (E26 BASE) |
|-----------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | EF4B10D927/JA8 | F4T10DLED927/JA8 | V6.5ST19DLED922/JA8 | EF8.5A19D927/JA8 |
| ORDER CODE | 103409 | 1409894 | 1409893 | 102275 |
| Input Wattage | 4W | 4W | 6.5W | 8.5W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 300 lm | 300 lm | 450 lm | 800 lm |
| Efficacy (lm/W) | 75 lm/W | 75 lm/W | 69 lm/W | 94 lm/W |
| Color Rendering Index (CRI) | 94 | 91 | 96 | 91 |
| Color Temperature (CCT) | 2700K | 2700K | 2200K | 2700K |
| Replacement | 40W INC | 40W INC | 40W INC | 60W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours | 15,000 hours | 15,000 hours |
| LISTINGS | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 |

LED Enclosed Rated Frosted Filament Lamps



CCTs Available:

2700K



| | B10 BLUNT TIP (E26 BASE) | B10 BLUNT TIP (E12 BASE) | B10 BENT TIP (E26 BASE) | B10 BENT TIP (E12 BASE) | B10 BLUNT TIP (E26 BASE) | B10 BLUNT TIP (E12 BASE) |
|-----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
| MODEL NUMBER | EFF3.5B1027 | EFF3.5B1027C | EFF3.5BA1027 | EFF3.5BA1027C | EFF5B1027 | EFF5B1027C |
| ORDER CODE | 14101729 | 14101727 | 14101728 | 14101726 | 14101733 | 14101731 |
| Input Wattage | 3.5W | 3.5W | 3.5W | 3.5W | 5W | 5W |
| Voltage | 120V | 120V | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 325 lm | 325 lm | 325 lm | 325 lm | 525 lm | 525 lm |
| Efficacy (lm/W) | 92 lm/W | 92 lm/W | 92 lm/W | 92 lm/W | 105 lm/W | 105 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 | 80 | 80 | 80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 40W INC | 40W INC | 40W INC | 60W INC | 60W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours | 15,000 hours | 15,000 hours | 15,000 hours | 15,000 hours |
| LISTINGS | cULus | cULus | cULus | cULus | cULus | cULus |

LED Enclosed Rated Frosted Filament Lamps



CCTs Available:

2700K

3000K

5000K



| | A19 (E26 BASE) | A19 (E26 BASE) | A21 (E26 BASE) |
|-----------------------------|----------------|----------------|----------------|
| MODEL NUMBER | EFF4.5A19D27* | EFF10A19D27 | EFF13A21D27 |
| ORDER CODE | 14101717 | 14101720 | 14101723 |
| Input Wattage | 4.5W | 10W | 13W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 450 lm | 1,100 lm | 1,600 lm |
| Efficacy (lm/W) | 100 lm/W | 110 lm/W | 123 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 75W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours | 15,000 hours |
| LISTINGS | cULus | cULus | cULus |

3000K and 5000K options.

LED Enclosed Rated JA8 Certified Frosted Filament Lamps



CCTs Available:

2700K

3000K



| | A19 (E26 BASE) | A19 (E26 BASE) |
|-----------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | EFF8.5A19D927/JA8 | EFF8.5A19D930/JA8 |
| ORDER CODE | 101150 | 102434 |
| Input Wattage | 8.5W | 8.5W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 800 lm | 800 lm |
| Efficacy (lm/W) | 94 lm/W | 94 lm/W |
| Color Rendering Index (CRI) | 90 | 90 |
| Color Temperature (CCT) | 2700K | 3000K |
| Replacement | 60W INC | 60W INC |
| Dimming Compatible | Yes | Yes |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours |
| LISTINGS | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 |

LED Filament Lamps



CCTs Available:

2700K

| | CLEAR (E26 BASE) | FROSTED (E26 BASE) |
|-----------------------------|------------------|--------------------|
| MODEL NUMBER | F2S14ND27 | FF2S14ND27 |
| ORDER CODE | 101418 | 101425 |
| Input Wattage | 2W | 2W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 180 lm | 160 lm |
| Efficacy (lm/W) | 90 lm/W | 80 lm/W |
| Color Rendering Index (CRI) | 80 | 80 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 11W INC | 11W INC |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 15,000 hours | 15,000 hours |
| LISTINGS | cULus | cULus |

LED Enclosed Rated Filament Lamps



CCTs Available:

2700K

3000K

| | T12 FROSTED (GU24 BASE) | T12 FROSTED (E26 BASE) | T12 CLEAR (E26 BASE) |
|-----------------------------|-------------------------|------------------------|------------------------|
| MODEL NUMBER | EFF8.5T12GUD927/JA8 | EFF8.5T12D927/JA8* | EF8.5T12D927/JA8* |
| ORDER CODE | 101318 | 103044 | 101335 |
| Input Wattage | 8.5W | 8.5W | 8.5W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 800 lm | 800 lm | 800 lm |
| Efficacy (lm/W) | 94 lm/W | 94 lm/W | 94 lm/W |
| Color Rendering Index (CRI) | 90 | 90 | 90 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 60W INC | 60W INC | 60W INC |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 11,000 hours | 11,000 hours | 11,000 hours |
| LISTINGS | cULus Listed, T20, JA8 | cULus Listed, T20, JA8 | cULus Listed, T20, JA8 |

2700K and 3000K options.

LED Omni-Directional Dimmable Enclosed Rated A-Lamps



CCTs Available:



| | A19 (E26 BASE) | A19 (E26 BASE) | A19 (E26 BASE) | A19 (E26 BASE) |
|-----------------------------|----------------|----------------|-----------------|-----------------|
| MODEL NUMBER | E6A19DLED27/G8 | E9A19DLED27/G8 | E11A19DLED27/G8 | E15A19DLED27/G8 |
| ORDER CODE | 14099390 | 14099394 | 14099399 | 14099402 |
| Input Wattage | 6W | 9W | 11W | 15W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 480 lm | 800 lm | 1,100 lm | 1,600 lm |
| Efficacy (lm/W) | 80 lm/W | 89 lm/W | 100 lm/W | 106 lm/W |
| Color Rendering Index (CRI) | 82 | 82 | 84 | 83 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 60W INC | 75W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | ENERGY STAR® | ENERGY STAR® | ENERGY STAR® | ENERGY STAR® |

LED Omni-Directional Dimmable Enclosed Rated A-Lamps



CCTs Available:



| | A19 (GU24 BASE) | A19 (GU24 BASE) | A19 (GU24 BASE) | A19 (GU24 BASE) |
|-----------------------------|------------------|------------------|-------------------|-------------------|
| MODEL NUMBER | E6A19GUDLED27/G7 | E9A19GUDLED27/G7 | E11A19GUDLED27/G7 | E15A19GUDLED27/G7 |
| ORDER CODE | 14099405 | 14099408 | 14099411 | 14099414 |
| Input Wattage | 6W | 9W | 11W | 15W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 480 lm | 800 lm | 1,100 lm | 1,600 lm |
| Efficacy (lm/W) | 80 lm/W | 89 lm/W | 100 lm/W | 106 lm/W |
| Color Rendering Index (CRI) | 82 | 82 | 84 | 83 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 60W INC | 75W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | ENERGY STAR® | ENERGY STAR® | ENERGY STAR® | ENERGY STAR® |

LED Omni-Directional Dimmable JA8 Certified Enclosed Rated A-Lamps



CCTs Available:



| | A19 (E26 BASE) | A19 (E26 BASE) | A19 (GU24 BASE) | A19 (E26 BASE) | A21 (E26 BASE) |
|-----------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| MODEL NUMBER | E5A19D927/JA8 | E9A19D927/JA8 | E9A19GUD927/JA8 | E12A19D927/JA8 | E17A21D927/JA8 |
| ORDER CODE | 14099798 | 14099800 | 102490 | 14099802 | 14099804 |
| Input Wattage | 5W | 9W | 9W | 12W | 17W |
| Voltage | 120V | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 450 lm | 810 lm | 810 lm | 1,100 lm | 1,600 lm |
| Efficacy (lm/W) | 90 lm/W | 90 lm/W | 90 lm/W | 92 lm/W | 94 lm/W |
| Color Rendering Index (CRI) | 92 | 92 | 92 | 90 | 92 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 60W INC | 60W INC | 75W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | ENERGY STAR®, T20, JA8 | ENERGY STAR®, T20, JA8 | ENERGY STAR®, T20, JA8 | ENERGY STAR®, T20, JA8 | ENERGY STAR®, T20, JA8 |

LED High Output Dimmable Omni-Directional A-Lamps



CCTs Available:



| | A21 (E26 BASE) | A21 (E26 BASE) | A23 (E26 BASE) |
|-----------------------------|---------------------|---------------------|---------------------|
| MODEL NUMBER | 17A21D27 | 21A21D27 | 26A23D27 |
| ORDER CODE | 102721 | 102717 | 102713 |
| Input Wattage | 17W | 21W | 26W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 2,000 lm | 2,600 lm | 3,000 - 3,200 lm |
| Efficacy (lm/W) | 118 lm/W | 123 lm/W | 123 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 125W INC | 150W INC | 200W INC |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED High Output Non-Dimmable Omni-Directional A-Lamps



CCTs Available:



| | A21 (E26 BASE) | A21 (E26 BASE) | A23 (E26 BASE) |
|-----------------------------|---------------------|---------------------|---------------------|
| MODEL NUMBER | 17A21ND27 | 21A21ND27 | 26A23ND27 |
| ORDER CODE | 102733 | 102931 | 102725 |
| Input Wattage | 17W | 21W | 26W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,000 lm | 2,600 lm | 3,000 - 3,200 lm |
| Efficacy (lm/W) | 118 lm/W | 123 lm/W | 123 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 125W INC | 150W INC | 200W INC |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED Rough Service Non-Dimmable Omni-Directional A-Lamps



CCTs Available:



| | A19 (E26 BASE) | A19 (E26 BASE) |
|-----------------------------|----------------|----------------|
| MODEL NUMBER | E9A19NDV3ORS | E14A19NDV3ORS |
| ORDER CODE | 102611 | 102406 |
| Input Wattage | 9W | 14W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 800 lm | 1,500 lm |
| Efficacy (lm/W) | 89 lm/W | 107 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K |
| Replacement | 60W INC | 100W INC |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 11,000 hours | 11,000 hours |
| LISTINGS | cULus | cULus |

LED Value Non-Dimmable Omni-Directional A-Lamps



CCTs Available:



| | A19 (E26 BASE) | A19 (E26 BASE) | A19 (E26 BASE) | A19 (E26 BASE) |
|-----------------------------|----------------|----------------|----------------|----------------|
| MODEL NUMBER | E6A19NDV27 | E9A19NDV27 | E11A19NDV27 | E14A19NDV27 |
| ORDER CODE | 102600 | 102604 | 102575 | 102578 |
| Input Wattage | 6W | 9W | 11W | 14W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 450 lm | 800 lm | 1,100 lm | 1,500 lm |
| Efficacy (lm/W) | 75 lm/W | 89 lm/W | 100 lm/W | 107 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 40W INC | 60W INC | 75W INC | 100W INC |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | 11,000 hours | 11,000 hours | 11,000 hours | 11,000 hours |
| LISTINGS | cULus | cULus | cULus | cULus |

LED Omni-Directional 3-Way A-Lamps



CCTs Available:



| | A21 (E26 BASE) |
|-----------------------------|--------------------|
| MODEL NUMBER | 15A21/3WLED927 |
| ORDER CODE | 14098774 |
| Input Wattage | 15W |
| Voltage | 120V |
| Delivered Lumens (lm) | 500/1,000/1,500 lm |
| Efficacy (lm/W) | > 100 lm/W |
| Color Rendering Index (CRI) | 91 |
| Color Temperature (CCT) | 2700K |
| Replacement | 40/60/100W INC |
| Dimming Compatible | No |
| Lumen Maintenance (L70) | 25,000 |
| LISTINGS | ENERGY STAR, T20 |

LED Globe Lamps



CCTs Available:



| | G16 (E26 BASE) | G25 (E26 BASE) | G40 (E26 BASE) |
|-----------------------------|-----------------|----------------|----------------|
| MODEL NUMBER | 5G16.5DLED27/G2 | 6G25DLED27/G3 | 12G40DLED302 |
| ORDER CODE | 103008 | 107505 | 1410218 |
| Input Wattage | 5W | 6W | 12W |
| Voltage | 120 | 120V | 120V |
| Delivered Lumens (lm) | 350 lm | 450 lm | 950 lm |
| Efficacy (lm/W) | 70 lm/W | 75 lm/W | 79 lm/W |
| Color Rendering Index (CRI) | 82 | 84 | 83 |
| Color Temperature (CCT) | 2700K | 2700K | 3000K |
| Replacement | 40W INC | 40W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | ENERGY STAR® | ENERGY STAR® | ENERGY STAR® |

LED JA8 Certified Globe Lamp



CCTs Available:



| | G25 (E26 BASE) |
|-----------------------------|----------------------------------|
| MODEL NUMBER | 10G25DLED927/JA8 |
| ORDER CODE | 1409460 |
| Input Wattage | 10W |
| Voltage | 120V |
| Delivered Lumens (lm) | 800 lm |
| Efficacy (lm/W) | 80 lm/W |
| Color Rendering Index (CRI) | 92 |
| Color Temperature (CCT) | 2700K |
| Replacement | 100W INC |
| Dimming Compatible | Yes |
| Lumen Maintenance (L70) | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR®, JA8 CEC 3.0 |

LED G4 & Wedge Retrofit Lamps



CCTs Available:

2700K



| | 12V (BI-PIN BASE) | 12V (WEDGE BASE) |
|-----------------------------|-------------------|--------------------|
| MODEL NUMBER | 2.5G4LED27 | 2.5WDGLED27 |
| ORDER CODE | 74107 | 74108 |
| Input Wattage | 2.5W | 2.5W |
| Voltage | 12V AC/DC | 12V AC/DC |
| Delivered Lumens (lm) | 180 lm | 180 lm |
| Efficacy (lm/W) | 72 lm/W | 72 lm/W |
| Color Rendering Index (CRI) | 80 | 80 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 20W HAL | 20W HAL |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours |
| LISTINGS | TUV | TUV |

LED G9 Retrofit Lamps



CCTs Available:

2700K



| | NON-DIM (G9 BASE) | DIM (G9 BASE) | NON-DIM (G9 BASE) | DIM (G9 BASE) |
|-----------------------------|-------------------|------------------|-------------------|------------------|
| MODEL NUMBER | 3G9LED27 | 3G9DLED27 | 5G9LED27 | 5G9DLED27 |
| ORDER CODE | 108071 | 108072 | 108073 | 108074 |
| Input Wattage | 3W | 3W | 5W | 5W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 270 lm | 270 lm | 480 lm | 360 lm |
| Efficacy (lm/W) | 90 lm/W | 90 lm/W | 96 lm/W | 72 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 | 80 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 25W INC | 25W INC | 40W INC | 40W INC |
| Dimming Compatible | No | Yes | No | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | TUV | TUV | TUV | TUV |

LED MR16 Lamps



CCTs Available:

2700K

3000K



| | MR16 (GU10 BASE) | MR16 (GU10 BASE) |
|-----------------------------|-----------------------|---------------------|
| MODEL NUMBER | 4.5MR16GUD27FL | 7MR16GUD27FL |
| ORDER CODE | 14099068 | 14099072 |
| Input Wattage | 4.5W | 7W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 315 lm | 500 lm |
| Efficacy (lm/W) | 70 lm/W | 71 lm/W |
| Color Rendering Index (CRI) | 83 | 82 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 35W INC | 50W INC |
| Beam Angle | 40° | 40° |
| CBCP (cd) | 739 cd | 554 cd |
| Dimming Compatible | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED MR16 Lamps



| | MR16 (GU5.3 BASE) | MR16 (GU5.3 BASE) | MR16 (GU5.3 BASE) |
|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | 5MR16D927FL35/JA8 | 5MR16D927NF25/JA8 | 5MR16D927SP15/JA8 |
| ORDER CODE | 14101632 | 14101630 | 14101634 |
| Input Wattage | 5W | 5W | 5W |
| Voltage | 12V | 12V | 12V |
| Delivered Lumens (lm) | 320 lm | 320 lm | 320 lm |
| Efficacy (lm/W) | 70 lm/W | 70 lm/W | 70 lm/W |
| Color Rendering Index (CRI) | 90 | 90 | 90 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 35W INC | 35W INC | 35W INC |
| Beam Angle | 35° | 25° | 15° |
| CBCP (cd) | 906 cd | 1601 cd | 3367 cd |
| Dimming Compatible | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 |

CCTs Available:



LED MR16 Lamps



| | MR16 (GU5.3 BASE) | MR16 (GU5.3 BASE) | MR16 (GU5.3 BASE) |
|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | 7MR16D927FL35/JA8 | 7MR16D927NF25/JA8 | 7MR16D927SP15/JA8 |
| ORDER CODE | 14101640 | 14101638 | 14101636 |
| Input Wattage | 7W | 7W | 7W |
| Voltage | 12V | 12V | 12V |
| Delivered Lumens (lm) | 500 lm | 500 lm | 500 lm |
| Efficacy (lm/W) | 71 lm/W | 71 lm/W | 71 lm/W |
| Color Rendering Index (CRI) | 90 | 90 | 90 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 50W INC | 50W INC | 50W INC |
| Beam Angle | 35° | 25° | 15° |
| CBCP (cd) | 1315 cd | 2323 cd | 4885 cd |
| Dimming Compatible | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 |

CCTs Available:



LED MR16 Lamps



| | MR16 (GU5.3 BASE) | MR16 (GU5.3 BASE) | MR16 (GU5.3 BASE) |
|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | 7.5MR16D927FL35/JA8 | 7.5MR16D927NF25/JA8 | 7.5MR16D927SP15/JA8 |
| ORDER CODE | 14101646 | 14101644 | 14101642 |
| Input Wattage | 7.5W | 7.5W | 7.5W |
| Voltage | 12V | 12V | 12V |
| Delivered Lumens (lm) | 570 lm | 570 lm | 570 lm |
| Efficacy (lm/W) | 73 lm/W | 73 lm/W | 73 lm/W |
| Color Rendering Index (CRI) | 90 | 90 | 90 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 75W INC | 75W INC | 75W INC |
| Beam Angle | 35° | 25° | 15° |
| CBCP (cd) | 1463 cd | 2583 cd | 5433 cd |
| Dimming Compatible | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 | cULus, ENERGY STAR®, T20, JA8 |

CCTs Available:



LED PAR Lamps



*PAR30 SN is Damp Rated

CCTs Available:




| | PAR20 (E26 BASE) | PAR30 SHORT NECK (E26 BASE) | PAR30 LONG NECK (E26 BASE) | PAR38 (E26 BASE) |
|-----------------------------|---------------------|-----------------------------|----------------------------|---------------------|
| MODEL NUMBER | 7P20WD27FL | 11P30D27FL* | 11P30WLND27FL | 15P38WD27FL |
| ORDER CODE | 14099200 | 14099226 | 14099203 | 14099210 |
| Input Wattage | 7W | 11W | 11W | 15W |
| Voltage | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 500 lm | 850 lm | 850 lm | 1,250 lm |
| Efficacy (lm/W) | 71 lm/W | 77 lm/W | 77 lm/W | 83 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 | 83 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 50W INC | 75W INC | 75W INC | 120W INC |
| Beam Angle | 40° | 40° | 40° | 40° |
| CBCP (cd) | 1135 cd | 1649 | 1917 | 2411 |
| Dimming Compatible | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED JA8 Certified PAR Lamps



CCTs Available:



| | PAR16 (E26 BASE) | PAR20 (E26 BASE) | PAR30 SHORT NECK (E26 BASE) | PAR30 LONG NECK (E26 BASE) | PAR38 (E26 BASE) |
|-----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| MODEL NUMBER | 6P16D927FL/JA8 | 6.5P20D927FL/JA8 | 11P30D927FL/JA8 | 11P30LND927FL/JA8 | 14P38D927FL/JA8 |
| ORDER CODE | 14101679 | 14101681 | 14101683 | 14101685 | 14101687 |
| Input Wattage | 6W | 6.5W | 11W | 11W | 14W |
| Voltage | 120V | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 500 lm | 575 lm | 975 lm | 975 lm | 1,250 lm |
| Efficacy (lm/W) | 83 lm/W | 88 lm/W | 88 lm/W | 88 lm/W | 89 lm/W |
| Color Rendering Index (CRI) | 90 | 90 | 90 | 90 | 90 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K | 2700K |
| Replacement | 50W INC | 50W INC | 75W INC | 75W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, T20, JA8 ENERGY STAR® | cULus, T20, JA8 ENERGY STAR® | cULus, T20, JA8 ENERGY STAR® | cULus, T20, JA8 ENERGY STAR® | cULus, T20, JA8 ENERGY STAR® |

LED 277V PAR Lamps



CCTs Available:



| | 277V PAR30 LONG NECK (E26 BASE) | 277V PAR38 (E26 BASE) |
|-----------------------------|---------------------------------|-----------------------|
| MODEL NUMBER | 13P30LNLED230FL | 17P38LED230FL |
| ORDER CODE | 74686 | 74687 |
| Input Wattage | 13W | 17W |
| Voltage | 277V | 277V |
| Delivered Lumens (lm) | 1,000 lm | 1,700 lm |
| Efficacy (lm/W) | 77 lm/W | 100 lm/W |
| Color Rendering Index (CRI) | 82 | 82 |
| Color Temperature (CCT) | 3000K | 3000K |
| Replacement | 90W | 120W |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours |
| LISTINGS | cRUus | cRUus |

LED High Output Wet Rated PAR Lamps



CCTs Available:



| | PAR30 (E26 BASE) | PAR30 (E26 BASE) | PAR38 (E26 BASE) | PAR38 (E26 BASE) | PAR38 (E26 BASE) |
|-----------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| MODEL NUMBER | 18P30WD30SP | 20P30WD30NF | 23P38WD30FL | 23P38WD30SP | 27P38WD30NF |
| ORDER CODE | 102755 | 102756 | 102758 | 102757 | 102759 |
| Input Wattage | 18W | 20W | 23W | 23W | 27W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,800 lm | 2,300 lm | 2,650 lm | 2,650 lm | 3,000 lm |
| Efficacy (lm/W) | 100 lm/W | 116 lm/W | 115 lm/W | 110 lm/W | 105 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K | 3000K | 3000K |
| Replacement | 75W INC | 75W INC | 250W HAL | 250W HAL | 250W HAL |
| Beam Angle | 15°, Spot | 25°, Narrow Flood | 40°, Flood | 15°, Spot | 25°, Narrow Flood |
| Dimming Compatible | Yes | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED High Output Wet Rated PAR Lamps



CCTs Available:



| | PAR38 (E26 BASE) | PAR38 (E26 BASE) |
|-----------------------------|---------------------|---------------------|
| MODEL NUMBER | 38P38WND30FL | 38P38WND30NF |
| ORDER CODE | 102629 | 102742 |
| Input Wattage | 38W | 38W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 4,000 lm | 4,000 lm |
| Efficacy (lm/W) | 105 lm/W | 105 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3000K |
| Replacement | 250W HAL | 250W HAL |
| Beam Angle | 40°, Flood | 25°, Narrow Flood |
| Dimming Compatible | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED Value Non-Dimmable PAR Lamps



CCTs Available:



| | PAR20 (E26 BASE) | PAR30 (E26 BASE) | PAR38 (E26 BASE) |
|-----------------------------|------------------|------------------|------------------|
| MODEL NUMBER | 7P20NDV30FL | 10P30NDV30FL | 13P38NDV30FL |
| ORDER CODE | 102646 | 102648 | 102650 |
| Input Wattage | 7W | 10W | 13W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 425 lm | 750 lm | 1,000 lm |
| Efficacy (lm/W) | 60 lm/W | 75 lm/W | 76 lm/W |
| Color Rendering Index (CRI) | ≥82 | ≥82 | ≥82 |
| Color Temperature (CCT) | 3000K | 3000K | 3000K |
| Replacement | 50W INC | 65W INC | 90W INC |
| Beam Angle | 40°, Flood | 40°, Flood | 40°, Flood |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 11,000 hours | 11,000 hours | 11,000 hours |
| LISTINGS | cULus | cULus | cULus |

LED BR Lamps



CCTs Available:



| | BR20 (E26 BASE) | BR30 (E26 BASE) | BR30 (E26 BASE) | BR40 (E26 BASE) | BR40 (E26 BASE) |
|-----------------------------|-----------------------|-----------------------|------------------------|------------------------|------------------------|
| MODEL NUMBER | 7BR20DLED27/G3 | 8BR30DLED27/G3 | 11BR30DLED27/G3 | 12BR40DLED27/G3 | 17BR40DLED27/G3 |
| ORDER CODE | 14099046 | 14099049 | 14099421 | 14099052 | 14099418 |
| Input Wattage | 7W | 8W | 11W | 12W | 17W |
| Voltage | 120V | 120V | 120V | 120V | 120V |
| Delivered Lumens (lm) | 550 lm | 650 lm | 850 lm | 1,050 lm | 1,400 lm |
| Efficacy (lm/W) | 78 lm/W | 81 lm/W | 77 lm/W | 88 lm/W | 82 lm/W |
| Color Rendering Index (CRI) | 80 | 84 | 83 | 82 | 82 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K | 2700K |
| Replacement | 50W INC | 65W INC | 65W INC | 75W INC | 100W INC |
| Dimming Compatible | Yes | Yes | Yes | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

3000K and 4000K options also available.

LED T20 BR Lamps



CCTs Available:



| | BR30 (E26 BASE) | BR30 (E26 BASE) |
|-----------------------------|-------------------------|-------------------------|
| MODEL NUMBER | 11BR30DLED927/G4 | 11BR30DLED930/G4 |
| ORDER CODE | 107608 | 107609 |
| Input Wattage | 11W | 11W |
| Voltage | 120V | 120V |
| Delivered Lumens (lm) | 800 lm | 800 lm |
| Efficacy (lm/W) | 72 lm/W | 72 lm/W |
| Color Rendering Index (CRI) | 92 | 92 |
| Color Temperature (CCT) | 2700K | 3000K |
| Replacement | 65W INC | 65W INC |
| Dimming Compatible | Yes | Yes |
| Lumen Maintenance (L70) | 25,000 hours | 25,000 hours |
| LISTINGS | cULus, ENERGY STAR® | cULus, ENERGY STAR® |

LED Value Dimmable BR Lamps



CCTs Available:



| | R20 (E26 BASE) | BR30 (E26 BASE) | BR40 (E26 BASE) |
|-----------------------------|-----------------|------------------|-------------------|
| MODEL NUMBER | 6R20DV27 | 8BR30DV27 | 13BR40DV27 |
| ORDER CODE | 102574 | 102620 | 102630 |
| Input Wattage | 6W | 8W | 13W |
| Voltage | 120V | 120V | 120V |
| Delivered Lumens (lm) | 325 lm | 650 lm | 900 lm |
| Efficacy (lm/W) | 54 lm/W | 81 lm/W | 69 lm/W |
| Color Rendering Index (CRI) | ≥82 | ≥82 | ≥82 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K |
| Replacement | 35W INC | 65W INC | 85W INC |
| Dimming Compatible | Triac | Triac | Triac |
| Lumen Maintenance (L70) | 11,000 hours | 11,000 hours | 11,000 hours |
| LISTINGS | cULus | cULus | cULus |

LED PL Retrofit Lamps (UL-B)



CCTs Available:



| | E26 BASE | G24Q BASE | GU24 BASE | GX23 BASE |
|-----------------------------|--------------|----------------|-----------------|------------------|
| MODEL NUMBER | 6PLE26LED27* | 6PLG24QLED27** | 6PLGU24LED27*** | 6PLGX23LED27**** |
| ORDER CODE | 76606 | 76608 | 76613 | 76616 |
| Input Wattage | 6W | 6W | 6W | 6W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 500 lm | 500 lm | 500 lm | 500 lm |
| Efficacy (lm/W) | 83 lm/W | 83 lm/W | 83 lm/W | 83 lm/W |
| Color Rendering Index (CRI) | ≥81 | 85 | 85 | 85 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 13W CFL | 13W CFL | 13W CFL | 13W CFL |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus | UL Classified | cULus | UL Classified |

*3000K options also available. **3000K, 3500K, 4000K and 5000K options also available. ***3000K and 4000K options also available. ****3500K, 4000K and 5000K options also available.

LED PL Retrofit Lamps (UL-B)



CCTs Available:



| | E26 BASE | G24Q BASE | GU24 BASE | GX23 BASE |
|-----------------------------|--------------|----------------|-----------------|------------------|
| MODEL NUMBER | 8PLE26LED27* | 8PLG24QLED27** | 8PLGU24LED27*** | 8PLGX23LED27**** |
| ORDER CODE | 76620 | 76488 | 76622 | 76625 |
| Input Wattage | 8W | 8W | 8W | 8W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 675 lm | 675 lm | 675 lm | 675 lm |
| Efficacy (lm/W) | 84 lm/W | 84 lm/W | 84 lm/W | 84 lm/W |
| Color Rendering Index (CRI) | 85 | 85 | 85 | 85 |
| Color Temperature (CCT) | 2700K | 2700K | 2700K | 2700K |
| Replacement | 18W CFL | 18W CFL | 18W CFL | 18W CFL |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus | UL Classified | cULus | UL Classified |

*3000K options also available. **3000K, 3500K, 4000K and 5000K options also available. ***3000K and 4000K options also available. ****3500K, 4000K and 5000K options also available.

LED PL DirectFit Retrofit Lamps (UL-A)



CCTs Available:



| | HORIZONTAL PL (G24q BASE) | VERTICAL PL (G24q BASE) |
|-----------------------------|---------------------------|-------------------------|
| MODEL NUMBER | 12PLG24QHLED27 | 12PLG24QVLED27 |
| ORDER CODE | 1408684 | 1408687 |
| Input Wattage | 12W (Bare Lamp) | 12W (Bare Lamp) |
| Voltage | (Ballast Dependent) | (Ballast Dependent) |
| Delivered Lumens (lm) | 900 lm | 900 lm |
| Efficacy (lm/W) | 75 lm/W | 75 lm/W |
| Color Rendering Index (CRI) | 82 | 82 |
| Color Temperature (CCT) | 2700K | 2700K |
| Replacement | 26W CFL | 26W CFL |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 25,000 hours | 50,000 hours |
| LISTINGS | Classified UL, DLC | Classified UL, DLC |

3000K, 3500K & 4000K options also available. Vertical PL Adaptor (G24QA01) available for 12PLG24QVLEDxx lamps.

LED DirectFit T8 U-Bend Lamp (UL-A)



CCTs Available:



T8 U-BEND (G13 PIN BASE)

| | |
|-----------------------------|---------------------|
| MODEL NUMBER | U13T8DF235 |
| ORDER CODE | 1409015 |
| Input Wattage | 13W (Bare Lamp) |
| Voltage | (Ballast Dependent) |
| Delivered Lumens (lm) | 1,800 lm |
| Color Rendering Index (CRI) | 85 |
| Color Temperature (CCT) | 3500K |
| Replacement | 32W FLUOR |
| Dimming Compatible | No |
| Lumen Maintenance (L70) | 50,000 hours |
| LISTINGS | cULus, DLC |

4000K & 5000K options also available.

LED DirectFit T8 Linear Lamps (UL-A)



CCTs Available:




| | 4' T8 (COATED GLASS, G13 PIN BASE) | 4' T8 (COATED GLASS, G13 PIN BASE) | 4' T8 (COATED GLASS, G13 PIN BASE) |
|-----------------------------|--|--|--|
| MODEL NUMBER | L9.5T8DF435-CG | L9.5T8DF440-CG | L9.5T8DF450-CG |
| ORDER CODE | 14099192 | 14099190 | 14091991 |
| Input Wattage | 9.5W (Bare Lamp) | 9.5W (Bare Lamp) | 9.5W (Bare Lamp) |
| Voltage | (Ballast Dependent) | (Ballast Dependent) | (Ballast Dependent) |
| Delivered Lumens (lm) | 1,700 lm | 1,700 lm | 1,800 lm |
| Efficacy (lm/W) | 131 lm/W | 138 lm/W | 138 lm/W |
| Color Rendering Index (CRI) | 82 | 82 | 82 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | Yes (Ballast Dependent) | Yes (Ballast Dependent) | Yes (Ballast Dependent) |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, ETL Sanitation, DLC | cULus, ETL Sanitation, DLC | cULus, ETL Sanitation, DLC |

LED DirectFit T8 Linear Lamps (UL-A)



CCTs Available:



| | 4' T8 (COATED GLASS, G13 PIN BASE) | 4' T8 (COATED GLASS, G13 PIN BASE) |
|-----------------------------|--|--|
| MODEL NUMBER | L13T8DF440-CG5 | L13T8DF450-CG5 |
| ORDER CODE | 14098819 | 107223 |
| Input Wattage | 13W (Bare Lamp) | 13W (Bare Lamp) |
| Voltage | (Ballast Dependent) | (Ballast Dependent) |
| Delivered Lumens (lm) | 1,850 lm | 1,900 lm |
| Efficacy (lm/W) | 116 lm/W | 119 lm/W |
| Color Rendering Index (CRI) | 83 | 83 |
| Color Temperature (CCT) | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | Yes (Ballast Dependent) | Yes (Ballast Dependent) |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, ETL Sanitation, DLC | cULus, ETL Sanitation, DLC |

LED DirectFit T8 Linear Lamps (UL-A)



CCTs Available:

4000K



| | 4' T8 (GLASS, G13 PIN BASE) | 4' T8 (GLASS, G13 PIN BASE) |
|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | L10.5T8DF440-GA | L14T8DF440-GA2 |
| ORDER CODE | 103331 | 103334 |
| Input Wattage | 10.5W (Bare Lamp) | 14.5W (Bare Lamp) |
| Voltage | (Ballast Dependent) | (Ballast Dependent) |
| Delivered Lumens (lm) | 1,800 lm | 2,200 lm |
| Efficacy (lm/W) | 138 lm/W | 129 lm/W |
| Color Rendering Index (CRI) | 80 | 80 |
| Color Temperature (CCT) | 4000K | 4000K |
| Replacement | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | Yes (Ballast Dependent) | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, DLC | cULus, DLC |

LED DirectFit BAA T8 Linear Lamps (UL-A)



CCTs Available:

4000K

5000K



| | 4' T8 (PLASTIC, G13 PIN BASE) | 4' T8 (PLASTIC, G13 PIN BASE) |
|-----------------------------|-------------------------------|-------------------------------|
| MODEL NUMBER | USL14T8DF440 | USL14T8DF450 |
| ORDER CODE | 14098908 | 14098909 |
| Input Wattage | 14W (Bare Lamp) | 14W (Bare Lamp) |
| Voltage | (Ballast Dependent) | (Ballast Dependent) |
| Delivered Lumens (lm) | 2,100 lm | 2,100 lm |
| Efficacy (lm/W) | 150 lm/W | 150 lm/W |
| Color Rendering Index (CRI) | 81 | 81 |
| Color Temperature (CCT) | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, DLC | cULus, DLC |

LED DirectFit T5 Linear Lamps (UL-A)



CCTs Available:

3500K

4000K

5000K



| | 4' T5 (COATED GLASS, G5 PIN BASE) | 4' T5 (COATED GLASS, G5 PIN BASE) | 4' T5 (COATED GLASS, G5 PIN BASE) |
|-----------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| MODEL NUMBER | L25T5DF435-CG5 | L25T5DF440-CG5 | L25T5DF450-CG5 |
| ORDER CODE | 1409171 | 1409172 | 1409173 |
| Input Wattage | 25W (Bare Lamp) | 25W (Bare Lamp) | 25W (Bare Lamp) |
| Voltage | (Ballast Dependent) | (Ballast Dependent) | (Ballast Dependent) |
| Delivered Lumens (lm) | 3,200 lm | 3,200 lm | 3,200 lm |
| Efficacy (lm/W) | 116 lm/W | 112 lm/W | 115 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 54W T5HO | 54W T5HO | 54W T5HO |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, ETL Sanitation, DLC | cULus, ETL Sanitation, DLC | cULus, ETL Sanitation, DLC |

LED Internal Driver T8 U-Bend Lamps (UL-B)



CCTs Available:



| | T8 U-BEND (PLASTIC, G13 PIN BASE) | T8 U-BEND (PLASTIC, G13 PIN BASE) | T8 U-BEND (PLASTIC, G13 PIN BASE) |
|-----------------------------|---|---|---|
| MODEL NUMBER | U15.5T8SE235 | U15.5T8SE240 | U15.5T8SE250 |
| ORDER CODE | 1409561 | 1409562 | 1409563 |
| Input Wattage | 15.5W | 15.5W | 15.5W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,800 lm | 1,850 lm | 1,900 lm |
| Efficacy (lm/W) | 116 lm/W | 119 lm/W | 123 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | UL Classified, rUL, DLC | UL Classified, rUL, DLC | UL Classified, rUL, DLC |

LED Internal Driver BAA T8 Linear Lamps (UL-B)



CCTs Available:



| | 4' T8 (PLASTIC, G13 PIN BASE) | 4' T8 (PLASTIC, G13 PIN BASE) |
|-----------------------------|--------------------------------------|--------------------------------------|
| MODEL NUMBER | USL15T8SE440 | USL15T8SE450 |
| ORDER CODE | 14098911 | 14098912 |
| Input Wattage | 15W | 15W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,800 lm | 1,800 lm |
| Efficacy (lm/W) | 150 lm/W | 150 lm/W |
| Color Rendering Index (CRI) | 81 | 81 |
| Color Temperature (CCT) | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, DLC | cULus, DLC |

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



| | 4' T8 (COATED GLASS, G5 PIN BASE) | 4' T8 (COATED GLASS, G5 PIN BASE) | 4' T8 (COATED GLASS, G5 PIN BASE) |
|-----------------------------|---|---|---|
| MODEL NUMBER | L11.5T8DE435-CG4 | L11.5T8DE440-CG4 | L11.5T8DE450-CG4 |
| ORDER CODE | 1409558 | 1409559 | 1409560 |
| Input Wattage | 11.5W | 11.5W | 11.5W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,800 lm | 1,800 lm | 1,800 lm |
| Efficacy (lm/W) | 156 lm/W | 156 lm/W | 156 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | UL Classified, ETL Sanitation, DLC | UL Classified, ETL Sanitation, DLC | UL Classified, ETL Sanitation, DLC |

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



| MODEL NUMBER | 4' T8 (COATED GLASS, G13 PIN BASE) | 4' T8 (COATED GLASS, G13 PIN BASE) | 4' T8 (COATED GLASS, G13 PIN BASE) |
|-----------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | L17T8DE435-CG | L17T8DE440-CG | L17T8DE450-CG |
| ORDER CODE | 14101756 | 14101757 | 14101758 |
| Input Wattage | 17W | 17W | 17W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,100 lm | 2,100 lm | 2,100 lm |
| Efficacy (lm/W) | 124 lm/W | 124 lm/W | 124 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 36W FLUOR | 36W FLUOR | 36W FLUOR |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | UL Classified, ETL, NSF, DLC | UL Classified, ETL, NSF, DLC | UL Classified, ETL, NSF, DLC |

LED Internal Driver T8 Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



| MODEL NUMBER | 8' T8 (COATED GLASS, FA8 BASE) | 8' T8 (COATED GLASS, FA8 BASE) | 8' T8 (COATED GLASS, FA8 BASE) |
|-----------------------------|---|---|---|
| | L42T8DEFA835-CG | L42T8DEFA840-CG | L42T8DEFA850-CG |
| ORDER CODE | 102740 | 102744 | 102745 |
| Input Wattage | 42W | 42W | 42W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 5,300 lm | 5,400 lm | 5,500 lm |
| Efficacy (lm/W) | 126 lm/W | 128 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 59W FLUOR | 59W FLUOR | 59W FLUOR |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | DLC Listed, cULus Classified, ETL Sanitation, FCC | DLC Listed, cULus Classified, ETL Sanitation, FCC | DLC Listed, cULus Classified, ETL Sanitation, FCC |

LED Internal Driver T8 Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



| MODEL NUMBER | 8' T8 (COATED GLASS, R17D BASE) | 8' T8 (COATED GLASS, R17D BASE) | 8' T8 (COATED GLASS, R17D BASE) |
|-----------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | L42T8DER17D835-CG | L42T8DER17D840-CG | L42T8DER17D850-CG |
| ORDER CODE | 102746 | 102747 | 102748 |
| Input Wattage | 42W | 42W | 42W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 5,300 lm | 5,400 lm | 5,500 lm |
| Efficacy (lm/W) | 126 lm/W | 128 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | 80 | 80 | 80 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 86W FLUOR | 86W FLUOR | 86W FLUOR |
| Dimming Compatible | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus Classified, ETL Sanitation, FCC | cULus Classified, ETL Sanitation, FCC | cULus Classified, ETL Sanitation, FCC |

LED Internal Driver T5 Linear Lamps (UL-B) Ballast Bypass



CCTs Available:



| MODEL NUMBER | 2' T5 (COATED GLASS, G5 PIN BASE) | 3' T5 (COATED GLASS, G5 PIN BASE) | 4' T5 (COATED GLASS, G5 PIN BASE) | 4' T5 (COATED GLASS, G5 PIN BASE) |
|-----------------------------|---|---|---|---|
| | L12T5SE235-CG | L16T5SE335-CG | L13T5SE435-CG | L25T5SE435-CG |
| ORDER CODE | 1409907 | 1409910 | 1409889 | 1409601 |
| Input Wattage | 9W | 16W | 13W | 25W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,125 lm | 1,800 lm | 1,600 lm | 3,200 lm |
| Efficacy (lm/W) | 125 lm/W | 112 lm/W | 123 lm/W | 128 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 | 82 |
| Color Temperature (CCT) | 3500K | 3500K | 3500K | 3500K |
| Replacement | 24W T5HO | 39W T5HO | 28W T5HE | 54W T5HO |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | UL Classified, cRUus, ETL Sanitation, DLC | UL Classified, cRUus, ETL Sanitation, DLC | UL Classified, cRUus, ETL Sanitation, DLC | UL Classified, cRUus, ETL Sanitation, DLC |

LED External Driver Dimmable T8 Linear Lamps (UL-C)



CCTs Available:



| | 2' T8 (GLASS, G13 PIN BASE) | 2' T8 (GLASS, G13 PIN BASE) | 2' T8 (GLASS, G13 PIN BASE) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | L7.5T8EX235 | L7.5T8EX240 | L7.5T8EX250 |
| ORDER CODE | 14101936 | 14101937 | 103413 |
| Input Wattage | 7.5W | 7.5W | 7.5W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,200 lm | 1,200 lm | 1,200 lm |
| Efficacy (lm/W) | 138 lm/W | 138 lm/W | 138 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 17W FLUOR | 17W FLUOR | 17W FLUOR |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | n/a | n/a | n/a |

External Driver for L7.5T8EX2xx Tubes



| | 1 OR 2 LAMP DRIVER | 3 OR 4 LAMP DRIVER |
|-------------------------|--------------------|--------------------|
| MODEL NUMBER | DDR2L7.5IND | DDR4L7.5IND |
| ORDER CODE | 14101944 | 14101945 |
| Input Voltage (V) | 120-277V | 120-277V |
| Input Frequency (Hz) | 50/60 Hz | 50/60 Hz |
| Max Input Power (W) | 18W | 36W |
| Min Power Factor (%) | 0.9 | 0.9 |
| Inrush Current | 6.8A | 12A |
| Output Channel | 2 | 4 |
| Max Output Voltage (V) | 42Vdc | 42Vdc |
| Max Output Current (mA) | 400mA | 800mA |

LED External Driver Dimmable T8 Linear Lamps (UL-C)



CCTs Available:



| | 3' T8 (GLASS, G13 PIN BASE) | 3' T8 (GLASS, G13 PIN BASE) | 3' T8 (GLASS, G13 PIN BASE) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | L10.5T8EX335 | L10.5T8EX340 | L10.5T8EX350 |
| ORDER CODE | 14101938 | 14101939 | 14101940 |
| Input Wattage | 10.5W | 10.5W | 10.5W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,600 lm | 1,600 lm | 1,600 lm |
| Efficacy (lm/W) | 138 lm/W | 138 lm/W | 138 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 25W FLUOR | 25W FLUOR | 25W FLUOR |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | n/a | n/a | n/a |

External Driver for L10.5T8EX3xx Tubes



| | 1 OR 2 LAMP DRIVER | 3 OR 4 LAMP DRIVER |
|-------------------------|---------------------|---------------------|
| MODEL NUMBER | DDR2L10.5IND | DDR4L10.5IND |
| ORDER CODE | 14101946 | 14101947 |
| Input Voltage (V) | 120-277V | 120-277V |
| Input Frequency (Hz) | 50/60 Hz | 50/60 Hz |
| Max Input Power (W) | 24W | 48W |
| Min Power Factor (%) | 0.9 | 0.9 |
| Inrush Current | 8.5A | 14A |
| Output Channel | 2 | 4 |
| Max Output Voltage (V) | 42Vdc | 42Vdc |
| Max Output Current (mA) | 520mA | 1040mA |

LED External Driver Dimmable T8 Linear Lamps (UL-C)



CCTs Available:



| | 4' T8 (GLASS, G13 PIN BASE) | 4' T8 (GLASS, G13 PIN BASE) | 4' T8 (GLASS, G13 PIN BASE) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | L11.5T8EX435 | L11.5T8EX440 | L11.5T8EX450 |
| ORDER CODE | 14101933 | 14101934 | 14101935 |
| Input Wattage | 11.5W | 11.5W | 11.5W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,800 lm | 1,800 lm | 1,800 lm |
| Efficacy (lm/W) | 138 lm/W | 138 lm/W | 138 lm/W |
| Color Rendering Index (CRI) | 82 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 4000K | 5000K |
| Replacement | 32W FLUOR | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | n/a | n/a | n/a |

External Driver for L11.5T8EX4xx Tubes



| | 1 OR 2 LAMP DRIVER | 3 OR 4 LAMP DRIVER |
|-------------------------|--------------------|--------------------|
| MODEL NUMBER | DDR2L11.5IND | DDR4L11.5IND |
| ORDER CODE | 14101948 | 14101949 |
| Input Voltage (V) | 120-277V | 120-277V |
| Input Frequency (Hz) | 50/60 Hz | 50/60 Hz |
| Max Input Power (W) | 26W | 52w |
| Min Power Factor (%) | 0.9 | 0.9 |
| Inrush Current | 9.2A | 15.2A |
| Output Channel | 2 | 4 |
| Max Output Voltage (V) | 42Vdc | 42Vdc |
| Max Output Current (mA) | 560mA | 1120mA |

LED External Driver Dimmable T8 Linear Lamps (UL-C)



CCTs Available:




| | 4' T8 (GLASS, G13 PIN BASE) | 4' T8 (GLASS, G13 PIN BASE) | 4' T8 (GLASS, G13 PIN BASE) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | L13T8EX435/G2 | L13T8EX440/G2 | L13T8EX450/G2 |
| ORDER CODE | 14101941 | 14101942 | 14101943 |
| Input Wattage | 13W | 13W | 13W |
| Voltage | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,200 lm | 2,200 lm | 2,200 lm |
| Efficacy (lm/W) | 138 lm/W | 138 lm/W | 138 lm/W |
| Color Rendering Index (CRI) | 83 | 83 | 83 |
| Color Temperature (CCT) | 3500K | 3500K | 3500K |
| Replacement | 32W FLUOR | 32W FLUOR | 32W FLUOR |
| Dimming Compatible | 0-10V | 0-10V | 0-10V |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | n/a | n/a | n/a |

External Driver for L13T8EX4xx/G2 Tubes



| | 1 OR 2 LAMP DRIVER | 3 OR 4 LAMP DRIVER |
|-------------------------|--------------------|--------------------|
| MODEL NUMBER | DDR2L13IND | DDR4L13IND |
| ORDER CODE | 14101950 | 14101951 |
| Input Voltage (V) | 120-277V | 120-277V |
| Input Frequency (Hz) | 50/60 Hz | 50/60 Hz |
| Max Input Power (W) | 30W | 60W |
| Min Power Factor (%) | 0.9 | 0.9 |
| Inrush Current | 10A | 19.6A |
| Output Channel | 2 | 4 |
| Max Output Voltage (V) | 42Vdc | 42Vdc |
| Max Output Current (mA) | 640mA | 1280mA |

LED Dual-Mode/Hybrid Series T8 Linear Lamps (UL-A+B)



CCTs Available:



| | 2' T8 (COATED GLASS, G5 PIN BASE) | 3' T8 (COATED GLASS, G5 PIN BASE) |
|-----------------------------|-----------------------------------|-----------------------------------|
| MODEL NUMBER | L9T8AB235-CG | L11T8AB335-CG |
| ORDER CODE | 102777 | 102771 |
| Input Wattage | 9W | 11W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 1,350 lm | 1,600 lm |
| Efficacy (lm/W) | 112 lm/W | 114 lm/W |
| Color Rendering Index (CRI) | 83 | 83 |
| Color Temperature (CCT) | 3500K | 3500K |
| Replacement | 17W FLUOR | 25W FLUOR |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, DLC | cULus, DLC |

LED Single-End Powered T8 Wiring Harnesses



| | 1 LAMP WIRING HARNESS | 2 LAMP WIRING HARNESS | 3 LAMP WIRING HARNESS | 4 LAMP WIRING HARNESS |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | G13KIT1 | G13KIT2 | G13KIT3 | G13KIT4 |
| ORDER CODE | 1409026 | 1409027 | 1409028 | 1409029 |
| Lamps Configuration | 1 | 2 | 3 | 4 |

LED Single-End Powered T5 Wiring Harnesses



| | 1 LAMP WIRING HARNESS | 2 LAMP WIRING HARNESS | 4 LAMP WIRING HARNESS | 6 LAMP WIRING HARNESS |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| MODEL NUMBER | G5KIT1 | G5KIT2 | G5KIT4 | G5KIT6 |
| ORDER CODE | 14098784 | 14098785 | 14098786 | 14098787 |
| Lamps Configuration | 1 | 2 | 3 | 4 |

G13 U-Bend Bypass T8 Non-Shunted Lamp Holder



| | |
|---------------------|----------|
| MODEL NUMBER | G13UNS |
| ORDER CODE | 14098795 |

G13 Low Profile T8 Non-Shunted Lamp Holder



| | |
|---------------------|---------|
| MODEL NUMBER | G13LPNS |
| ORDER CODE | 73978 |

LED PLL Plug & Play Lamps



CCTs Available:



| | COATED GLASS (2G11 BASE) | COATED GLASS (2G11 BASE) | COATED GLASS (2G11 BASE) | COATED GLASS (2G11 BASE) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| MODEL NUMBER | 13PLLA30-CG | 13PLLA35-CG | 13PLLA40-CG | 13PLLA50-CG |
| ORDER CODE | 103366 | 14100784 | 14100785 | 103285 |
| Input Wattage | 13W | 13W | 13W | 13W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,050 lm | 2,050 lm | 2,100 lm | 2,100 lm |
| Efficacy (lm/W) | 124 lm/W | 124 lm/W | 127 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3500K | 4000K | 5000K |
| Replacement | 40W CFL | 40W CFL | 40W CFL | 40W CFL |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | UL Listed, FCC | UL Listed, FCC | UL Listed, FCC | UL Listed, FCC |

LED PLL Bypass Lamps



CCTs Available:



| | COATED GLASS (2G11 BASE) | COATED GLASS (2G11 BASE) | COATED GLASS (2G11 BASE) | COATED GLASS (2G11 BASE) |
|-----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| MODEL NUMBER | 17PLLB30-CG | 17PLLB35-CG | 17PLLB40-CG | 17PLLB50-CG |
| ORDER CODE | 103367 | 14100787 | 14100788 | 14100789 |
| Input Wattage | 17W | 17W | 17W | 17W |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Delivered Lumens (lm) | 2,050 lm | 2,150 lm | 2,200 lm | 2,200 lm |
| Efficacy (lm/W) | 121 lm/W | 127 lm/W | 130 lm/W | 130 lm/W |
| Color Rendering Index (CRI) | ≥80 | ≥80 | ≥80 | ≥80 |
| Color Temperature (CCT) | 3000K | 3500K | 4000K | 5000K |
| Replacement | 40W CFL | 40W CFL | 40W CFL | 40W CFL |
| Dimming Compatible | No | No | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | UL Classified, UL UR, FCC | UL Classified, UL UR, FCC | UL Classified, UL UR, FCC | UL Classified, UL UR, FCC |

LED Post Tops



| | POST TOP (E26 BASE) | POST TOP (E39 BASE) | POST TOP (E39 BASE) | POST TOP (E39 BASE) | POST TOP (E39 BASE) |
|-----------------------------|--------------------------|------------------------|-------------------------|-------------------------|------------------------|
| MODEL NUMBER | 27PT50E26 | 36PT50EX39 | 45PT50EX39 | 54PT50EX39 | 100PT50EX39 |
| ORDER CODE | 14102034 | 14102036 | 14102038 | 14102040 | 14102042 |
| Input Wattage | 27W | 36W | 45W | 54W | 100W |
| Voltage | 120V-277V | 120V-277V | 120V-277V | 120V-277V | 120V-277V |
| Delivered Lumens (lm) | 3,900 lm | 5,400 lm | 6,750 lm | 8,100 lm | 15,000 lm |
| Efficacy (lm/W) | 144 lm/W | 150 lm/W | 150 lm/W | 150 lm/W | 150 lm/W |
| Color Rendering Index (CRI) | 82 | 82 | 82 | 82 | 82 |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K | 5000K |
| Replacement | 100W MH | 150W MH | 175W MH | 200-250W MH | 400W MH |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, FCC | cULus, DLC, FCC | cULus, DLC, FCC | cULus, DLC, FCC | cULus, DLC, FCC |
| PHOTOCELL SENSOR | DTDS-PT 103637 | | MICROWAVE SENSOR | MS-PT 103638 | |
| PIR SENSOR | | PIR SENSOR | | PIR-PT 103636 | |

CCTs Available:



LED Area Lamps



| | AREA (E39 BASE) | AREA (EX39 BASE) |
|-----------------------------|----------------------|-----------------------|
| MODEL NUMBER | AR40LED50 | AR100LED50 |
| ORDER CODE | 101621 | 101497 |
| Input Wattage | 40W | 105W |
| Voltage | 120-277V | 120-277V |
| Delivered Lumens (lm) | 5,400 lm (Bare Lamp) | 10,500 lm (Bare Lamp) |
| Efficacy (lm/W) | 135 lm/W | 105 lm/W |
| Color Rendering Index (CRI) | 80 | 83 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 175W MH | 400W MH |
| Dimming Compatible | No | No |
| Lumen Maintenance (L70) | 50,000 hours | 50,000 hours |
| LISTINGS | cULus, DLC | cULus, DLC |

CCTs Available:



LED High Bay DirectFit Lamps



| | MOGUL BASE | MOGUL BASE |
|-----------------------------|-------------------|--------------|
| MODEL NUMBER | E145MH750 | 250MH750 |
| ORDER CODE | 14101699 | 14101700 |
| Input Wattage | 145W | 250W |
| Voltage | 120V-277V | 120V-277V |
| Delivered Lumens (lm) | 7,880 - 19,000 lm | 37,000 lm |
| Efficacy (lm/W) | 126 lm/W | 148 lm/W |
| Color Rendering Index (CRI) | 70 | 70 |
| Color Temperature (CCT) | 5000K | 5000K |
| Replacement | 175W - 400W HID | 1,000W HID |
| Lumen Maintenance (L70) | 50,000 hours | 60,000 hours |
| LISTINGS | cULus Listed | cULus Listed |

CCTs Available:



PhotonMAX® Horticulture Ceramic Metal Halide Single Lamp Fixtures



| MODEL NUMBER | PH-MHF315130 | PH-MHF315230 |
|----------------|--------------|--------------|
| ORDER CODE | 107827 | 14099003 |
| Input Wattage | 315W | 315W |
| Voltage | 120V | 277V |
| Lifetime (L70) | 10,000 hours | 10,000 hours |
| LISTINGS | ETL/CETL | ETL/CETL |

PhotonMAX® Horticulture Ceramic Metal Halide Two Lamp Fixtures



| MODEL NUMBER | PH-MHF630130 | PH-MHF630230 |
|----------------|--------------|--------------|
| ORDER CODE | 1409956 | 14099004 |
| Input Wattage | 630W | 630W |
| Voltage | 120V | 277V |
| Lifetime (L70) | 10,000 hours | 10,000 hours |
| LISTINGS | ETL/CETL | ETL/CETL |

Contact your MaxLite representative if your voltage is not listed.

PhotonMAX® Horticulture Doubled-Ended High Pressure Sodium Fixtures



| Model Number | PH-1000HPS-F-DE | PH-1000HPS2-F-DE | PH-1000HPS3-F-DE |
|----------------|-----------------|------------------|------------------|
| Order Code | 1409955 | 14099005 | 14099631 |
| Input Wattage | 1000W | 1000W | 1000W |
| Voltage | 120-240V | 220-277V | 347V |
| Lifetime (L70) | 10,000 hours | 10,000 hours | 10,000 hours |
| LISTINGS | ETL/CETL | ETL/CETL | ETL/CETL |

Contact your MaxLite representative if your voltage is not listed.

PhotonMAX® Horticulture Ceramic Metal Halide Lamp



| MODEL NUMBER | PGZ18 BASE PH-MHL315130 |
|---------------|----------------------------|
| ORDER CODE | 107826 |
| Input Wattage | 315W |
| PPF | 480 (µmol/S) |
| Voltage | 120-277V |
| L70 | 10,000 hours |

PhotonMAX® Horticulture Doubled-Ended High Pressure Sodium Lamp



| MODEL NUMBER | PH-1000HPS-L-DE |
|---------------|-----------------|
| ORDER CODE | 1410139 |
| Input Wattage | 1,000W |
| PPF | ≥1,950 (µmol/S) |
| Voltage | 400V |
| L70 | 10,000 Hours |
| LISTINGS | CE |

PhotonMAX® Horticulture LED Spot Lights (120-277V)



| MODEL NUMBER | PH-GH360UBPRF-WCO | PH-GH360UBPRX-WCO | PH-GH360UBXRF-WCO | PH-GH360UFSRF-WCO |
|-------------------------------|---|--|--|--|
| ORDER CODE | 14100180 | 14100177 | 14100178 | 14100179 |
| Input Wattage | 360W | 360W | 360W | 360W |
| PPF | 680.1 (µmol/S) | 755.2 (µmol/S) | 699.8 (µmol/S) | 753.2 (µmol/S) |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Spectrum | Blue 450nm with Heavy Red 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Full Spectrum with Heavy Red 660nm and Far Red 730nm |
| Photon Flux Maintenance (Q90) | >42,000 hours | >42,000 hours | >42,000 hours | >42,000 hours |
| LISTINGS | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 |

PhotonMAX® Horticulture LED Spot Lights (120-277V)



| MODEL NUMBER | PH-GH600UBPRF-WCO | PH-GH600UBPRX-WCO | PH-GH600UBXRF-WCO | PH-GH600UFSRF-WCO |
|-------------------------------|---|--|--|--|
| ORDER CODE | 14100171 | 14100169 | 14100167 | 14100168 |
| Input Wattage | 600W | 600W | 600W | 600W |
| PPF | 1,088.5 (µmol/S) | 1,143.7 (µmol/S) | 1,234.7 (µmol/S) | 1,224.2 (µmol/S) |
| Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Spectrum | Blue 450nm with Heavy Red 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Full Spectrum with Heavy Red 660nm and Far Red 730nm |
| Photon Flux Maintenance (Q90) | >42,000 hours | >42,000 hours | >42,000 hours | >42,000 hours |
| LISTINGS | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 |

PhotonMAX® Horticulture LED Spot Lights (347-480V)



| MODEL NUMBER | PH-GH360HBPRF-WCO | PH-GH360HBPRX-WCO | PH-GH360HBXRF-WCO | PH-GH360HFSRF-WCO |
|-------------------------------|---|--|--|--|
| ORDER CODE | 14100185 | 14100182 | 14100183 | 14100184 |
| Input Wattage | 360W | 360W | 360W | 360W |
| PPF | 680.1 (µmol/S) | 755.2 (µmol/S) | 699.8 (µmol/S) | 753.2 (µmol/S) |
| Voltage | 347-480V | 347-480V | 347-480V | 347-480V |
| Spectrum | Blue 450nm with Heavy Red 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Full Spectrum with Heavy Red 660nm and Far Red 730nm |
| Photon Flux Maintenance (Q90) | >42,000 hours | >42,000 hours | >42,000 hours | >42,000 hours |
| LISTINGS | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 |

PhotonMAX® Horticulture LED Spot Lights (347-480V)



| MODEL NUMBER | PH-GH360UBPRF-WCO | PH-GH360UBPRX-WCO | PH-GH360UBXRF-WCO | PH-GH360UFSRF-WCO |
|-------------------------------|---|--|--|--|
| ORDER CODE | 14100180 | 14100177 | 14100178 | 14100179 |
| Input Wattage | 600W | 600W | 600W | 600W |
| PPF | 1,088.5 (µmol/S) | 1,143.7 (µmol/S) | 1,234.7 (µmol/S) | 1,224.2 (µmol/S) |
| Voltage | 347-480V | 347-480V | 347-480V | 347-480V |
| Spectrum | Blue 450nm with Heavy Red 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Broad Par with Heavy 660nm and Far Red 730nm | Full Spectrum with Heavy Red 660nm and Far Red 730nm |
| Photon Flux Maintenance (Q90) | >42,000 hours | >42,000 hours | >42,000 hours | >42,000 hours |
| LISTINGS | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 | Horticultural DLC, UL listed, IP66 |

PhotonMAX® Horticulture LED Linear Lights (120-277V)



Photon Flux Maintenance (Q90)

| MODEL NUMBER | PH-LI200UBPRX-W | PH-LI200UBPBX-W | PH-LI200UFSRX-W |
|-------------------------------|--|--|--|
| ORDER CODE | 103377 | 14102045 | 14102044 |
| Input Wattage | 200W | 200W | 200W |
| PPF | 461 (µmol/S) | 466 (µmol/S) | 507 (µmol/S) |
| Voltage | 120-277V | 120-277V | 120-277V |
| Spectrum | Broad Par with Heavy 660nm | Broad Par with Heavy 660nm | Full Spectrum with Heavy 660nm |
| Photon Flux Maintenance (Q90) | >42,000 hours | >42,000 hours | >42,000 hours |
| LISTINGS | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 |

PhotonMAX® Horticulture LED Linear Lights (120-277V)



Photon Flux Maintenance (Q90)

| MODEL NUMBER | PH-LI300UBPRX-W |
|-------------------------------|--|
| ORDER CODE | 14102049 |
| Input Wattage | 300W |
| PPF | 741 (µmol/S) |
| Voltage | 120-277V |
| Spectrum | Broad Par with Heavy 660nm |
| Photon Flux Maintenance (Q90) | >42,000 hours |
| LISTINGS | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 |

PhotonMAX® Horticulture LED Linear Lights (347-480V)



Photon Flux Maintenance (Q90)

| MODEL NUMBER | PH-LI200HBPRX-W | PH-LI200HBPBX-W | PH-LI200HFSRX-W |
|-------------------------------|--|--|--|
| ORDER CODE | 14102046 | 14102048 | 14102047 |
| Input Wattage | 200W | 200W | 200W |
| PPF | 461 (µmol/S) | 466 (µmol/S) | 507 (µmol/S) |
| Voltage | 347-480V | 347-480V | 347-480V |
| Spectrum | Broad Par with Heavy 660nm | Broad Par with Heavy 660nm | Full Spectrum with Heavy 660nm |
| Photon Flux Maintenance (Q90) | >42,000 hours | >42,000 hours | >42,000 hours |
| LISTINGS | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 |

PhotonMAX® Horticulture LED Linear Lights (347-480V)



Photon Flux Maintenance (Q90)

| MODEL NUMBER | PH-LI300HBPRX-W |
|-------------------------------|--|
| ORDER CODE | 14102050 |
| Input Wattage | 300W |
| PPF | 741 (µmol/S) |
| Voltage | 347-480V |
| Spectrum | Broad Par with Heavy 660nm |
| Photon Flux Maintenance (Q90) | >42,000 hours |
| LISTINGS | Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65 |

Lighting Controls Your Way



IntelliMax[®]

A new and improved version of IntelliMax[®] is on its way!



Simple Bluetooth[®] Controls

OSRAM
ENCELIUM[®]

legrand[®]
WATTSTOPPER[®]

CASAMBI

enlighted

LUTRON


MaxLite can also provide factory-installed lighting controls from Avi-on, Casambi, Lutron, Encelium, Legrand Wattstopper[™], Enlighted and other leading solution providers. Ask your customer relations manager for details!

Complimentary lighting design services we offer:

- Controls layouts
- Expert recommendations
- ROI calculations
- Utility rebate assistance

MaxLite Tools & Resources

YouTube Channel (MaxLiteNewsRoom)

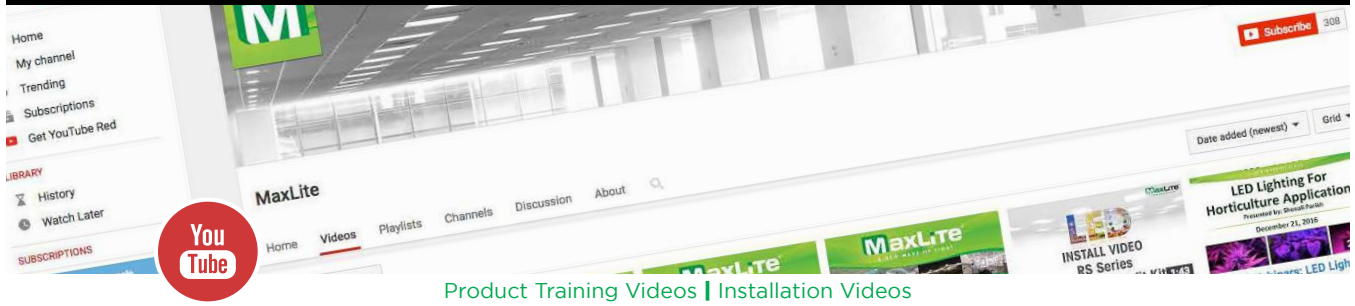


[Product Training Videos](#) | [Installation Videos](#)

Social Media (Find, Like and Follow us on...)



MaxLite.com

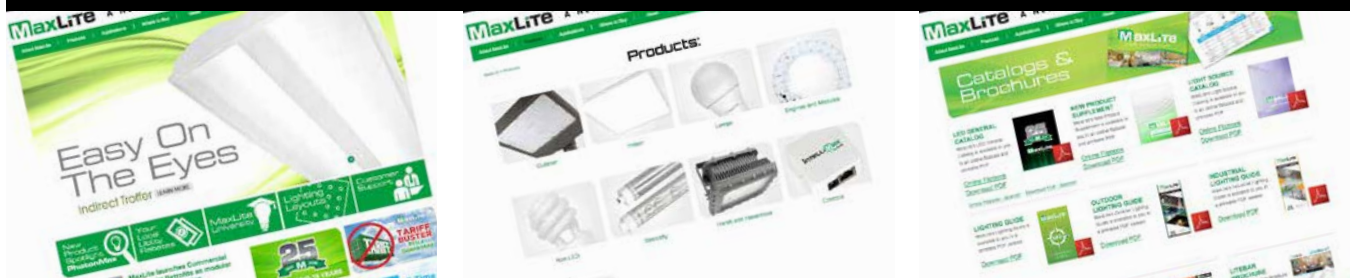

[Product Datasheets](#) | [Case Studies](#) | [Catalogs & Brochures](#) | [ROI Calculator](#) | [Utility Rebate Finder](#) | [ENERGY STAR](#)

MaxLiteUniversity.com



[Free online lighting degree program](#) | [Eligible for ALA Credit Hours](#)

Product Specific Micro Sites



MaxLite®

A NEW WAVE OF LIGHT

www.maxlite.com

Find, like and follow us on social media.



| | |
|---------------------------------|--|
| 10 YEAR WARRANTY | Labor Included MaxLite offers a 10-year limited warranty on most LED indoor and outdoor fixtures. Go to MaxLite.com/warranties for applicable terms and conditions. |
|---------------------------------|--|

Updated: 02/05/20
SECOND PRINTING

Item #
LEDGENCATQ419

Ord. Code:
102352

Corporate Headquarters

12 York Ave.
West Caldwell, NJ 07006
T: 1-800-555-5629
F: 973-244-7333

Indiana Facility

998 Gerdt Court
Greenwood, IN 46143
T: 317-300-0130

California Facility

1148 North Ocean Circle
Anaheim, CA 92806
T: 1-800-793-1212
F: 714-678-5096