BIG WHITE®
2025

SLV LIGHTING CATALOGUE

SLV

EXPERIENCE LIGHT



STAY WELL-INFORMED

Scan the QR code, select your country and always receive our current prices.
Visit us at **slv.com**

Unless otherwise agreed, all deliveries and services are subject to our General Terms and Conditions, which can be viewed on our website at **slv.com**

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

*Please note the guarantee conditions available at slv.com → Service → Downloads → Guarantee conditions.

INDOOR

Recessed lights 052
Ceiling lights 166
Pendant lights 218
Wall and ceiling lights 322
Table and floor lamps 476

48V system 500
Low-voltage cable system 538
High-voltage track 1-phase 550
High-voltage track 3-phase 600
Profile solutions and LED strips 668

OUTDOOR

Mobile lights and floor lamps 696
Spotlights 802
Ceiling lights 822
Wall and ceiling lights 838
Recessed lights 946
Recessed floor lights 956

NEW

TECHNICAL LIGHTING

SLV tec

Indoor 989
Industry 1012
Outdoor 1026
Lamps 1031

ACCESSORIES

Lamps 1032
Accessory parts 1044

NAVIGATION

Index, Application 8
Index, Numerical 1060
Index, Alphabetical 1075

NAVIGATION

CATEGORY OVERVIEW

Everything at a glance.
Find the right lights based on category.

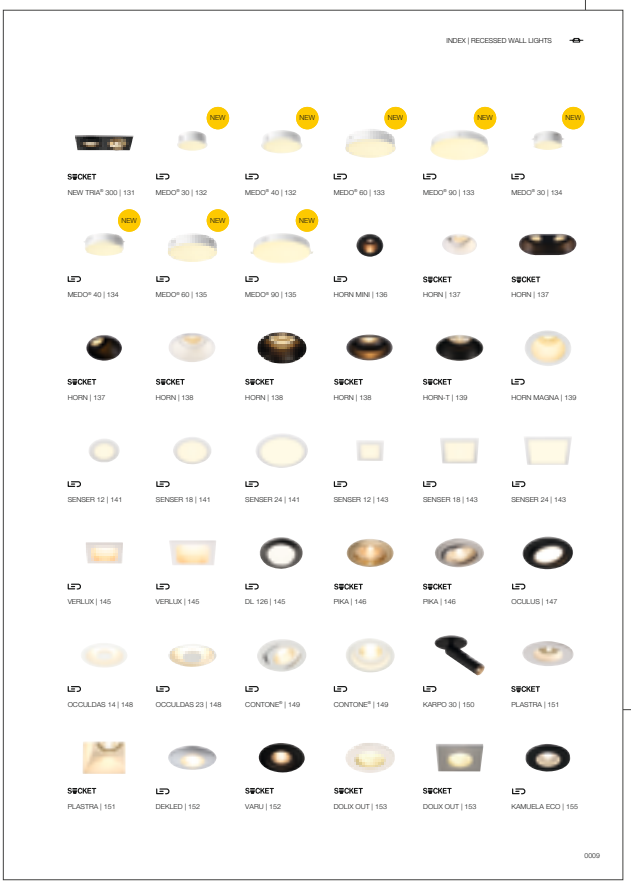

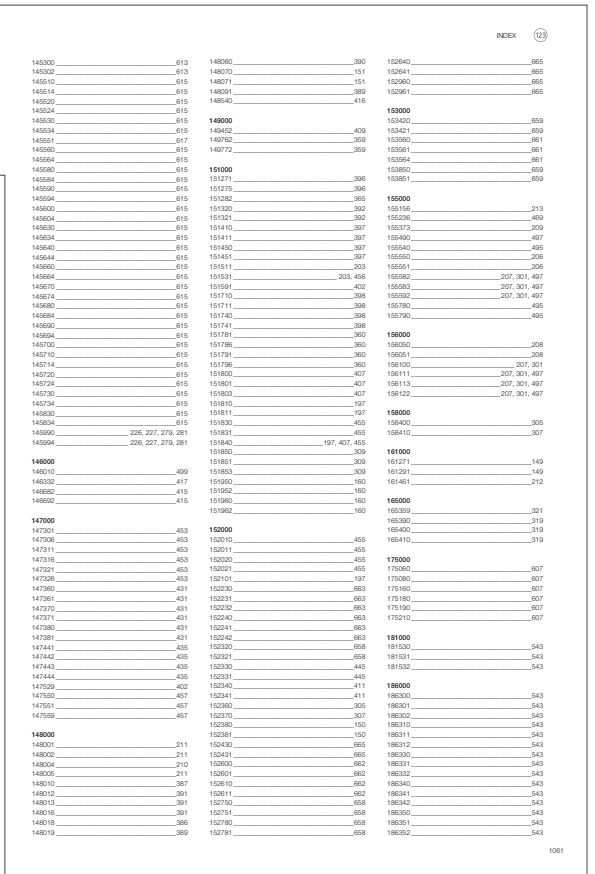

INDEX

Find your light quickly in the numerical or alphabetical index.



PRODUCT CATEGORIES

Know how long it lasts. The new icons and colours let you quickly and easily navigate to the respective product categories.

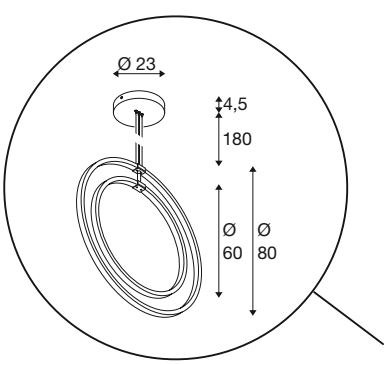

RECOMMENDATIONS

Fast and simple. Discover the right accessories and lamps for your selected products.

PLEASE NOTE

All measurements are given in **cm**.

CLEARLY EXPLAINED

In our new advice section, important information about lighting and our SLV products is explained clearly and concisely.

From planning tools and system representations to lighting knowledge, you'll learn everything in this BIG WHITE®. Take note of this when browsing our yellow advice pages, too.

DESIGN YOUR LED PROFILE

Create accents or illuminate entire rooms – from 700 lm pup to 4,000 lm per metre.

Bring colour into play – LED strips available in white, as CCT (Tunable White) or RGBW version.

Frosted, opaque or transparent, i
versions - Choose from different
applications and light distribution

All visible system components are
coordinated. The metal end caps
with the same powder as the pro

The strip mounting surface of the
powder-coated to optimise heat

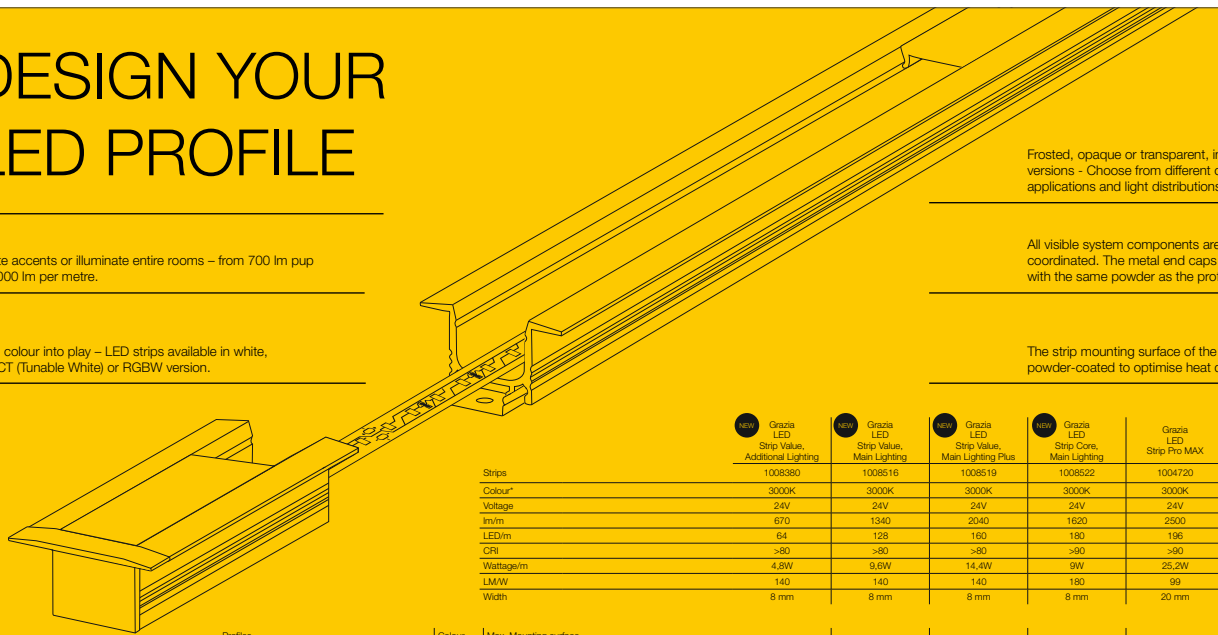

	NEW Grazia LED Strip Value, Additional Lighting	NEW Grazia LED Strip Value, Main Lighting	NEW Grazia LED Strip Value, Main Lighting Plus	NEW Grazia LED Strip Core, Main Lighting	Grazia LED Strip Pro MAX
Strips	1008380	1008516	1008519	1008522	1004720
Colour*	3000K	3000K	3000K	3000K	3000K
Voltage	24V	24V	24V	24V	24V
lm/m	670	1340	2040	1620	2500
LED/m	64	128	160	180	196
CRI	>80	>80	>80	>90	>90
Wattage/m	4,8W	9,6W	14,4W	9W	25,2W
LM/W	140	140	140	180	99
Width	8 mm	8 mm	8 mm	8 mm	20 mm

Profiles		Colour	Max. Mounting surface					
GRAZIA 10 Surface-mounted profile, flat 2 m	1000462	black	10mm	✓	✓	✓	✓	-
	1000461	white						
GRAZIA 10 Surface-mounted profile, standard	1000465	black	10mm	✓	✓	✓	✓	-
	1000464	white						
GRAZIA 10 Flush-mounted profile 2 m	1000459	black	10mm	✓	✓	✓	✓	-
	1000458	white						
GRAZIA 10 Corner 2m	1004889	aluminium	10mm	✓	✓	✓	✓	-
	1004890	white						
GRAZIA 20 Surface-mounted profile, standard 3 m	1000525	black	20mm	✓	✓	✓	✓	✓
	1000524	white						
GRAZIA 20 Surface-mounted profile, flat 3 m	1000534	black	20mm	✓	✓	✓	✓	-
	1000533	white						
GRAZIA 20 Flush-mounted profile 3 m	1000498	black	20mm	✓	✓	✓	✓	✓
	1000497	white						
GRAZIA 60 Surface mounted profile, 1.5 m	1004896	black	40mm	✓	✓	✓	✓	✓
	1004897	white						
GRAZIA 60 Surface-mounted profile, 3 m	1004898	black	40mm	✓	✓	✓	✓	✓
	1004899	white						
GRAZIA 60 Flush-mounted profile, 1.5 m	1004905	black	40mm	✓	✓	✓	✓	✓
	1004906	white						
GRAZIA 60 Flush-mounted profile 3 m	1004908	black	40mm	✓	✓	✓	✓	✓
	1004907	white						

684



ALL PRODUCTS DIRECT ONLINE

At **slv.com** you will find the complete SLV range with all product details, descriptions, availability, and much more. Useful design files, 3D data, configurators and calculation tools such as FastCalc by DIAL are there to help you create your perfect lighting design.

SLV LIGHTING KNOWLEDGE

LUMEN

The luminous flux (indicated in Lumen) describes how much light is emitted in all directions by a light source. It represents the overall brightness perceived by the human eye. The efficiency of a luminaire is often given in Lumen per Watt. The higher the luminous flux (in Lumen) per power consumed (in Watt), the more efficient the light source

CRI

The colour rendering index is the impact of a light source on the colour of an object as perceived by the human eye compared to a natural source of light (e.g. sunlight). According to EN 12464-1, indoor spaces in which people spend or work for longer amounts of time should have a colour rendering index (CRI) of >80.

COLOUR TEMPERATURE

The colour temperature of a light source is indicated in Kelvin (K). The higher the colour temperature, the cooler and more stimulating the light (e.g. daylight = 5500K). The lower the Kelvin figure, the warmer and cosier the light. The colour temperature of a 2700K light bulb is now recommended as the perfect home lighting. The CCT switch allows the colour temperature of a luminaire to be adjusted.

DIM-TO-WARM (DTW)

The dim-to-warm feature lets you adjust the colour temperature and brightness of the light. The light colour changes from cool white to warm white when dimmed down, but cannot be controlled any further.

TUNEABLE WHITE (TW)

The Tuneable White function allows you to set the colour temperature of LED lights as desired. The light can be adjusted to suit different times of day and moods.

RGB RGB+W

An RGB-compatible luminaire covers the entire colour spectrum from red, green and blue with the white balance in the background. The white balance of the RGB+W is also optimised and can be represented in pastel tones.

PROTECTION CLASS

Protection classes indicate which safety measures a device has installed to prevent electric shocks. There are three protection classes which are represented by the symbols below.

IK

The IK protection class is a classification of building materials and surfaces that determines how resistant they are to mechanical impact such as blows, collisions or pressure.

IP

The abbreviation IP stands for Ingress Protection. The first digit in these standardised IP codes indicates the protection against solid objects, the second digit indicates protection against moisture.

HALF-DIFFUSION ANGLE

The half beam angle describes the light emission taking the composition of the luminaire, lamp and distance from an object into account. The smaller the half beam angle, the narrower the beam of light.

UGR

UGR (Unified Glare Rating) rates the glare of a luminaire to relieve the eye. The lower the UGR value, the more pleasant the light is to the eye. A UGR<19 is therefore recommended for workplaces.

SMART LIGHTING

Smart Lighting describes automated light management. With DALI, ZIGBEE, Casambi and BLUETOOTH, smart luminaires can be controlled via apps and other controls.



SOCKET

KAMI | 57



UNIVERSAL DOWNLIGHT | 59



KADUX | 62



KADUX | 63



KADUX | 65



KADUX | 65



KADUX | 65



SOCKET

KADUX | 66



SOCKET

KADUX | 66



SOCKET

KADUX | 66



SOCKET

KADUX | 67



SOCKET

KADUX | 67



NUMINOS® XS | 69



NUMINOS® S | 71



NUMINOS® M | 73



NUMINOS® L | 75



NUMINOS® XL | 77



NUMINOS® MOVE XS | 79



NUMINOS® MOVE S | 81



NUMINOS® MOVE M | 83



NUMINOS® MOVE L | 85



NUMINOS® MOVE XL | 87



NUMINOS® GIMBLE XS | 89



NUMINOS® GIMBLE S | 91



NUMINOS® GIMBLE M | 93



NUMINOS® GIMBLE L | 95



NUMINOS® GIMBLE XL | 97



NEW TRIA® 68 | 104



NEW TRIA® 68 | 107



NEW TRIA® 75 | 107



NEW TRIA® 68 | 109



NEW TRIA® UNIVERSAL 68 | 111



SOCKET

NEW TRIA® 68 | 113



SOCKET

NEW TRIA® 75 / XL | 115



SOCKET

NEW TRIA® | 116



NEW TRIA® | 117



NEW TRIA® | 118



NEW TRIA® 95 | 124



NEW TRIA® 155 | 127



NEW TRIA® 45 | 130

SOCKET

NEW TRIA® 150 | 131

SOCKET

NEW TRIA® 150 | 131



SOCKET

NEW TRIA® 300 | 131



LED

MEDO® 30 | 132



LED

MEDO® 40 | 132



LED

MEDO® 60 | 133



LED

MEDO® 90 | 133



LED

MEDO® 30 | 134



LED

MEDO® 40 | 134



LED

MEDO® 60 | 135



LED

MEDO® 90 | 135



LED

HORN MINI | 136



SOCKET

HORN | 137



SOCKET

HORN | 137



SOCKET

HORN | 137



SOCKET

HORN | 138



SOCKET

HORN | 138



SOCKET

HORN | 138



SOCKET

HORN-T | 139

LED

HORN MAGNA | 139

LED

SENSER 12 | 141

LED

SENSER 18 | 141

LED

SENSER 24 | 141

LED

SENSER 12 | 143

LED

SENSER 18 | 143

LED

SENSER 24 | 143

LED

VERLUX | 145

LED

VERLUX | 145



LED

DL 126 | 145



SOCKET

PIKA | 146



SOCKET

PIKA | 146



LED

OCULUS | 147

LED

OCCULDAS 14 | 148

LED

OCCULDAS 23 | 148



LED

CONTONE® | 149

LED

CONTONE® | 149



LED

KARPO 30 | 150



SOCKET

PLASTRA | 151



SOCKET

PLASTRA | 151



LED

DEKLED | 152



SOCKET

VARU | 152



SOCKET

DOLIX OUT | 153

SOCKET

DOLIX OUT | 153

LED

KAMUELA ECO | 155

INDOOR RECESSED CEILING LIGHTS

KINI | 155

AKALO D83 | 155



FRAME BASIC SET | 156

FRAME BASIC | 156



FRAME BASIC | 156



FRAME CURVE | 157



FRAME CURVE | 157

NOTAPO S | 159

NOTAPO L | 159



DOWNUNDER PUR 80 | 160



DOWNUNDER PUR 150 | 160



MOBALA | 161

WORO | 161



PATTA-I | 162



PATTA-I | 162



PATTA-I | 163



PATTA-I | 163

PATTA-F | 164



PATTA-F | 165

OUTDOOR RECESSED WALL LIGHTS



CONCRETO | 949



CONCRETO | 949



ADI | 950



DOWNUNDER OUT S | 951



DOWNUNDER OUT M | 951



DOWNUNDER OUT L | 951



BRICK MESH | 953



BRICK | 953



BRICK | 953



SOCKET

BRICK DOWNUNDER | 955



BRICK DOWNUNDER | 955

OUTDOOR RECESSED FLOOR LIGHTS



DASAR® 600 | 959



DASAR® 1200 | 959



DASAR® S | 961



DASAR® S | 961

NEW



DASAR® M | 962

NEW



DASAR® M | 963



DASAR® L | 965



DASAR® L | 965



DASAR® XL | 966



DASAR® XL | 967



DASAR®
FLAT 80 | 969



DASAR®
FLAT 120 | 969



DASAR® 255 | 969



DASAR® 920 | 970



DASAR® 920 | 970



DASAR® 270 | 971



DASAR® 270 | 971



SOCKET

DASAR® 115 | 973



SOCKET

DASAR® 115 | 973



SOCKET

DASAR® 115 | 973



SOCKET

DASAR®
EXACT 116 | 975



SOCKET

DASAR®
EXACT 116 | 975



SOCKET

DASAR® 215 | 976



SOCKET

DASAR® 215 | 977



SOCKET

DASAR® 215 | 977



DASAR® 370 | 977



TRAIL-LITE® 60 | 978



POWER
TRAIL-LITE® | 979



POWER
TRAIL-LITE® | 979



SMALL PLOT | 981



SMALL PLOT | 981



SMALL PLOT | 983



BIG PLOT | 983



ROCCI | 984



ROCCI | 984



ROCCI 200 | 985



ROCCI 200 | 985



SOCKET

SOLASTO | 987



SOCKET

SOLASTO | 987



ONE® VERTICAL
1008003


QUIMERA
1008033
QUIMERA
1008038



SOCKET

SUN 20 | 168



SOCKET

SUN 30 | 169



SOCKET

KAMI | 170



SOCKET

KAMI | 171



SOCKET

KAMI | 171



SOCKET

KAMI | 171



LED

ONE 40 | 173



LED

ONE 60 | 173



LED

ONE 40 | 175



LED

ONE 60 | 175



SOCKET

VARYT | 177



VARYT | 177



VARYT | 177



VARYT | 177



VARYT | 177



LED

TRILEDO | 181



LED

TRILEDO | 181



LED

TRILEDO | 181



LED

NUMINOS® S | 182



LED

NUMINOS® M | 184



LED

NUMINOS® L | 186



LED

NUMINOS® XL | 188

LED

MEDO® | 191

LED

MEDO® | 191



SOCKET

TRILEDO | 193



SOCKET

TRILEDO | 193



SOCKET

TRILEDO | 193



LED

OCULUS | 195



LED

OCULUS | 196



SOCKET

ENOLA B | 197



LED

ENOLA C | 197

SOCKET

ASTINA | 198



LED

ANELA | 199



SOCKET

ASTO TUBE | 201



LED

OCCULDAS 13 | 202



LED

OCCULDAS 23 | 202



SOCKET

ALTRA DICE | 203



SOCKET

ALTRA DICE | 203



SOCKET

KARDAMOD | 205



SOCKET

KARDAMOD | 205

SOCKET

FENDA | 206

FENDA | 207

FENDA | 207



FENDA | 207



SOCKET

TENORA | 208



SOCKET

SOPRANA | 209



SOCKET

PLASTRA | 210



PLASTRA | 211



SOCKET

PLASTRA 105 | 211



SOCKET

PLASTRA 104 | 211



FERA 25 | 212



FERA 25 | 212



MARONA | 213



Q-LINE® | 215



Q-LINE® | 215

PANEL 60 | 217

PANEL 60 | 217

OUTDOOR | CEILING LIGHTS



SOCKET

PHOTONI CYL | 825



SOCKET

PHOTONI | 825



S-CUBE | 826



ESKINA FRAME | 827



ENOLA OCULUS | 828



ENOLA
ROUND S | 829



ENOLA
ROUND M | 829



ENOLA
ROUND L | 829



ENOLA
SQUARE S | 831



ENOLA
SQUARE M | 831



ENOLA
SQUARE L | 831



BIG THEO | 833



SOCKET

BIG THEO | 833



OVALISK | 833



SOCKET

MOLAT | 834



SOCKET

SITRA | 835



SOCKET

ROX | 837



SOCKET

ROX | 837

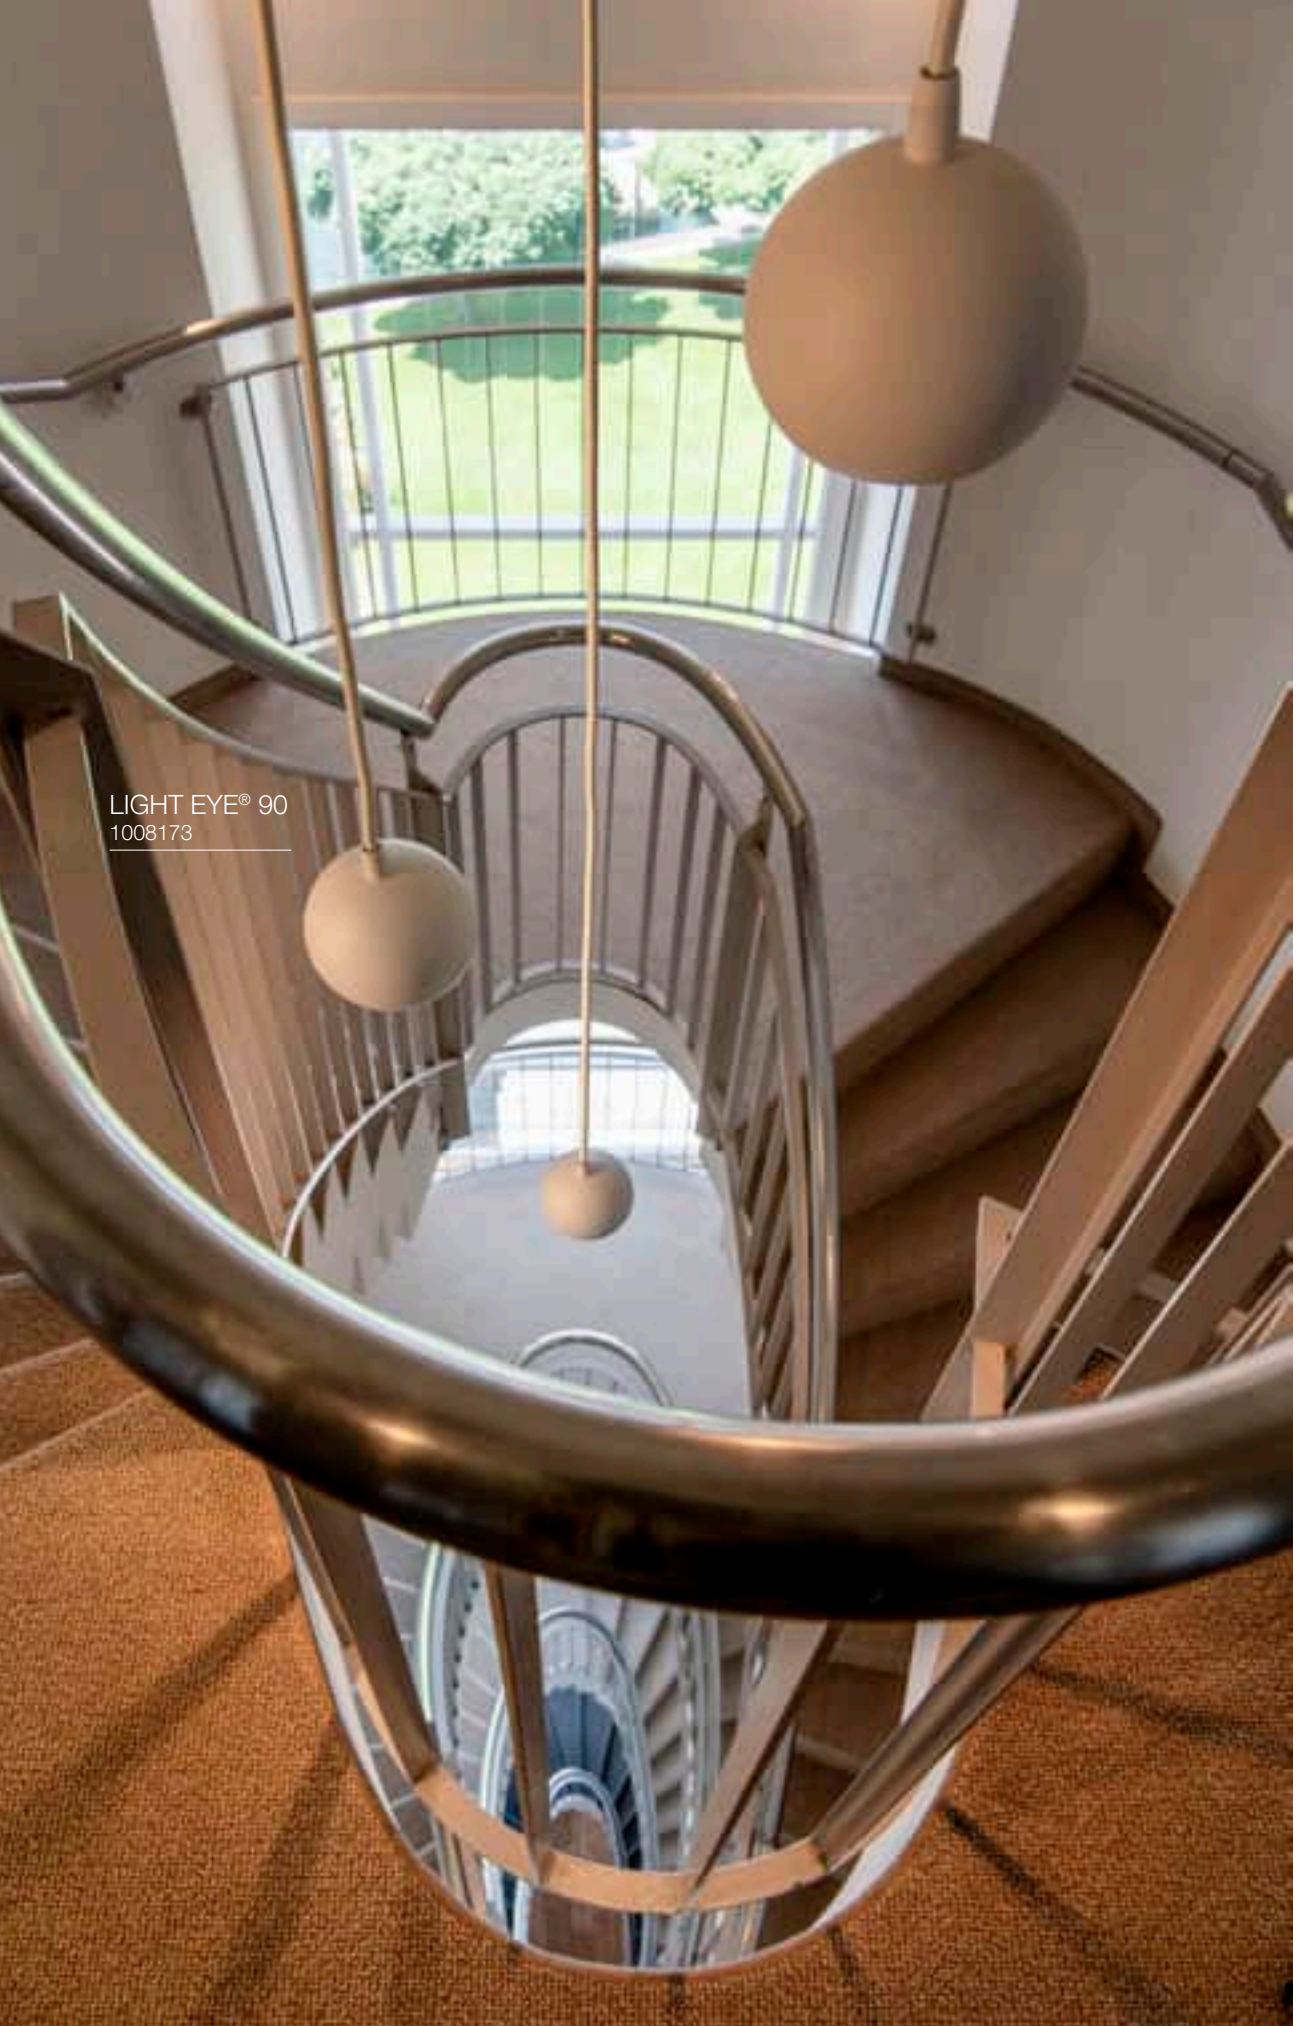

LIGHT EYE® 90
1008173

INDOOR PENDANT LIGHTS



QUIMERA | 223



VARYT | 225



VARYT | 225



VARYT | 225



VARYT | 225



VARYT | 225



WUD | 226



WUD | 227



WUD | 227



WUD | 227



SUN 20 | 228



SUN 20 | 229



MAGICO 20 | 231



MAGICO 38 | 231



MAGICO 55 | 231



NUMINOS® S | 232



NUMINOS® M | 234



NUMINOS® L | 236



NUMINOS® XL | 238



MEDO® RING 60 | 240, 241



MEDO® RING 90 | 241



MEDO® PRO 30 | 242



MEDO® PRO 40 | 243



MEDO® PRO 60 | 244



MEDO® PRO 90 | 245

MEDO® PRO 30 | 246

MEDO® PRO 40 | 247

MEDO® PRO 60 | 248

MEDO® PRO 90 | 249



MEDO® 30 | 250



MEDO® 40 | 250



MEDO® 60 | 251



MEDO® 90 | 251

MEDO® | 253



LALU® | 257



LALU® | 257

LALU® | 258



LALU® | 259



LALU® TETRA 14 | 260



LALU® TETRA 24 | 260

LALU® TETRA 36 | 260

LALU® CONE 15 | 260



LALU®
PLATE 15 | 260



LALU®
PLATE 22 | 260



LALU® E
LYPSE 15 | 261



LALU®
ELYPSE 22 | 261



LALU®
ELYPSE 33 | 261

NEW



ONE® FLAT | 265

NEW



ONE® FLAT | 265

NEW



ONE® VERTICAL | 267



ONE® CUBE | 269



ONE® CUBE | 269



ONE® 60 | 271



ONE® 60 | 271



ONE® 60 | 271



ONE® 80 | 273



ONE® 80 | 273



ONE® DOUBLE | 274



ONE® DOUBLE | 274



ONE® TRIPLE | 275



ONE®
LINEAR 100 | 277



ONE®
LINEAR 140 | 277



SOCKET

PANTILO
ROPE 19 | 279



SOCKET

PANTILO
ROPE 20 | 279



SOCKET

PANTILO
ROPE 27 | 279



SOCKET

PANTILO OVAL | 281



SOCKET

PANTILO 20 | 281



SOCKET

PANTILO 28 | 281



SOCKET

PANTILO
CONVEX 29 | 283



SOCKET

PANTILO
CONVEX 40 | 283

NEW



SOCKET

LIGHT EYE® 90 | 285

NEW



SOCKET

LIGHT EYE® 150 | 285



SOCKET

ASTO TUBE | 287



SOCKET

ASTO TUBE | 287



SOCKET

ASTO TUBE | 287



SOCKET

ASTO TUBE | 287



WORKLIGHT
PRO 120 | 289



WORKLIGHT
PRO 150 | 289



WORKLIGHT | 290

PANEL 60 | 291



NOYA | 292



GLENOS | 293

GLENOS | 293

Q-LINE® | 295



LED

Q-LINE® | 295



LED

Q-LINE® | 295



LED

OCULUS | 296



LED

OCULUS | 297



SOCKET

FITU | 299



SOCKET

FENDA | 300



FENDA | 300



FENDA | 300



FENDA | 301



FENDA | 301



FENDA | 301

LED

HELIA
AMBIENT 35 | 304



LED

HELIA
AMBIENT 35 | 304

LED

HELIA 30 | 305

LED

HELIA 30 | 305

LED

HELIA 40 | 307

LED

HELIA 40 | 307



SOCKET

ASTINA | 309



SOCKET

ENOLA B | 309



SOCKET

ENOLA | 309



LED

ANELA | 310

SOCKET

TONGA® | 311

SOCKET

QUADRASS | 311



SOCKET

PARA CONE 20 | 313



SOCKET

PARA CONE 30 | 313



SOCKET

PHELIA 10 | 315



SOCKET

PHELIA 20 | 315



SOCKET

PHELIA 30 | 315



SOCKET

FORCHINI 50 | 316



SOCKET

FORCHINI 70 | 316



SOCKET

FORCHINI M 40 | 317



SOCKET

FORCHINI M 50 | 317



SOCKET

ROTOBALL 25 | 319

SOCKET

ROTOBALL 40 | 319

SOCKET

ROTOBALL 50 | 319



SOCKET

PARA DOME | 320



PARA DOME | 320



PARA DOME | 320



SOCKET

PARA 380 | 321



QUIMERA | 329



LYGANT | 331



LYGANT | 331



SOCKET

VARYT | 333



VARYT | 333



VARYT | 333



VARYT | 333



VARYT | 333



SOCKET

SUN | 334



SOCKET

SUN | 335



NUMINOS® S | 336



NUMINOS® M | 338



NUMINOS® L | 340



NUMINOS® XL | 342



MEDO® PRO 30 | 344



MEDO® PRO 40 | 345



MEDO® PRO 60 | 346



MEDO® PRO 90 | 347

MEDO® PRO 30 | 348

MEDO® PRO 40 | 349

MEDO® PRO 60 | 350

MEDO® PRO 90 | 351



MEDO® 30 | 352



MEDO® 40 | 352



MEDO® 60 | 353



MEDO® 90 | 353



ONE LINEAR 50 | 354



ONE LINEAR 70 | 355



ONE 40 | 357



ONE 60 | 357

TRUKKO | 358

TRUKKO | 358



TRUKKO | 359

TRUKKO 60 | 359

TRUKKO 90 | 359

SEDO 14 | 360

SEDO 21 | 360



ARLINA 60 | 361



ARLINA 130 | 361



MARYLIN 40 | 363

MARYLIN 60 | 363

MARYLIN 90 | 363



SOCKET

WL 106 | 364



SOCKET

WL 106 | 364



SOCKET

MIBO UP/DOWN | 365



LED

MAGANDA | 365



LED

DORISA 30 | 367



LED

DORISA 50 | 367



LED

DORISA 60 | 367



LED

Q-LINE® | 368

LED

L-LINE 60 | 369



LED

L-LINE 120 | 369



SOCKET

PANTILO ROPE | 373



SOCKET

ASTO TUBE | 375



SOCKET

ASTO TUBE | 375



LED

MANA BASE | 377



MANA BASE | 378



MANA 40 | 378



MANA 60 | 378

NEW



MANA 40 | 379

NEW

MANA 40 | 379

NEW



MANA 40 | 379

NEW



MANA 60 | 379

NEW



MANA 60 | 379

NEW



MANA 60 | 379

MANA | 381



MANA | 381

LED

MANA | 383



MANA | 383



LED

OCULUS | 385



LED

OCULUS | 385

NEW



LED

OCULUS | 385



SOCKET

PLASTRA | 386



SOCKET

PLASTRA | 386



SOCKET

PLASTRA | 387

SOCKET

PLASTRA | 387



SOCKET

PLASTRA | 389

LED

PLASTRA | 389



LED

PLASTRA | 389



SOCKET

PLASTRA | 390



SOCKET

PLASTRA 101 | 391

SOCKET

PLASTRA | 391

SOCKET

PLASTRA 104 | 391

LED

LOGS IN | 392



LED

LOGS IN | 392

LED

LOGS IN L | 393



LED

LOGS IN L | 393



LED

QUAD FRAME 14 | 395



LED

QUAD FRAME 19 | 395



LED

ASSO 300 | 396

LED

ASSO 300 | 397



SOCKET

OSSA 180 | 397



SOCKET

ASSO 300 | 397



LED

CARISO | 398



LED

CARISO | 398



LED

CHROMBO | 399

LED

DIRETO 60 | 401

LED

DIRETO 90 | 401



SOCKET

DENA 30 | 402

SOCKET

BASKET | 402



SOCKET

QUADRASS | 403



LED

QUADRASS
SPOT | 403



FITU | 404



FITU CUBE | 404



SOCKET

THEO UP/DOWN | 405



SOCKET

SOLID CUBE | 405



SOCKET

ENOLA B | 407



SOCKET

ENOLA B | 407

SOCKET

ASTINA
UP/DOWN | 407



SOCKET

FENDA | 408



FENDA | 408



LED

KENKUA SPOT | 409



LED

COUPA FLEX | 409



LED

KARPO MAGN | 410



LED

KARPO MAGN | 410



LED

KARPO 30 | 411



LED

KARPO | 411



LED

SOMNILA SPOT | 412



LED

SOMNILA SPOT | 413

LED

SOMNILA FLEX | 413

LED

SOMNILA FLEX | 413



SOCKET

DIO FLEX PLATE | 415



LED

DIO FLEX PLATE | 415



PHELIA | 416

LED

MERADO FLOOD | 416

SOCKET

DISPLAY ADL 50 | 417



LED

DECONA 30 | 418



LED

DECONA 42 | 419



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 420



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 422



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 424



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 426



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



PURI 2.0 | 429



PURI 2.0I | 429



PURI 2.0 | 429



SOCKET

PURI | 431



SOCKET

PURI | 431



SOCKET

PURI | 431



SOCKET

PURI | 431



SOCKET

AVO | 433



SOCKET

AVO | 433



SOCKET

AVO | 433

SOCKET

AVO | 433

SOCKET

ASTO | 435



SOCKET

ASTO | 435



SOCKET

ASTO | 435



SOCKET

ASTO | 435



SOCKET

PANTILO
ROPE 19 | 437



SOCKET

PANTILO
ROPE 27 | 437



CYFT WAVE | 439



CYFT | 439

NEW



SOCKET

KAMI | 441



SOCKET

ASTO TUBE | 443



SOCKET

ASTO TUBE | 443



SOCKET

ASTO TUBE | 443



SOCKET

ASTO TUBE | 443



OCULUS | 445



KARPO 30 | 445

NEW



NOBLO® | 447

NEW



NOBLO® | 447

NEW



NOBLO® | 447

NEW



NOBLO® | 449

NEW

NOBLO® | 449

NEW

NOBLO® | 449



KALU | 451



KALU | 451



KALU | 451



KALU | 451



SOCKET

KALU | 453



SOCKET

KALU | 453



SOCKET

KALU | 453



SOCKET

KALU | 453



SOCKET

ENOLA B | 455



SOCKET

ENOLA B | 455



SOCKET

ENOLA B | 455



SOCKET

ALTRA DICE | 456



SPOT 79 | 457



INDA 12 | 457

SENSER 12 | 459

SENSER 18 | 459



SENSER 24 | 459

SENSER 12 | 461

SENSER 18 | 461



SENSER 24 | 461

SIMA | 462

SIMA | 462

SIMA | 463

SIMA | 463

LIPSY® 30 | 465

LIPSY® 40 | 465

LIPSY® 50 | 465

LIPSY® 30 | 467

LIPSY® 40 | 467

LIPSY® 50 | 467

LIPSY® 40 | 468

LIPSY® 50 | 468



MELAN | 469

BATTEN 60 | 471

BATTEN 120 | 471



LONG GRILL | 473

SIGHT 60 | 475



SIGHT 115 | 475



VARYT
1008110 + 1007859


GRID CUBE
1008477



R-CUBE | 843



S-CUBE | 843



SOCKET

PHOTONI CYL | 845



SOCKET

PHOTONI | 845



LID I | 846



LID I | 846



LID II | 847



LID II | 847



Q-RING | 849



Q-RING | 849



D-RING S | 851

D-RING M | 851



I-RING | 852



OVAL 14 | 853



OVAL 18 | 853



CONCRETO M | 855



CONCRETO L | 855



VANO WING | 857



VANO WING | 857



MANA BASE | 858



RUSTY® MANA | 858



RUSTY® MANA | 858



MANA OUT | 859



MANA OUT | 859



SOCKET

THEO UP/DOWN | 861



BIG THEO BEAM UP/ FLOOD DOWN | 861



SOCKET

BIG THEO UP/ DOWN | 861



SOCKET

THEO | 862



BIG THEO FLOOD UP/ DOWN | 862



SOCKET

BIG THEO | 863



BIG THEO | 863



ENOLA OCULUS | 865



ENOLA OCULUS | 865



ENOLA ROUND S | 867



ENOLA ROUND M | 867



ENOLA ROUND L | 867



ENOLA ROUND S UP/DOWN | 869



ENOLA ROUND M UP/DOWN | 869



ENOLA ROUND L UP/DOWN | 869



ENOLA SQUARE S | 871

ENOLA SQUARE M | 871

ENOLA SQUARE L | 871



ENOLA SQUARE S
UP/DOWN | 872



ENOLA SQUARE M
UP/DOWN | 872



ENOLA SQUARE L
UP/DOWN | 872



SITRA S | 877



SITRA S | 877



SITRA M | 879



SITRA L | 879



SITRA CUBE | 879



GRAFIT | 880



GRAFIT | 880



GRAFIT | 881



GRAFIT | 881



QUADRULO | 882



QUADRULO
SENSOR | 883



QUADRULO | 883



MERIDIAN | 884



MERIDIAN BOX | 884



MERIDIAN BOX
SENSOR | 885



MERIDIAN BOX | 885



ESKINA FRAME | 887



ESKINA FRAME | 887



ESKINA FRAME | 887



BOOKAT | 889



BIG QUAD | 890



BIG QUAD
UP/DOWN | 891



QUAD | 892



QUAD
UP/DOWN 15 | 893



RUSTY®
UP/DOWN | 894



RUSTY®
UP/DOWN | 894



OVALISK
SENSOR | 895



OVALISK | 895



PEMA® | 896



PEMA® | 897



PEMA® | 897



PEMA® | 897



FLATT | 898



FLATT SENSOR | 898



ASTINA | 899



ASTINA STEEL | 899

NEW



MODELA | 901

ANGOLUX
SENSOR | 902

ANGOLUX | 902



LED

VILUA S | 903



LED

VILUA L | 903



LED

VILUA | 903



SOCKET

MYRA UP/DOWN | 904



LED

SITRA UP/DOWN | 905



SOCKET

SITRA UP/DOWN | 905



SOCKET

ROX UP/DOWN | 907



LED

DELWA | 907

NEW



SOCKET

T-TUBE | 840

NEW



SOCKET

T-TUBE | 840

NEW



SOCKET

T-TUBE | 841

NEW



SOCKET

T-TUBE | 841



SOCKET

WALLYX | 910



LED

DOWNUNDER
OUT | 911



LED

DOWNUNDER
OUT | 911

NEW



LED

ABRIDOR | 913



LED

ABRIDOR | 915



LED

ABRIDOR
SENSOR | 915

NEW



LED

ORDI II SENSOR | 916

NEW



LED

ORDI II | 916



LED

ORDI SENSOR | 917



LED

ORDI | 917



SOCKET

BOX-L | 919



LED

BOX-L | 919



SOCKET

BOX UP/DOWN | 919



LED

LOGS | 921



LED

OUT-BEAM UP/
FLOOD DOWN | 921



LED

L-LINE OUT | 921



SOCKET

PHOTONIA | 923



SOCKET

MOLAT | 923



SOCKET

GLOO PURE | 923



SOCKET

F-POL | 924



SOCKET

SQUARE | 925



SOCKET

KERAS ELT | 925



SOCKET

SITRA | 925



LED

IPERI | 926



SOCKET

QUADRASYL | 927



SOCKET

SQUARE TURN | 927



LED

TODAY PRO | 929



LED

ESKINA D | 929

SOCKET

MYRA DISPLAY | 929

LED

LED SPOT | 931



SOCKET

NAUTILUS | 931



SOCKET

MYRA | 931



LED

RASTERLYS | 933



SOCKET

RASTERLYS | 935



LED

R-CUBE | 935



LED

S-CUBE | 935



LED

ESKINA SPOT
SENSOR | 937



LED

ESKINA SPOT | 937



SOCKET

SITRA 360 | 938



SOCKET

THEO BRACKET | 938



LED

HELIA | 939



LED

HELIA | 939



SOCKET

MYRA | 941

LED

OUT-BEAM
FRAME | 941



LED

QUADRULO | 941

LED

AINOS | 942



LED

AINOS | 943

LED

AINOS | 943



LED

AINOS | 943



LED

RUBA | 944



LED

TERANG 200 | 944



SOCKET

BULAN | 945



SOCKET

BULAN GRID | 945


QUIMERA
1008038

INDOOR TABLE AND FLOOR LAMPS


NEW
SOCKET
VARYT | 478

NEW
VARYT | 479


NEW
VARYT | 479


NEW
VARYT | 479

NEW
VARYT | 479


NEW
LED
QUIMERA | 481


LED
ONE STRAIGHT | 483


LED
ONE BOW | 483


LED
VINOLINA ONE | 485


LED
VINOLINA | 485


LED
VINOLINA TWO | 487


LED
TAHA | 489


SOCKET
TINY SUN | 491


SOCKET
LITTLE SUN | 491


LED
WORKLIGHT PRO | 492


LED
WORKLIGHT PRO | 492

LED
WORKLIGHT | 493


LED
WORKLIGHT | 493


SOCKET
FENDA | 495


SOCKET
FENDA | 495


SOCKET
FENDA | 495


SOCKET
FENDA | 497


FENDA | 497

FENDA | 497


FENDA | 497


FENDA | 497


LED
KARPO | 498

LED
KARPO | 498


SOCKET
PHELIA | 499


T-TUBE 70
1008017

MOBILE LIGHTS AND OUTDOOR FLOOR LAMPS


NEW

SUN GRID | 701


NEW

GRID CUBE | 701



VINOLINA ONE | 703



VINOLINA | 703



VINOLINA TWO | 705



TAHA | 707



S-TUBE 32/75 | 709


NEW

PHOTONI CYL | 711



PHOTONI 45/75 | 713



S-CUBE 35/75 | 714



R-CUBE 35/75 | 715


NEW

ADEGAN | 717


NEW

ADEGAN | 717



I-RING | 718



LID I 45/75 | 719



M-POL S | 720



M-POL S | 721



M-POL S | 722



M-POL S | 723



M-POL S | 724



M-POL M | 725



M-POL M | 726



M-POL M | 727



M-POL
30/60/90 | 728, 729



CONCRETO | 733



CONCRETO | 733


NEW

RASTERLYS | 735



ESKINA
FRAME 45/75 | 737



ESKINA
FRAME 75 | 737



ESKINA
FRAME 125/175 | 738



ESKINA 30/80 | 739


NEW

T-TUBE 70 | 740, 741


NEW

T-TUBE 70 | 740, 741



LOGS 40/70 | 743



GRAFIT 30/60/90 | 745



GRAFIT 30/60/90 | 747



QUADRULO | 749



RUSTY®
SLOT 50/80 | 750



RUSTY®
SLOT 50/80 | 751



RUSTY®
PATHLIGHT | 752

RUSTY® PATHLIGHT
40/70 | 753

RUSTY® 40/70 | 755



SOCKET

RUSTY® 40/70 | 697



SOCKET

RUSTY®
CONE 24 | 757



SOCKET

RUSTY®
CONE 40/70 | 757



SOCKET

RUSTY® 40/70 | 758



SOCKET

ARROCK
GRANITE 40/70 | 759



SOCKET

ARROCK ARC | 760



LED

ARROCK
STONE 50/75 | 761



SOCKET

ARROCK SLOT | 761



LED

L-LINE OUT
30 | 762



LED

L-LINE OUT
60 | 763



LED

L-LINE OUT
50/80 | 763



SOCKET

THEO
PATHLIGHT | 764



LED

OVALISK 75/100 | 765



SOCKET

GLOO PURE
27/44/70 | 767



SOCKET

ROTOBALL
25/40/50 | 769



SOCKET

PHOTONIA | 771



SOCKET

OTOS GLAS | 771



SOCKET

CUBIX | 772



SOCKET

CONE | 772



SOCKET

MOLAT | 773



SOCKET

MOLAT | 773



SOCKET

LISENNE 40/70 | 774



SOCKET

ADEGAN | 775



SOCKET

ALPA MUSHROOM
45/75 | 777



SOCKET

ALPA CONE 100 | 777



LED

APONI 90/120 | 778



LED

TRUST 30/60 | 779



SOCKET

BIG NAILS 50/80 | 780



SOCKET

ROX ACRYL
30/60/90 | 781



SOCKET

VAP SLIM
30/60/90 | 783



SOCKET

C-POL | 784



SOCKET

F-POL | 784



SOCKET

SQUARE POLE
30/60/90 | 785



LED

SLOTS 45/65 | 787



LED

H-POL 30/60 | 788



LED

H-POL TWIN 60 | 789



SLOTBOX 40/60 | 791



FLATT 65/100 | 793



NEW

ORDI II | 795



NEW

ORDI II | 795



NEW

ABRIDOR 60/100 | 796



ABRIDOR 60/100 | 797



IPERI 50 | 798



QUADRASYL 75 | 799



QUAD POLE | 800



BOOKAT | 800



MYRA SPOT | 801



SITRA 360 | 801



SYNA GARDEN
1007147

OUTDOOR SPOTLIGHTS

NEW

LED
SYNA | 804

NEW

SOCKET
SYNA | 805


LED
SYNA PLANT | 807


LED
SYNA GARDEN | 807


LED
SYNA | 807


LED
GALEN 60 | 808


LED
GALEN 120 | 808


LED
FLAC BEAM® | 809


SOCKET
SAMRINA | 809


SOCKET
NAUTILUS 10 | 810


SOCKET
BIG NAUTILUS | 810


SOCKET
NAUTILUS 10 | 811


LED
NAUTILUS 10 | 812


SOCKET
NAUTILUS | 813


SOCKET
NAUTILUS 10
SPOT | 813


LED
NAUTILUS 10
SPOT LED | 813


LED
DASAR®
PROJECTOR | 815


LED
DASAR® 920 | 815

NEW

LED
HELIA SLIM | 816

NEW

LED
HELIA SLIM | 816


LED
HELIA SPOT S | 817


LED
HELIA SPOT L | 817


SOCKET
THEO BRACKET | 819


LED
LED SPIKE | 819


SOCKET
SITRA 360 SPIKE | 821


SOCKET
SITRA 360 SPIKE | 821

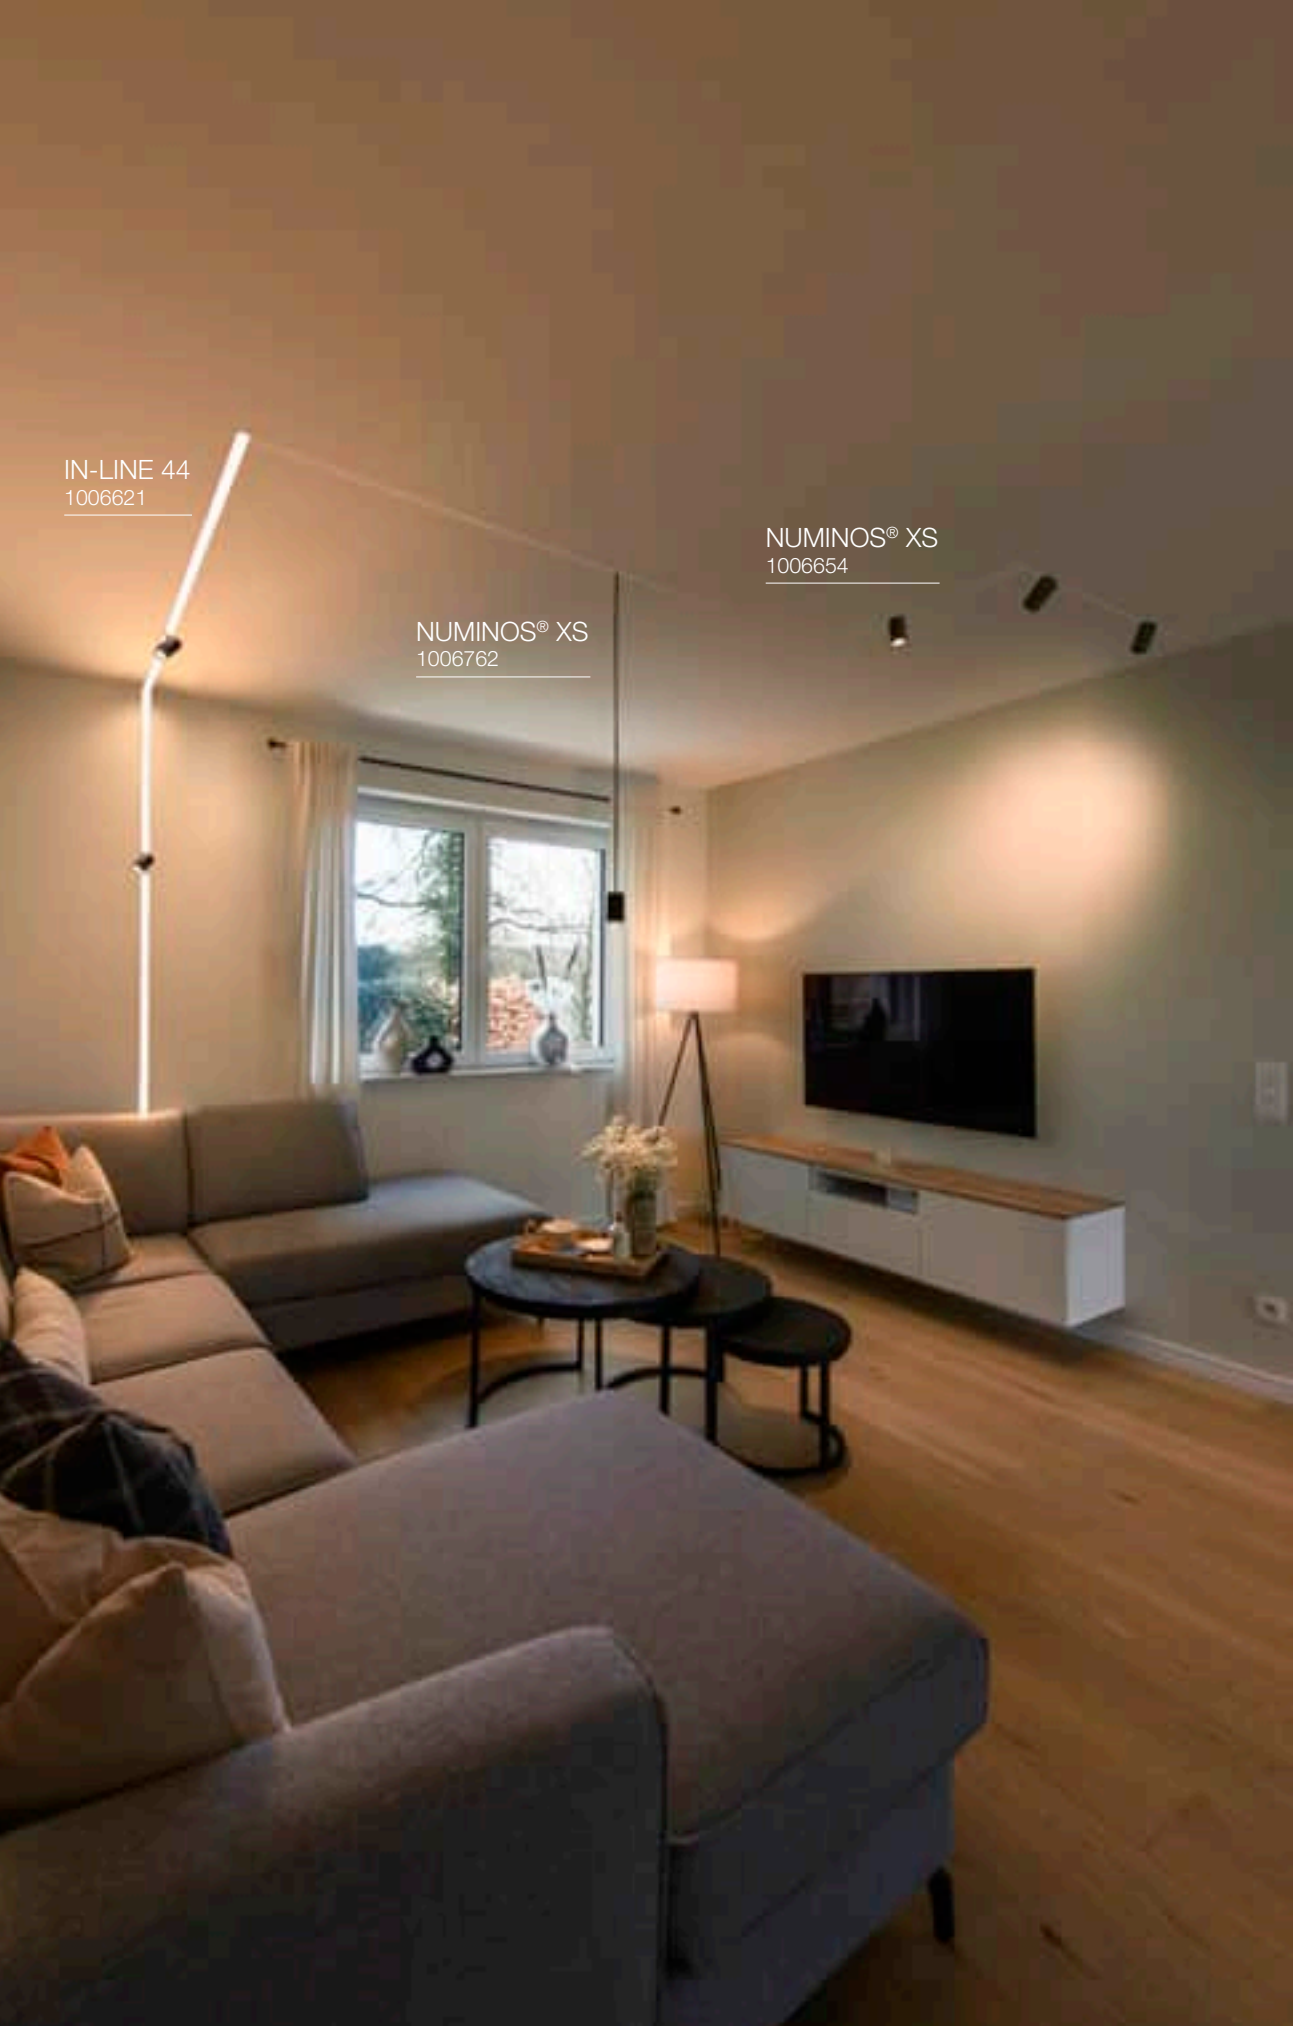
IN-LINE 44
1006621
NUMINOS® XS
1006654
NUMINOS® XS
1006762

INDOOR | 48 V SYSTEMS



NUMINOS® XS | 514



NUMINOS® S | 516



NUMINOS® XS | 518



NUMINOS® S | 520

IN-LINE 22 | 523

IN-LINE 22 | 523

IN-LINE 44 | 525

IN-LINE 44 | 525



IN-LINE 24 | 527



IN-LINE 46 | 527

NEW



GRIP! S | 529

NEW



GRIP! S | 529

NEW



GRIP! S | 529

NEW



GRIP! S | 531

NEW



GRIP! S | 531

NEW

GRIP! S | 531

NEW



LALU® PD | 533



LALU®
TETRA 14 | 534



LALU®
TETRA 24 | 534



LALU®
ELYPSE 15 | 535



LALU®
PLATE 15 | 535



LALU®
CONE 15 | 535



LALU®
ELYPSE 22 | 535



LALU®
PLATE 22 | 535

INDOOR LOW-VOLTAGE SYSTEMS



SOCKET

ASMARA | 544



SOCKET

TELESKOP | 544



SOCKET

COSMIC | 545



SOCKET

SYROS | 547



SOCKET

SALUNA | 547



DURNO | 547



PLYTTA | 548



NOBLO SPOT | 549



COMET LED | 549



SOCKET

COMET | 549



NOBLO® SPOT
1007352

INDOOR 1-PHASE SYSTEMS



NEW

LED

QUIMERA | 559



NEW

SOCKET

FORCHINI M
40 TRACK | 561



NEW

SOCKET

PURI 2.0 | 563



NEW

SOCKET

PURI 2.0 | 563



NEW

SOCKET

PURI 2.0 | 563



NEW

SOCKET

PURI 2.0 | 565



NEW

SOCKET

PURI 2.0 | 565



NEW

SOCKET

PURI 2.0 | 565



NEW

SOCKET

PURI 2.0 | 566



NEW

SOCKET

PURI 2.0 | 567



NEW

PURI 2.0 | 567



NEW

PURI 2.0 | 567



PURI 2.0 | 567



GRIP! S | 569



GRIP! S | 569



GRIP! S | 569



GRIP! M | 571



GRIP! M | 571



GRIP! M | 571



GRIP! L | 573



GRIP! L | 573



LIGHT EYE® 90 | 576



LIGHT EYE® 150 | 577



LIGHT EYE® 90 | 579



LIGHT EYE® 150 | 579



KALU TRACK | 581



KALU TRACK | 581



NOBLO SPOT | 582



NOBLO SPOT | 582



NOBLO SPOT | 583



NOBLO SPOT | 583



ASTO TUBE | 585



PANTILO
ROPE 19 | 585



PARA CONE GL | 587



PARA CONE 14 | 587



PARA CONE 14 | 587



HELIA 50 TRACK | 589



PANEL TRACK | 589

PANEL TRACK | 589



PURI TRACK | 591



PURI TRACK | 591

TONGA® | 592



PURIA TRACK | 593

AVO TRACK | 593



ENOLA C TRACK | 594



ENOLA C TRACK | 594



ENOLA B TRACK | 595

ENOLA B | 595



BIMA | 597



BIMA | 597



EURO SPOT
TRACK | 598



ALTRA DICE
TRACK | 599



INDOOR 3-PHASE SYSTEMS



S⇄CKET

PURI 2.0 | 619



S⇄CKET

PURI 2.0 | 619



S⇄CKET

PURI 2.0 | 619



S⇄CKET

PURI 2.0 | 621



S⇄CKET

PURI 2.0 | 621



S⇄CKET

PURI 2.0 | 621



S⇄CKET

PURI 2.0 | 622



S⇄CKET

PURI 2.0 | 623



PURI 2.0 | 623



PURI 2.0 | 623



PURI 2.0 | 623



L⇄D

GRIP! M | 624



GRIP! M | 624



GRIP! M | 625



GRIP! M | 625



GRIP! L | 627



NUMINOS® S | 628



NUMINOS® M | 630



NUMINOS® L | 632



NUMINOS® XL | 634



NUMINOS® ZOOM M | 636



ONE 40 TRACK | 643



NOBLO SPOT | 644



NOBLO SPOT | 644



NOBLO SPOT | 645



NOBLO SPOT | 645

SIGHT EASY | 647

SIGHT EASY | 647



SIGHT TRACK | 648

SIGHT TRACK | 648



SIGHT MOVE | 649



SIGHT MOVE | 649



PARA CONE 14 | 651



PARA CONE 14 | 651



PARA CONE GL | 653



PARA CONE GL | 653



FORCHINI M 40 TRACK | 655



LIGHT EYE® 90 | 656



LIGHT EYE® 150 | 657



LIGHT EYE® 150 | 657



ALTRA DICE TRACK | 658



EURO CUBE | 658



EURO SPOT TRACK | 659



EURO SPOT TRACK | 659



PURI TRACK | 661



PURI TRACK | 661



KALU TRACK | 662



KALU TRACK | 662



BIMA | 663



BIMA | 663



HELIA 50 TRACK | 665



ENOLA C TRACK | 665

AVO TRACK | 665



GRAZIA IP
FLEXSTRIP
1004737

PROFILES



GRAZIA 10 SURFACE-MOUNTED PROFILE | 669



GRAZIA 10 RECESSED PROFILE | 669



GRAZIA 10 EDGE | 672



GRAZIA 20 SURFACE-MOUNTED PROFILE | 675



GRAZIA 20 RECESSED PROFILE | 675



GRAZIA 60 SURFACE-MOUNTED PROFILE | 679



GRAZIA 60 RECESSED PROFILE | 679



GRAZIA 10 ACCESSORIES | 671



GRAZIA 10 EDGE ACCESSORIES | 673



GRAZIA 20 ACCESSORIES | 676–677



GRAZIA 60 ACCESSORIES | 680–681

LED STRIPS

NEW



GRAZIA LED STRIP VALUE ADDITIONAL LIGHTING AND ACCESSORIES | 684

NEW



GRAZIA LED STRIP VALUE MAIN LIGHTING AND ACCESSORIES | 685

NEW



GRAZIA LED STRIP VALUE MAIN LIGHTING + AND ACCESSORIES | 686

NEW



GRAZIA LED STRIP CORE MAIN LIGHTING AND ACCESSORIES | 687



GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 688



GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 689



GRAZIA PRO FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 690



GRA ZIA PRO FLEXSTRIP RGBW AND ACCESSORIES | 691



GRAZIA IP FLEXSTRIP | 692



GRAZIA IP FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 693



GRAZIA IP FLEXSTRIP RGBW AND ACCESSORIES | 693



HIGHBAY C 400
1008526 + 1008530

SLVtec



PANEL C 600 | 990



PANEL C
DALI 600 | 991



PANEL C 625 | 993



PANEL C
DALI 625 | 993



PANEL C 1200 | 995



PANEL C
DALI 1200 | 995

PANEL V 600 | 996

PANEL V 600 | 997

PANEL V
DALI 600 | 997

PANEL V 625 | 998

PANEL V 625 | 999

PANEL V
DALI 625 | 999

SURFACE
V 390 | 1001

SURFACE
V 390 | 1001



TRACKSPOT V | 1002

TRACKSPOT V | 1003



DOWNLIGHT C | 1005



DOWNLIGHT C | 1005



DOWNLIGHT C | 1006



DOWNLIGHT C | 1007



DOWNLIGHT
V 100 | 1008



DOWNLIGHT
V 150 | 1008



DOWNLIGHT
V 200 | 1008



UNIVERSAL
DOWNLIGHT | 1011



WATERPROOF
V 600 | 1013



WATERPROOF
V DALI 600 | 1013



WATERPROOF
V 1200 | 1014



WATERPROOF
V DALI 1200 | 1015



WATERPROOF
V 1500 | 1017



WATERPROOF
V DALI 1500 | 1017



INDUSTRY BATTEN
V 1200 | 1018



INDUSTRY BATTEN
V 1500 | 1019



HIGHBAY C 340 | 1021



HIGHBAY C 400 | 1021



HIGHBAY C
DALI 400 | 1021



HIGHBAY V 330 | 1024



OUTDOOR BULKHEAD
V 360 | 1027



OUTDOOR BULKHEAD
V 360 | 1027



FLOODI S | 1029



FLOODI M | 1029

FLOODI L | 1029

LED TUBE | 1031

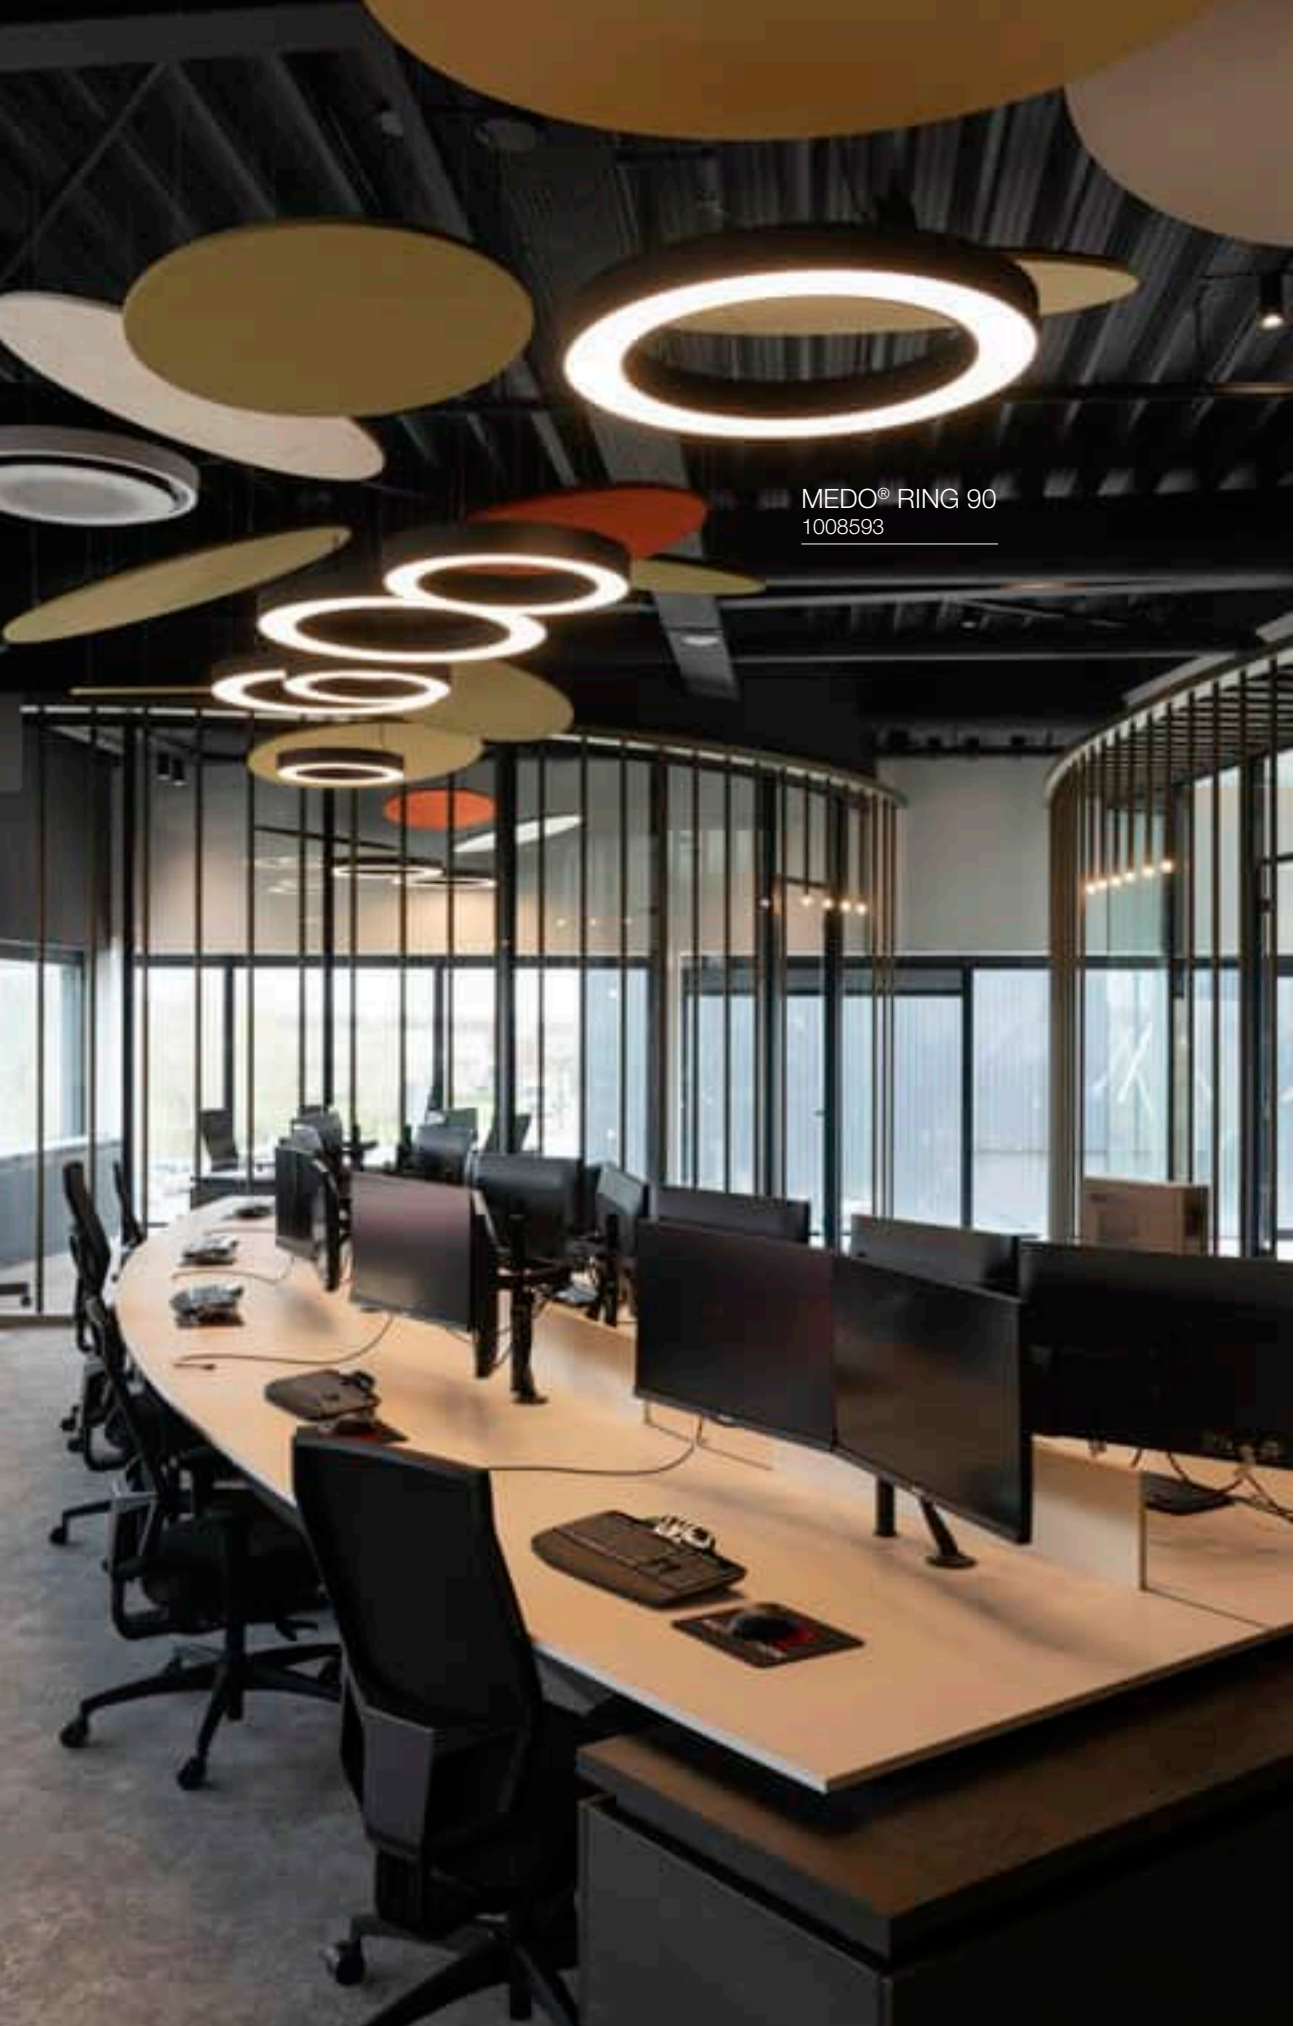
MEDO® RING 90
1008593


GRIP! L
1008471





SOCKET

KAMI | 57



UNIVERSAL DOWNLIGHT | 59



KADUX | 62



KADUX | 63



KADUX | 65



KADUX | 65



KADUX | 65



SOCKET

KADUX | 66



SOCKET

KADUX | 66



SOCKET

KADUX | 66



SOCKET

KADUX | 67



SOCKET

KADUX | 67



NUMINOS® XS | 69



NUMINOS® S | 71



NUMINOS® M | 73



NUMINOS® L | 75



NUMINOS® XL | 77



NUMINOS® MOVE XS | 79



NUMINOS® MOVE S | 81



NUMINOS® MOVE M | 83



NUMINOS® MOVE L | 85



NUMINOS® MOVE XL | 87



NUMINOS® GIMBLE XS | 89



NUMINOS® GIMBLE S | 91



NUMINOS® GIMBLE M | 93



NUMINOS® GIMBLE L | 95



NUMINOS® GIMBLE XL | 97



NEW TRIA® 68 | 104



NEW TRIA® 68 | 107



NEW TRIA® 75 | 107



NEW TRIA® 68 | 109



NEW TRIA® UNIVERSAL 68 | 111



SOCKET

NEW TRIA® 68 | 113



SOCKET

NEW TRIA® 75 / XL | 115



SOCKET

NEW TRIA® | 116



NEW TRIA® | 117



NEW TRIA® | 118



NEW TRIA® 95 | 124



NEW TRIA® 155 | 127



NEW TRIA® 45 | 130

SOCKET

NEW TRIA® 150 | 131

SOCKET

NEW TRIA® 150 | 131



SOCKET

NEW TRIA® 300 | 131



MEDO® 30 | 132



MEDO® 40 | 132



MEDO® 60 | 133



MEDO® 90 | 133



MEDO® 30 | 134



MEDO® 40 | 134



MEDO® 60 | 135



MEDO® 90 | 135



HORN MINI | 136



SOCKET

HORN | 137



SOCKET

HORN | 137



SOCKET

HORN | 137



SOCKET

HORN | 138



SOCKET

HORN | 138



SOCKET

HORN | 138



SOCKET

HORN-T | 139

HORN MAGNA | 139

SENSER 12 | 141

SENSER 18 | 141

SENSER 24 | 141

SENSER 12 | 143

SENSER 18 | 143

SENSER 24 | 143

VERLUX | 145

VERLUX | 145



DL 126 | 145



SOCKET

PIKA | 146



SOCKET

PIKA | 146



OCULUS | 147

OCCULDAS 14 | 148

OCCULDAS 23 | 148



CONTONE® | 149

CONTONE® | 149



KARPO 30 | 150



SOCKET

PLASTRA | 151



SOCKET

PLASTRA | 151



DEKLED | 152



SOCKET

VARU | 152



SOCKET

DOLIX OUT | 153

SOCKET

DOLIX OUT | 153

KAMUELA ECO | 155



KINI | 155

AKALO D83 | 155



FRAME BASIC SET | 156

FRAME BASIC | 156



FRAME BASIC | 156



FRAME CURVE | 157



FRAME CURVE | 157

NOTAPO S | 159

NOTAPO L | 159



DOWNUNDER PUR 80 | 160



DOWNUNDER PUR 150 | 160



MOBALA | 161

WORO | 161



PATTA-I | 162



PATTA-I | 162



PATTA-I | 163



PATTA-I | 163

PATTA-F | 164



PATTA-F | 165





KAMI
RL, single, QPAR51

NEW









IP20 IK02 340° 90°

220-240V ~50/60Hz
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1007745	55.00
black/gold	1007741	55.00
white	1007744	55.00
white/black	1007742	55.00
white/gold	1007740	55.00

LED QPAR51 | 6W | 38°
3000K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005080 | 7.00 GBP

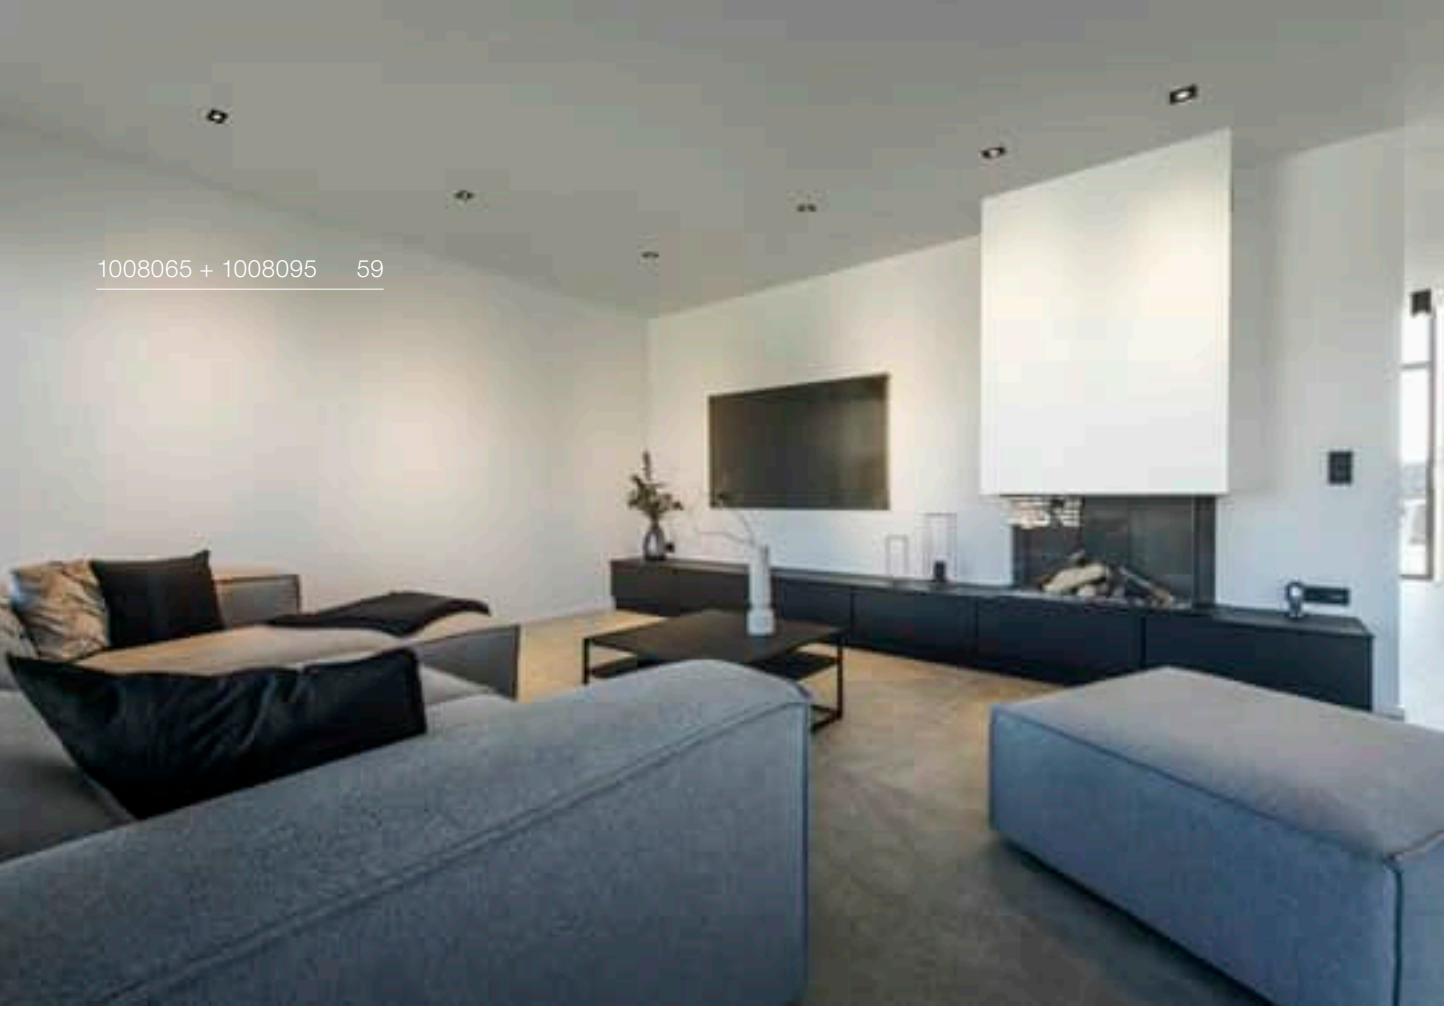

1008065 + 1008095 59

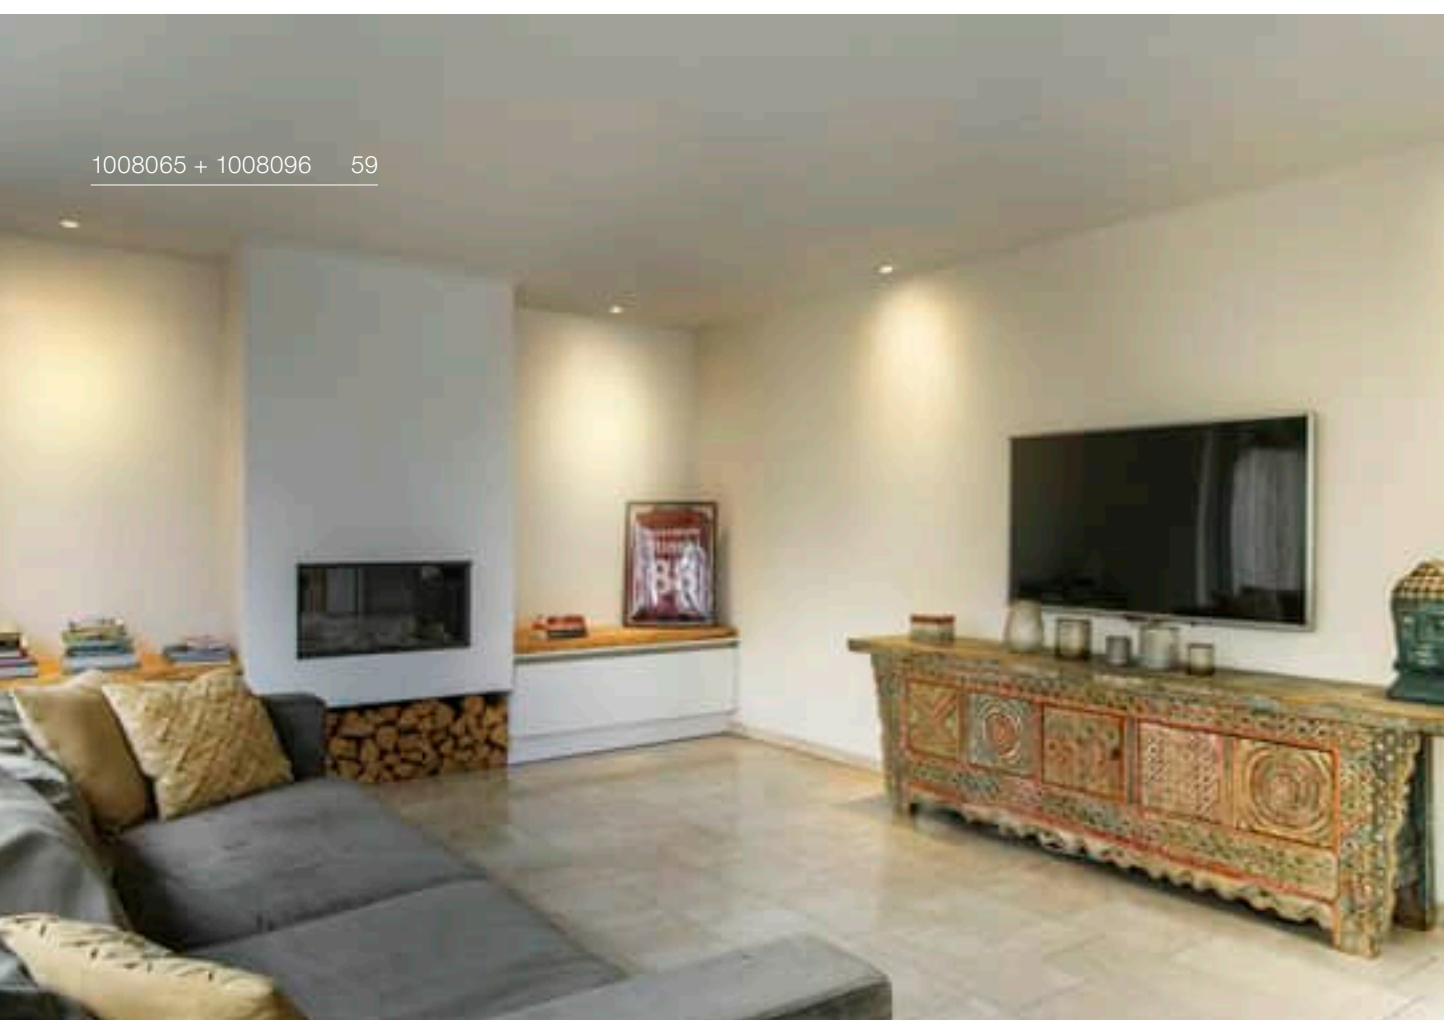

1008065 + 1008096 59

UNIVERSAL DOWNLIGHT
DL, PHASE

CCT

NEW





C | IP20 | IK02 | 38° | L80B50 | 30° | 10

220-240V ~50/60Hz | 60/mA
Total wattage: 5W/7W
Material: steel

- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

5W	470lm	2700K
	490lm	3000K
	500lm	4000K
	490lm	6500K
7W	670lm	2700K
	680lm	3000K
	690lm	4000K
	680lm	6500K

Version	Prod. no.	GBP
● black	1008065	23.00

UNIVERSAL DOWNLIGHT
Cover, non tilt, round



Ø: 8.8 cm
H: 0.5 cm
Material: polycarbonate (PC)

- IP65 in conjunction with the Universal Downlight module

Version	Prod. no.	GBP
● black	1008067	2.60
○ white	1008068	2.60
● matt gold	1008070	3.00
● aluminium	1008069	3.00

UNIVERSAL DOWNLIGHT
Cover, non tilt, square



L: 8.8 cm
W: 8.8 cm
H: 0.55 cm
Material: polycarbonate (PC)

- IP65 in conjunction with the Universal Downlight module

Version	Prod. no.	GBP
● black	1008096	2.60
○ white	1008095	2.60
● matt gold	1008098	3.00
● aluminium	1008097	3.00

UNIVERSAL DOWNLIGHT
Cover, tilt, round



Ø: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
● black	1007091	3.00
○ white	1007092	3.00
● matt gold	1007191	4.00
● aluminium	1007093	4.00

UNIVERSAL DOWNLIGHT
Cover, tilt, square



L: 8.8 cm
W: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
● black	1007184	4.00
○ white	1007185	4.00
● matt gold	1007194	4.00
● aluminium	1007186	4.00

UNIVERSAL DOWNLIGHT: NOW EVEN MORE UNIVERSAL

- Can be used universally thanks to adjustable light colour: 2700/3000/4000/6500K and total wattage: 5W/7W
- Natural colour rendering CRI>90
- Customisable to your requirements: fixed version IP65 and swivel version IP20
- Easy to install thanks to quick connector box and lockable springs
- Can be installed directly in the insulation or covered with insulating material
- Airtight when IP65 cover is used
- Tested for use in fire-retardant rated suspended ceilings

CHOOSE YOUR FAVOURITE ...

1. Cover (fixed IP65, swivel IP20)
2. Shape and colour (black, white, aluminium, gold)
3. Choice of colour temperature (2700, 3000, 4000, 6500K)
4. Choice of total wattage (5W, 7W)

DONE!

UNIVERSAL DOWNLIGHT



NEW

Easy installation by means of quick connector box
and lockable springs



Choice of fixed or swivel cover, square or round design, and colours black, white, aluminium or gold

IP65



Rigid version IP65 and airtight

IP20



Swivel version IP20

Adjustable colour temperature
2700K / 3000K / 4000K / 6500K

Adjustable total wattage 5W / 7W

High light quality and colour rendering thanks
to LED with CRI90

KADUX
DL, single, DALI

NEW





12.5 cm

Dali 2.0 | IP20 | 30° | L80B10 | 20°

220-240V ~50/60 Hz | 700 mA
Total wattage: 27W
Material: aluminium/steel

- Material thickness of mounting surface: max. 25 mm

LED INSIDE | CRI 90

Down — 3050lm | 3000K / 3350lm | 4000K

Version	Prod. no.	GBP
● black 3050lm | 3000K	**1008568**	**197.00**
● black 3350lm | 4000K	**1008570**	**197.00**
○ white 3050lm | 3000K	**1008567**	**197.00**
○ white 3350lm | 4000K	**1008569**	**197.00**

1008572 63



KADUX
DL, double, DALI

NEW









220-240V ~50/60 Hz | 1400
Total wattage: 54W
Material: aluminium/steel

- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 90

Down 3400lm | 4000K

Version	Prod. no.	GBP
● black 3150lm | 3000K	**1008572**	**343.00**
● black 3400lm | 4000K	**1008574**	**343.00**
○ white 3150lm | 3000K	**1008571**	**343.00**
○ white 3400lm | 4000K	**1008573**	**343.00**



1007560 65



1007567 65

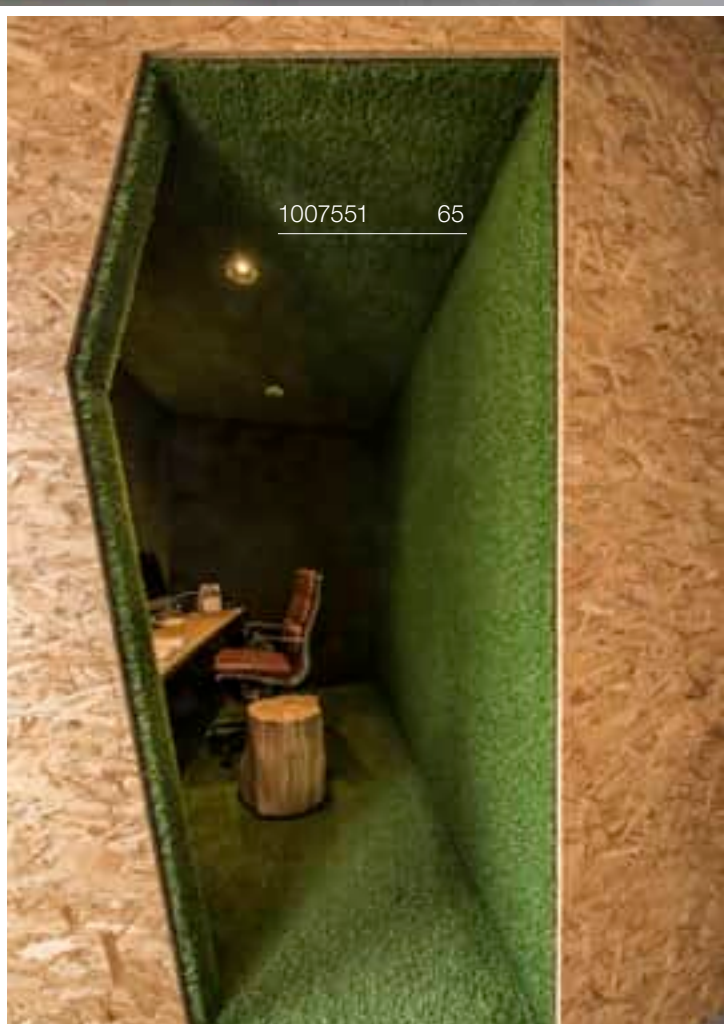

1007551 65

KADUX
DL, single, PHASE





C,L | IP 20 | 38° | L80B10 | 30°

220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

Down 770lm | 3000K

Version	Prod. no.	GBP
● black	**1007551**	**73.00**
○ white	**1007552**	**73.00**

KADUX
DL, double, PHASE





C,L | IP 20 | 38° | L80B10 | 30°

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

Down 1550lm | 3000K

Version	Prod. no.	GBP
● black	**1007559**	**138.00**
○ white	**1007560**	**138.00**

KADUX
DL, triple, PHASE





C,L | IP 20 | 38° | L80B10 | 30°

220-240V ~50/60Hz | 350mA
Total wattage: 20W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

Down 2350lm | 3000K

Version	Prod. no.	GBP
● black	**1007567**	**181.00**
○ white	**1007568**	**181.00**

KADUX
EL, single, QPAR51





IP 20 30°

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**115510**	**29.00**
○ white	**115511**	**29.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

KADUX
EL, double, QPAR51





IP 20 30°

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <50 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**115520**	**53.00**
○ white	**115521**	**53.00**

LED GU10 51mm | 5W | 38°
2700-6500K | 350lm | EEC=G
5kWh/1000h



Prod. no.: 1005079 | 7.00 GBP

KADUX
EL, triple, QPAR51





IP 20 30°

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <50 W

Base: 3xGU10

Version	Prod. no.	GBP
● black	**115530**	**72.00**
○ white	**115531**	**72.00**

LED GU10 51mm | 5W | 38°
2700-6500K | 350lm | EEC=G
5kWh/1000h



Prod. no.: 1005079 | 7.00 GBP



KADUX
EL, single, QPAR111





IP 20 20°

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE <75 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**115540**	**92.00**
○ white	**115541**	**92.00**

QPAR111 | 8W | 38°
2700K | 680lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005274 | 26.00 GBP



KADUX
EL, double, QPAR111





IP 20 20°

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE <75 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**115550**	**141.00**
○ white	**115551**	**141.00**

LED GU10 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h

C,L

Prod. no.: 1005278 | 48.00 GBP

NUMINOS® XS
DL





IP 20
IP 44

IK02

L80B50

10

CRI 90

INSIDE

200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All XS versions	**63.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	640lm	20°	16	**1005499**	
	620lm	40°	22	**1005502**	
	640lm	55°	25	**1005505**	
3000K	700lm	20°	16	**1005517**	
	670lm	40°	22	**1005520**	
	690lm	55°	25	**1005523**	
4000K	720lm	20°	16	**1005535**	
	700lm	40°	22	**1005538**	
	710lm	55°	25	**1005541**	
2700K	670lm	20°	16	**1005500**	
	650lm	40°	22	**1005503**	
	670lm	55°	25	**1005506**	
3000K	730lm	20°	16	**1005518**	
	700lm	40°	22	**1005521**	
	720lm	55°	25	**1005524**	
4000K	750lm	20°	16	**1005536**	
	730lm	40°	22	**1005539**	
	740lm	55°	25	**1005542**	
2700K	670lm	20°	16	**1005501**	
	650lm	40°	22	**1005504**	
	670lm	55°	25	**1005507**	
3000K	730lm	20°	16	**1005519**	
	700lm	40°	22	**1005522**	
	720lm	55°	25	**1005525**	
4000K	750lm	20°	16	**1005537**	
	730lm	40°	22	**1005540**	
	740lm	55°	25	**1005543**	
2700K	640lm	20°	16	**1005508**	
	620lm	40°	22	**1005511**	
	640lm	55°	25	**1005514**	
3000K	700lm	20°	16	**1005526**	
	670lm	40°	22	**1005529**	
	690lm	55°	25	**1005532**	
4000K	720lm	20°	16	**1005544**	
	700lm	40°	22	**1005547**	
	710lm	55°	25	**1005550**	
2700K	670lm	20°	16	**1005509**	
	650lm	40°	22	**1005512**	
	670lm	55°	25	**1005515**	
3000K	730lm	20°	16	**1005527**	
	700lm	40°	22	**1005530**	
	720lm	55°	25	**1005533**	
4000K	750lm	20°	16	**1005545**	
	730lm	40°	22	**1005548**	
	740lm	55°	25	**1005551**	
2700K	670lm	20°	16	**1005510**	
	650lm	40°	22	**1005513**	
	670lm	55°	25	**1005516**	
3000K	730lm	20°	16	**1005528**	
	700lm	40°	22	**1005531**	
	720lm	55°	25	**1005534**	
4000K	750lm	20°	16	**1005546**	
	730lm	40°	22	**1005549**	
	740lm	55°	25	**1005552**	

NUMINOS® S
DL





IP 20
IP 44
IK02
L80B50
10
CRI 90

INSIDE

250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All S versions	**63.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



● chrome



● black



○ white



○ white



● chrome

	670lm	20°	19	**1003769**	
2700K	670lm	40°	18.5	**1003772**	
	670lm	55°	22	**1003775**	
	690lm	20°	19	**1003793**	
3000K	690lm	40°	19	**1003796**	
	690lm	55°	22	**1003799**	
	730lm	20°	19	**1003817**	
4000K	730lm	40°	19	**1003820**	
	730lm	55°	22	**1003823**	
	720lm	20°	18.5	**1003770**	
2700K	720lm	40°	19	**1003773**	
	720lm	55°	22	**1003776**	
	730lm	20°	19	**1003794**	
3000K	730lm	40°	19	**1003797**	
	730lm	55°	22	**1003800**	
	790lm	20°	19	**1003818**	
4000K	790lm	40°	19	**1003821**	
	790lm	55°	22	**1003824**	
	690lm	20°	19	**1003771**	
2700K	690lm	40°	19	**1003774**	
	690lm	55°	22	**1003777**	
	700lm	20°	19	**1003795**	
3000K	700lm	40°	19	**1003798**	
	700lm	55°	19	**1003801**	
	750lm	20°	19	**1003819**	
4000K	750lm	40°	19	**1003822**	
	750lm	55°	22	**1003825**	
	670lm	20°	19	**1003781**	
2700K	670lm	40°	19	**1003784**	
	670lm	55°	22	**1003787**	
	690lm	20°	19	**1003805**	
3000K	690lm	40°	19	**1003808**	
	690lm	55°	22	**1003811**	
	730lm	20°	19	**1003829**	
4000K	730lm	40°	19	**1003832**	
	730lm	55°	22	**1003835**	
	720lm	20°	18.5	**1003782**	
2700K	720lm	40°	19	**1003785**	
	720lm	55°	22	**1003788**	
	730lm	20°	19	**1003806**	
3000K	730lm	40°	19	**1003809**	
	730lm	55°	22	**1003812**	
	790lm	20°	19	**1003830**	
4000K	790lm	40°	19	**1003833**	
	790lm	55°	22	**1003836**	
	690lm	20°	19	**1003783**	
2700K	690lm	40°	19	**1003786**	
	690lm	55°	22	**1003789**	
	700lm	20°	19	**1003807**	
3000K	700lm	40°	19	**1003810**	
	700lm	55°	22	**1003813**	
	750lm	20°	19	**1003831**	
4000K	750lm	40°	19	**1003834**	
	750lm	55°	22	**1003837**	

NUMINOS® M
DL





IP 20
IP 44

IK02

L80B50

10

CRI 90

INSIDE

500mA
Power consumption: 17.6W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All M versions	**75.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	1460lm	20°	19	**1003841**	
	1460lm	40°	22	**1003844**	
	1460lm	55°	22	**1003847**	
3000K	1500lm	20°	19	**1003865**	
	1500lm	40°	22	**1003868**	
	1500lm	55°	22	**1003871**	
4000K	1600lm	20°	19	**1003889**	
	1600lm	40°	22	**1003892**	
	1600lm	55°	22	**1003895**	
2700K	1600lm	20°	22	**1003842**	
	1600lm	40°	19.4	**1003845**	
	1600lm	55°	22	**1003848**	
3000K	1600lm	20°	22	**1003866**	
	1600lm	40°	22	**1003869**	
	1600lm	55°	22	**1003872**	
4000K	1750lm	20°	22	**1003890**	
	1750lm	40°	22	**1003893**	
	1750lm	55°	22	**1003896**	
2700K	1550lm	20°	19	**1003843**	
	1550lm	40°	19	**1003846**	
	1550lm	55°	19	**1003849**	
3000K	1550lm	20°	19	**1003867**	
	1550lm	40°	19	**1003870**	
	1550lm	55°	19	**1003873**	
4000K	1660lm	20°	19	**1003891**	
	1660lm	40°	19	**1003894**	
	1660lm	55°	19	**1003897**	
2700K	1460lm	20°	19	**1003853**	
	1460lm	40°	22	**1003856**	
	1460lm	55°	22	**1003859**	
3000K	1500lm	20°	19	**1003877**	
	1500lm	40°	22	**1003880**	
	1500lm	55°	22	**1003883**	
4000K	1600lm	20°	19	**1003901**	
	1600lm	40°	22	**1003904**	
	1600lm	55°	22	**1003907**	
2700K	1600lm	20°	22	**1003854**	
	1600lm	40°	19	**1003857**	
	1600lm	55°	22	**1003860**	
3000K	1600lm	20°	22	**1003878**	
	1600lm	40°	22	**1003881**	
	1600lm	55°	22	**1003884**	
4000K	1750lm	20°	22	**1003902**	
	1750lm	40°	22	**1003905**	
	1750lm	55°	22	**1003908**	
2700K	1550lm	20°	19	**1003855**	
	1550lm	40°	19	**1003858**	
	1550lm	55°	19	**1003861**	
3000K	1550lm	20°	19	**1003879**	
	1550lm	40°	19	**1003882**	
	1550lm	55°	19	**1003885**	
4000K	1660lm	20°	19	**1003903**	
	1660lm	40°	19	**1003906**	
	1660lm	55°	19	**1003909**	

NUMINOS® L
DL





IP 20
IP 44

IK02

L80B50

10

CRI 90

INSIDE

700mA
Power consumption: 25.4 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All L versions	**91.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	2150lm	20°	22	**1003913**	
	2150lm	40°	22	**1003916**	
	2150lm	55°	22	**1003919**	
3000K	2150lm	20°	22	**1003937**	
	2150lm	40°	22	**1003940**	
	2150lm	55°	25	**1003943**	
4000K	2350lm	20°	22	**1003961**	
	2350lm	40°	22	**1003964**	
	2350lm	55°	25	**1003967**	
2700K	2250lm	20°	19	**1003914**	
	2250lm	40°	19	**1003917**	
	2250lm	55°	22	**1003920**	
3000K	2300lm	20°	19	**1003938**	
	2300lm	40°	19	**1003941**	
	2300lm	55°	20	**1003944**	
4000K	2450lm	20°	19	**1003962**	
	2450lm	40°	19	**1003965**	
	2450lm	55°	22	**1003968**	
2700K	2150lm	20°	19	**1003915**	
	2150lm	40°	19	**1003918**	
	2150lm	55°	19	**1003921**	
3000K	2200lm	20°	19	**1003939**	
	2200lm	40°	19	**1003942**	
	2200lm	55°	19	**1003945**	
4000K	2350lm	20°	19	**1003963**	
	2350lm	40°	19	**1003966**	
	2350lm	55°	19	**1003969**	
2700K	2150lm	20°	22	**1003925**	
	2150lm	40°	22	**1003928**	
	2150lm	55°	22	**1003931**	
3000K	2150lm	20°	22	**1003949**	
	2150lm	40°	22	**1003952**	
	2150lm	55°	25	**1003955**	
4000K	2350lm	20°	22	**1003973**	
	2350lm	40°	22	**1003976**	
	2350lm	55°	25	**1003979**	
2700K	2250lm	20°	19	**1003926**	
	2250lm	40°	19	**1003929**	
	2250lm	55°	22	**1003932**	
3000K	2300lm	20°	19	**1003950**	
	2300lm	40°	19	**1003953**	
	2300lm	55°	22	**1003956**	
4000K	2450lm	20°	19	**1003974**	
	2450lm	40°	19	**1003977**	
	2450lm	55°	22	**1003980**	
2700K	2150lm	20°	19	**1003927**	
	2150lm	40°	19	**1003930**	
	2150lm	55°	19	**1003933**	
3000K	2200lm	20°	19	**1003951**	
	2200lm	40°	19	**1003954**	
	2200lm	55°	19	**1003957**	
4000K	2350lm	20°	19	**1003975**	
	2350lm	40°	19	**1003978**	
	2350lm	55°	19	**1003981**	

NUMINOS® XL
DL





IP 20
IP 44

IK02

L80B50

10

CRI 90

INSIDE

1050 mA
Power consumption: 37.4 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All XL versions	**114.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	3300lm	20°	22	**1003985**	
	3300lm	40°	22	**1003988**	
	3300lm	55°	22	**1003991**	
3000K	3300lm	20°	22	**1004009**	
	3300lm	40°	22	**1004012**	
	3300lm	55°	22	**1004015**	
4000K	3600lm	20°	22	**1004033**	
	3600lm	40°	22	**1004036**	
	3600lm	55°	25	**1004039**	
2700K	3500lm	20°	19	**1003986**	
	3500lm	40°	19	**1003989**	
	3500lm	55°	19	**1003992**	
3000K	3550lm	20°	19	**1004010**	
	3550lm	40°	19	**1004013**	
	3550lm	55°	19	**1004016**	
4000K	3800lm	20°	19	**1004034**	
	3800lm	40°	19	**1004037**	
	3800lm	55°	19	**1004040**	
2700K	3400lm	20°	19	**1003987**	
	3400lm	40°	19	**1003990**	
	3400lm	55°	19	**1003993**	
3000K	3500lm	20°	19	**1004011**	
	3500lm	40°	19	**1004014**	
	3500lm	55°	19	**1004017**	
4000K	3750lm	20°	19	**1004035**	
	3750lm	40°	19	**1004038**	
	3750lm	55°	19	**1004041**	
2700K	3300lm	20°	22	**1003997**	
	3300lm	40°	22	**1004000**	
	3300lm	55°	22	**1004003**	
3000K	3300lm	20°	22	**1004021**	
	3300lm	40°	22	**1004024**	
	3300lm	55°	22	**1004027**	
4000K	3600lm	20°	22	**1004045**	
	3600lm	40°	22	**1004048**	
	3600lm	55°	25	**1004051**	
2700K	3500lm	20°	19	**1003998**	
	3500lm	40°	19	**1004001**	
	3500lm	55°	19	**1004004**	
3000K	3550lm	20°	19	**1004022**	
	3550lm	40°	19	**1004025**	
	3550lm	55°	19	**1004028**	
4000K	3800lm	20°	19	**1004046**	
	3800lm	40°	19	**1004049**	
	3800lm	55°	19	**1004052**	
2700K	3400lm	20°	19	**1003999**	
	3400lm	40°	19	**1004002**	
	3400lm	55°	19	**1004005**	
3000K	3500lm	20°	19	**1004023**	
	3500lm	40°	19	**1004026**	
	3500lm	55°	19	**1004029**	
4000K	3750lm	20°	19	**1004047**	
	3750lm	40°	19	**1004050**	
	3750lm	55°	19	**1004053**	

NUMINOS® MOVE XS
DL







IP 20 IK02 L80B50 355° 30°

10

200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All XS versions	**73.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	640lm	20°	16	**1005553**	
	620lm	40°	22	**1005556**	
	640lm	55°	25	**1005559**	
3000K	700lm	20°	16	**1005571**	
	670lm	40°	22	**1005574**	
	690lm	55°	25	**1005577**	
4000K	720lm	20°	16	**1005589**	
	700lm	40°	22	**1005592**	
	710lm	55°	25	**1005595**	
2700K	670lm	20°	16	**1005554**	
	650lm	40°	22	**1005557**	
	670lm	55°	25	**1005560**	
3000K	730lm	20°	16	**1005572**	
	700lm	40°	22	**1005575**	
	720lm	55°	25	**1005578**	
4000K	750lm	20°	16	**1005590**	
	730lm	40°	22	**1005593**	
	740lm	55°	25	**1005596**	
2700K	670lm	20°	16	**1005555**	
	650lm	40°	22	**1005558**	
	670lm	55°	25	**1005561**	
3000K	730lm	20°	16	**1005573**	
	700lm	40°	22	**1005576**	
	720lm	55°	25	**1005579**	
4000K	750lm	20°	16	**1005591**	
	730lm	40°	22	**1005594**	
	740lm	55°	25	**1005597**	
2700K	640lm	20°	16	**1005562**	
	620lm	40°	22	**1005565**	
	640lm	55°	25	**1005568**	
3000K	700lm	20°	16	**1005580**	
	670lm	40°	22	**1005583**	
	690lm	55°	25	**1005586**	
4000K	720lm	20°	16	**1005598**	
	700lm	40°	22	**1005603**	
	710lm	55°	25	**1005606**	
2700K	670lm	20°	16	**1005563**	
	650lm	40°	22	**1005566**	
	670lm	55°	25	**1005569**	
3000K	730lm	20°	16	**1005581**	
	700lm	40°	22	**1005584**	
	720lm	55°	25	**1005587**	
4000K	750lm	20°	16	**1005599**	
	730lm	40°	22	**1005604**	
	740lm	55°	25	**1005607**	
2700K	670lm	20°	16	**1005564**	
	650lm	40°	22	**1005567**	
	670lm	55°	25	**1005570**	
3000K	730lm	20°	16	**1005582**	
	700lm	40°	22	**1005585**	
	720lm	55°	25	**1005588**	
4000K	750lm	20°	16	**1005600**	
	730lm	40°	22	**1005605**	
	740lm	55°	25	**1005608**	

NUMINOS® MOVE S
DL





IP 20 | IK02 | L80B50 | 350° | 30°

10

250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All S versions	**79.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	670lm	20°	19	**1005319**	
	670lm	40°	19	**1005322**	
	670lm	55°	22	**1005325**	
3000K	690lm	20°	19	**1005337**	
	690lm	40°	19	**1005340**	
	690lm	55°	22	**1005343**	
4000K	730lm	20°	19	**1005355**	
	730lm	40°	19	**1005358**	
	730lm	55°	22	**1005361**	
2700K	720lm	20°	19	**1005320**	
	720lm	40°	19	**1005323**	
	720lm	55°	22	**1005326**	
3000K	730lm	20°	19	**1005338**	
	730lm	40°	19	**1005341**	
	730lm	55°	22	**1005344**	
4000K	790lm	20°	19	**1005356**	
	790lm	40°	19	**1005359**	
	790lm	55°	22	**1005362**	
2700K	690lm	20°	19	**1005321**	
	690lm	40°	19	**1005324**	
	690lm	55°	22	**1005327**	
3000K	700lm	20°	19	**1005339**	
	700lm	40°	19	**1005342**	
	700lm	55°	22	**1005345**	
4000K	750lm	20°	19	**1005357**	
	750lm	40°	19	**1005360**	
	750lm	55°	22	**1005363**	
2700K	670lm	20°	19	**1005328**	
	670lm	40°	19	**1005331**	
	670lm	55°	22	**1005334**	
3000K	690lm	20°	19	**1005346**	
	690lm	40°	19	**1005349**	
	690lm	55°	22	**1005352**	
4000K	730lm	20°	19	**1005364**	
	730lm	40°	19	**1005367**	
	730lm	55°	22	**1005370**	
2700K	720lm	20°	19	**1005329**	
	720lm	40°	19	**1005332**	
	720lm	55°	22	**1005335**	
3000K	730lm	20°	19	**1005347**	
	730lm	40°	19	**1005350**	
	730lm	55°	22	**1005353**	
4000K	790lm	20°	19	**1005365**	
	790lm	40°	19	**1005368**	
	790lm	55°	22	**1005371**	
2700K	690lm	20°	19	**1005330**	
	690lm	40°	19	**1005333**	
	690lm	55°	22	**1005336**	
3000K	700lm	20°	19	**1005348**	
	700lm	40°	19	**1005351**	
	700lm	55°	22	**1005354**	
4000K	750lm	20°	19	**1005366**	
	750lm	40°	19	**1005369**	
	750lm	55°	22	**1005372**	

NUMINOS® MOVE M
DL







IP 20 IK02 L80B50 355° 24°

10

500mA
Power consumption: 17.6W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All M versions	**88.00**

Note:
You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



○ white



● black



○ white



◑ chrome

			UGR	Prod. no.	
2700K	1460lm	20°	19	**1003553**	
	1460lm	40°	22	**1003556**	
	1460lm	55°	22	**1003559**	
3000K	1500lm	20°	19	**1003577**	
	1500lm	40°	22	**1003580**	
	1500lm	55°	22	**1003583**	
4000K	1600lm	20°	19	**1003601**	
	1600lm	40°	22	**1003604**	
	1600lm	55°	22	**1003607**	
2700K	1600lm	20°	22	**1003554**	
	1600lm	40°	19	**1003557**	
	1600lm	55°	22	**1003560**	
3000K	1600lm	20°	22	**1003578**	
	1600lm	40°	22	**1003581**	
	1600lm	55°	22	**1003584**	
4000K	1750lm	20°	22	**1003602**	
	1750lm	40°	22	**1003605**	
	1750lm	55°	22	**1003608**	
2700K	1550lm	20°	19	**1003555**	
	1550lm	40°	19	**1003558**	
	1550lm	55°	19	**1003561**	
3000K	1550lm	20°	19	**1003579**	
	1550lm	40°	19	**1003582**	
	1550lm	55°	19	**1003585**	
4000K	1660lm	20°	19	**1003603**	
	1660lm	40°	19	**1003606**	
	1660lm	55°	19	**1003609**	
2700K	1460lm	20°	19	**1003565**	
	1460lm	40°	22	**1003568**	
	1460lm	55°	22	**1003571**	
3000K	1500lm	20°	19	**1003589**	
	1500lm	40°	22	**1003592**	
	1500lm	55°	22	**1003595**	
4000K	1600lm	20°	19	**1003613**	
	1600lm	40°	22	**1003616**	
	1600lm	55°	22	**1003619**	
2700K	1600lm	20°	22	**1003566**	
	1600lm	40°	22	**1003569**	
	1600lm	55°	22	**1003572**	
3000K	1600lm	20°	22	**1003590**	
	1600lm	40°	22	**1003593**	
	1600lm	55°	22	**1003596**	
4000K	1750lm	20°	22	**1003614**	
	1750lm	40°	22	**1003617**	
	1750lm	55°	22	**1003620**	
2700K	1550lm	20°	19	**1003567**	
	1550lm	40°	19	**1003570**	
	1550lm	55°	19	**1003573**	
3000K	1550lm	20°	19	**1003591**	
	1550lm	40°	19	**1003594**	
	1550lm	55°	19	**1003597**	
4000K	1660lm	20°	19	**1003615**	
	1660lm	40°	19	**1003618**	
	1660lm	55°	19	**1003621**	

NUMINOS® MOVE L
DL







700mA
Power consumption: 25.4 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All L versions	**105.00**

Note:
You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



○ white



● black



○ white



◑ chrome

			UGR	Prod. no.	
2700K	2150lm	20°	22	**1003625**	
	2150lm	40°	22	**1003628**	
	2150lm	55°	22	**1003631**	
3000K	2150lm	20°	22	**1003649**	
	2150lm	40°	22	**1003652**	
	2150lm	55°	25	**1003655**	
4000K	2350lm	20°	22	**1003673**	
	2350lm	40°	22	**1003676**	
	2350lm	55°	25	**1003679**	
2700K	2250lm	20°	19	**1003626**	
	2250lm	40°	19	**1003629**	
	2250lm	55°	22	**1003632**	
3000K	2300lm	20°	19	**1003650**	
	2300lm	40°	19	**1003653**	
	2300lm	55°	22	**1003656**	
4000K	2450lm	20°	19	**1003674**	
	2450lm	40°	19	**1003677**	
	2450lm	55°	22	**1003680**	
2700K	2150lm	20°	19	**1003627**	
	2150lm	40°	19	**1003630**	
	2150lm	55°	19	**1003633**	
3000K	2200lm	20°	19	**1003651**	
	2200lm	40°	19	**1003654**	
	2200lm	55°	19	**1003657**	
4000K	2350lm	20°	19	**1003675**	
	2350lm	40°	19	**1003678**	
	2350lm	55°	19	**1003681**	
2700K	2150lm	20°	22	**1003637**	
	2150lm	40°	22	**1003640**	
	2150lm	55°	22	**1003643**	
3000K	2150lm	20°	22	**1003661**	
	2150lm	40°	22	**1003664**	
	2150lm	55°	25	**1003667**	
4000K	2350lm	20°	22	**1003685**	
	2350lm	40°	22	**1003688**	
	2350lm	55°	25	**1003691**	
2700K	2250lm	20°	19	**1003638**	
	2250lm	40°	19	**1003641**	
	2250lm	55°	22	**1003644**	
3000K	2300lm	20°	19	**1003662**	
	2300lm	40°	19	**1003665**	
	2300lm	55°	22	**1003668**	
4000K	2450lm	20°	19	**1003686**	
	2450lm	40°	19	**1003689**	
	2450lm	55°	22	**1003692**	
2700K	2150lm	20°	19	**1003639**	
	2150lm	40°	19	**1003642**	
	2150lm	55°	19	**1003645**	
3000K	2200lm	20°	19	**1003663**	
	2200lm	40°	19	**1003666**	
	2200lm	55°	19	**1003669**	
4000K	2350lm	20°	19	**1003687**	
	2350lm	40°	19	**1003690**	
	2350lm	55°	19	**1003693**	

NUMINOS® MOVE XL
DL





IP 20 IK02 L80B50 355° 30°

10

CRI 90

INSIDE

1050 mA
Power consumption: 37.4 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All XL versions	**131.00**

Note:
You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



○ white



● black



○ white



◑ chrome

			UGR	Prod. no.	
2700K	3300lm	20°	22	**1003697**	
	3300lm	40°	22	**1003700**	
	3300lm	55°	22	**1003703**	
3000K	3300lm	20°	22	**1003721**	
	3300lm	40°	22	**1003724**	
	3300lm	55°	22	**1003727**	
4000K	3600lm	20°	22	**1003745**	
	3600lm	40°	22	**1003748**	
	3600lm	55°	25	**1003751**	
2700K	3500lm	20°	19	**1003698**	
	3500lm	40°	19	**1003701**	
	3500lm	55°	19	**1003704**	
3000K	3550lm	20°	19	**1003722**	
	3550lm	40°	19	**1003725**	
	3550lm	55°	19	**1003728**	
4000K	3800lm	20°	19	**1003746**	
	3800lm	40°	19	**1003749**	
	3800lm	55°	19	**1003752**	
2700K	3400lm	20°	19	**1003699**	
	3400lm	40°	19	**1003702**	
	3400lm	55°	19	**1003705**	
3000K	3500lm	20°	19	**1003723**	
	3500lm	40°	19	**1003726**	
	3500lm	55°	19	**1003729**	
4000K	3750lm	20°	19	**1003747**	
	3750lm	40°	19	**1003750**	
	3750lm	55°	19	**1003753**	
2700K	3300lm	20°	22	**1003709**	
	3300lm	40°	22	**1003712**	
	3300lm	55°	22	**1003715**	
3000K	3300lm	20°	22	**1003733**	
	3300lm	40°	22	**1003736**	
	3300lm	55°	22	**1003739**	
4000K	3600lm	20°	22	**1003757**	
	3600lm	40°	22	**1003760**	
	3600lm	55°	25	**1003763**	
2700K	3500lm	20°	19	**1003710**	
	3500lm	40°	19	**1003713**	
	3500lm	55°	19	**1003716**	
3000K	3550lm	20°	19	**1003734**	
	3550lm	40°	19	**1003737**	
	3550lm	55°	19	**1003740**	
4000K	3800lm	20°	19	**1003758**	
	3800lm	40°	19	**1003761**	
	3800lm	55°	19	**1003764**	
2700K	3400lm	20°	19	**1003711**	
	3400lm	40°	19	**1003714**	
	3400lm	55°	19	**1003717**	
3000K	3500lm	20°	19	**1003735**	
	3500lm	40°	19	**1003738**	
	3500lm	55°	19	**1003741**	
4000K	3750lm	20°	19	**1003759**	
	3750lm	40°	19	**1003762**	
	3750lm	55°	19	**1003765**	

NUMINOS® GIMBLE XS
DL





IP 20 | L80B50 | 355° | 60° | 10

CRI 90 | LED INSIDE

200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All XS versions	**79.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	640lm	20°	16	**1005813**	
	620lm	40°	22	**1005816**	
	640lm	55°	25	**1005819**	
3000K	700lm	20°	16	**1005831**	
	670lm	40°	22	**1005834**	
	690lm	55°	25	**1005837**	
4000K	720lm	20°	16	**1005849**	
	700lm	40°	22	**1005852**	
	710lm	55°	25	**1005855**	
2700K	670lm	20°	16	**1005814**	
	650lm	40°	22	**1005817**	
	670lm	55°	25	**1005820**	
3000K	730lm	20°	16	**1005832**	
	700lm	40°	22	**1005835**	
	720lm	55°	25	**1005838**	
4000K	750lm	20°	16	**1005850**	
	730lm	40°	22	**1005853**	
	740lm	55°	25	**1005856**	
2700K	670lm	20°	16	**1005815**	
	650lm	40°	22	**1005818**	
	670lm	55°	25	**1005821**	
3000K	730lm	20°	16	**1005833**	
	700lm	40°	22	**1005836**	
	720lm	55°	25	**1005839**	
4000K	750lm	20°	16	**1005851**	
	730lm	40°	22	**1005854**	
	740lm	55°	25	**1005857**	
2700K	640lm	20°	16	**1005822**	
	620lm	40°	22	**1005825**	
	640lm	55°	25	**1005828**	
3000K	700lm	20°	16	**1005840**	
	670lm	40°	22	**1005843**	
	690lm	55°	25	**1005846**	
4000K	720lm	20°	16	**1005858**	
	700lm	40°	22	**1005861**	
	710lm	55°	25	**1005864**	
2700K	670lm	20°	16	**1005823**	
	650lm	40°	22	**1005826**	
	670lm	55°	25	**1005829**	
3000K	730lm	20°	16	**1005841**	
	700lm	40°	22	**1005844**	
	720lm	55°	25	**1005847**	
4000K	750lm	20°	16	**1005859**	
	730lm	40°	22	**1005862**	
	740lm	55°	25	**1005865**	
2700K	670lm	20°	16	**1005824**	
	650lm	40°	22	**1005827**	
	670lm	55°	25	**1005830**	
3000K	730lm	20°	16	**1005842**	
	700lm	40°	22	**1005845**	
	720lm	55°	25	**1005848**	
4000K	750lm	20°	16	**1005860**	
	730lm	40°	22	**1005863**	
	740lm	55°	25	**1005866**	

NUMINOS® GIMBLE S
DL





● black





250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All S versions	**88.00**

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



○ white



◑ chrome



● black



○ white



○ white



◑ chrome

			UGR	Prod. no.	
2700K	670lm	20°	19	**1005867**	
	670lm	40°	19	**1005870**	
	670lm	55°	22	**1005873**	
3000K	690lm	20°	19	**1005885**	
	690lm	40°	19	**1005888**	
	690lm	55°	22	**1005891**	
4000K	730lm	20°	19	**1005903**	
	730lm	40°	19	**1005906**	
	730lm	55°	22	**1005909**	
2700K	720lm	20°	19	**1005868**	
	720lm	40°	19	**1005871**	
	720lm	55°	22	**1005874**	
3000K	730lm	20°	19	**1005886**	
	730lm	40°	19	**1005889**	
	730lm	55°	22	**1005892**	
4000K	790lm	20°	19	**1005904**	
	790lm	40°	19	**1005907**	
	790lm	55°	22	**1005910**	
2700K	690lm	20°	19	**1005869**	
	690lm	40°	19	**1005872**	
	690lm	55°	22	**1005875**	
3000K	700lm	20°	19	**1005887**	
	700lm	40°	19	**1005890**	
	700lm	55°	22	**1005893**	
4000K	750lm	20°	19	**1005905**	
	750lm	40°	19	**1005908**	
	750lm	55°	22	**1005911**	
2700K	670lm	20°	19	**1005876**	
	670lm	40°	19	**1005879**	
	670lm	55°	22	**1005882**	
3000K	690lm	20°	19	**1005894**	
	690lm	40°	19	**1005897**	
	690lm	55°	22	**1005900**	
4000K	730lm	20°	19	**1005912**	
	730lm	40°	19	**1005915**	
	730lm	55°	22	**1005918**	
2700K	720lm	20°	19	**1005877**	
	720lm	40°	19	**1005880**	
	720lm	55°	22	**1005883**	
3000K	730lm	20°	19	**1005895**	
	730lm	40°	19	**1005898**	
	730lm	55°	22	**1005901**	
4000K	790lm	20°	19	**1005913**	
	790lm	40°	19	**1005916**	
	790lm	55°	22	**1005919**	
2700K	690lm	20°	19	**1005878**	
	690lm	40°	19	**1005881**	
	690lm	55°	22	**1005884**	
3000K	700lm	20°	19	**1005896**	
	700lm	40°	19	**1005899**	
	700lm	55°	22	**1005902**	
4000K	750lm	20°	19	**1005914**	
	750lm	40°	19	**1005917**	
	750lm	55°	22	**1005920**	

NUMINOS® GIMBLE M
DL







IP 20 L80B50 355° 60° 10

CRI 90 INSIDE

500mA
Power consumption: 17.5 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All M versions	**97.00**

Note:
You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



○ white



● black



○ white



◑ chrome



● black



○ white



◑ chrome

			UGR	Prod. no.	
2700K	1460lm	20°	22	**1005921**	
	1460lm	40°	22	**1005924**	
	1460lm	55°	22	**1005927**	
3000K	1500lm	20°	22	**1005939**	
	1500lm	40°	22	**1005942**	
	1500lm	55°	22	**1005945**	
4000K	1600lm	20°	22	**1005957**	
	1600lm	40°	22	**1005960**	
	1600lm	55°	22	**1005963**	
2700K	1600lm	20°	22	**1005922**	
	1600lm	40°	22	**1005925**	
	1600lm	55°	22	**1005928**	
3000K	1600lm	20°	22	**1005940**	
	1600lm	40°	22	**1005943**	
	1600lm	55°	22	**1005946**	
4000K	1750lm	20°	22	**1005958**	
	1750lm	40°	22	**1005961**	
	1750lm	55°	22	**1005964**	
2700K	1550lm	20°	22	**1005923**	
	1550lm	40°	22	**1005926**	
	1550lm	55°	22	**1005929**	
3000K	1550lm	20°	22	**1005941**	
	1550lm	40°	22	**1005944**	
	1550lm	55°	22	**1005947**	
4000K	1660lm	20°	22	**1005959**	
	1660lm	40°	22	**1005962**	
	1660lm	55°	22	**1005965**	
2700K	1460lm	20°	22	**1005930**	
	1460lm	40°	22	**1005933**	
	1460lm	55°	22	**1005936**	
3000K	1500lm	20°	22	**1005948**	
	1500lm	40°	22	**1005951**	
	1500lm	55°	22	**1005954**	
4000K	1600lm	20°	22	**1005966**	
	1600lm	40°	22	**1005969**	
	1600lm	55°	22	**1005972**	
2700K	1600lm	20°	22	**1005931**	
	1600lm	40°	22	**1005934**	
	1600lm	55°	22	**1005937**	
3000K	1600lm	20°	22	**1005949**	
	1600lm	40°	22	**1005952**	
	1600lm	55°	22	**1005955**	
4000K	1750lm	20°	22	**1005967**	
	1750lm	40°	22	**1005970**	
	1750lm	55°	22	**1005973**	
2700K	1550lm	20°	22	**1005932**	
	1550lm	40°	22	**1005935**	
	1550lm	55°	22	**1005938**	
3000K	1550lm	20°	22	**1005950**	
	1550lm	40°	22	**1005953**	
	1550lm	55°	22	**1005956**	
4000K	1660lm	20°	22	**1005968**	
	1660lm	40°	22	**1005971**	
	1660lm	55°	22	**1005974**	

NUMINOS® GIMBLE L
DL





IP 20 | L80B50 | 355° | 60° | 10

CRI 90

700mA
Power consumption: 25.4 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All L versions	**114.00**

Note:
You can find suitable drivers, diffusers, and reducer rings on pages 98-101.



● black



● black



○ white



◑ chrome



○ white



● black



○ white



◑ chrome

			UGR	Prod. no.	
2700K	2150lm	20°	22	**1005975**	
	2150lm	40°	22	**1005978**	
	2150lm	55°	22	**1005981**	
3000K	2150lm	20°	22	**1005993**	
	2150lm	40°	22	**1005996**	
	2150lm	55°	22	**1005999**	
4000K	2350lm	20°	22	**1006011**	
	2350lm	40°	22	**1006014**	
	2350lm	55°	22	**1006017**	
2700K	2250lm	20°	22	**1005976**	
	2250lm	40°	22	**1005979**	
	2250lm	55°	22	**1005982**	
3000K	2300lm	20°	22	**1005994**	
	2300lm	40°	22	**1005997**	
	2300lm	55°	22	**1006000**	
4000K	2450lm	20°	22	**1006012**	
	2450lm	40°	22	**1006015**	
	2450lm	55°	22	**1006018**	
2700K	2150lm	20°	22	**1005977**	
	2150lm	40°	22	**1005980**	
	2150lm	55°	22	**1005983**	
3000K	2200lm	20°	22	**1005995**	
	2200lm	40°	22	**1005998**	
	2200lm	55°	22	**1006001**	
4000K	2350lm	20°	22	**1006013**	
	2350lm	40°	22	**1006016**	
	2350lm	55°	22	**1006019**	
2700K	2150lm	20°	22	**1005984**	
	2150lm	40°	22	**1005987**	
	2150lm	55°	22	**1005990**	
3000K	2150lm	20°	22	**1006002**	
	2150lm	40°	22	**1006005**	
	2150lm	55°	22	**1006008**	
4000K	2350lm	20°	22	**1006020**	
	2350lm	40°	22	**1006023**	
	2350lm	55°	22	**1006026**	
2700K	2250lm	20°	22	**1005985**	
	2250lm	40°	22	**1005988**	
	2250lm	55°	22	**1005991**	
3000K	2300lm	20°	22	**1006003**	
	2300lm	40°	22	**1006006**	
	2300lm	55°	22	**1006009**	
4000K	2450lm	20°	22	**1006021**	
	2450lm	40°	22	**1006024**	
	2450lm	55°	22	**1006027**	
2700K	2150lm	20°	22	**1005986**	
	2150lm	40°	22	**1005989**	
	2150lm	55°	22	**1005992**	
3000K	2200lm	20°	22	**1006004**	
	2200lm	40°	22	**1006007**	
	2200lm	55°	22	**1006010**	
4000K	2350lm	20°	22	**1006022**	
	2350lm	40°	22	**1006025**	
	2350lm	55°	22	**1006028**	

NUMINOS® GIMBLE XL
DL





● black



● black



○ white





◑ chrome



CRI 90 LED INSIDE

1050 mA
Power consumption: 37.4 W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Version	GBP
All XL versions	**133.00**



○ white



● black



○ white



◑ chrome

Note:
You can find suitable drivers, diffusers, and reducer rings on pages 98-101.

		UGR	Prod. no.	
2700K	3300lm	20°	22	**1006029**	
	3300lm	40°	22	**1006032**	
	3300lm	55°	22	**1006035**	
3000K	3300lm	20°	22	**1006047**	
	3300lm	40°	22	**1006050**	
	3300lm	55°	22	**1006053**	
4000K	3600lm	20°	22	**1006065**	
	3600lm	40°	22	**1006068**	
	3600lm	55°	22	**1006071**	
2700K	3500lm	20°	22	**1006030**	
	3500lm	40°	22	**1006033**	
	3500lm	55°	22	**1006036**	
3000K	3550lm	20°	22	**1006048**	
	3550lm	40°	22	**1006051**	
	3550lm	55°	22	**1006054**	
4000K	3800lm	20°	22	**1006066**	
	3800lm	40°	22	**1006069**	
	3800lm	55°	22	**1006072**	
2700K	3400lm	20°	22	**1006031**	
	3400lm	40°	22	**1006034**	
	3400lm	55°	22	**1006037**	
3000K	3500lm	20°	22	**1006049**	
	3500lm	40°	22	**1006052**	
	3500lm	55°	22	**1006055**	
4000K	3750lm	20°	22	**1006067**	
	3750lm	40°	22	**1006070**	
	3750lm	55°	22	**1006073**	
2700K	3300lm	20°	22	**1006038**	
	3300lm	40°	22	**1006041**	
	3300lm	55°	22	**1006044**	
3000K	3300lm	20°	22	**1006056**	
	3300lm	40°	22	**1006059**	
	3300lm	55°	22	**1006062**	
4000K	3600lm	20°	22	**1006074**	
	3600lm	40°	22	**1006077**	
	3600lm	55°	22	**1006080**	
2700K	3500lm	20°	22	**1006039**	
	3500lm	40°	22	**1006042**	
	3500lm	55°	22	**1006045**	
3000K	3550lm	20°	22	**1006057**	
	3550lm	40°	22	**1006060**	
	3550lm	55°	22	**1006063**	
4000K	3800lm	20°	22	**1006075**	
	3800lm	40°	22	**1006078**	
	3800lm	55°	22	**1006081**	
2700K	3400lm	20°	22	**1006040**	
	3400lm	40°	22	**1006043**	
	3400lm	55°	22	**1006046**	
3000K	3500lm	20°	22	**1006058**	
	3500lm	40°	22	**1006061**	
	3500lm	55°	22	**1006064**	
4000K	3750lm	20°	22	**1006076**	
	3750lm	40°	22	**1006079**	
	3750lm	55°	22	**1006082**	

ACCESSORIES
Driver assignment and modules

						
	LED driver 10W | 200mA	**LED driver 10W | 200mA Dimmable**	**LED driver 13,5W | 200mA DALI dimmable**	**LED driver 12W | 200mA DALI for RF module**	**RF module Zigbee**	**RF module Casambi**
	XS				-	
					-	
	200mA				-	
Material	polycarbonate (PC)				polycarbonate (PC)	
Colour	white				white	
Voltage prim.	200-240V ~50/60Hz				3.3V	
Voltage sec.	29-42V DC	30-42V DC	15-54V DC	10-40V DC	-	
Output current	200mA				-	
Number of outputs sec.	1				-	
Wattage of	5.8W	6W	3.8W	1.5W	-	
Wattage up to	8.4W		13.5W	12W	-	
Environmental temp. min.	-20°C				-40°C	
Environmental temp. max.	50°C				45°C	
Thermal protection	110°C				-	
IP protection class	IP 20				-	
Dimmable	–	PHASE C	DALI	DALI for RF	Zigbee	Casambi
Length	6.5 cm	8.5 cm	18 cm	14.18 cm	4.3 cm	
Width	3.9 cm	4.1 cm	4.5 cm	4.38 cm	3.1 cm	
Height	2 cm	2.2 cm	2.7 cm	3 cm	1.2 cm	
Prod. no.	**1005610**	**1005609**	**1005611**	**1006457**	**1006199**	**1006454**
GBP	**23.00**	**31.00**	**83.00**	**78.00**	**33.00**	**111.00**

Diffusers

				
	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	XS			
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**
GBP	**4.00**	**5.00**	**5.00**	**8.00**

						
	LED driver 10W | 250mA	**LED driver 10W | 250mA Dimmable**	**LED driver 20W | 250mA DALI dimmable**	**LED driver 12W | 250mA DALI for RF module**	**RF module Zigbee**	**RF module Casambi**
	S				-	
					-	
	250mA		250/350/ 500/700mA	250mA	-	
Material	polycarbonate (PC)				polycarbonate (PC)	
Colour	white				white	
Voltage prim.	220-240V ~50/60Hz				3.3V	
Voltage sec.	26-40V DC		6-60V DC	10-40V DC	-	
Output current	250mA				-	
Number of outputs sec.	1				-	
Wattage of	6.5W		1.5W		-	
Wattage up to	10W		20W	12W	-	
Environmental temp. min.	-20°C				-40°C	
Environmental temp. max.	45°C		50°C		45°C	
Thermal protection	110°C				-	
IP protection class	IP 20				-	
Dimmable	–	PHASE C	DALI	DALI for RF	Zigbee	Casambi
Length	6.5 cm	6.5 cm	15 cm	14.18 cm	4.3 cm	
Width	3.9 cm	3.9 cm	5.2 cm	4.38 cm	3.1 cm	
Height	2 cm	2 cm	2.8 cm	3 cm	1.2 cm	
Prod. no.	**1004058**	**1004055**	**1004067**	**1006458**	**1006199**	**1006454**
GBP	**23.00**	**35.00**	**71.00**	**78.00**	**33.00**	**111.00**

				
	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	S			
Prod. no.	**1004786**	**1004787**	**1004788**	**1004789**
GBP	**4.00**	**5.00**	**5.00**	**8.00**

ACCESSORIES
Driver assignment and modules

						
	LED driver 30W | 500mA	**LED driver 30W | 500mA Dimmable**	**LED driver 40W | 500mA DALI dimmable**	**LED driver 42W | 500mA DALI for RF module**	**RF module Zigbee**	**RF module Casambi**
	M				-	
					-	
	500/600/700mA	500mA	250/350/ 500/700mA	500mA	-	
Material	polycarbonate (PC)				polycarbonate (PC)	
Colour	white				white	
Voltage prim.	220-240V ~50/60Hz				3.3V	
Voltage sec.	30-42V DC	25–42V DC	6 - 58V DC	10-42V DC	-	
Output current	500mA				-	
Number of outputs sec.	1				-	
Wattage of	21W	12.5W	1.5W	5W	-	
Wattage up to	29.5W	21W	40.6W	42W	-	
Environmental temp. min.	-20°C		-25°C	-20°C	-40°C	
Environmental temp. max.	50°C			45°C	45°C	
Thermal protection	110°C				-	
IP protection class	IP 20				-	
Dimmable	–	PHASE C	DALI	DALI for RF	Zigbee	Casambi
Length	14.7 cm	11.5 cm	12.3 cm	12.3 cm	4.3 cm	
Width	4.3 cm	4.1 cm	7.9 cm	7.9 cm	3.1 cm	
Height	3 cm	2.5 cm	2.4 cm	3 cm	1.2 cm	
Prod. no.	**1004064**	**1004054**	**1004069**	**1006459**	**1006199**	**1006454**
GBP	**27.00**	**51.00**	**71.00**	**91.00**	**33.00**	**111.00**

Diffusers

				
	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	M			
Prod. no.	**1004790**	**1004791**	**1004792**	**1004793**
GBP	**4.00**	**5.00**	**5.00**	**11.00**

						
	LED driver 30W | 700mA	**LED driver 30W | 700mA Dimmable**	**LED driver 40W | 700mA DALI dimmable**	**LED driver 42W | 700mA DALI for RF module**	**RF module Zigbee**	**RF module Casambi**
	L				-	
					-	
	500/600/700mA	700mA			-	
Material	polycarbonate (PC)				polycarbonate (PC)	
Colour	white				white	
Voltage prim.	220-240V ~50/60Hz				3.3V	
Voltage sec.	30-42V DC	25–42V DC	6-58V DC	10-42V DC	-	
Output current	700mA		250/350/ 500/700mA	700mA	-	
Number of outputs sec.	1				-	
Wattage of	21W	17.5W	1.5W	5W	-	
Wattage up to	29.5W	29.4W	40.6W	42W	-	
Environmental temp. min.	-20°C		-25°C	-20°C	-40°C	
Environmental temp. max.	50°C			45°C	45°C	
Thermal protection	110°C				-	
IP protection class	IP 20				-	
Dimmable	–	PHASE C	DALI	DALI for RF	Zigbee	Casambi
Length	14.7 cm	14.5 cm	12.3 cm	12.3 cm	4.3 cm	
Width	4.3 cm	4 cm	7.9 cm	7.9 cm	3.1 cm	
Height	3 cm	3 cm	2.4 cm	3 cm	1.2 cm	
Prod. no.	**1004062**	**1004065**	**1004070**	**1006460**	**1006199**	**1006454**
GBP	**28.00**	**51.00**	**71.00**	**91.00**	**33.00**	**111.00**

				
	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	L			
Prod. no.	**1004794**	**1004795**	**1004796**	**1004797**
GBP	**5.00**	**6.00**	**6.00**	**15.00**

ACCESSORIES
Driver assignment and modules

						
	LED driver 40W | 1050mA	**LED driver 40W | 1000mA Dimmable**	**LED driver 50W | 1050mA DALI dimmable**	**LED driver 40W | 1050mA DALI for RF module**	**RF module Zigbee**	**RF module Casambi**
	XL				-	
					-	
	800/900/1050mA	1000mA	1050mA	1050mA	-	
Material	polycarbonate (PC)				polycarbonate (PC)	
Colour	white				white	
Voltage prim.	220-240V ~50/60Hz				3.3V	
Voltage sec.	25-42V DC	25–40V DC	6-58V DC	10-42V DC	-	
Output current	1050mA	1000mA	1050mA		-	
Number of outputs sec.	1				-	
Wattage of	20W	26.3W	4.2W	5W	-	
Wattage up to	44W	42W	50W	42W	-	
Environmental temp. min.	-20°C		-25°C	-20°C	-40°C	
Environmental temp. max.	50°C	45°C	50°C	45°C	45°C	
Thermal protection	110°C				-	
IP protection class	IP 20				-	
Dimmable	–	PHASE C	DALI	DALI for RF	Zigbee	Casambi
Length	14.7 cm	14.5 cm	12.3 cm	12.3 cm	4.3 cm	
Width	4.3 cm	4 cm	7.9 cm	7.9 cm	3.1 cm	
Height	3 cm	3 cm	2.4 cm	3 cm	1.2 cm	
Prod. no.	**1004059**	**1004066**	**1004071**	**1006461**	**1006199**	**1006454**
GBP	**30.00**	**55.00**	**71.00**	**91.00**	**33.00**	**111.00**

Diffusers

				
	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	XL			
Prod. no.	**1004798**	**1004799**	**1004800**	**1004801**
GBP	**6.00**	**7.00**	**7.00**	**19.00**

Reducer ring, round



Material	steel	steel	steel	steel	steel
External Ø	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8,5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006135**	**1006139**	**1006143**	**1006147**	**1006151**
Prod. no. white	**1006136**	**1006140**	**1006144**	**1006148**	**1006152**
GBP	**16.00**	**14.00**	**17.00**	**16.00**	**15.00**

Reducer ring, square



Material	steel	steel	steel	steel	steel
Length	16 cm	16 cm	24 cm	24 cm	24 cm
Width	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8,5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006137**	**1006141**	**1006145**	**1006149**	**1006153**
Prod. no. white	**1006138**	**1006142**	**1006146**	**1006150**	**1006154**
GBP	**16.00**	**14.00**	**17.00**	**16.00**	**15.00**

NEW TRIA® 68
DL, PHASE



1





2





C,L | 50 000 Hours | CRI 90 | LED INSIDE

L80B10

220-240V ~50/60Hz | 200mA
Total wattage: 8.3W
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

1



● black



○ white

2



● black



○ white





	IP				Prod. no.	GBP	
30°	IP 20	2700K	705lm	38°	**1007386**	**47.00**	
		2700K	705lm	60°	**1007388**	**47.00**	
		3000K	750lm	38°	**1007390**	**47.00**	
		3000K	750lm	60°	**1007392**	**47.00**	
30°	IP 20	2700K	705lm	38°	**1007385**	**47.00**	
		2700K	705lm	60°	**1007387**	**47.00**	
		3000K	750lm	38°	**1007389**	**47.00**	
		3000K	750lm	60°	**1007391**	**47.00**	
30°	IP 20	2700K	705lm	38°	**1007394**	**47.00**	
		2700K	705lm	60°	**1007396**	**47.00**	
		3000K	750lm	38°	**1007398**	**47.00**	
		3000K	750lm	60°	**1007400**	**47.00**	
30°	IP 20	2700K	705lm	38°	**1007393**	**47.00**	
		2700K	705lm	60°	**1007395**	**47.00**	
		3000K	750lm	38°	**1007397**	**47.00**	
		3000K	750lm	60°	**1007399**	**47.00**	





NEW TRIA® 68
DL, PHASE







L80B10

220-240V ~50/60Hz | 200mA
Total wattage: 8.3W
Material: aluminium

- Material thickness of mounting surface: max. 20 mm



● black



○ white

NEW TRIA® 75
DL, round, PHASE







L80B10

220-240V ~50/60Hz | 200mA
Total wattage: 8.3W
Material: aluminium

- Material thickness of mounting surface: max. 20 mm



● black



○ white

	IP				Prod. no.	GBP	
-	IP 20 IP 65*	2700K	460lm	38°	**1007406**	**60.00**	
		3000K	500lm	38°	**1007408**	**60.00**	
-	IP 20 IP 65*	2700K	530lm	38°	**1007405**	**60.00**	
		3000K	570lm	38°	**1007407**	**60.00**	

*IP65 room side

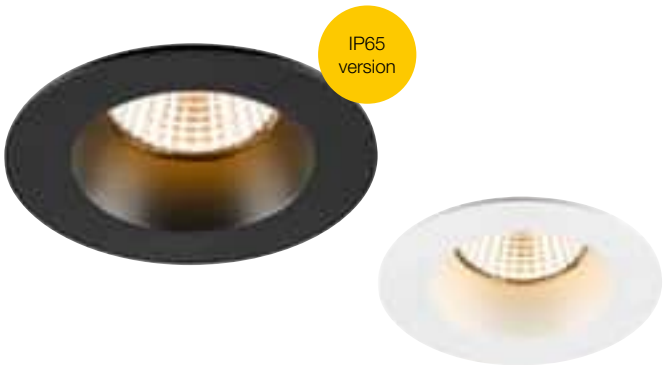

	IP				Prod. no.	GBP	
30°	IP 20	2700K	705lm	38°	**1007402**	**55.00**	
		3000K	750lm	38°	**1007404**	**55.00**	
30°	IP 20	2700K	705lm	38°	**1007401**	**55.00**	
		3000K	750lm	38°	**1007403**	**55.00**	



NEW TRIA® 68
DL, DTW, PHASE

DIM TO WARM



1





2





C,L | 50 000 Hours | CRI 90 | LED INSIDE

L80B10

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

1



● black



○ white

2



● black



○ white





	IP				Prod. no.	GBP	
30°	IP 20	1800K - 3000K	70lm - 700lm	38°	**1007424**	**60.00**	
				60°	**1007426**	**60.00**	
30°	IP 20	1800K - 3000K	70lm - 700lm	38°	**1007423**	**60.00**	
				60°	**1007425**	**60.00**	
30°	IP 20	1800K - 3000K	70lm - 700lm	38°	**1007428**	**60.00**	
				60°	**1007430**	**60.00**	
30°	IP 20	1800K - 3000K	70lm - 700lm	38°	**1007427**	**60.00**	
				60°	**1007429**	**60.00**	

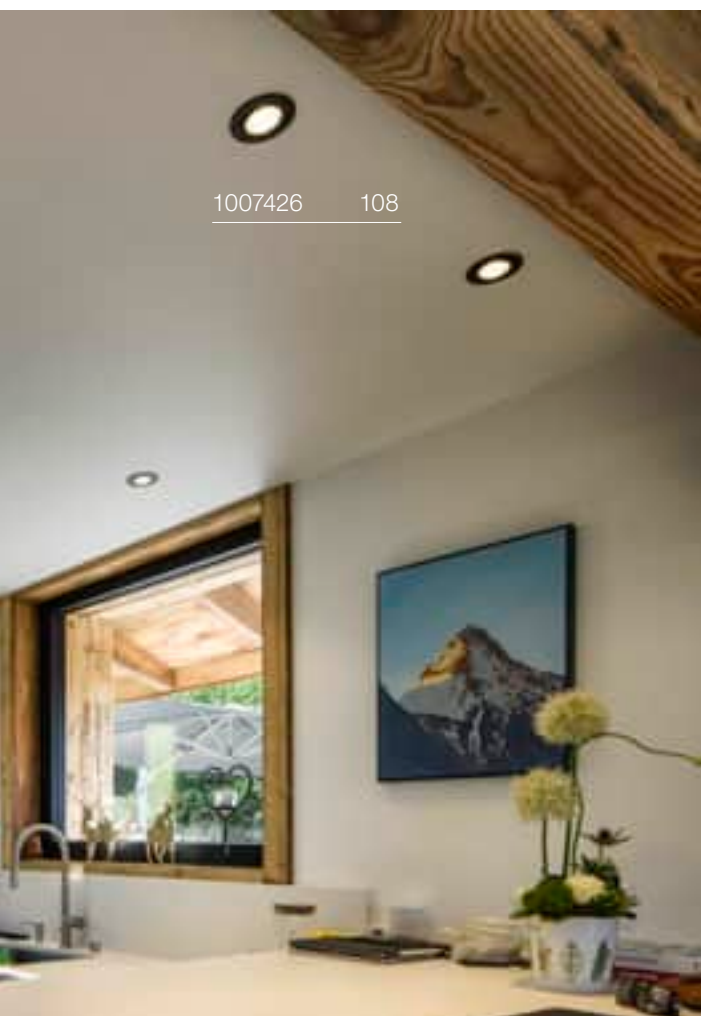



NEW TRIA® UNIVERSAL 68
DL, PHASE

CCT



1



2



3



C.L | 50000 Hours | CRI 90 | LED INSIDE

L80B10

220-240V ~50/60Hz | 100-180mA
Total wattage: 8.6W
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

1



● black



○ white

2



● black



○ white

3



● black



○ white







						Prod. no.	GBP	
	30°	IP 20	2500K 3000K 4000K	540lm 600lm 600lm	38°	**1007434**	**77.00**	
					60°	**1007436**	**77.00**	
	30°	IP 20	2500K 3000K 4000K	540lm 600lm 600lm	38°	**1007433**	**77.00**	
					60°	**1007435**	**77.00**	
	30°	IP 20	2500K 3000K 4000K	540lm 600lm 600lm	38°	**1007438**	**77.00**	
					60°	**1007440**	**77.00**	
	30°	IP 20	2500K 3000K 4000K	540lm 600lm 600lm	38°	**1007437**	**77.00**	
					60°	**1007439**	**77.00**	
	-	IP 20 IP 65*	2500K 3000K 4000K	370lm 410lm 410lm	38°	**1007442**	**85.00**	
	-	IP 20 IP 65*	2500K 3000K 4000K	370lm 410lm 410lm	38°	**1007441**	**85.00**	

*IP65 room side



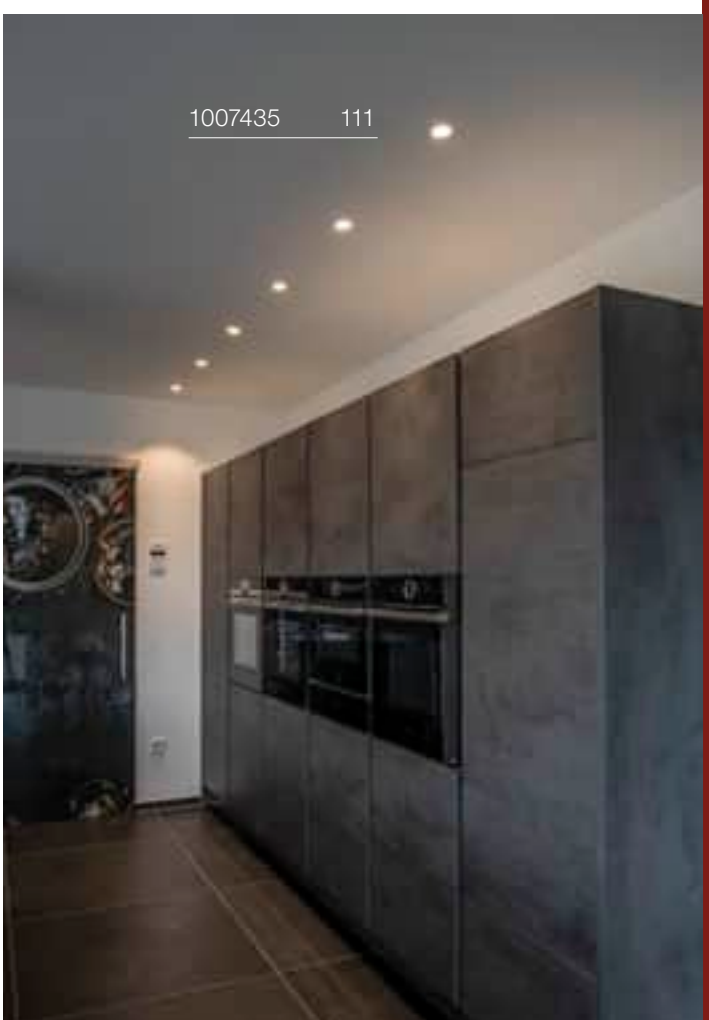

NEW TRIA® 68
DL, QPAR51



1



- black



- white



- aluminium

2



- black



- white



- aluminium

1



2





IK02

220-240V ~50/60Hz
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP







				Prod. no.	GBP	
30°	IP 20	Base: 1xGU10	-	**1007369**	**18.00**	
30°	IP 20	Base: 1xGU10	-	**1007368**	**18.00**	
30°	IP 20	Base: 1xGU10	-	**1007370**	**23.00**	
30°	IP 20	Base: 1xGU10	-	**1007372**	**18.00**	
30°	IP 20	Base: 1xGU10	-	**1007371**	**18.00**	
30°	IP 20	Base: 1xGU10	-	**1007373**	**23.00**	



NEW TRIA® 75 / XL
DL, QPAR51



1



2



XL

3



4



1



- black
- white
- aluminium

2



- black
- white
- aluminium

3



- black, XL
- white, XL
- aluminium, XL

4



- black, XL
- white, XL
- aluminium, XL

IK02

220-240V ~50/60Hz
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

					Prod. no.	GBP	
	30°	IP 20	Base: 1xGU10	-	**1007375**	**23.00**	
	30°	IP 20	Base: 1xGU10	-	**1007374**	**23.00**	
	30°	IP 20	Base: 1xGU10	-	**1007376**	**26.00**	
	30°	IP 20	Base: 1xGU10	-	**1007378**	**23.00**	
	30°	IP 20	Base: 1xGU10	-	**1007377**	**23.00**	
	30°	IP 20	Base: 1xGU10	-	**1007379**	**26.00**	

	30°	IP20	Base: 1xGU10	-	**1007625**	**27.00**	
	30°	IP20	Base: 1xGU10	-	**1007624**	**27.00**	
	30°	IP20	Base: 1xGU10	-	**1007626**	**30.00**	
	30°	IP20	Base: 1xGU10	-	**1007628**	**27.00**	
	30°	IP20	Base: 1xGU10	-	**1007627**	**27.00**	
	30°	IP20	Base: 1xGU10	-	**1007629**	**30.00**	







NEW TRIA®
155 DL, double, QPAR51

NEW









220-240V ~50/60 Hz
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

SOCKET INSIDE 10 W

Base: 2xGU10

Version		Prod. no.	GBP
●	black	**1008510**	**39.00**
○	white	**1008509**	**39.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h





Prod. no.: 1005077 | 7.00 GBP





NEW TRIA®
155 DL, double

NEW









220-240V ~50/60 Hz | 350 mA
Total wattage: 13.6W
Material: aluminium

- Material thickness of mounting surface: max. 20 mm

LED INSIDE CRI 90

Down 610lm | 2700K

Version	Prod. no.	GBP
● black 610lm | 2700K	**1008512**	**94.00**
● black 640lm | 3000K	**1008514**	**94.00**
○ white 610lm | 2700K	**1008511**	**94.00**
○ white 640lm | 3000K	**1008513**	**94.00**

COMBINE OTHER ITEMS FROM THE FOLLOWING PAGES





GU10 socket or LED module

+



Mounting ring available in black, white, rose gold and aluminium

=



GU10
LED CONNECTION BOX
with base, max. 10W





IP 20

220-240V ~50/60Hz
Material: plastic

SOCKET INSIDE 10 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1007283**	**6.00**

NEW TRIA®
DL, LED modulel, PHASE





C,L | IP 20 | 38° 60° | L80B10

220-240V ~50/60Hz 200mA
Total wattage: 8.63W
Material: aluminium

LED INSIDE | CRI 90

Down	705 | 2700K 750 | 3000K	

Version	Prod. no.	GBP
● black 2700K | 38°	**1007381**	**39.00**
● black 2700K | 60°	**1007382**	**39.00**
● black 3000K | 38°	**1007383**	**39.00**
● black 3000K | 60°	**1007384**	**39.00**

NEW TRIA®
DL, LED module, DTW, PHASE

DIM TO WARM





C,L | IP 20 | 38° 60° | L80B10

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down	70lm | 1800K	-	700lm | 3000K

Version	Prod. no.	GBP
● black 38°	**1007421**	**49.00**
● black 60°	**1007422**	**49.00**

NEW TRIA® UNIVERSAL
DL, LED module, PHASE

CCT





C,L | IP 20 | 38° 60° | L80B10

220-240V ~50/60Hz | 100-180mA
Total wattage: 8.6W
Material: aluminium

LED INSIDE | CRI 90

540lm | 2500K	600lm | 3000K	600lm | 4000K

Version	Prod. no.	GBP
● black 38°	**1007431**	**66.00**
● black 60°	**1007432**	**66.00**

Find suitable mounting rings on the following pages.



NEW TRIA® 68
Round ring, GU10/LED module



IP 20

H: 2.6 cm
Ø: 8.2 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	**1007332**	**13.00**
white	**1007333**	**13.00**
aluminium	**1007335**	**18.00**
rose gold	**1007334**	**22.00**

NEW TRIA® 68
Square ring, GU10/LED module



IP 20

L: 8.2 cm
W: 8.2 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	**1007329**	**13.00**
white	**1007328**	**13.00**
aluminium	**1007330**	**18.00**
rose gold	**1007331**	**22.00**

NEW TRIA® 68
Round ring, GU10/LED module



IP 20

H: 4.4 cm
Ø: 8.2 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007451**	**14.00**
○ white	**1007453**	**14.00**

NEW TRIA® 68
Round ring, GU10/LED module



IP 65

H: 3.55 cm
Ø: 8.3 cm
Material: aluminium/glass

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007336**	**31.00**
○ white	**1007337**	**31.00**

NEW TRIA® 68
Square ring, GU10/LED module



IP 65

L: 8.3 cm
W: 8.3 cm
H: 3.55 cm
Material: aluminium/glass

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007338**	**31.00**
○ white	**1007339**	**31.00**

NEW TRIA® 68
Round ring, GU10/LED module



IP 65

H: 3.4 cm
Ø: 8.2 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007345**	**22.00**
○ white	**1007346**	**22.00**

NEW TRIA® 68
Square ring, GU10/LED module



IP 65

L: 8.2 cm
W: 8.2 cm
H: 3.4 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007347**	**22.00**
○ white	**1007348**	**22.00**

NEW TRIA® 75
Round ring, GU10/LED module



IP 20

H: 2.6 cm
Ø: 9.3 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	1007343	18.00
white	1007342	18.00
aluminium	1007351	21.00
rose gold	1007344	25.00

NEW TRIA® 75
Square ring, GU10/LED module



IP 20

L: 9 cm
W: 9 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	1007340	18.00
white	1007349	18.00
aluminium	1007350	21.00
rose gold	1007341	25.00

NEW TRIA® 75
Round ring, GU10/LED module



IP 20

H: 4.9 cm
Ø: 8.2 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	1007449	17.00
white	1007450	17.00

NEW TRIA® 75
Round ring, GU10/LED module



IP 20

H: 4.3 cm
Ø: 8.2 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	1007488	13.00
white	1007489	13.00





1007283 + 1007342 118 + 122

NEW TRIA® 75 XL
Round ring, GU10/LED module



IP20

H: 2.6 cm
Ø: 11 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	**1007631**	**22.00**
white	**1007630**	**22.00**
aluminium	**1007632**	**25.00**
rose gold	**1007633**	**30.00**

NEW TRIA® 75 XL
Round ring, GU10/LED module



IP20

L: 11 cm
W: 11 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
black	**1007635**	**22.00**
white	**1007634**	**22.00**
aluminium	**1007636**	**25.00**
rose gold	**1007637**	**30.00**

CREATE YOUR NEW TRIA 95 DOWNLIGHT



LED module

+



Version-95 mounting rings available in black, white, rose gold and aluminium

=



NEW TRIA®
DL, LED module, PHASE





C.L | IP 20 | 38° 60° | L80B10

Material: aluminium

- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 90

Down | 1130 \| 2700K 1200 \| 3000K

Version	Prod. no.	GBP
● black 1130lm | 2700K | 38°	**1007409**	**82.00**
● black 1200lm | 3000K | 38°	**1007410**	**82.00**
● black 1130lm | 2700K | 60°	**1007411**	**82.00**
● black 1200lm | 3000K | 60°	**1007412**	**82.00**

NEW TRIA® 95
Ring, round, LED module



IP 20

H: 2.6 cm
Ø: 11 cm
Material: aluminium

- Installation diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007444**	**26.00**
○ white	**1007443**	**26.00**
● aluminium	**1007445**	**30.00**
● rose gold	**1007447**	**35.00**

NEW TRIA® 95
Ring, square, LED module



IP 20

L: 11 cm
W: 11 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007446**	**26.00**
○ white	**1007448**	**26.00**

NEW TRIA® 95
Ring, round, LED module



IP 20

H: 5.5 cm
Ø: 10.3 cm
Material: aluminium

- Installation diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Version	Prod. no.	GBP
● black	**1007452**	**26.00**
○ white	**1007454**	**26.00**



NEW TRIA®
DL, double LED module, PHASE

NEW





C,L | IP20 | 2x38° | L80B10

220-240V ~50/60Hz | 350mA
Total wattage: 13.6 W
Material: aluminium

LED INSIDE | CRI 90

Down 610lm | 2700K

Version	Prod. no.	GBP
● black 1220lm | 2700K	**1008005**	**65.00**
● black 1280lm | 3000K	**1008006**	**65.00**

NEW TRIA® 155
Ring, double, square
GU10/LED module

NEW



IP20

L: 17 cm W: 9 cm H: 3.75 cm
Material: aluminium

Version	Prod. no.	GBP
● black	**1008007**	**32.00**
○ white	**1008008**	**32.00**
◍ aluminium	**1008009**	**32.00**

CONFIGURE YOUR NEW TRIA®

For greater flexibility, the NEW TRIA offers the option of configuring customised sets from the modular system in addition to the existing sets. Just choose the appropriate options and benefit from rapid installation.

CHOOSE YOUR PREFERRED MOUNTING RING ...

1. Installation diameter: 68, 75, 95 mm
2. Pivoting, swivel and rotate, IP65
3. Colour
   black, white, rose gold or aluminium
4. Round or square

CHOOSE THE APPROPRIATE MODULE ...

5. Colour temperature
   2700K or 3000K, 1800 — 3000K or CCT 2500 / 3000 / 4000K
6. Beam angle
   38° / 60°

DONE!

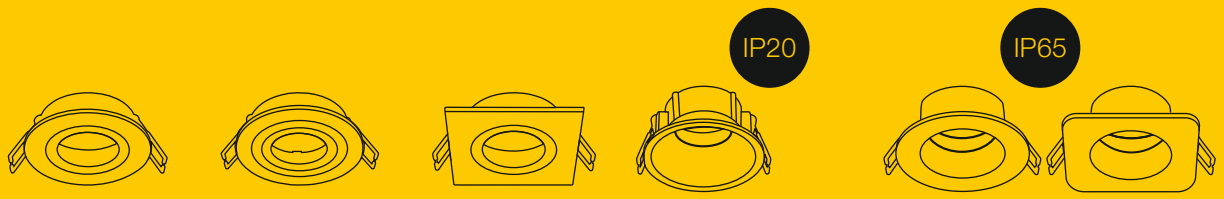

Mounting ring

Available as a pivoting, rotating and pivoting, or IP65 version
with 68, 75 or 95 mm installation diameter

Available in black, white, rose gold or aluminium

Available in round or square design

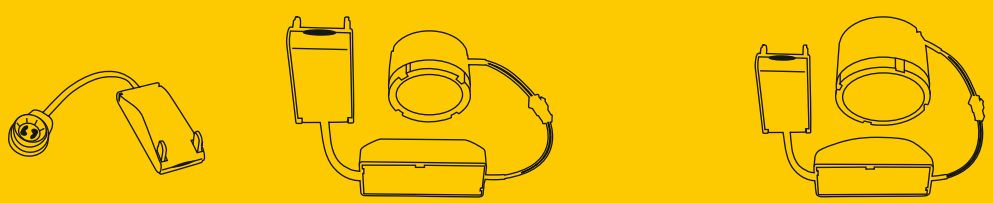

GU10 LED MODULE LED MODULE

NEW TRIA® 68 **NEW TRIA® 75** **NEW TRIA® 95**

Colour temperature
2700 / 3000K, DTW 1800 - 3000K or multi CCT

Beam angle
38° / 60°

Colour temperature
2700 / 3000K

Beam angle
38° / 60°

NEW TRIA® 45
DL, round











220-240V ~50/60Hz | 700mA
Total wattage: 3.4W
Material: aluminium/aluminium

- Spring clips
- Material thickness of mounting surface: max. 20 mm
- IP 44 room side



Down 190lm | 3000K

Version	Prod. no.	GBP
● black	**113970**	**46.00**
○ white	**113971**	**46.00**
◍ aluminium	**113976**	**52.00**



NEW TRIA® 150
DL, round, QPAR111





IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <75 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**113550**	**45.00**
○ white	**113540**	**45.00**

QPAR111 | 8W | 38°
2700K | 680lm | EEC=F
8kWh/1000h



Prod. no.: 1005274 | 26.00 GBP

NEW TRIA® 150
DL, square, QPAR111





IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <75 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**113830**	**45.00**
○ white	**113541**	**45.00**

LED GU10 111mm | 7.3W | 40°
2700K | 500lm | EEC=G
8kWh/1000h



Prod. no.: 1005294 | 22.00 GBP

NEW TRIA® 300
DL, Double, QPAR111





IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <75 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**113840**	**90.00**
○ white	**113841**	**90.00**
● aluminium	**111382**	**99.00**

QPAR111 | 12.5W | 30°
2700K | 950lm | EEC=F
13kWh/1000h



Prod. no.: 1005276 | 43.00 GBP

MEDO® 30
RL, frame

CCT

NEW





IP20 | 70° | 19 | L80B10

250 mA
Total wattage: 8W
Material: aluminium

- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	1150lm | 3000K	1150lm | 4000K

Version	Prod. no.	GBP
○ white	**1008629** ●	**137.00**

Product	Prod. no.	GBP
Driver LED driver 10W | 180-270mA PHASE	**1008660**	**28.00**
Driver LED Driver 15W | 100-700mA DALI	**1008666**	**61.00**
Driver strain relief Standard	**1008672**	**0.70**
Compatible with through-wiring	**1008673**	**20.00**

MEDO® 40
RL, frame

CCT

NEW





IP20 | 80° | 19 | L80B10

500 mA
Total wattage: 16W
Material: aluminium

- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	2200lm | 3000K	2300lm | 4000K

Version	Prod. no.	GBP
○ white	**1008631** ●	**171.00**

Product	Prod. no.	GBP
Driver LED driver 20W | 350-500mA PHASE	**1008663**	**40.00**
Driver LED driver 23W | 100-700mA DALI	**1008667**	**66.00**
Driver strain relief Standard	**1008672**	**0.70**
Compatible with through-wiring	**1008673**	**20.00**



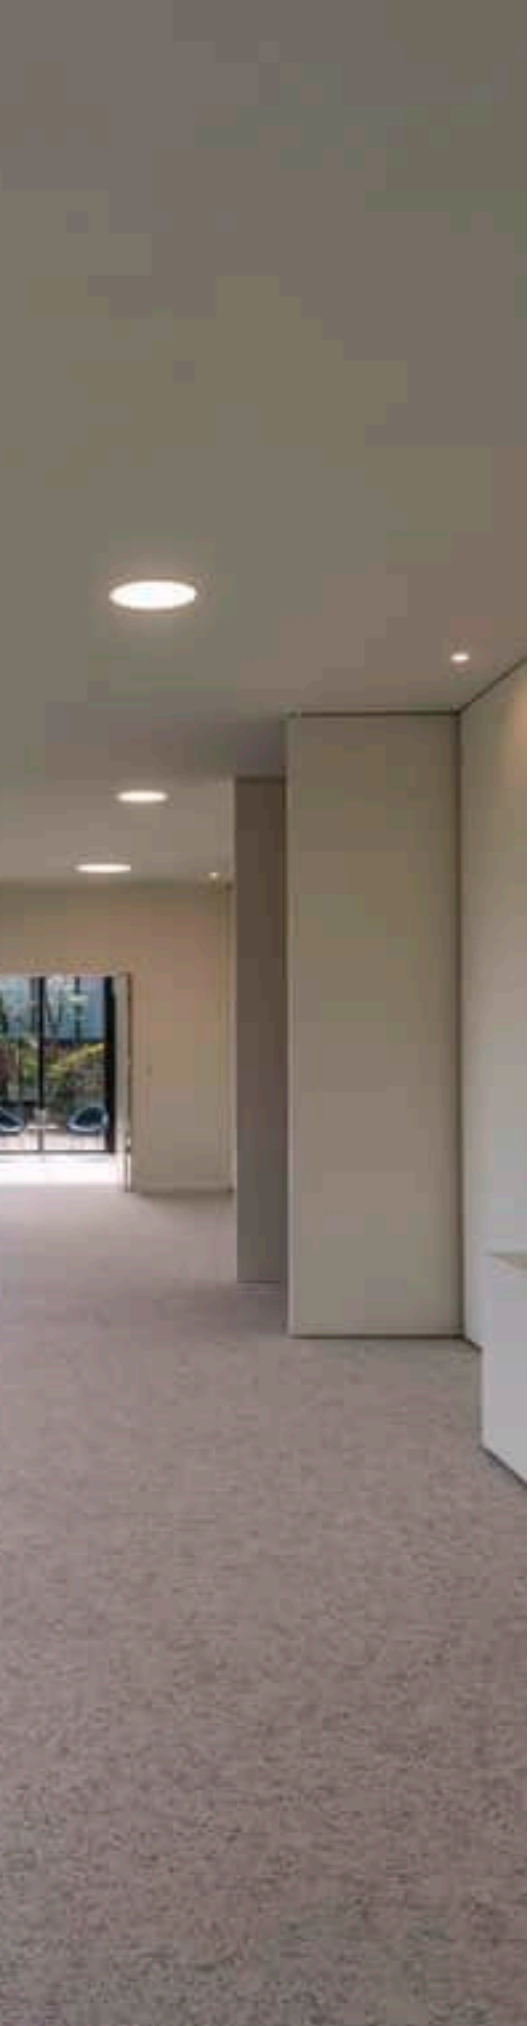

MEDO® 60
RL, frame

CCT

NEW





IP20 | 80° | UGR 19 | L80B10

1000 mA
Total wattage: 16.5W
Material: aluminium

- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	4600lm | 3000K	4700lm | 4000K

Version	Prod. no.	GBP
○ white	1008633 ●	386.00

⊕

Product	Prod. no.	GBP
Driver LED driver 40W | 700-1050mA PHASE	1008665	49.00
Driver LED driver 53W | 650-1400mA DALI	1008669	79.00
Driver strain relief Standard	1008674	0.70

MEDO® 90
RL, frame

CCT

NEW





IP20 | 80° | UGR 19 | L80B10

2x1000 mA
Total wattage: 33W
Material: aluminium

- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	8800lm | 3000K	9100lm | 4000K

Version	Prod. no.	GBP
○ white	1008635 ●	773.00

⊕

Product	Prod. no.	GBP
Driver LED driver 40W | 700-1050mA PHASE	1008665	49.00
Driver LED driver 53W | 650-1400mA DALI	1008669	79.00
Driver strain relief Standard	1008674	0.70

MEDO® 30
RL, frameless

CCT

NEW





IP20 | 70° | UGR 19 | L80B10

250 mA
Total wattage: 8W
Material: aluminium

- Material thickness of mounting surface: max. 35 mm

LED INSIDE | CRI 90

Down	1150lm | 3000K	1150lm | 4000K

Version	Prod. no.	GBP
○ white	**1008630**	**137.00**

⊕

Product	Prod. no.	GBP
Driver LED driver 10W | 180-270mA PHASE	**1008660**	**28.00**
Driver LED Driver 15W | 100-700mA DALI	**1008666**	**61.00**
Driver strain relief Standard	**1008672**	**0.70**
Compatible with through-wiring	**1008673**	**20.00**

MEDO® 40
RL, frameless

CCT

NEW





IP20 | 80° | UGR 19 | L80B10

500 mA
Total wattage: 16W
Material: aluminium

- Material thickness of mounting surface: max. 35 mm

LED INSIDE | CRI 90

Down	2200lm | 3000K	2300lm | 4000K

Version	Prod. no.	GBP
○ white	**1008632**	**171.00**

⊕

Product	Prod. no.	GBP
Driver LED driver 20W | 350-500mA PHASE	**1008663**	**40.00**
Driver LED driver 23W | 100-700mA DALI	**1008667**	**66.00**
Driver strain relief Standard	**1008672**	**0.70**
Compatible with through-wiring	**1008673**	**20.00**

1008636 135

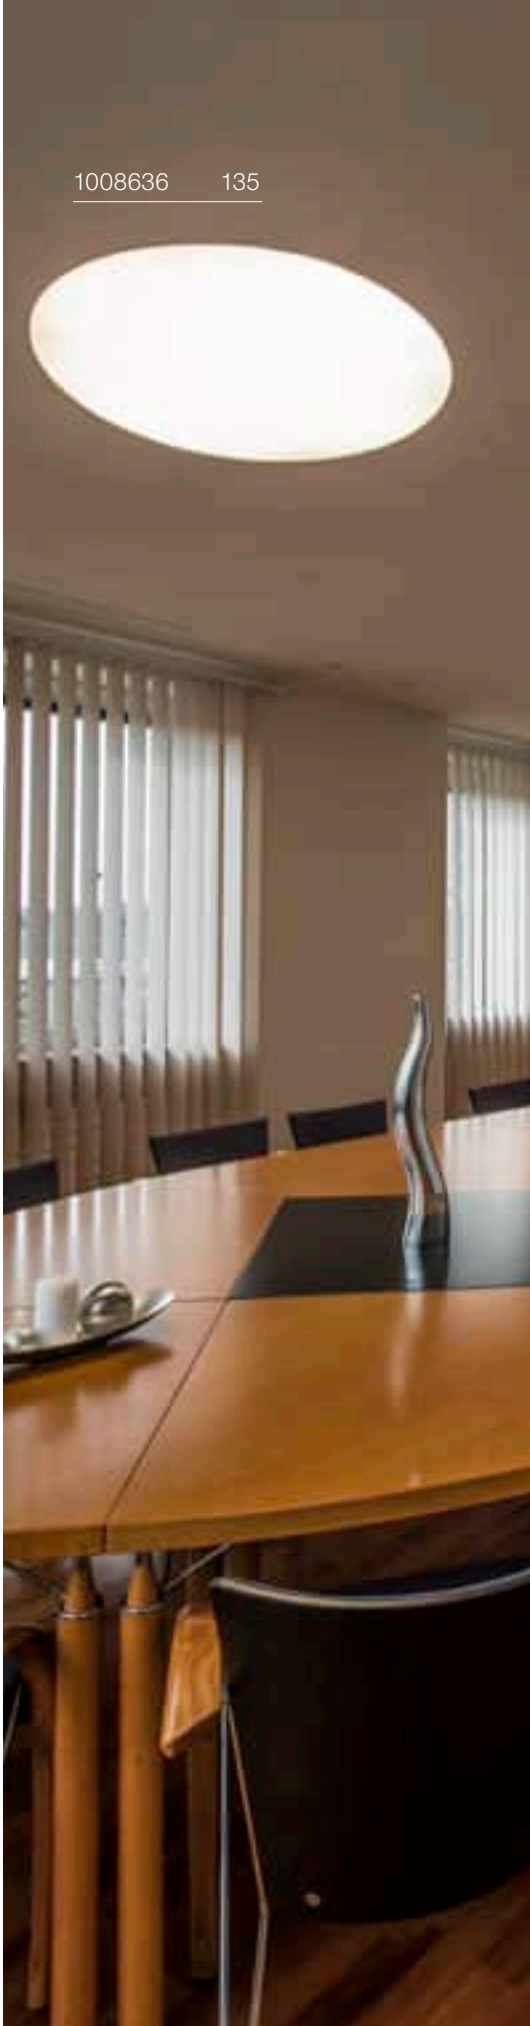

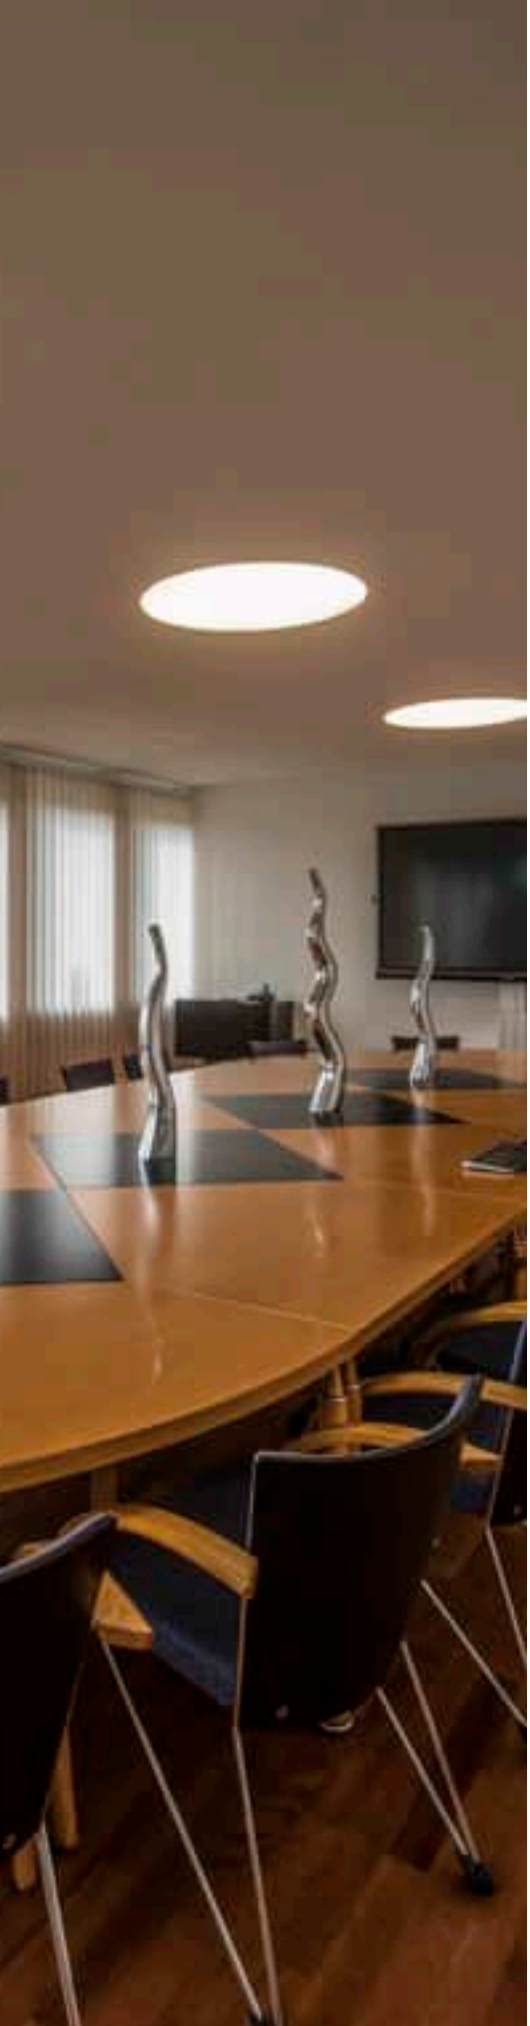

MEDO® 60
RL, frameless

CCT

NEW





IP20 | 80° | UGR 19 | L80B10

1000 mA
Total wattage: 16.5W
Material: aluminium

- Material thickness of mounting surface: max. 35 mm

LED INSIDE | CRI 90

Down	4600lm | 3000K	4700lm | 4000K

Version	Prod. no.	GBP
○ white	**1008634**	**386.00**

Product	Prod. no.	GBP
Driver LED driver 40W | 700-1050mA PHASE	**1008665**	**49.00**
Driver LED driver 53W | 650-1400mA DALI	**1008669**	**79.00**
Driver strain relief Standard	**1008674**	**0.70**

MEDO® 90
RL, frameless

CCT

NEW





IP20 | 80° | UGR 19 | L80B10

2x1000 mA
Total wattage: 33W
Material: aluminium

- Material thickness of mounting surface: max. 35 mm

LED INSIDE | CRI 90

Down	8800lm | 3000K	9100lm | 4000K

Version	Prod. no.	GBP
○ white	**1008636**	**773.00**

Product	Prod. no.	GBP
Driver LED driver 40W | 700-1050mA PHASE	**1008665**	**49.00**
Driver LED driver 53W | 650-1400mA DALI	**1008669**	**79.00**
Driver strain relief Standard	**1008674**	**0.70**

HORN MINI
EL





IP 20 | 12° | UGR 19 | L70B50 | 50

350mA
Power consumption: 1W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 30 mm
- AMP plug included
- Different light colour with golden reflector

LED INSIDE | CRI 90

Down	70lm	2900K 3000K

Version	Prod. no.	GBP
● black		
3000K	**1000915**	**35.00**
●● black/gold		
2900K	**1000917**	**38.00**
○ white		
3000K	**1000914**	**35.00**

⊕

Product	Prod. no.	GBP
LED Driver 4W | 350mA		
○ white	**1008656** ●	**16.00**





HORN
DL, single, QPAR51





IP20 30° 20

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <25 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**113140**	**45.00**
○ white	**113141**	**45.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

HORN
DL, double, QPAR51





IP20 30° 20

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <25 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**1006121**	**65.00**
○ white	**1006122**	**65.00**

LED GU10 51mm | 5W | 38°
2700-6500K | 350lm | EEC=G
5kWh/1000h



Prod. no.: 1005079 | 7.00 GBP

HORN
DL, single, Asymmetrical, QPAR51





IP 20 IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <25 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**113150**	**49.00**
○ white	**113151**	**49.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

HORN
DL, single, QPAR51





IP 20
IP 44
IK02
20

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE <25 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**113160**	**45.00**
○ white	**113161**	**45.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

HORN
EL, single, QPAR51





IP20

220-240V ~50/60Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 45 mm

SOCKET INSIDE <50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Version	Prod. no.	GBP
● black	**112910**	**24.00**
○ white	**112911**	**24.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005076 | 7.00 GBP

HORN
DL, GU10, blower door tested





IP 20
IP 44
IK02

220-240V ~50/60Hz
Material: aluminium

- The downlight meets the RT2012 standards.
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <25 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1005435**	**23.00**
○ white	**1005436**	**23.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP



HORN-T
EL, QPAR111





IP 20 | 15°

220-240V ~50/60Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE | <75 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**113170**	**60.00**
○ white	**113171**	**60.00**

LED GU10 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h



Prod. no.: 1005278 | 48.00 GBP



HORN MAGNA
EL



IP 20 | 25° | L70B50 | 30

500mA
Power consumption: 9W
Material: aluminium/polycarbonate (PC)

- Different light colour with golden reflector
- Spring clips
- Material thickness of mounting surface: max. 25 mm
- Open cable end

LED INSIDE | CRI 80

Down	445lm 550lm 570lm	3000K

Version	Prod. no.	GBP
● black		
445lm	**1002592**	**65.00**
● black/gold		
570lm	**1002594**	**67.00**
○ white		
550lm	**1002591**	**65.00**

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227** ●	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**
Honeycomb module		
● black	**1002596**	**4.00**



SENSER 12
EL, round



IP 20 | IK02 | 30 | L70B50

200mA
Power consumption: 6.5 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 90

Down — 450lm | 3000K; 470lm | 4000K

Version	Prod. no.	GBP
○ white		
450lm | 3000K | 6.5W	**1003008**	**26.00**
○ white		
470lm | 4000K | 6W	**1004694**	**26.00**

⊕

Product	Prod. no.	GBP
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**

SENSER 18
EL, round



IP 20 | IK02 | 29 | L70B50

350mA
Power consumption: 10W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 90

Down — 890lm | 3000K; 990lm | 4000K

Version	Prod. no.	GBP
○ white		
890lm | 3000K | 10W	**1003009**	**30.00**
○ white		
990lm | 4000K | 12W	**1004695**	**30.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA inc. strain relief		
○ white	**1007225** ●	**26.00**
LED driver 20W | 350mA | dimmable		
○ white	**1007228** ●	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**

SENSER 24
EL, round



IP 20 | IK02 | 27 | L70B50

500mA
Power consumption: 13W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 90

Down — 1140lm | 3000K; 1300lm | 4000K

Version	Prod. no.	GBP
○ white		
1140lm | 3000K	**1003010**	**39.00**
○ white		
1300lm | 4000K	**1004696**	**39.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227** ●	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**



SENSER 12
EL, square



IP 20 | IK02 | 29 | L70B50

200mA
Power consumption: 6.5 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 90

Down	420lm | 3000K 440lm | 4000K	

Version	Prod. no.	GBP
○ white 3000K	**1003011**	**26.00**
○ white 4000 K	**1004697**	**26.00**

⊕

Product	Prod. no.	GBP
LED driver 25W | 150-700mA | DALI dimmable ○ white	**1007229** ●	**61.00**

SENSER 18
EL, square



IP 20 | IK02 | 27 | L70B50

350mA
Power consumption: 10W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 90

Down	780lm | 3000K 880lm | 4000K	

Version	Prod. no.	GBP
○ white 780lm | 3000K | 10W	**1003012**	**30.00**
○ white 880lm | 4000K | 12W	**1004698**	**30.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA inc. strain relief ○ white	**1007225** ●	**26.00**
LED driver 20W | 350mA | dimmable ○ white	**1007228** ●	**35.00**
LED driver 25W | 150-700mA | DALI dimmable ○ white	**1007229** ●	**61.00**

SENSER 24
EL, square



IP 20 | IK02 | 26 | L70B50

500mA
Power consumption: 13W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 90

Down	1140lm | 3000K 1240lm | 4000K	

Version	Prod. no.	GBP
○ white 1140lm | 3000K	**1003013**	**39.00**
○ white 1240lm | 4000K	**1004699**	**39.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE ○ white	**1007227** ●	**35.00**
LED driver 25W | 150-700mA | DALI dimmable ○ white	**1007229** ●	**61.00**


112682 145


112222 145

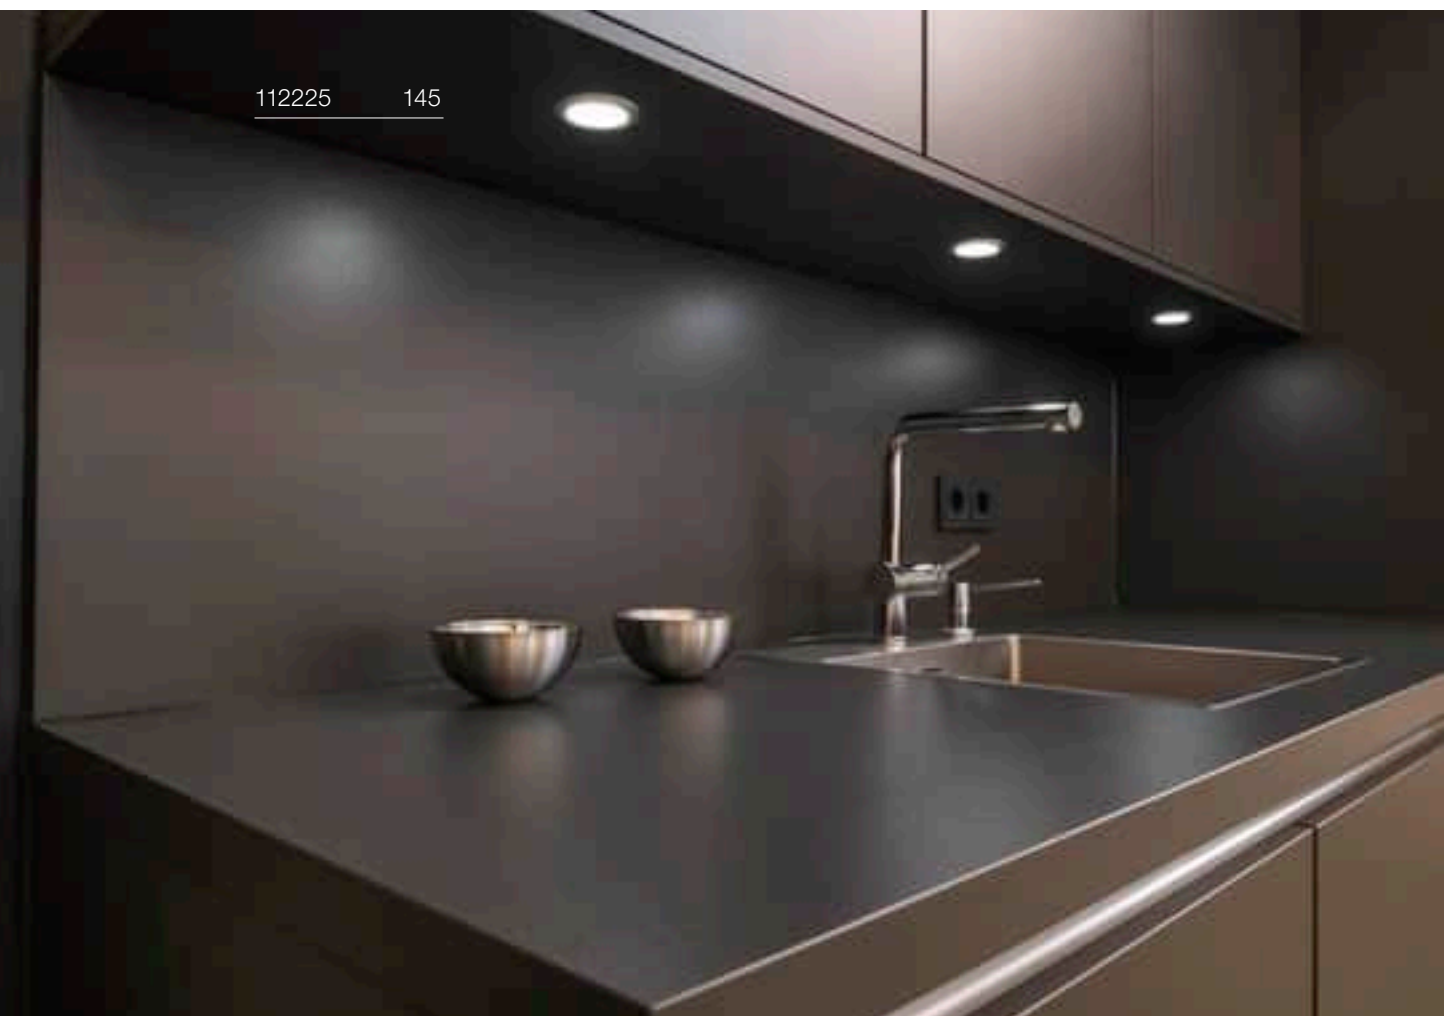
112225 145

VERLUX
EL, square, PHASE



IP 20 | IK02 | 80° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

Down 940lm | 3000K

Version	Prod. no.	GBP
white	**112682**	**78.00**

VERLUX
EL, square, PHASE



IP 20 | IK02 | 80° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 25 mm

LED INSIDE | CRI 80

Down 1800lm | 3000K

Version	Prod. no.	GBP
white	**112692**	**115.00**

DL 126
EL





IP 20 | 90° | L70B50 | 200

12V DC
Power consumption: 2.8W
Material: aluminium/plastic

- Leaf springs

LED INSIDE | CRI 80

Down 170lm | 3000K

Version	Prod. no.	GBP
white	**112221**	**32.00**
chrome	**112222**	**37.00**
grey	**112225**	**32.00**

⊕

Product	Prod. no.	GBP
LED power supply 12V | 12W, round		
white	**1008651**	**23.00**

PIKA
DL, round, QPAR51, rigid









220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 13 mm

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
white	**1000714**	**11.00**
brass	**1000716**	**16.00**
chrome	**1000715**	**16.00**
grey	**1000717**	**11.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005075 | 7.00 GBP

PIKA
DL, round, QPAR51, swivel









220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
white	**1000718**	**16.00**
brass	**1000720**	**18.00**
chrome	**1000719**	**18.00**
grey	**1000721**	**16.00**

LED GU10 51mm | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP

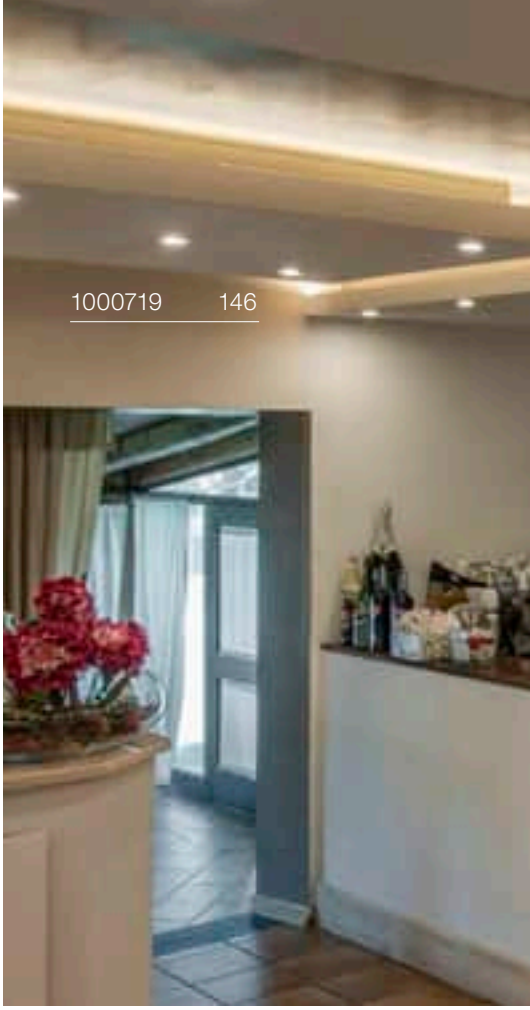

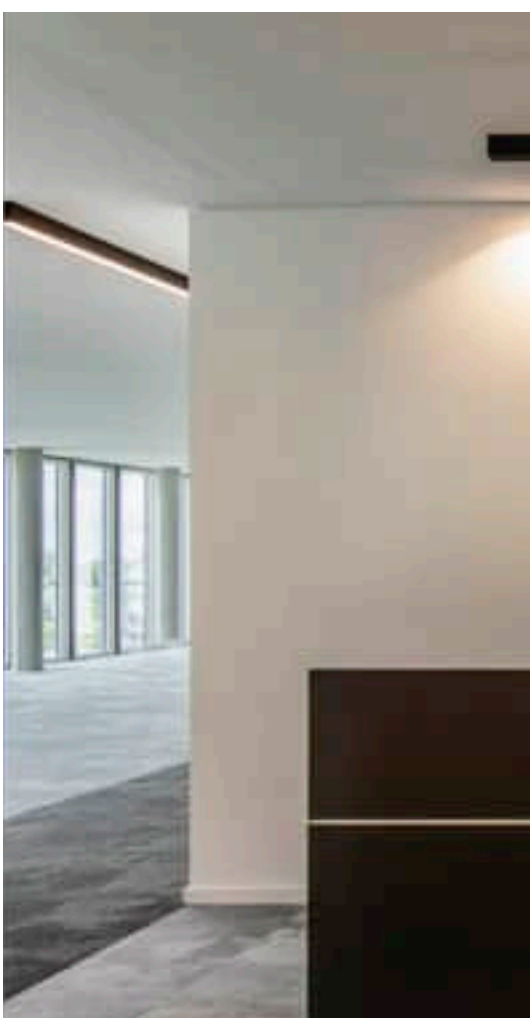



OCULUS
CL, Move, PHASE







IP20 100° L80B20 30°

220-240V ~50/60Hz | 250mA
Total wattage: 11W

- Spring clips
- Additional frosted lens included
- Material thickness of mounting surface: max. 20 mm

Down	36lm | 2000K	-	780lm | 3000K	

Version	Prod. no.	GBP
● black	**1004668**	**180.00**
○ white	**1004669**	**180.00**

OCCULDAS 14
EL, indirect, PHASE



IP 20 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

Down 810lm | 3000K

Version	Prod. no.	GBP
○ white	**117331**	**144.00**

OCCULDAS 23
EL, indirect, PHASE



IP 20 | IK02 | 120° | 28 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 23W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 80

Down 1500lm | 3000K

Version	Prod. no.	GBP
○ white	**117311**	**265.00**







CONTONE®
DL, round, adjustable, PHASE





IP 20 | 30° | L70B50 | 18°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm

Down	1000lm | 2000-3000K	-

Version	Prod. no.	GBP
○ white	**161271**	**89.00**

CONTONE®
DL, round, rigid, PHASE



IP 44 | 30° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm

Down	1000lm | 2000-3000K	-

Version	Prod. no.	GBP
○ white	**161291**	**89.00**



KARPO 30
EL









IP 20 | 40° | L70B50 | 350° | 90°

500mA
Total wattage: 7.5W
Material: aluminium/steel

- Material thickness of mounting surface: max. 12 mm. When connecting several lights, make sure that they are connected in series!
- Spring clips
- AMP plug included
- Material thickness of mounting surface: max. 12 mm

LED INSIDE | CRI 90

Down	450lm 470lm	3000K

Version	Prod. no.	GBP
● black		
3000K	**152380**	**108.00**
○ white		
4000 K	**152381**	**108.00**

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227**	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229**	**61.00**

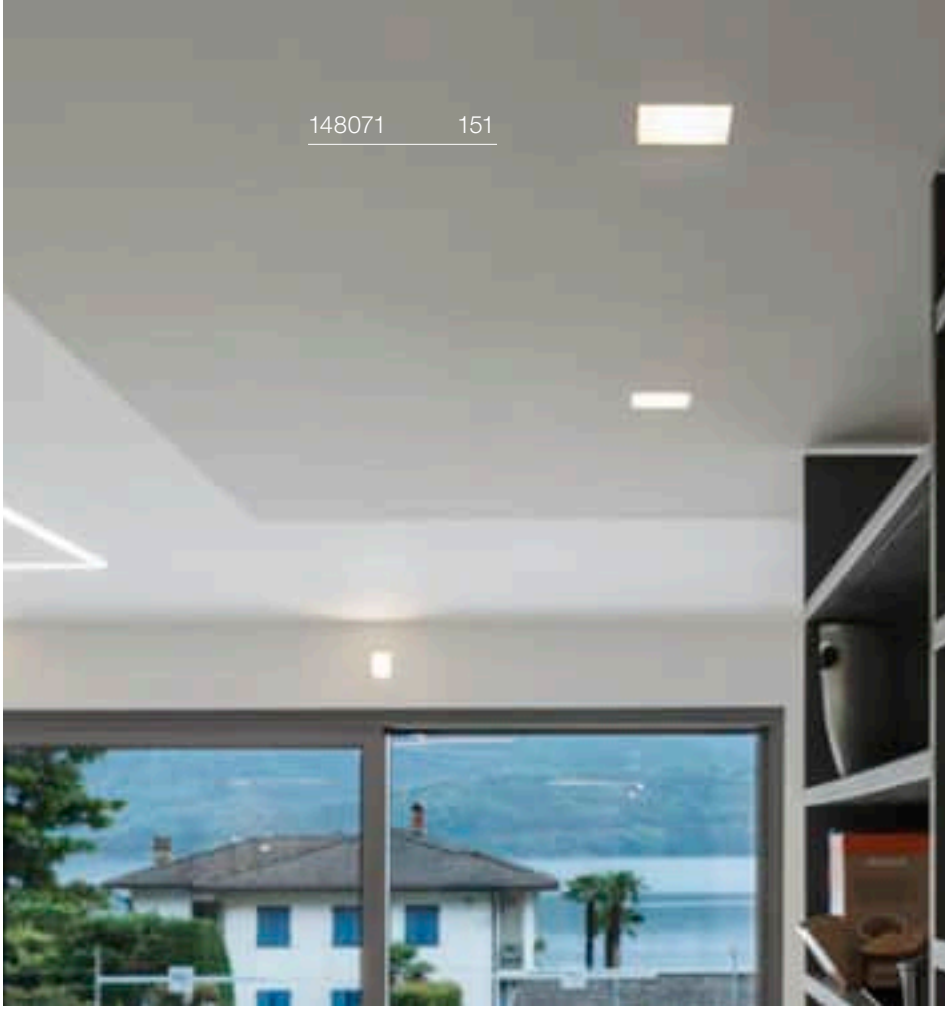

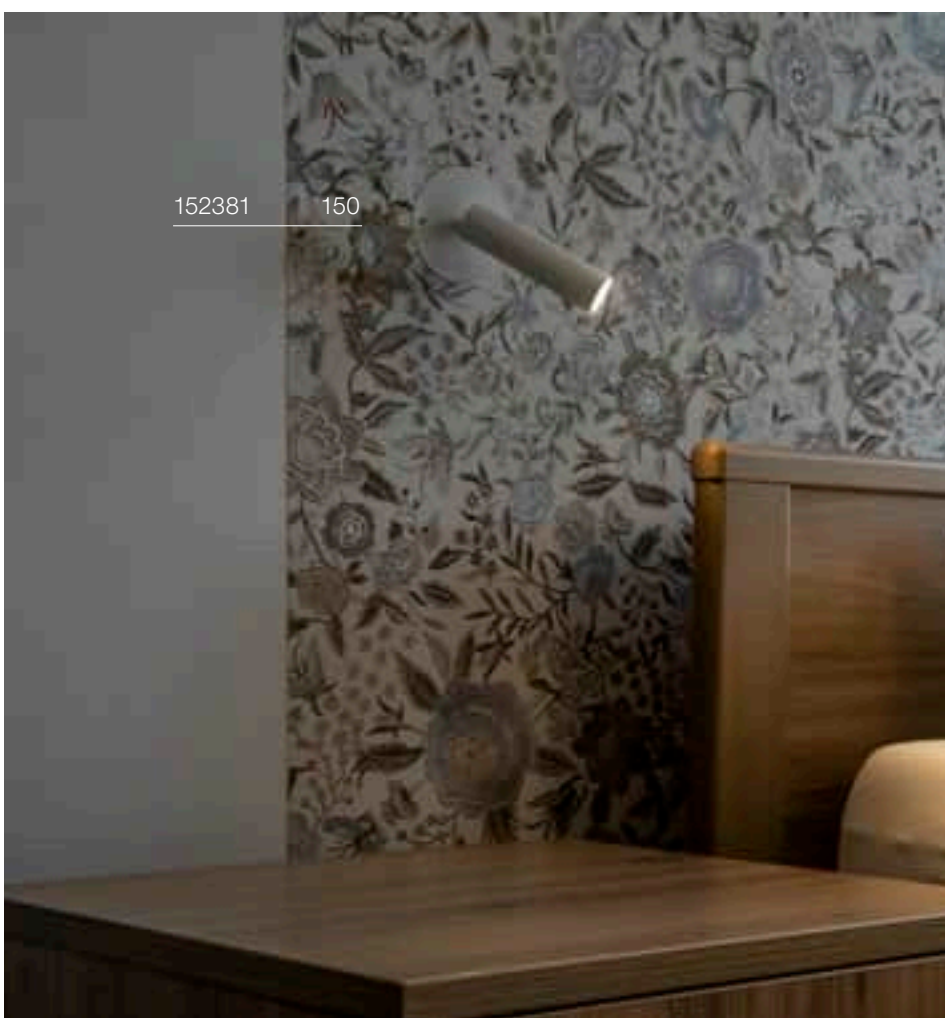

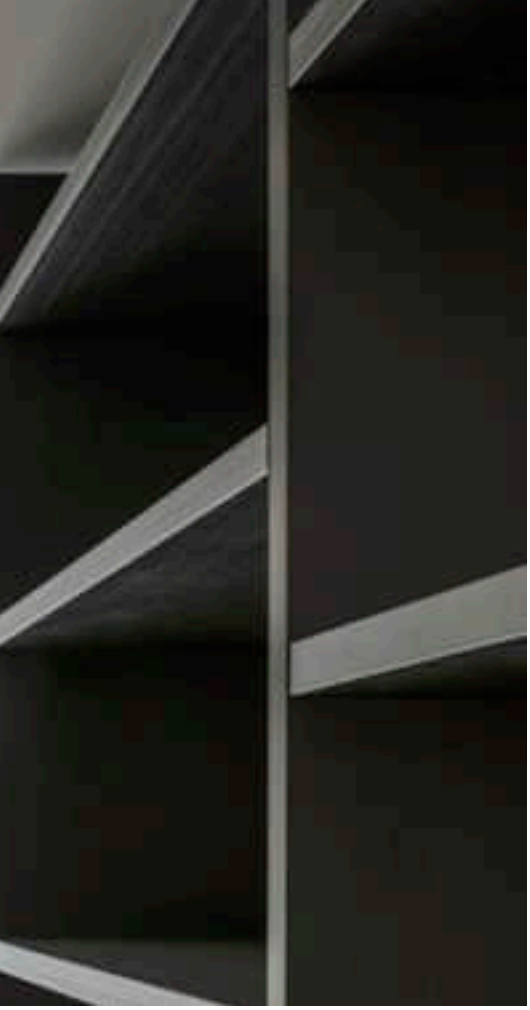

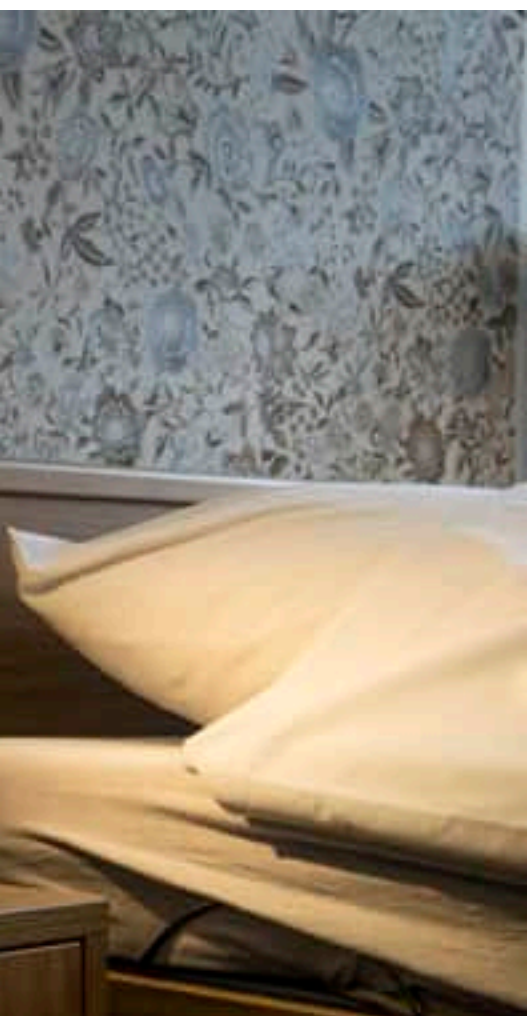

PLASTRA
RL, round, QPAR51





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE <35 W

Base: 1xGU10

Version	Prod. no.	GBP
○ white	**148070**	**37.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

PLASTRA
RL, square, QPAR51





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE <35 W

Base: 1xGU10

Version	Prod. no.	GBP
○ white	**148071**	**37.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005076 | 7.00 GBP

DEKLED
EL





IP 20 | 45° | L70B50 | 150

350mA
Total wattage: 1W
Material: aluminium/polycarbonate (PC)

- Material thickness of mounting surface: max. 15 mm

LED INSIDE | CRI 80

Down | 60lm | 3000K

Version	Prod. no.	GBP
grey	112242	27.00

Product	Prod. no.	GBP
LED driver 350mA/6W dimmable		
white	1008698	23.00

VARU
EL, QPAR51





IP 20 IP 65 | IK02

220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 15 mm

SOCKET INSIDE | <5 W

Base: 1xGU10 | max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1001930	36.00
white	1001931	36.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP







DOLIX OUT
EL, round, QPAR51





IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
white	**1001165**	**31.00**
silver	**1001168**	**34.00**
chrome	**1001166**	**34.00**
grey	**1001167**	**31.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005075 | 7.00 GBP

DOLIX OUT
EL, square, QPAR51





IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
white	**1001169**	**31.00**
silver	**1001172**	**34.00**
grey	**1001171**	**31.00**

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h

Prod. no.: 1005078 | 7.00 GBP



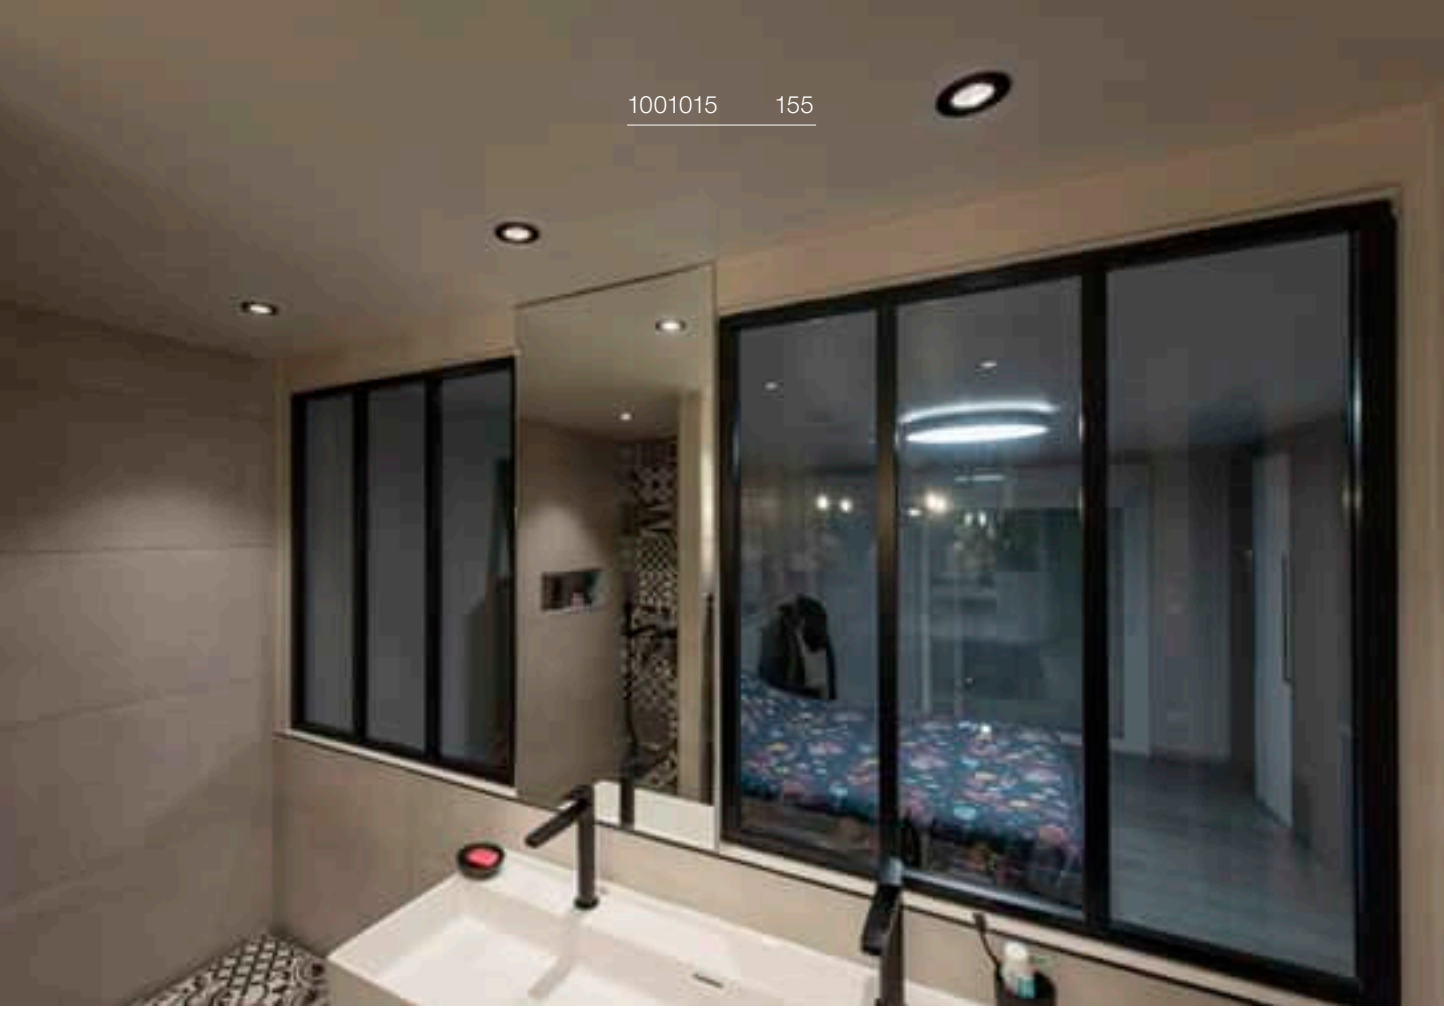

1001015 155

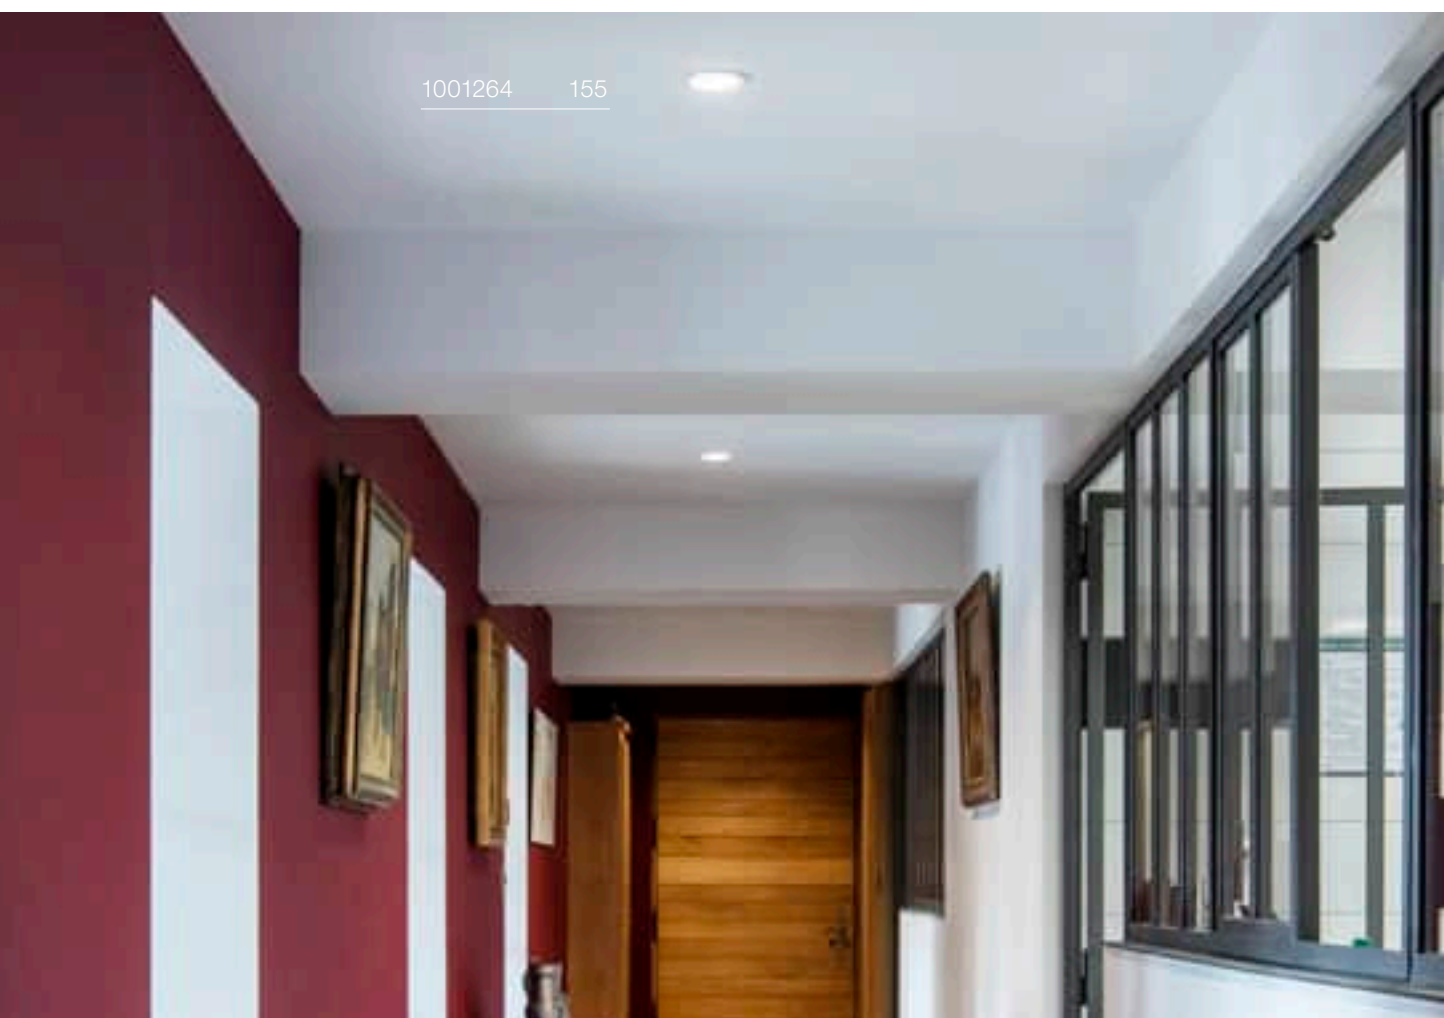

1001264 155

KAMUELA ECO
EL, round, PHASE





C,L | IP 65 | IK02 | 38° | L70B50

220-240V ~50Hz
Total wattage: 6W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 40 mm
- Fire resistant for at least 90 minutes compliant with BS 476-21

LED INSIDE | CRI 84

Down	500lm | 3000K

Version	Prod. no.	GBP
● black	**1001015**	**31.00**
○ white	**1001016**	**31.00**

KINI
EL, PHASE





C,L | IP 65 | IK02 | 60° | L70B50

220-240V ~50/60Hz | 260mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

Down	850lm | 3000K

Version	Prod. no.	GBP
○ white	**1000833**	**89.00**

AKALO D83
EL

CCT



C,L | IK02 | 90° | UGR 28 | L70B50

220-240V ~50/60Hz | 120mA
Total wattage: 9W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

800lm | 3000K	880lm | 4000K	850lm | 5700K

Version	Prod. no.	GBP
○ white	**1001264**	**35.00**

FRAME BASIC SET
RL





IP 20 90° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 8.3W
Material: aluminium/acrylic

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE CRI 80

Down 600lm | 3000K

Version	Prod. no.	GBP
● black	**112720**	**47.00**
○ white	**112721**	**47.00**

FRAME BASIC
RL, HV



IP 20 L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 3W
Material: aluminium

- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

Down 170lm | 2700K

Version	Prod. no.	GBP
○ white	**1000576**	**61.00**
● grey	**1000577**	**61.00**

⊕

Product	Prod. no.	GBP
Wall box		
● black	**112781**	**10.00**
Flush frame		
● gold	**112780**	**6.00**

FRAME BASIC
RL





IP 20 L70B50

350mA
Total wattage: 1W
Material: aluminium/glass

- When connecting several lights, make sure they are connected in series!
- AMP plug included
- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

Down 40lm | 3000K

Version	Prod. no.	GBP
○ white	**113262**	**35.00**
● grey	**111262**	**35.00**

⊕

Product	Prod. no.	GBP
Wall box		
● black	**112781**	**10.00**
Flush frame		
● gold	**112780**	**6.00**
LED Driver 4W | 350mA		
○ white	**1008656** ●	**16.00**

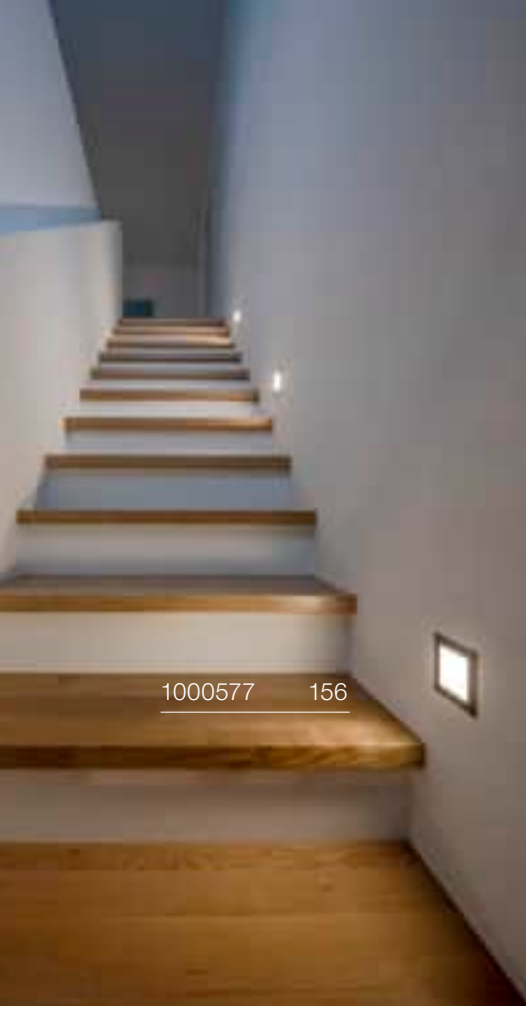

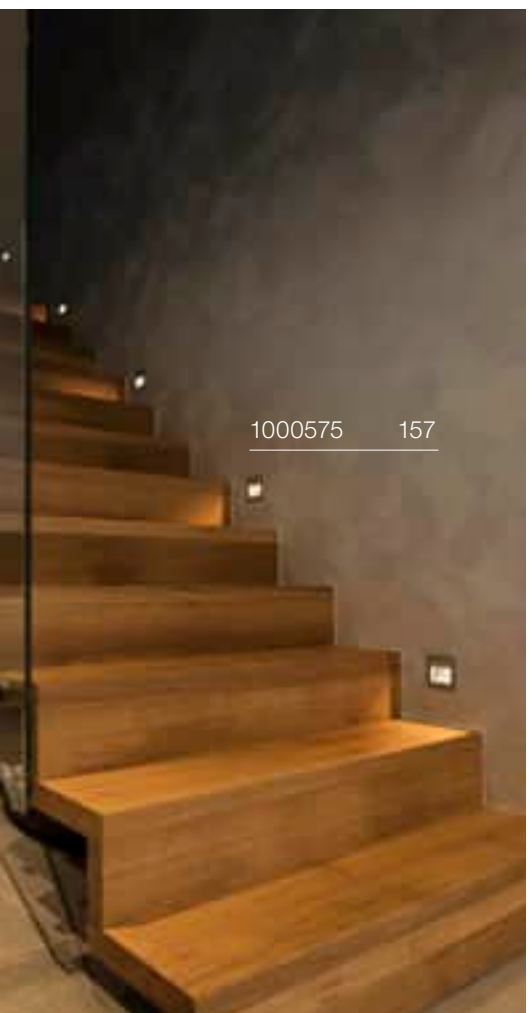

FRAME CURVE
EL





IP 20 L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 3W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

Down 140lm | 2700K

Version	Prod. no.	GBP
white	1000574	67.00
grey	1000575	67.00

Product	Prod. no.	GBP
Wall box		
black	112781	10.00
Flush frame		
gold	112780	6.00

FRAME CURVE
EL





IP 20 L70B50

350mA
Total wattage: 1W
Material: aluminium

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- AMP plug included
- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 90

Down 60lm | 3000K

Version	Prod. no.	GBP
white	113292	47.00
grey	111292	47.00

Product	Prod. no.	GBP
Wall box		
black	112781	10.00
Flush frame		
gold	112780	6.00
LED Driver 4W | 350mA		
white	1008656	16.00

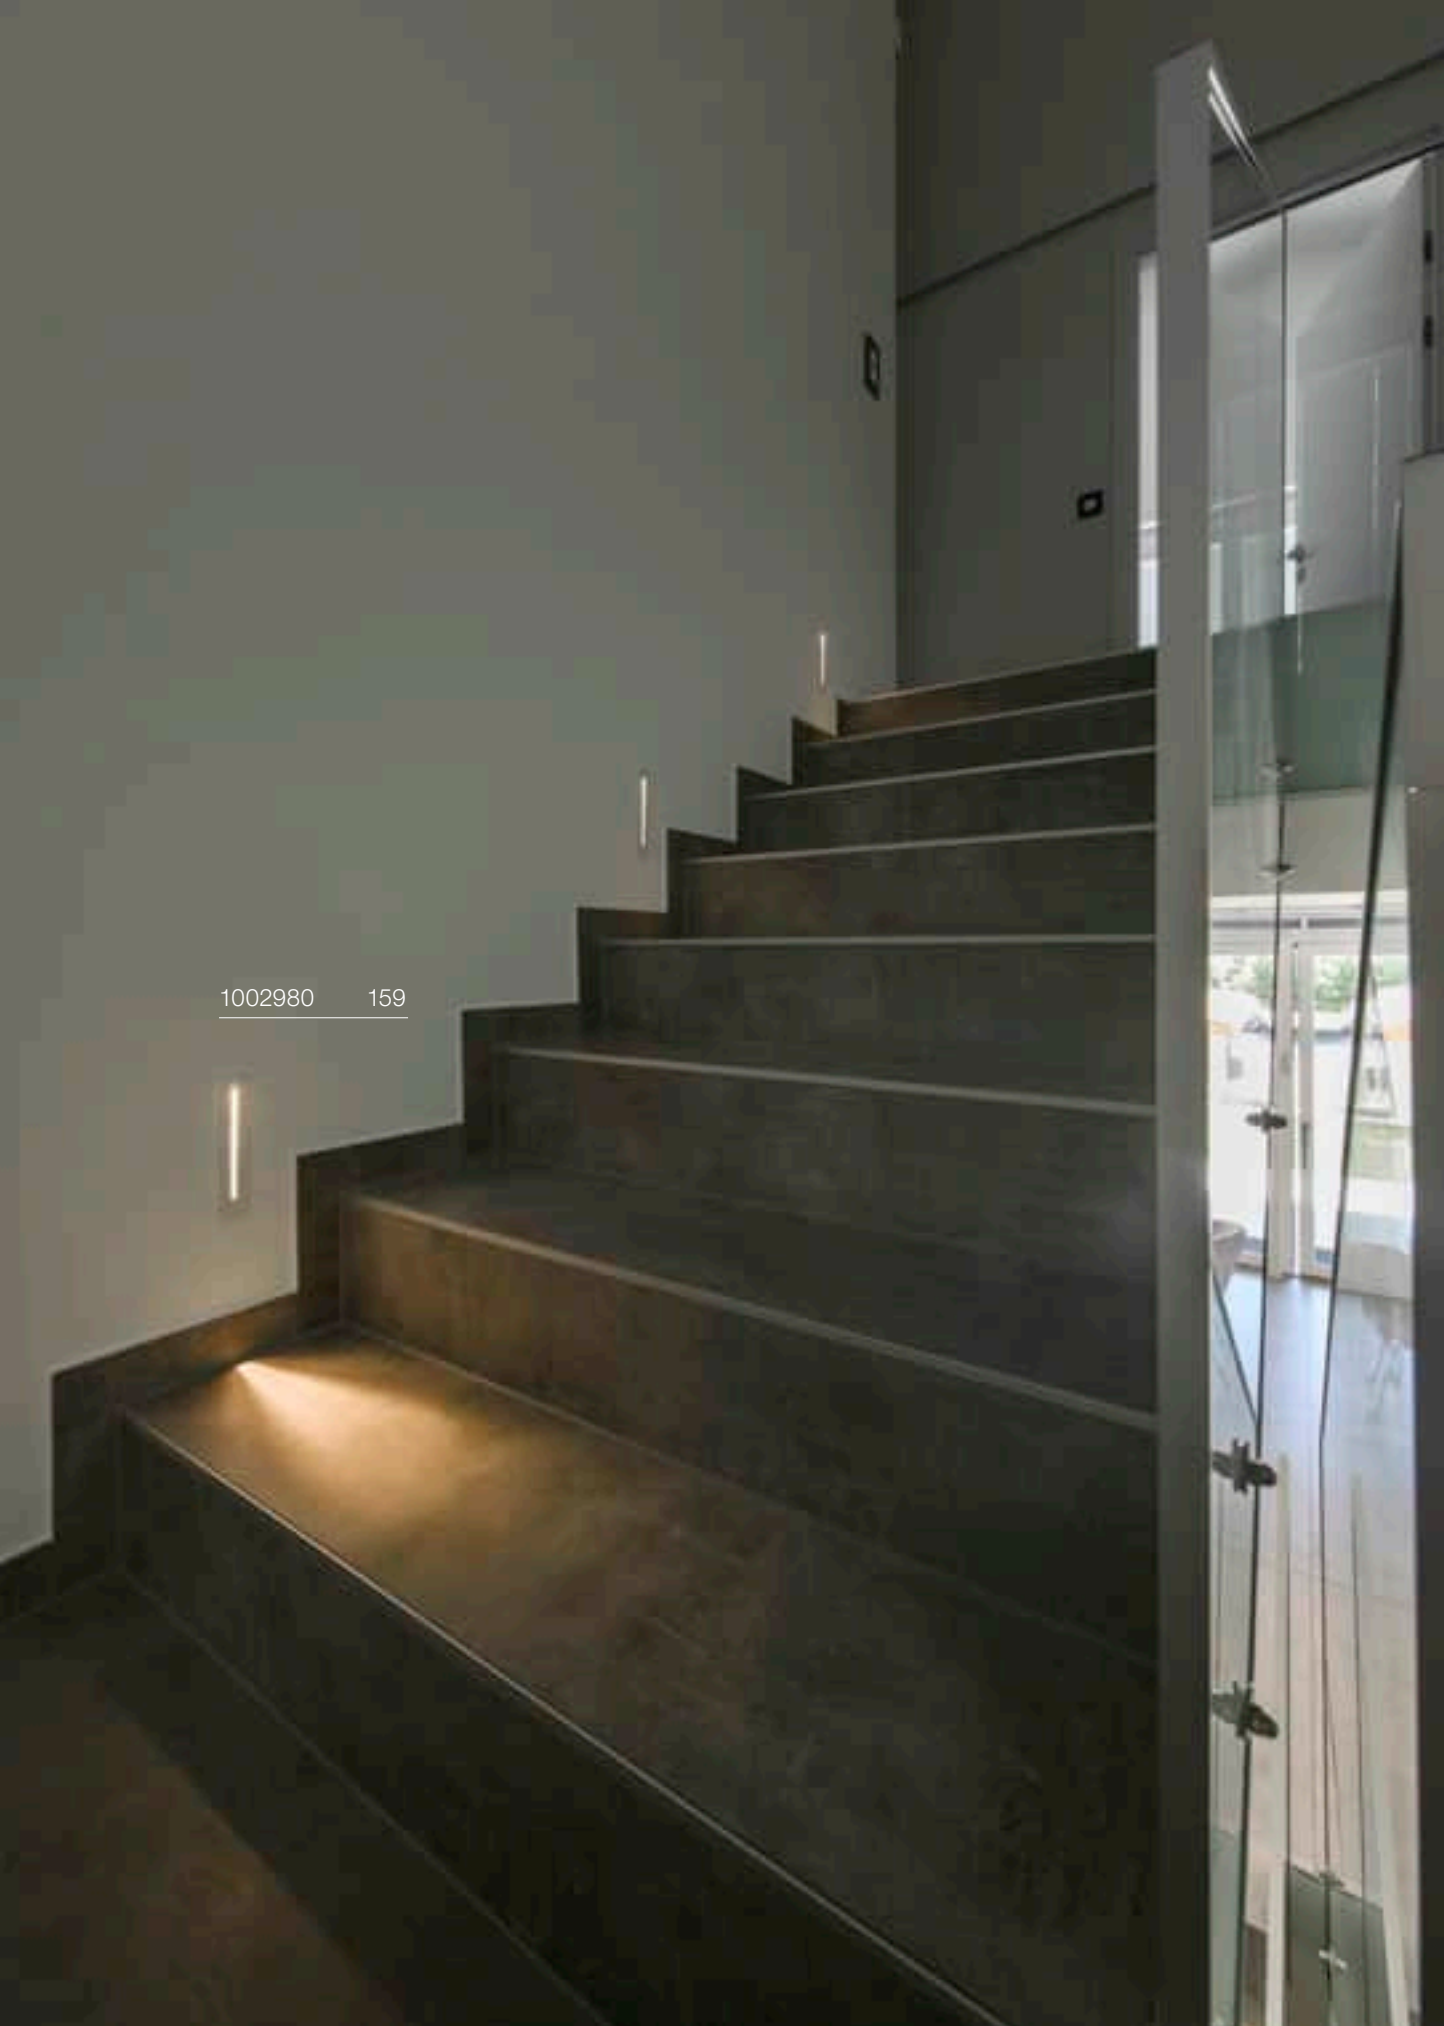
1002980 159

NOTAPO S
RL



IP 20 L70B50 30

700mA
Power consumption: 2.2W
Material: aluminium

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Open cable end

LED INSIDE CRI 90

Down 6lm | 3000K

Version	Prod. no.	GBP
○ white	**1002979**	**52.00**

⊕

Product	Prod. no.	GBP
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**
NOTAPO | mounting frame		
● black	**1002981**	**21.00**

NOTAPO L
RL





IP 20 L70B50 30

700mA
Power consumption: 2.2W
Material: aluminium

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Open cable end

LED INSIDE CRI 90

Down 6lm | 3000K

Version	Prod. no.	GBP
○ white	**1002980**	**71.00**

⊕

Product	Prod. no.	GBP
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**
NOTAPO | mounting frame		
● black	**1002981**	**21.00**

DOWNUNDER PUR 80
EL





IP 20 L70B50

350mA
Total wattage: 3.6W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs

LED INSIDE CRI 80

Down 180lm | 3000K

Version	Prod. no.	GBP
○ white	**151950**	**52.00**

⊕

Product	Prod. no.	GBP
Mounting frame		
● grey	**151960**	**8.00**
LED Driver 4W | 350mA		
○ white	**1008656** ●	**16.00**

DOWNUNDER PUR 150
EL





IP 20 L70B50

500mA
Total wattage: 5.2W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs

LED INSIDE CRI 80

Down 230lm | 3000K

Version	Prod. no.	GBP
○ white	**151952**	**74.00**

⊕

Product	Prod. no.	GBP
Mounting frame		
● grey	**151962**	**12.00**
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227** ●	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229** ●	**61.00**





MOBALA
EL





IP 20 L70B50

100-240V ~50/60Hz | 24V
Total wattage: 1.3W
Material: aluminium

- The mounting frame (1002984) or wall box (1002983) are required for assembly.
- Leaf springs

LED INSIDE CRI 80

Down 40lm | 3000K

Version	Prod. no.	GBP
○ white	**1002982**	**62.00**

⊕

Product	Prod. no.	GBP
MOBALA | wall box		
● black	**1002983**	**12.00**
MOBALA | mounting frame		
● black	**1002984**	**12.00**

WORO
EL





IP 20 L70B50 35

350mA
Total wattage: 1.2W
Material: steel

- When connecting several lights, make sure they are connected in series!
- This item is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets.
- Leaf springs
- Open cable end

LED INSIDE CRI 80

Down 50lm | 3000K

Version	Prod. no.	GBP
○ white	**1002922**	**61.00**

⊕

Product	Prod. no.	GBP
LED Treiber 4W | 350mA		
○ white	**1008656** ●	**16.00**

PATTA-I
EL, round, PHASE





IP 20
IP 65 | IK02 | 38° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass

- Spring clips Spring clips are included with the product.
- Material thickness of mounting surface: max. 20 mm

CRI 95

Down 440lm | 1800-3000K

Version	Prod. no.	GBP
black	**1002098**	**74.00**
white	**1002099**	**74.00**
aluminium	**1002100**	**78.00**

PATTA-I
DL, square, PHASE





IP 20
IP 65 | IK02 | 38° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass

- Spring clips Spring clips are included with the product.
- Material thickness of mounting surface: max. 20 mm

CRI 95

Down 440lm | 1800-3000K

Version	Prod. no.	GBP
black	**1002101**	**74.00**
white	**1002102**	**74.00**







PATTA-I
EL, round, PHASE





C,L | IP 20 IP 65 | 38° | 40 000 Hours L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 25 mm

LED INSIDE | CRI 80

Down 910lm | 3000K

Version	Prod. no.	GBP
● black	**114420**	**74.00**
○ white	**114421**	**74.00**
◍ aluminium	**114426**	**78.00**

PATTA-I
EL, square, PHASE





C,L | IP 20 IP 65 | 38° | 40 000 Hours L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 25 mm

LED INSIDE | CRI 80

Down 910lm | 3000K

Version	Prod. no.	GBP
● black	**114430**	**74.00**
○ white	**114431**	**74.00**
◍ aluminium	**114436**	**78.00**

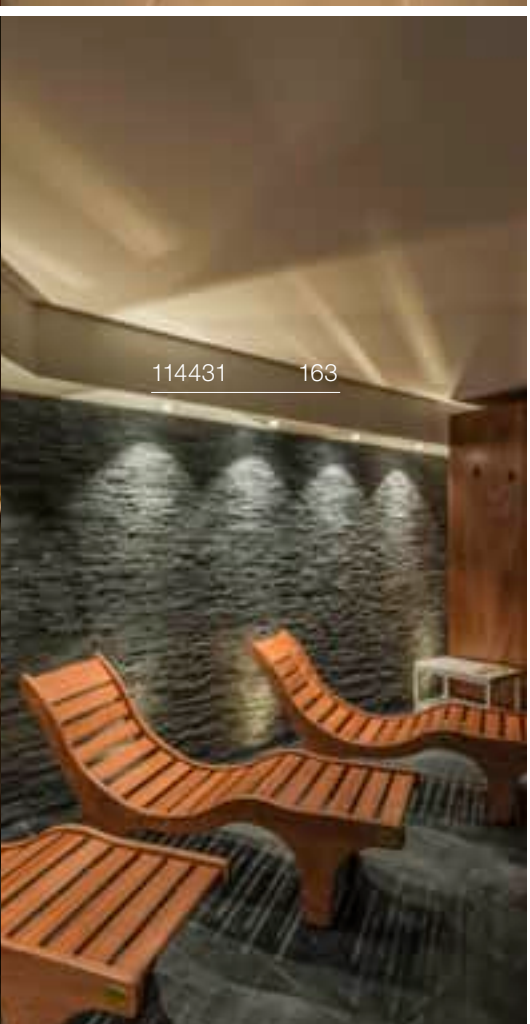

PATTA-F
EL, round, PHASE





C.L | IP 20 IP 65 | IK02 | 38° | 40 000 Hours L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

Down	745lm 860lm	3000K

Version	Prod. no.	GBP
● black 745lm	**114440**	**84.00**
○ white 860lm	**114441**	**84.00**

114450 165

PATTA-F
EL, square, PHASE







220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

Down	745lm 860lm	3000K

Version	Prod. no.	GBP
● black 745lm	**114450**	**84.00**
○ white 860lm	**114451**	**84.00**



SOCKET

SUN 20 | 168



SOCKET

SUN 30 | 169



SOCKET

KAMI | 170



SOCKET

KAMI | 171



SOCKET

KAMI | 171



SOCKET

KAMI | 171



LED

ONE 40 | 173



LED

ONE 60 | 173

LED

ONE 40 | 175



LED

ONE 60 | 175



SOCKET

VARYT | 177



VARYT | 177



VARYT | 177



VARYT | 177

LED

VARYT | 177



LED

TRILEDO | 181



LED

TRILEDO | 181



LED

TRILEDO | 181



LED

NUMINOS® S | 182



LED

NUMINOS® M | 184



LED

NUMINOS® L | 186



LED

NUMINOS® XL | 188

LED

MEDO® | 191

LED

MEDO® | 191



SOCKET

TRILEDO | 193



SOCKET

TRILEDO | 193



SOCKET

TRILEDO | 193



LED

OCULUS | 195



LED

OCULUS | 196



SOCKET

ENOLA B | 197



LED

ENOLA C | 197

SOCKET

ASTINA | 198



LED

ANELA | 199



SOCKET

ASTO TUBE | 201



LED

OCCULDAS 13 | 202



LED

OCCULDAS 23 | 202



SOCKET

ALTRA DICE | 203



SOCKET

ALTRA DICE | 203



SOCKET

KARDAMOD | 205



SOCKET

KARDAMOD | 205

SOCKET

FENDA | 206

FENDA | 207

FENDA | 207



FENDA | 207



SOCKET

TENORA | 208



SOCKET

SOPRANA | 209



SOCKET

PLASTRA | 210



LED

PLASTRA | 211



SOCKET

PLASTRA 105 | 211



SOCKET

PLASTRA 104 | 211



LED

FERA 25 | 212



LED

FERA 25 | 212



LED

MARONA | 213



LED

Q-LINE® | 215



LED

Q-LINE® | 215

LED

PANEL 60 | 217

LED

PANEL 60 | 217

SUN 20
CL, E27

NEW





IP20 IK02

220-240V ~50/60 Hz
Material: glass/steel

SOCKET INSIDE 60 W

Base: 1xE27 | Max. Ø: 4.5 cm | L: 12 cm

Version	Prod. no.	GBP
black	1008125	94.00
gold	1008126	99.00

LED T38 | 8W | 300°
4000K | 920lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005290 | 9.00 GBP



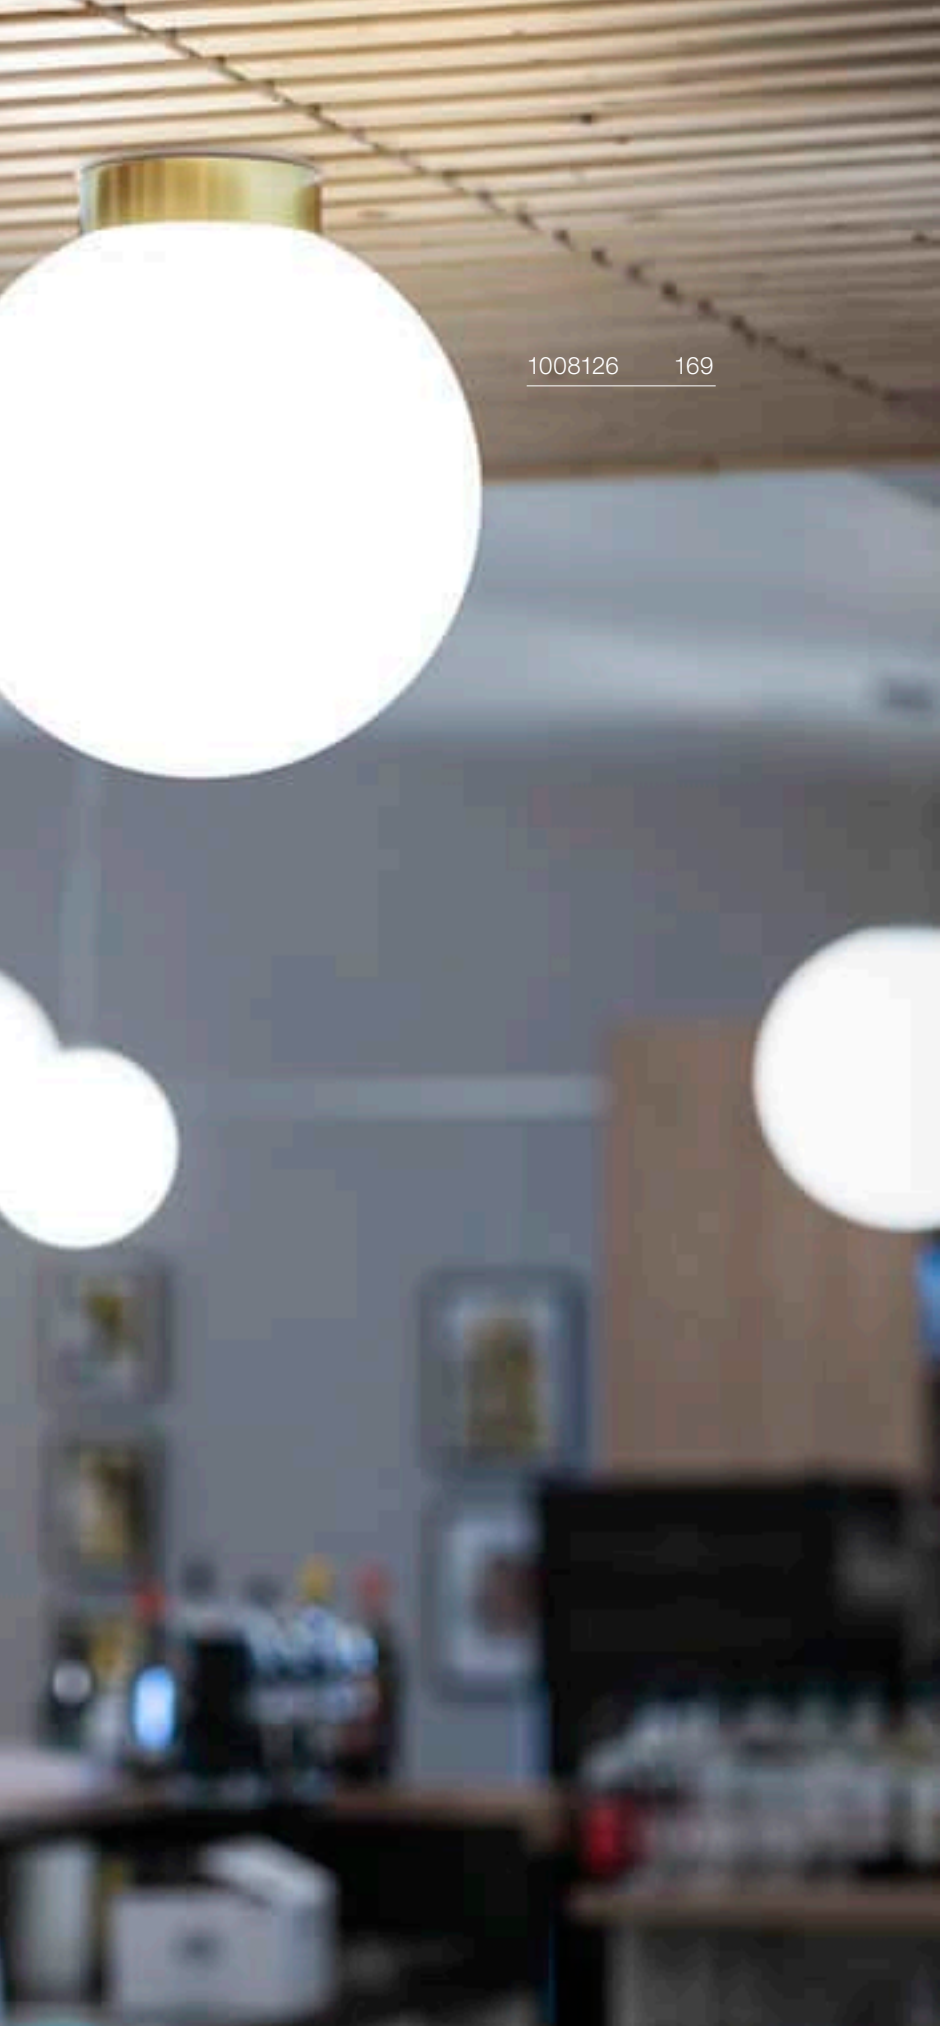

SUN 30
CL, E27

NEW





IP20 IK02

220-240V ~50/60 Hz
Material: glass/steel

SOCKET INSIDE 60 W

Base: 1xE27 | Max. Ø: 4.5 cm | L: 14 cm

Version	Prod. no.	GBP
black	1008127	102.00
gold	1008128	108.00

LED T38 | 8W | 300°
4000K | 920lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005290 | 9.00 GBP

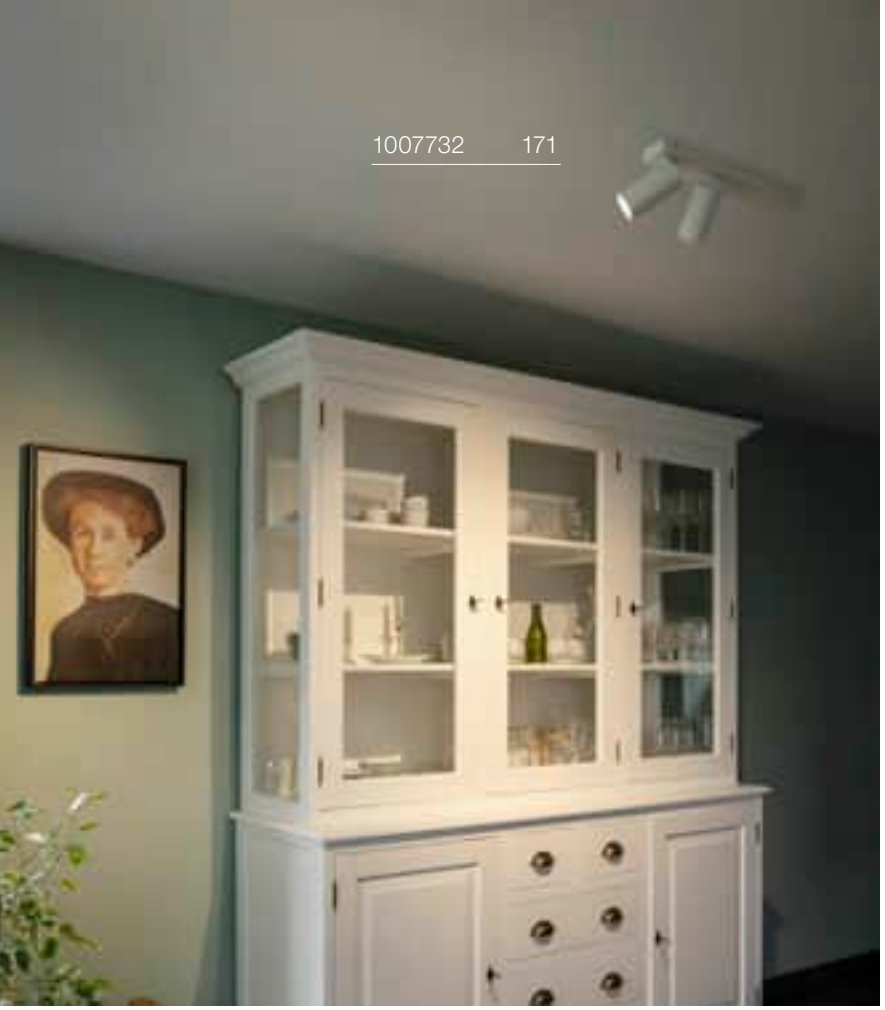

KAMI
CL, single, QPAR51

NEW





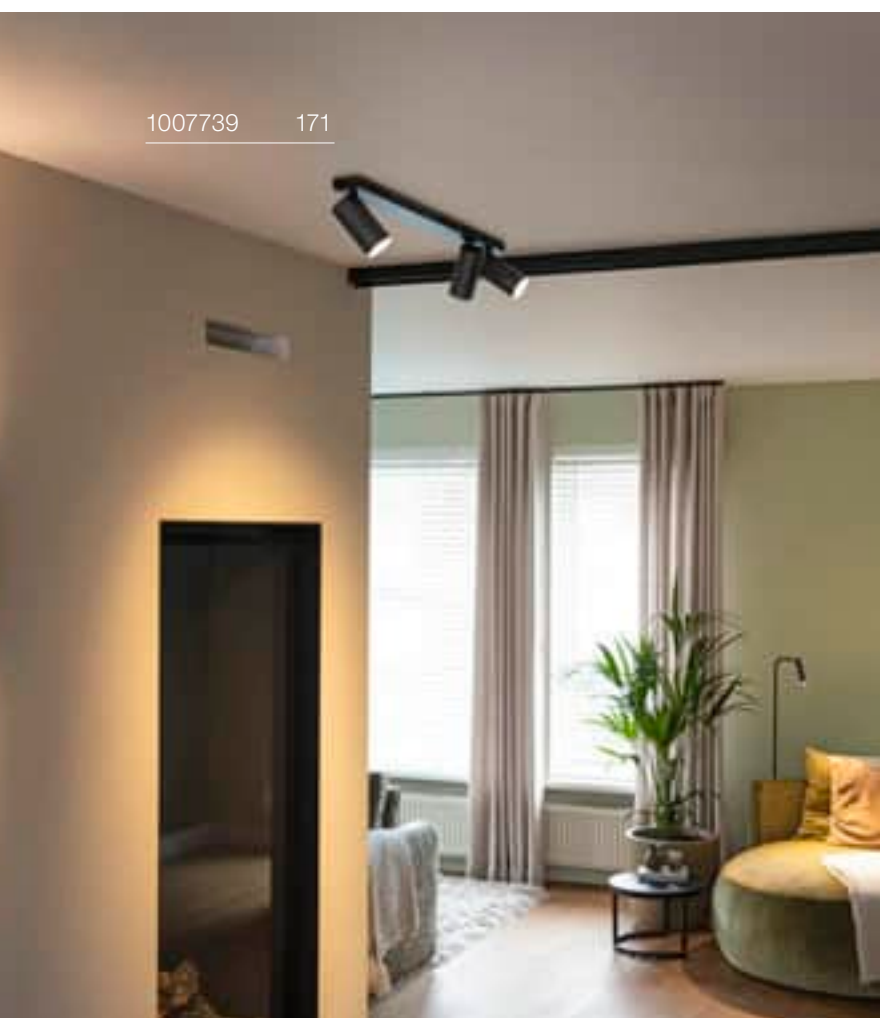

IP20 IK02

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 Max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1007715	46.00
black/gold	1007711	46.00
white	1007714	46.00
white/black	1007712	46.00
white/gold	1007710	46.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005076 | 7.00 GBP

KAMI
CL, double, QPAR51

NEW





IP20 IK02 340° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10 Max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1007727	86.00
black/gold	1007723	86.00
white	1007726	86.00
white/black	1007724	86.00
white/gold	1007722	86.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005076 | 7.00 GBP

KAMI
CL, double, long, QPAR51

NEW





IP20 IK02 340° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10 Max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1007733	102.00
black/gold	1007729	102.00
white	1007732	102.00
white/black	1007730	102.00
white/gold	1007728	102.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

KAMI
CL, triple, long, QPAR51

NEW





IP20 IK02 340° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 3xGU10 Max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1007739	136.00
black/gold	1007735	136.00
white	1007738	136.00
white/black	1007736	136.00
white/gold	1007734	136.00

LED QPAR51 | 6W | 38°
3000K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005079 | 7.00 GBP



1008546 173

ONE 40
CL, Phase, up/down

CCT

NEW





IP20 2x130° L80B50

220-240V ~50/60 Hz | 350 mA
Total wattage: 14W
Material: aluminium/steel

LED INSIDE CRI 90

Up	450lm	2700K	450lm	3000K
Down	450lm		450lm	

Version	Prod. no.	GBP
black	1008547	283.00
white	1008546	283.00
brass	1008545	283.00

ONE 60
CL, Phase, up/down

CCT

NEW





IP20 2x130° L80B50

220-240V ~50/60 Hz | 600 mA
Total wattage: 23W
Material: aluminium/steel

LED INSIDE CRI 90

Up	550lm	2700K	550lm	3000K
Down	750lm 750lm		800lm 800lm	

Version	Prod. no.	GBP
black 550/550lm	1008550	335.00
white 750/800lm	1008549	335.00
brass 750/800lm	1008548	335.00



1008546 175

ONE 40
CL, DALI, up/down

CCT

DALI

NEW



Dali IP20 2x130° L80B50

220-240V ~50/60 Hz | 350 mA
Total wattage: 14W
Material: aluminium/steel

LED INSIDE CRI 90

Up	450lm	2700K	450lm	3000K
Down	450lm		450lm	

Version	Prod. no.	GBP
black	1008553	343.00
white	1008552	343.00
brass	1008551	343.00

ONE 60
CL, DALI, up/down

CCT

DALI

NEW





Dali IP20 2x130° L80B50

220-240V ~50/60 Hz | 600 mA
Total wattage: 23W
Material: aluminium/steel

LED INSIDE CRI 90

Up	550lm	2700K	550lm	3000K
Down	750lm		850lm	
	750lm		800lm	

Version	Prod. no.	GBP
black		
550/550lm	1008556	403.00
white		
750/850lm	1008555	403.00
brass		
750/850lm	1008554	403.00


1008101 + 1007859 177

VARYT
CL, E14

MIX match

NEW





IP20 IK02

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xE14 | Max. Ø: 11 cm | L: 3.8 cm

Version	Prod. no.	GBP
black	1008099	85.00
white	1008100	85.00
brass (PVD)	1008102	111.00
chrome	1008101	102.00
copper (PVD)	1008103	111.00

C35 | 4.2W | 320°
2700K | 380lm | EEC=F
5kWh/1000h

C,L

Prod. no.: 1005284 | 6.00 GBP

VARYT
Glass shade for PD, WL, CL, TL

MIX match

NEW



IK02

H: 12.8 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1008119	51.00

VARYT
Glass shade diamond
for PD, WL, CL, TL

MIX match

NEW



IK02

H: 12.7 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
amber	1008023	69.00
smoke	1007858	69.00

VARYT
Glass shade line
for PD, WL, CL, TL

MIX match

NEW



IK02

H: 13 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1007859	59.00

VARYT
Glass shade pleated
for PD, WL, CL, TL

MIX match

NEW

IK02

H: 13.5 cm
Ø: 11.5 cm
Material: glass

Version	Prod. no.	GBP
white	1007860	64.00

MIX & MATCH VARYT

VARYT PD

black	*1008114*
white	*1008115*
brass	*1008117*
chrome	*1008116*
copper	*1008118*

VARYT CL

black	*1008099*
white	*1008100*
brass	*1008102*
chrome	*1008101*
copper	*1008103*

VARYT WL

black	*1008104*
white	*1008105*
brass	*1008107*
chrome	*1008106*
copper	*1008108*

VARYT TL

black	*1008743*
white	*1008744*
brass	*1008746*
chrome	*1008745*
copper	*1008747*











VARYT BALL Ø12

white | *1008119*



VARYT LINE Ø12

white | *1007859*



VARYT PLEATED Ø11.5

white | *1007860*

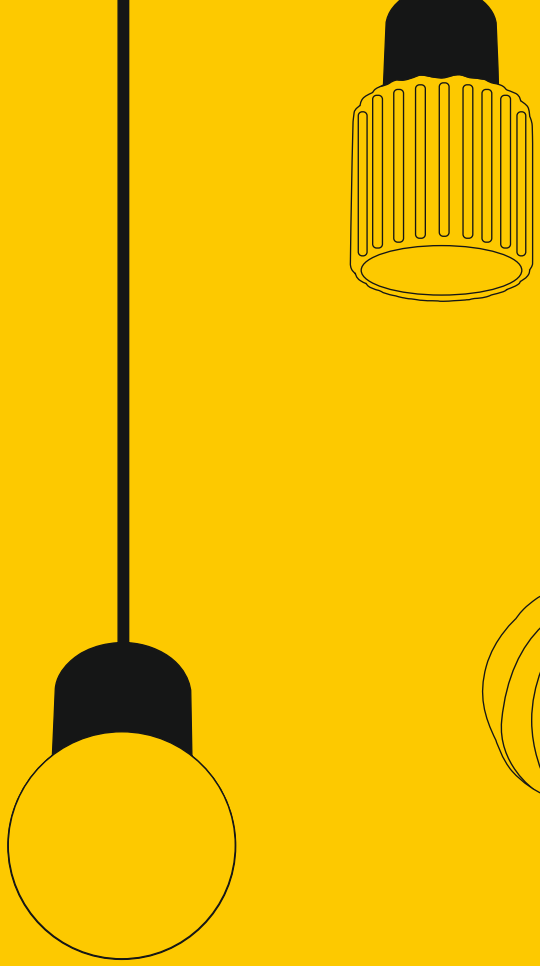

Suitable for all VARYT table, wall, ceiling and pendant lights

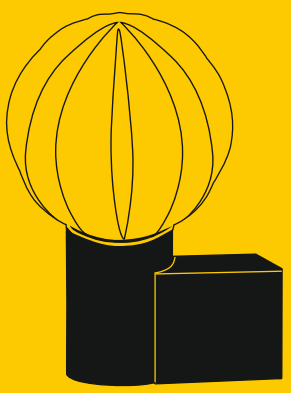



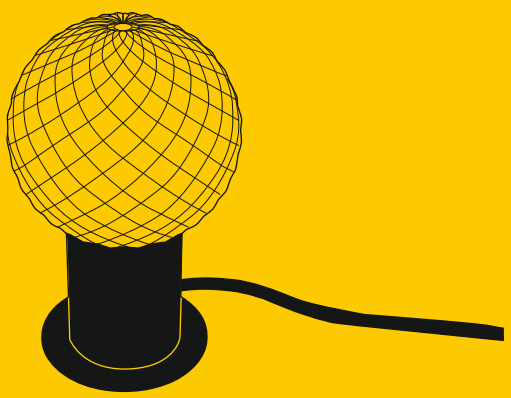

VARYT DIAMOND Ø11

Smoked | *1007858*
Amber | *1008023*

Combine the SLV Mix & Match products to suit your taste. Perfectly coordinated for combinations within the Varyt family. You can recognise SLV Mix & Match products by the following symbol:

MIX match



113940 181



1002003 181



113931 181

TRILEDO
CL, double, square







220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium



Down 1300lm | 3000K

Version	Prod. no.	GBP
● black	**1002003**	**140.00**
○ white	**1002008**	**140.00**

TRILEDO
CL, single, round







220-240V ~50/60Hz | 350mA
Total wattage: 7.6W
Material: aluminium/aluminium



Down 640lm | 3000K

Version	Prod. no.	GBP
● black	**113930**	**101.00**
○ white	**113931**	**101.00**

TRILEDO
CL, single, square







220-240V ~50/60Hz | 350mA
Total wattage: 7.6W
Material: aluminium/aluminium



Down 640lm | 3000K

Version	Prod. no.	GBP
● black	**113940**	**101.00**
○ white	**113941**	**101.00**

NUMINOS® S
CL





● black





○ white

IP 20 L80B50

200mA
220-240V ~50/60Hz
Total wattage: 8.6W
Material: aluminium/plastic

Version	GBP
All S versions	**88.00**
All S versions DALI	**129.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring S ○ white	**1006167**	**2.00**
Front ring S gold	**1008144**	**7.00**
Front ring S copper	**1008140**	**7.00**

	930lm	24°	16	**1004122**	
2700K	944lm	36°	16	**1004123**	
	960lm	60°	19	**1004124**	
	1016lm	24°	13	**1004130**	
C 3000K	1037lm	36°	13	**1004131**	
	1042lm	60°	19	**1004132**	
	1074lm	24°	16	**1004138**	
4000K	1092lm	36°	16	**1004139**	
	1098lm	60°	19	**1004140**	
	930lm	24°	16	**1004410**	
2700K	944lm	36°	16	**1004411**	
	960lm	60°	19	**1004412**	
	1016lm	24°	13	**1004418**	
Dali 3000K	1037lm	36°	13	**1004419**	
	1042lm	60°	19	**1004420**	
	1074lm	24°	16	**1004426**	
4000K	1092lm	36°	16	**1004427**	
	1098lm	60°	19	**1004428**	
	930lm	24°	16	**1004126**	
2700K	944lm	36°	16	**1004127**	
	960lm	60°	19	**1004128**	
	1016lm	24°	13	**1004134**	
C 3000K	1037lm	36°	13	**1004135**	
	1042lm	60°	19	**1004136**	
	1074lm	24°	16	**1004142**	
4000K	1092lm	36°	16	**1004143**	
	1098lm	60°	19	**1004144**	
	930lm	24°	16	**1004414**	
2700K	944lm	36°	16	**1004415**	
	960lm	60°	19	**1004416**	
	1016lm	24°	13	**1004422**	
Dali 3000K	1037lm	36°	13	**1004423**	
	1042lm	60°	19	**1004424**	
	1074lm	24°	16	**1004430**	
4000K	1092lm	36°	16	**1004431**	
	1098lm	60°	19	**1004432**	

NUMINOS® M
CL





● black





○ white

IP 20 L80B50

350mA
220-240V ~50/60Hz
Total wattage: 14W
Material: aluminium/plastic

Version	GBP
All M versions	**109.00**
All M versions DALI	**133.00**

Note:
Decorative ring also available in white, gold and copper



⊕

Version	Prod. no.	GBP
Front ring M ○ white	**1006168**	**3.00**
Front ring M ● gold	**1008145** ●	**8.00**
Front ring M ● copper	**1008141** ●	**8.00**

				UGR	Prod. no.	
C	2700K	1750lm	24°	16	**1004218**	
		1744lm	36°	16	**1004219**	
		1697lm	60°	22	**1004220**	
	3000K	1804lm	24°	16	**1004226**	
		1790lm	36°	13	**1004227**	
		1749lm	60°	22	**1004228**	
	4000K	1931lm	24°	19	**1004234**	
		1927lm	36°	16	**1004235**	
		1872lm	60°	25	**1004236**	
Dali	2700K	1750lm	24°	16	**1004506**	
		1744lm	36°	16	**1004507**	
		1697lm	60°	22	**1004508**	
	3000K	1804lm	24°	16	**1004514**	
		1790lm	36°	13	**1004515**	
		1749lm	60°	22	**1004516**	
	4000K	1931lm	24°	19	**1004522**	
		1927lm	36°	16	**1004523**	
		1872lm	60°	25	**1004524**	
C	2700K	1750lm	24°	16	**1004222**	
		1744lm	36°	16	**1004223**	
		1697lm	60°	22	**1004224**	
	3000K	1804lm	24°	16	**1004230**	
		1790lm	36°	13	**1004231**	
		1749lm	60°	22	**1004232**	
	4000K	1931lm	24°	19	**1004238**	
		1927lm	36°	16	**1004239**	
		1872lm	60°	25	**1004240**	
Dali	2700K	1750lm	24°	16	**1004510**	
		1744lm	36°	16	**1004511**	
		1697lm	60°	22	**1004512**	
	3000K	1804lm	24°	16	**1004518**	
		1790lm	36°	13	**1004519**	
		1749lm	60°	22	**1004520**	
	4000K	1931lm	24°	19	**1004526**	
		1927lm	36°	16	**1004527**	
		1872lm	60°	25	**1004528**	

NUMINOS® L
CL





● black





○ white

IP 20 L80B50

500mA
220-240V ~50/60Hz
Total wattage: 19 W
Material: aluminium/plastic

Version	GBP
All L versions	**126.00**
All L versions DALI	**170.00**

Note:
Decorative ring also available in white, gold and copper



⊕

Version	Prod. no.	GBP
Front ring L ○ white	**1006169**	**3.00**
Front ring L ● gold	**1008146** ●	**9.00**
Front ring L ● copper	**1008142** ●	**9.00**

				UGR	Prod. no.	
C	2700K	2370lm	24°	19	**1004314**	
		2245lm	36°	19	**1004315**	
		2304lm	60°	22	**1004316**	
	3000K	2432lm	24°	13	**1004322**	
		2320lm	36°	13	**1004323**	
		2373lm	60°	22	**1004324**	
	4000K	2694lm	24°	19	**1004330**	
		2557lm	36°	19	**1004331**	
		2601lm	60°	22	**1004332**	
Dali	2700K	2370lm	24°	19	**1004602**	
		2245lm	36°	19	**1004603**	
		2304lm	60°	22	**1004604**	
	3000K	2432lm	24°	13	**1004610**	
		2320lm	36°	13	**1004611**	
		2373lm	60°	22	**1004612**	
	4000K	2694lm	24°	19	**1004618**	
		2557lm	36°	19	**1004619**	
		2601lm	60°	22	**1004620**	
C	2700K	2370lm	24°	19	**1004318**	
		2245lm	36°	19	**1004319**	
		2304lm	60°	22	**1004320**	
	3000K	2432lm	24°	13	**1004326**	
		2320lm	36°	13	**1004327**	
		2373lm	60°	22	**1004328**	
	4000K	2694lm	24°	19	**1004334**	
		2557lm	36°	19	**1004335**	
		2601lm	60°	22	**1004336**	
Dali	2700K	2370lm	24°	19	**1004606**	
		2245lm	36°	19	**1004607**	
		2304lm	60°	22	**1004608**	
	3000K	2432lm	24°	13	**1004614**	
		2320lm	36°	13	**1004615**	
		2373lm	60°	22	**1004616**	
	4000K	2694lm	24°	19	**1004622**	
		2557lm	36°	19	**1004623**	
		2601lm	60°	22	**1004624**	

NUMINOS® XL
CL





● black





○ white

IP 20 L80B50

700mA
220-240V ~50/60Hz
Total wattage: 26W
Material: aluminium/polycarbonate (PC)

Version	GBP
All XL versions	**150.00**
All XL versions DALI	**202.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring XL ○ white	**1006170**	**4.00**
Front ring XL ● gold	**1008147** ●	**9.50**
Front ring XL ● copper	**1008143** ●	**9.50**

				UGR	Prod. no.	
C	2700K	3566lm	24°	19	**1005687**	
		3542lm	36°	19	**1005688**	
		3152lm	60°	25	**1005689**	
	3000K	3586lm	24°	19	**1005693**	
		3536lm	36°	19	**1005694**	
		3135lm	60°	25	**1005695**	
	4000K	3891lm	24°	19	**1005699**	
		3840lm	36°	19	**1005700**	
		3438lm	60°	25	**1005701**	
Dali	2700K	3566lm	24°	19	**1005759**	
		3542lm	36°	19	**1005760**	
		3152lm	60°	25	**1005761**	
	3000K	3586lm	24°	19	**1005765**	
		3536lm	36°	19	**1005766**	
		3135lm	60°	25	**1005767**	
	4000K	3891lm	24°	19	**1005771**	
		3840lm	36°	19	**1005772**	
		3438lm	60°	25	**1005773**	
C	2700K	3566lm	24°	19	**1005690**	
		3542lm	36°	19	**1005691**	
		3152lm	60°	25	**1005692**	
	3000K	3586lm	24°	19	**1005696**	
		3536lm	36°	19	**1005697**	
		3135lm	60°	25	**1005698**	
	4000K	3891lm	24°	19	**1005702**	
		3840lm	36°	19	**1005703**	
		3438lm	60°	25	**1005704**	
Dali	2700K	3566lm	24°	19	**1005762**	
		3542lm	36°	19	**1005763**	
		3152lm	60°	25	**1005764**	
	3000K	3586lm	24°	19	**1005768**	
		3536lm	36°	19	**1005769**	
		3135lm	60°	25	**1005770**	
	4000K	3891lm	24°	19	**1005774**	
		3840lm	36°	19	**1005775**	
		3438lm	60°	25	**1005776**	

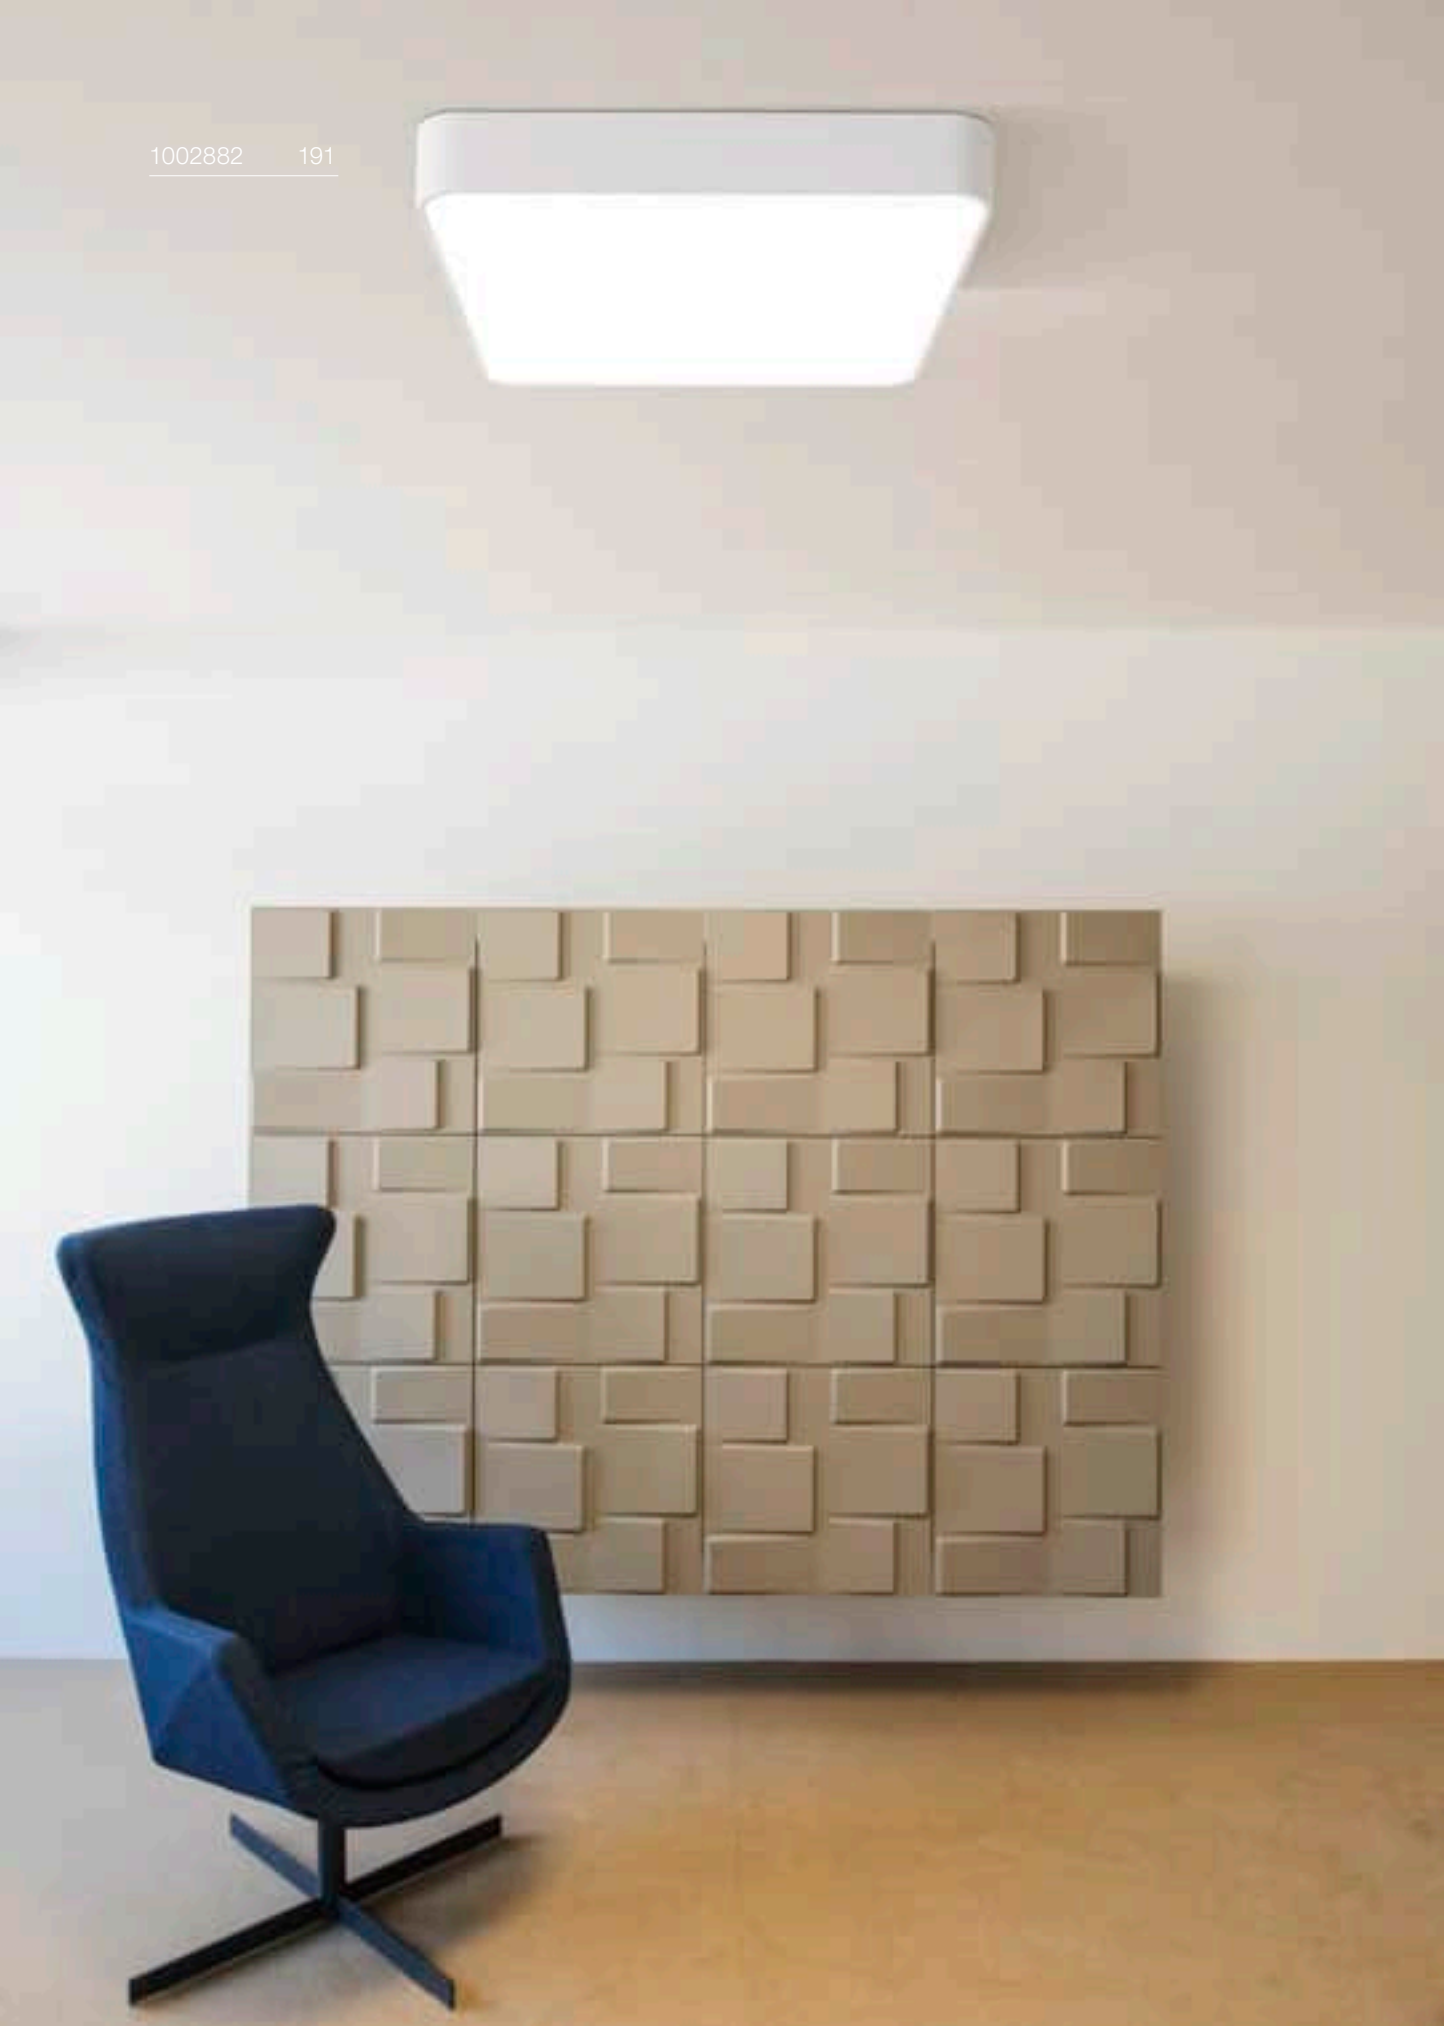

MEDO®
CL, Square, 1-10V



1-10V | IP 20 | IK02 | 105° | UGR 22 | 25 000 Hours L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic

LED INSIDE | CRI 80

Down 3800lm | 3000K

Version	Prod. no.	GBP
○ white	**1000726**	**428.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
○ white	**135251**	**39.00**
Suspension kit 5m		
○ white	**1001950**	**85.00**

MEDO®
CL, Square, DALI



Dali | IP 20 | IK02 | 105° | UGR 22 | 25 000 Hours L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic

LED INSIDE | CRI 80

Down 3800lm | 4000K

Version	Prod. no.	GBP
○ white	**1002882**	**471.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
○ white	**135251**	**39.00**
Suspension kit 5m		
○ white	**1001950**	**85.00**


1002004 193


1002005 193


1002011 193

TRILEDO
CL, single, square, QPAR51





IP 20 350° 20°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Version	Prod. no.	GBP
● black	1002013	63.00
○ white	1002015	63.00
● aluminium	1002004	67.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

TRILEDO
CL, double, square, QPAR51





IP 20 350° 20°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Version	Prod. no.	GBP
● black	1002005	92.00
○ white	1002006	92.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

TRILEDO
CL, single, round, QPAR51





IP 20 350° 20°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Version	Prod. no.	GBP
● black	1002010	63.00
○ white	1002011	63.00
● aluminium	1002012	67.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP


1008619 195

OCULUS
CL, DTW

DIM TO WARM

NEW





C | IP20 | IK02 | 100° | 40 000 Hours L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down	36lm | 2000K	-	780lm | 3000K

Version	Prod. no.	GBP
brass (PVD)	**1008619**	**245.00**
dark copper (PVD)	**1008620**	**245.00**
dark bronze (PVD)	**1008618**	**245.00**

OCULUS
CL, PHASE

DIM TO WARM





C | IP 20 | 100° | 25 000 Hours L70B50

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

• Additional frosted lens included

LED INSIDE | CRI 90

Down 36lm | 2000K - 780lm | 3000K

Version	Prod. no.	GBP
● black	**1004666**	**197.00**
○ white	**1004667**	**197.00**

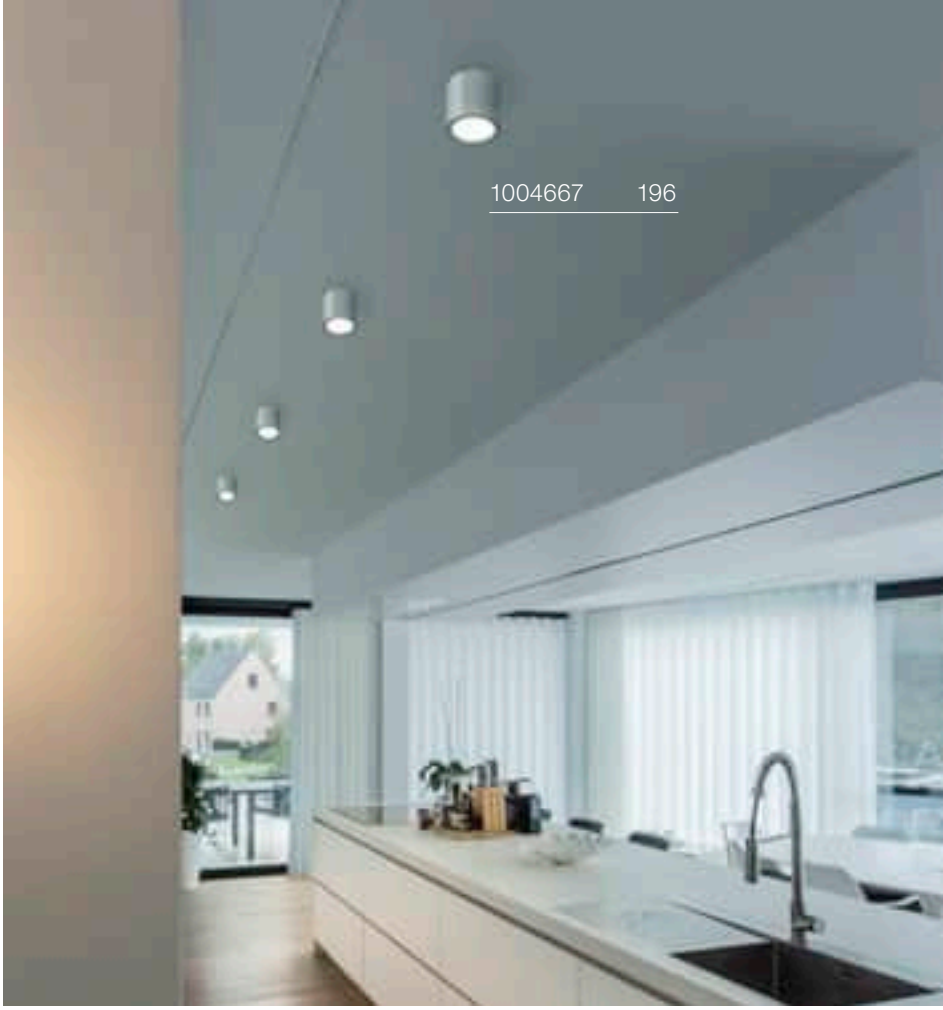



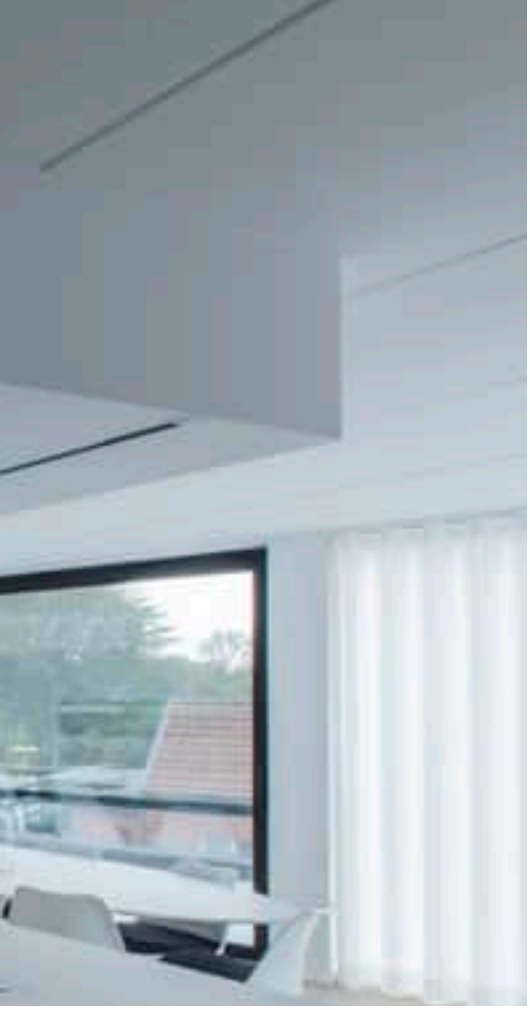



ENOLA B
CL, QPAR51





IP 20

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <35 W

Base: 1xGU10 max. L: 8.5 cm

Version	Prod. no.	GBP
● black	**151810**	**46.00**
○ white	**151811**	**46.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA C
CL





IP 20 35° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

LED INSIDE CRI 80

Down 1020lm | 3000K

Version	Prod. no.	GBP
○ white	**152101**	**170.00**

ASTINA
CL, QPAR51



IP 20

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 1xGU10

Version		Prod. no.	GBP
●	black	**1002936**	**76.00**
○	white	**1002934**	**76.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005076 | 7.00 GBP







ANELA
CL, PHASE





IP 20 28° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Reflector not included

LED INSIDE CRI 90

Down	220lm | 3000K	750lm |

Version	Prod. no.	GBP
● black	**1000807**	**134.00**

⊕

Product	Prod. no.	GBP
Reflector 28°		
● gold	**1000809**	**17.00**


1006439 201

ASTO TUBE
CL, single, GU10





IP 20

220-240V ~50/60Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1006439**	**43.00**
○ white	**1006440**	**43.00**

ASTO TUBE
Decorative reflector



H: 3.95 cm
Ø: 6.75 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
● black/chrome	**1007190**	**4.00**
● gold	**1006450**	**4.00**
● chrome	**1006449**	**4.00**
● copper	**1006451**	**4.00**

OCCULDAS 13
CL, indirect, PHASE





IP 20 IK02 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE CRI 80

Down 810lm | 3000K

Version	Prod. no.	GBP
○ white	**117351**	**174.00**

OCCULDAS 23
CL, indirect, PHASE





IP 20 120° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 24W
Material: aluminium/steel

LED INSIDE CRI 80

Down 1500lm | 3000K

Version	Prod. no.	GBP
○ white	**117321**	**286.00**







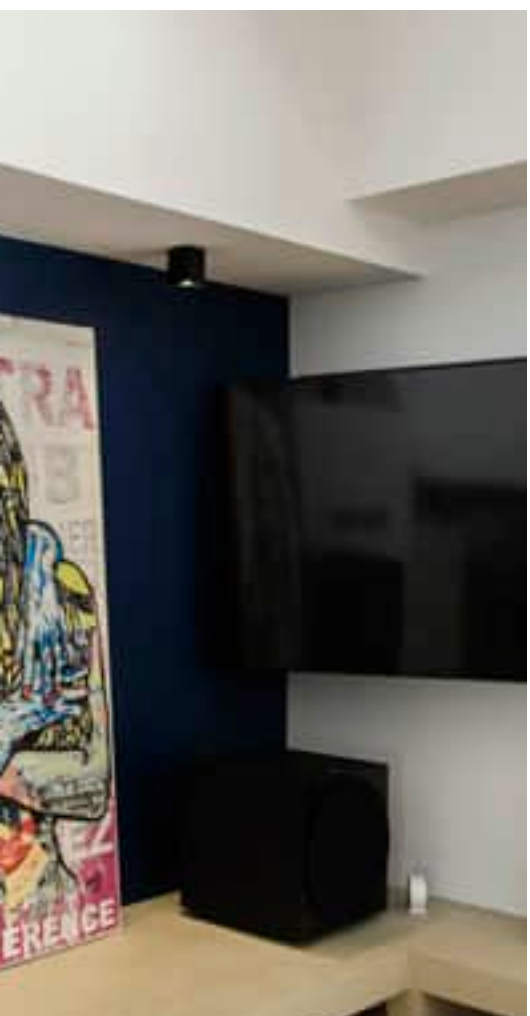

ALTRA DICE
CL, QPAR51





IP 20

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <35 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1002216**	**52.00**
○ white	**151511**	**52.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005077 | 7.00 GBP

ALTRA DICE
CW, double, QPAR51





IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <50 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**1002215**	**94.00**
○ white	**151531**	**94.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

117101 205





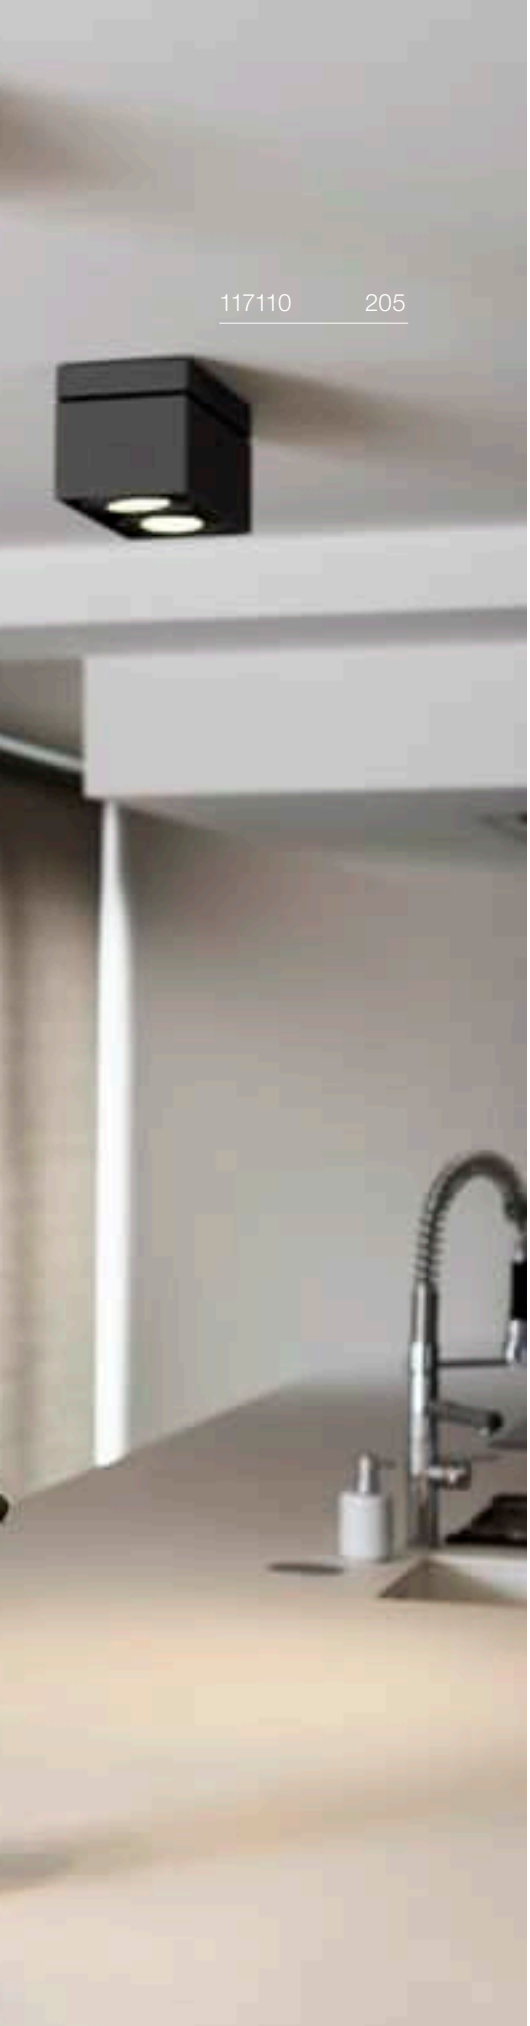

KARDAMOD
CL, single, square, QPAR111





IP 20

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <75 W

Base: 1xGU10

Version		Prod. no.	GBP
●	black	**117100**	**121.00**
○	white	**117101**	**121.00**

QPAR111 | 12W | 55°
2700K | 670lm | EEC=G
12kWh/1000h

C,L



Prod. no.: 1005297 | 73.00 GBP

KARDAMOD
CL, double, square, QPAR111





IP 20

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <75 W

Base: 2xGU10

Version		Prod. no.	GBP
●	black	**117110**	**217.00**
○	white	**117111**	**217.00**

LED GU10 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h

C,L



Prod. no.: 1005278 | 48.00 GBP

FENDA
Ceiling rose, E27

MIX match





IP 20

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <60 W

Base: 1xE27

Version		Prod. no.	GBP
●	black	**155550**	**41.00**
○	white	**155551**	**41.00**

LED A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

L

Prod. no.: 1005305 | 17.00 GBP

155551 + 156122 206 + 207



FENDA
Ø 30 cm, round

MIX match

H: 20 cm
Ø: 30 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	155592	61.00
white	155582	46.00
grey	1004774	46.00
beige	155583	46.00

FENDA
Ø 45 cm, round

MIX match



H: 28 cm
Ø: 45.5 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	156122	76.00
white	156111	72.00
grey	1004775	72.00
beige	156113	72.00

⊕

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 45.5 cm		
white	156100	39.00

FENDA
Ø 70cm, round

MIX match



H: 36 cm
Ø: 70 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	1000580	111.00
white	1000579	97.00

⊕

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 70 cm		
white	1000957	81.00



TENORA
CL, E27





IP 20

220-240V ~50/60Hz
Material: steel/textile

SOCKET INSIDE <23 W

Base: 3XE27 max. L: 14.8 cm

Version	Prod. no.	GBP
● black	**156050**	**161.00**
○ white	**156051**	**161.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h

C,L



Prod. no.: 1005302 | 11.00 GBP



SOPRANA
CL, E27





IP 20

220-240V ~50/60Hz
Material: steel/textile

SOCKET INSIDE <60 W

Base: 3XE27

Version	Prod. no.	GBP
beige	**155373**	**177.00**

A60 | 9W | 220°
2700K | 800lm | EEC=F
9kWh/1000h

C,L

Prod. no.: 1005301 | 7.00 GBP

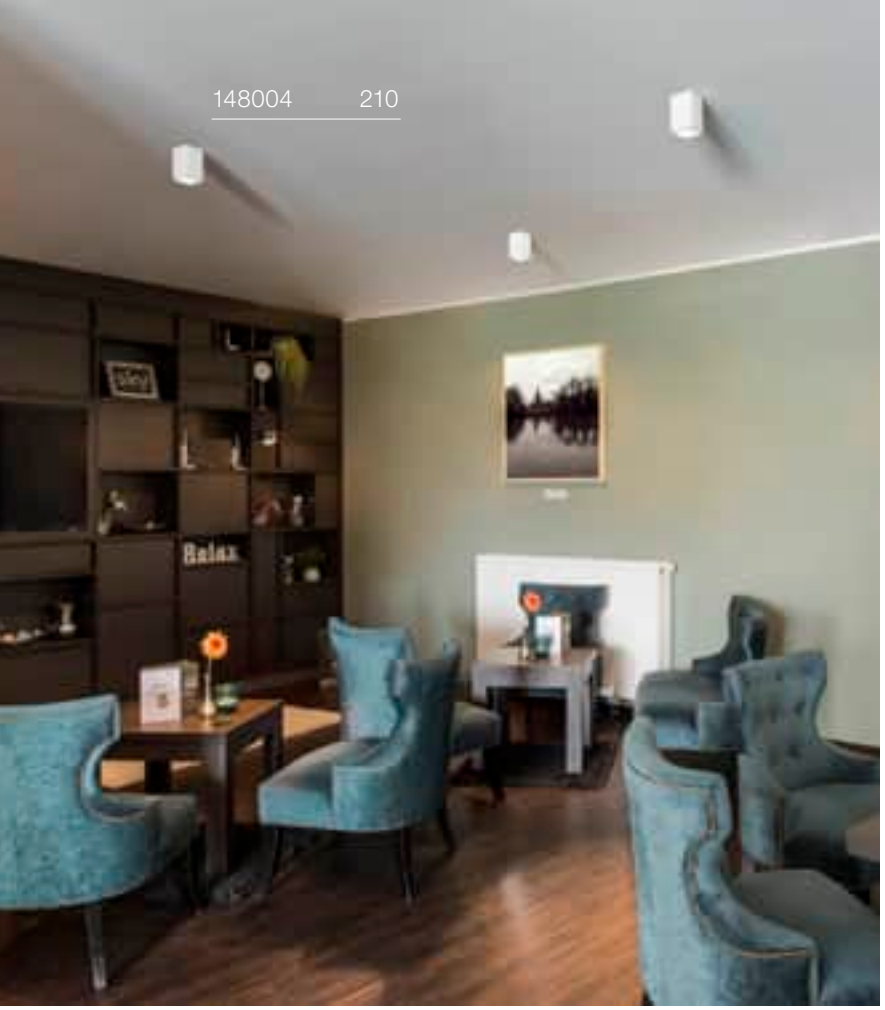

PLASTRA
CL, QPAR51





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <35 W

Base: 1xGU10

Version	Prod. no.	GBP
○ white	**148004**	**58.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

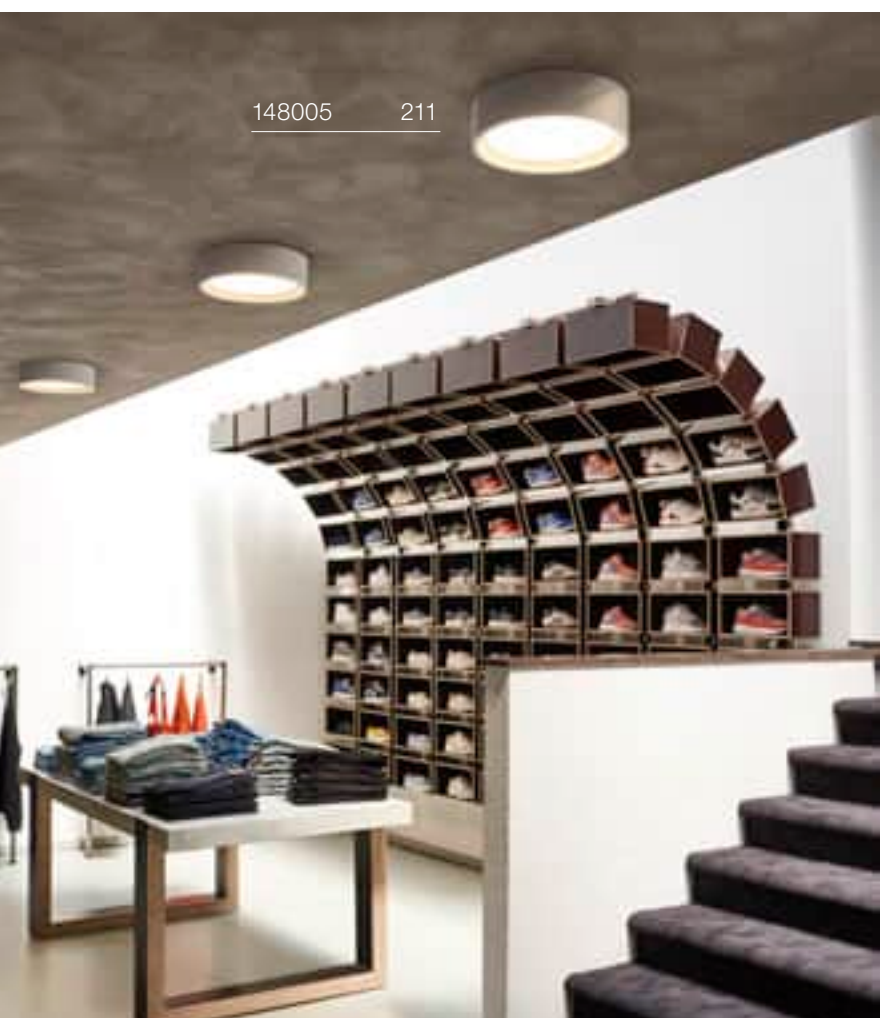

PLASTRA
CL, PHASE





C,L IP 20 110° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: plaster/glass

- Can be painted over/wallpapered to match wall colour

LED INSIDE CRI 80

Down 990lm | 3000K

Version	Prod. no.	GBP
○ white	**148005**	**115.00**

PLASTRA 105
CL, E27





IP 20

220-240V ~50/60Hz
Material: plaster/glass

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <25 W

Base: 2xE27 | Max. Ø: 5.1 cm | L: 14 cm

Version	Prod. no.	GBP
○ white	**148001**	**79.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005290 | 9.00 GBP

PLASTRA 104
CL, E27



IP 20

220-240V ~50/60Hz
Material: plaster/glass

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <25 W

Base: 2xE27 | Max. Ø: 5.1 cm | L: 14 cm

Version	Prod. no.	GBP
○ white	**148002**	**73.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005290 | 9.00 GBP

FERA 25
CL, DALI

CCT

DALI





Dali 2.0 | IP20 | 90° | 30 000 Hours L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: polycarbonate (PC)

LED INSIDE | CRI 80

Down	1580lm | 3000K	1650lm | 4000K

Version	Prod. no.	GBP
● black	**1002968**	**234.00**
○ white	**1002967**	**234.00**

FERA 25
CL





IP 20 | 100° | 20 000 Hours L70B50

220-240V ~50/60Hz | 550mA
Total wattage: 23W
Material: aluminium/polystyrene (PS)

LED INSIDE | CRI 80

Down	1800lm | 3000K

Version	Prod. no.	GBP
● black	**1001939**	**173.00**
○ white	**161461**	**173.00**

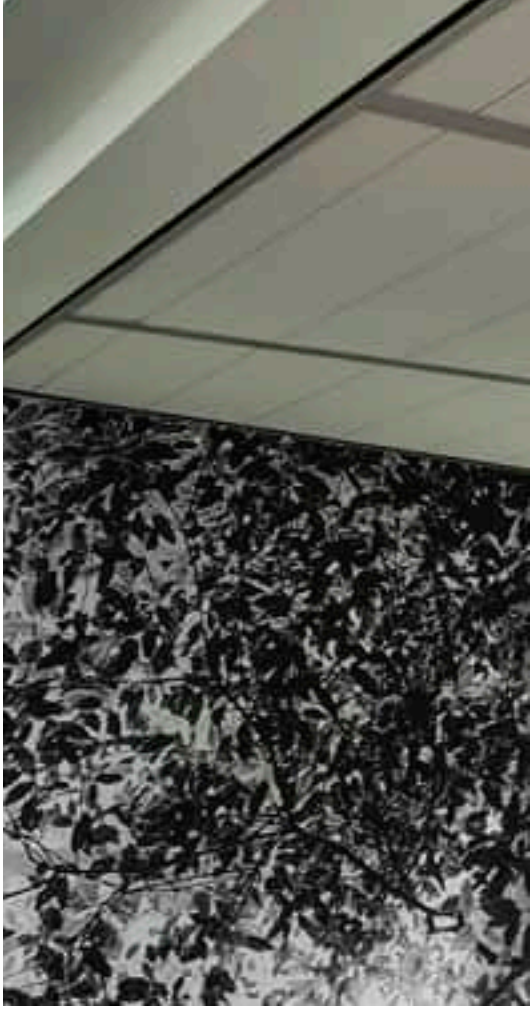

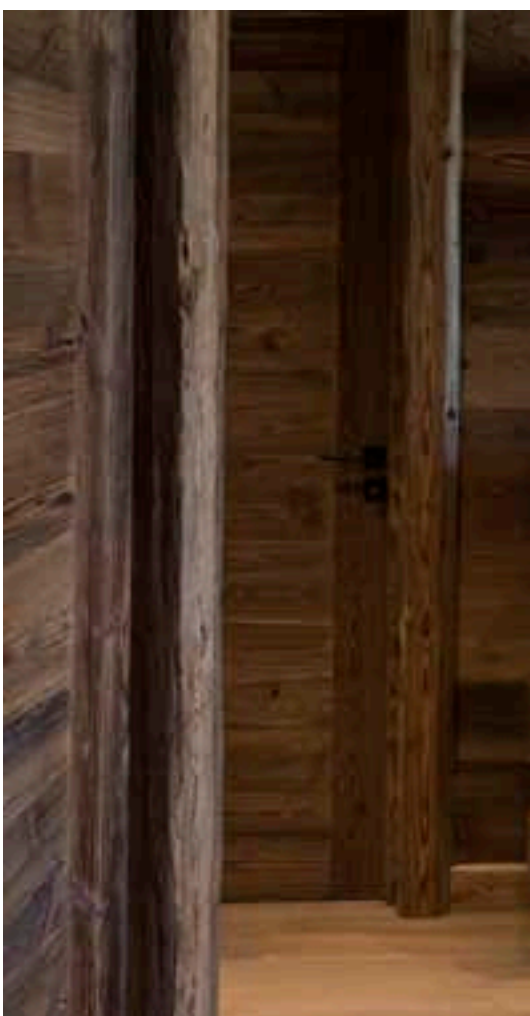

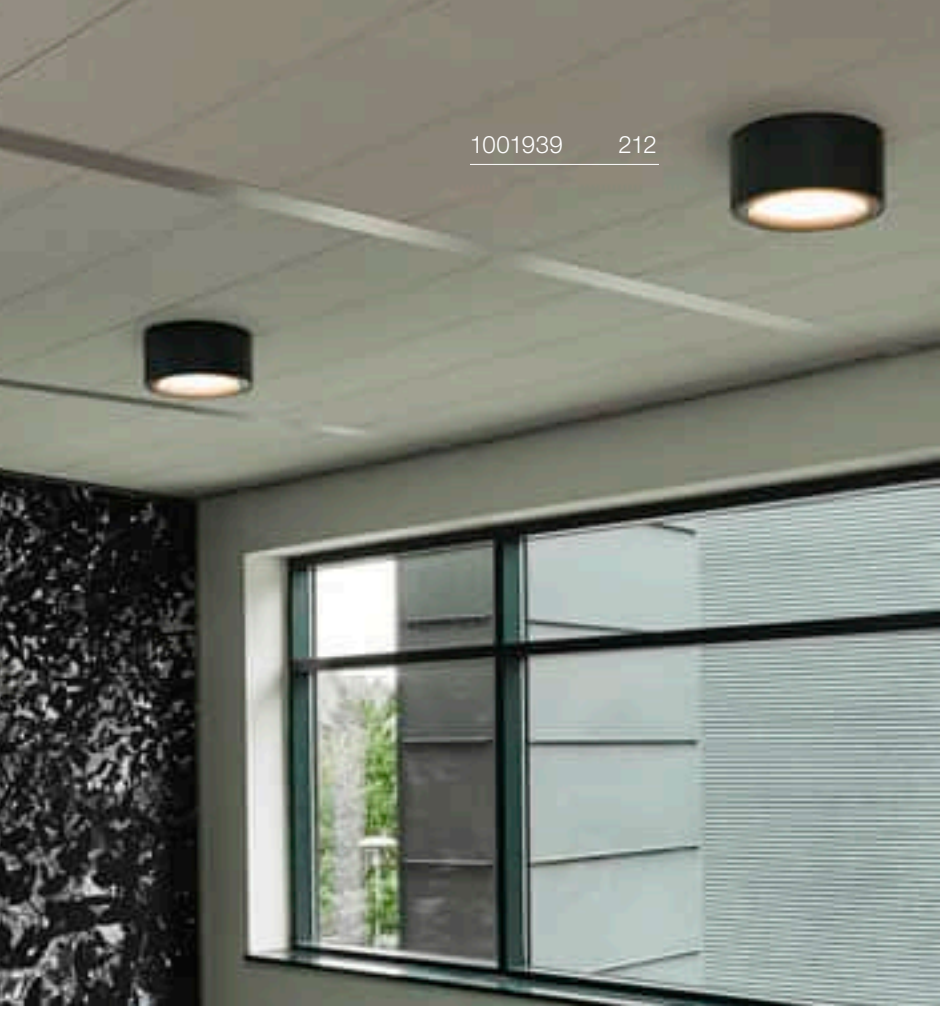

MARONA
CL, PHASE





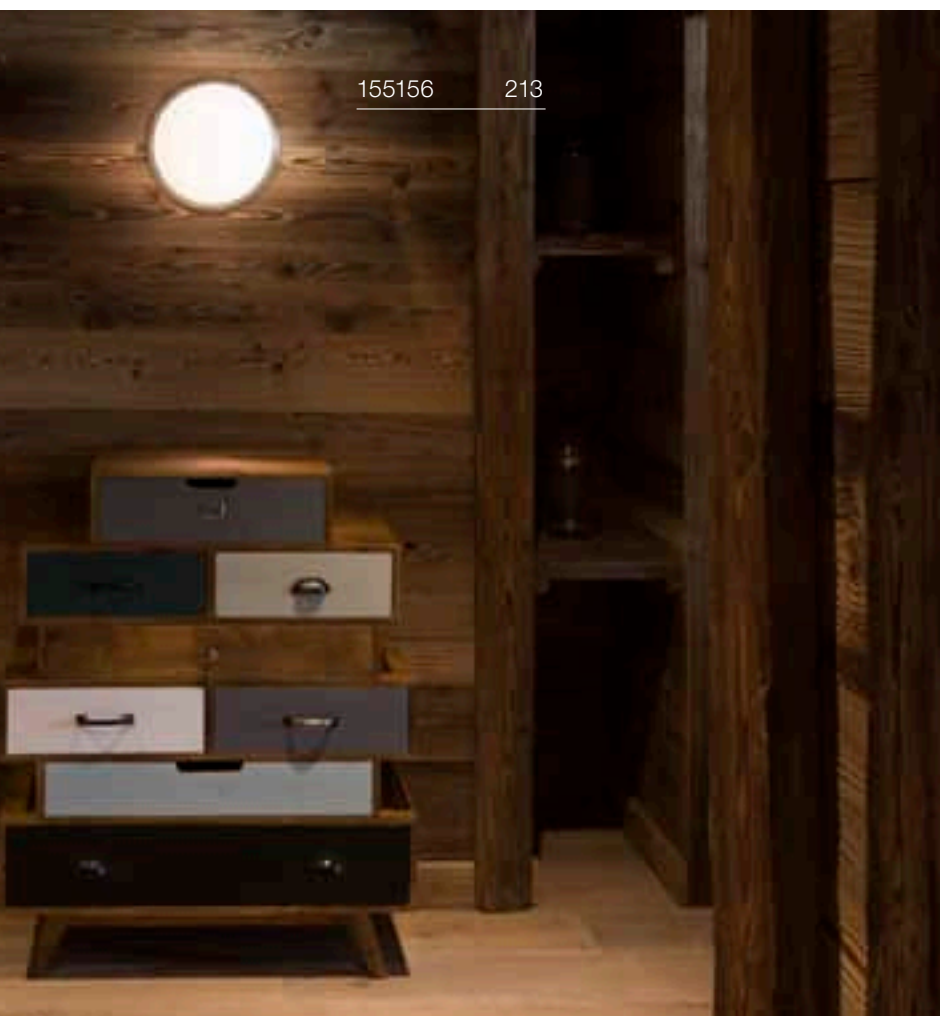

IP 20 120° L70B50

200-240V ~50/60Hz | 430mA
Total wattage: 15W
Material: polymethylacrylate (PMMA)/steel

LED INSIDE CRI 80

Down 1200lm | 3000K

Version	Prod. no.	GBP
grey	**155156**	**99.00**


1000692 215

Q-LINE®
CL, 1m, BAP, PHASE





IP 20 | 30° | UGR 10 | L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic

LED INSIDE | CRI 90

Down — 2100lm | 3000K, 2300lm | 4000K

Version	Prod. no.	GBP
● black 2100lm | 3000K	**1000686**	**398.00**
● black 2300lm | 4000K	**1000689**	**398.00**
○ white 2100lm | 3000K	**1000685**	**398.00**
○ white 2300lm | 4000K	**1000688**	**398.00**

Q-LINE®
CL, 2m, BAP, PHASE





IP 20 | 30° | UGR 10 | L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic

LED INSIDE | CRI 90

Down — 4200lm | 3000K, 4600lm | 4000K

Version	Prod. no.	GBP
● black 4200lm | 3000K	**1000692**	**597.00**
● black 4600lm | 4000K	**1000695**	**597.00**
○ white 4200lm | 3000K	**1000691**	**597.00**
○ white 4600lm | 4000K	**1000694**	**597.00**

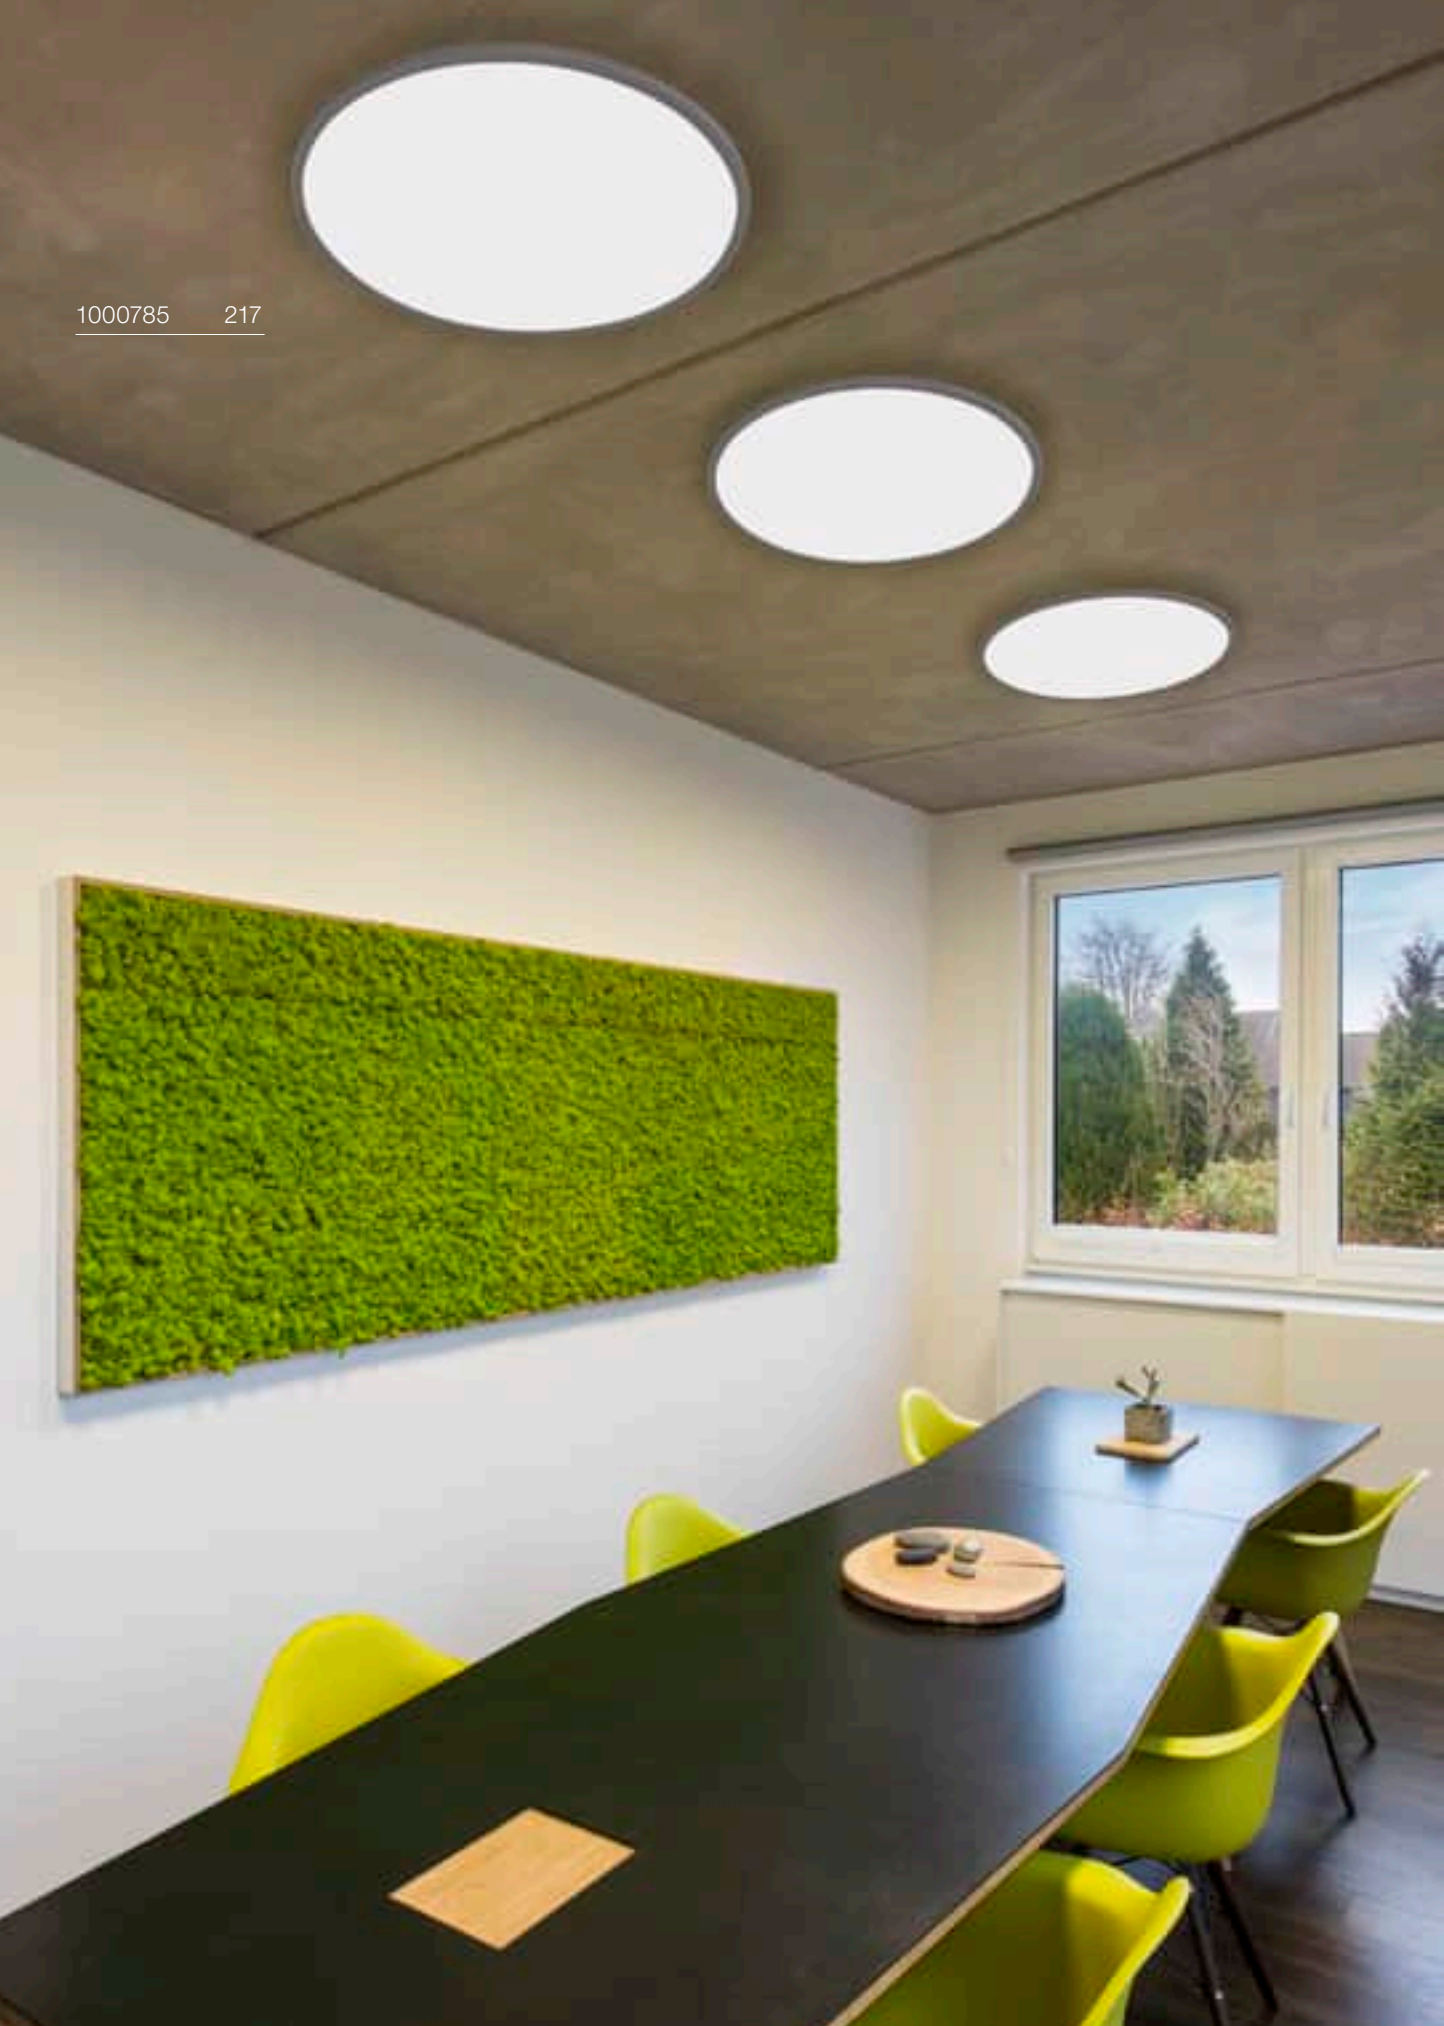
1000785 217

PANEL 60
CL, round, PHASE





C | IP | UGR | 30 000 Hours | L70B50

IP 20 | 110° | 22 | L70B50 | 40

220-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material:
aluminium/polymethylacrylate (PMMA)

LED INSIDE | CRI 80

Down — 3150lm | 3000K
3350lm | 4000K

Version	Prod. no.	GBP
○ white 3150lm | 3000K	**1000783**	**251.00**
○ white 3350lm | 4000K	**1000784**	**251.00**
● grey 3150lm | 3000K	**1000785**	**251.00**
● grey 3350lm | 4000K	**1000786**	**251.00**

PANEL 60
CL, round, DALI





Dali | IP | UGR | 30 000 Hours | L70B50

IP 20 | 110° | 22 | L70B50 | 40

120-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material:
aluminium/polymethylacrylate (PMMA)

LED INSIDE | CRI 80

Down — 3150lm | 3000K
3350lm | 4000K

Version	Prod. no.	GBP
○ white 3150lm | 3000K	**1003040**	**260.00**
○ white 3350lm | 4000K	**1003041**	**260.00**
● grey 3150lm | 3000K	**1003042**	**260.00**
● grey 3350lm | 4000K	**1003043**	**260.00**


1008179 285



QUIMERA | 223



VARYT | 225



VARYT | 225



VARYT | 225



VARYT | 225



VARYT | 225



WUD | 226



WUD | 227



WUD | 227



WUD | 227



SUN 20 | 228



SUN 20 | 229



MAGICO 20 | 231



MAGICO 38 | 231



MAGICO 55 | 231



NUMINOS® S | 232



NUMINOS® M | 234



NUMINOS® L | 236



NUMINOS® XL | 238



MEDO® RING 60 | 240, 241



MEDO® RING 90 | 241



MEDO® PRO 30 | 242



MEDO® PRO 40 | 243



MEDO® PRO 60 | 244



MEDO® PRO 90 | 245



MEDO® PRO 30 | 246

MEDO® PRO 40 | 247

MEDO® PRO 60 | 248

MEDO® PRO 90 | 249



MEDO® 30 | 250



MEDO® 40 | 250



MEDO® 60 | 251



MEDO® 90 | 251

MEDO® | 253



LALU® | 257



LALU® | 257

LALU® | 258



LALU® | 259



LALU® TETRA 14 | 260



LALU® TETRA 24 | 260

LALU® TETRA 36 | 260

LALU® CONE 15 | 260



LALU®
PLATE 15 | 260



LALU®
PLATE 22 | 260



LALU® E
LYPSE 15 | 261



LALU®
ELYPSE 22 | 261



LALU®
ELYPSE 33 | 261

NEW



ONE® FLAT | 265

NEW



ONE® FLAT | 265

NEW



ONE® VERTICAL | 267



ONE® CUBE | 269



ONE® CUBE | 269



ONE® 60 | 271



ONE® 60 | 271



ONE® 60 | 271



ONE® 80 | 273



ONE® 80 | 273



ONE® DOUBLE | 274



ONE® DOUBLE | 274



ONE® TRIPLE | 275



ONE®
LINEAR 100 | 277



ONE®
LINEAR 140 | 277



SOCKET

PANTILO
ROPE 19 | 279



SOCKET

PANTILO
ROPE 20 | 279



SOCKET

PANTILO
ROPE 27 | 279



SOCKET

PANTILO OVAL | 281



SOCKET

PANTILO 20 | 281



SOCKET

PANTILO 28 | 281



SOCKET

PANTILO
CONVEX 29 | 283



SOCKET

PANTILO
CONVEX 40 | 283

NEW



SOCKET

LIGHT EYE® 90 | 285

NEW



SOCKET

LIGHT EYE® 150 | 285



SOCKET

ASTO TUBE | 287



SOCKET

ASTO TUBE | 287



SOCKET

ASTO TUBE | 287



SOCKET

ASTO TUBE | 287



WORKLIGHT
PRO 120 | 289



WORKLIGHT
PRO 150 | 289



WORKLIGHT | 290

PANEL 60 | 291



NOYA | 292



GLENOS | 293

GLENOS | 293

Q-LINE® | 295



LED

Q-LINE® | 295



LED

Q-LINE® | 295



LED

OCULUS | 296



NEW

LED

OCULUS | 297



SOCKET

FITU | 299



SOCKET

FENDA | 300



FENDA | 300



FENDA | 300



FENDA | 301



FENDA | 301



FENDA | 301

LED

HELIA
AMBIENT 35 | 304



LED

HELIA
AMBIENT 35 | 304

LED

HELIA 30 | 305

LED

HELIA 30 | 305

LED

HELIA 40 | 307

LED

HELIA 40 | 307



SOCKET

ASTINA | 309



SOCKET

ENOLA B | 309



SOCKET

ENOLA | 309



LED

ANELA | 310

SOCKET

TONGA® | 311

SOCKET

QUADRASS | 311



SOCKET

PARA CONE 20 | 313



SOCKET

PARA CONE 30 | 313



SOCKET

PHELIA 10 | 315



SOCKET

PHELIA 20 | 315



SOCKET

PHELIA 30 | 315



SOCKET

FORCHINI 50 | 316



SOCKET

FORCHINI 70 | 316



SOCKET

FORCHINI M 40 | 317



SOCKET

FORCHINI M 50 | 317



SOCKET

ROTOBALL 25 | 319

SOCKET

ROTOBALL 40 | 319

SOCKET

ROTOBALL 50 | 319



SOCKET

PARA DOME | 320



PARA DOME | 320



PARA DOME | 320



SOCKET

PARA 380 | 321


1008033 223

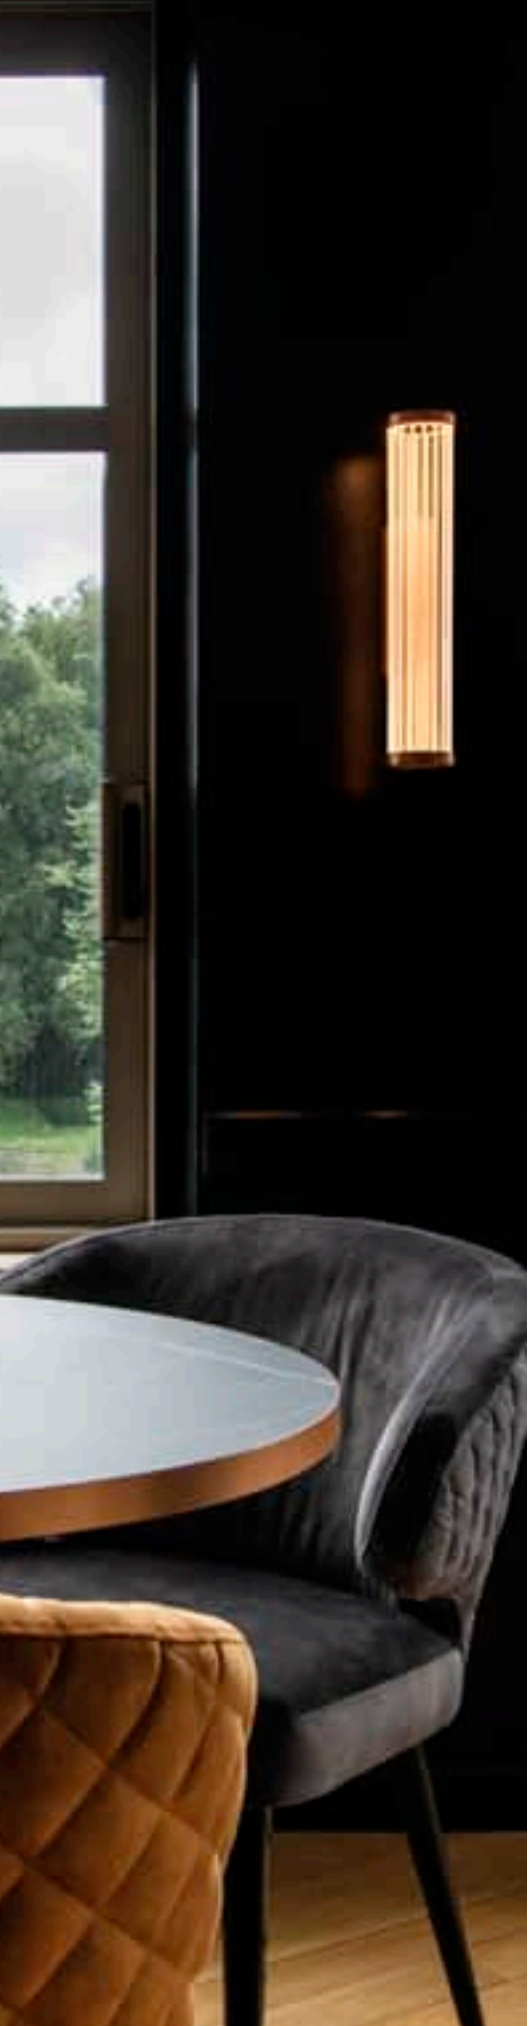

QUIMERA
PD, Phase

CCT

NEW





IP20 | IK03 | 360° | L80B50 | 150

220-240V ~50/60Hz | 700mA
Total wattage: 8.2W
Material: aluminium/glass

LED INSIDE | CRI 90

Down	310lm | 2700K	320lm | 3000K

Version	Prod. no.	GBP
brass (PVD)	**1008033**	**317.00**
dark copper (PVD)	**1008034**	**317.00**
dark bronze (PVD)	**1008032**	**317.00**

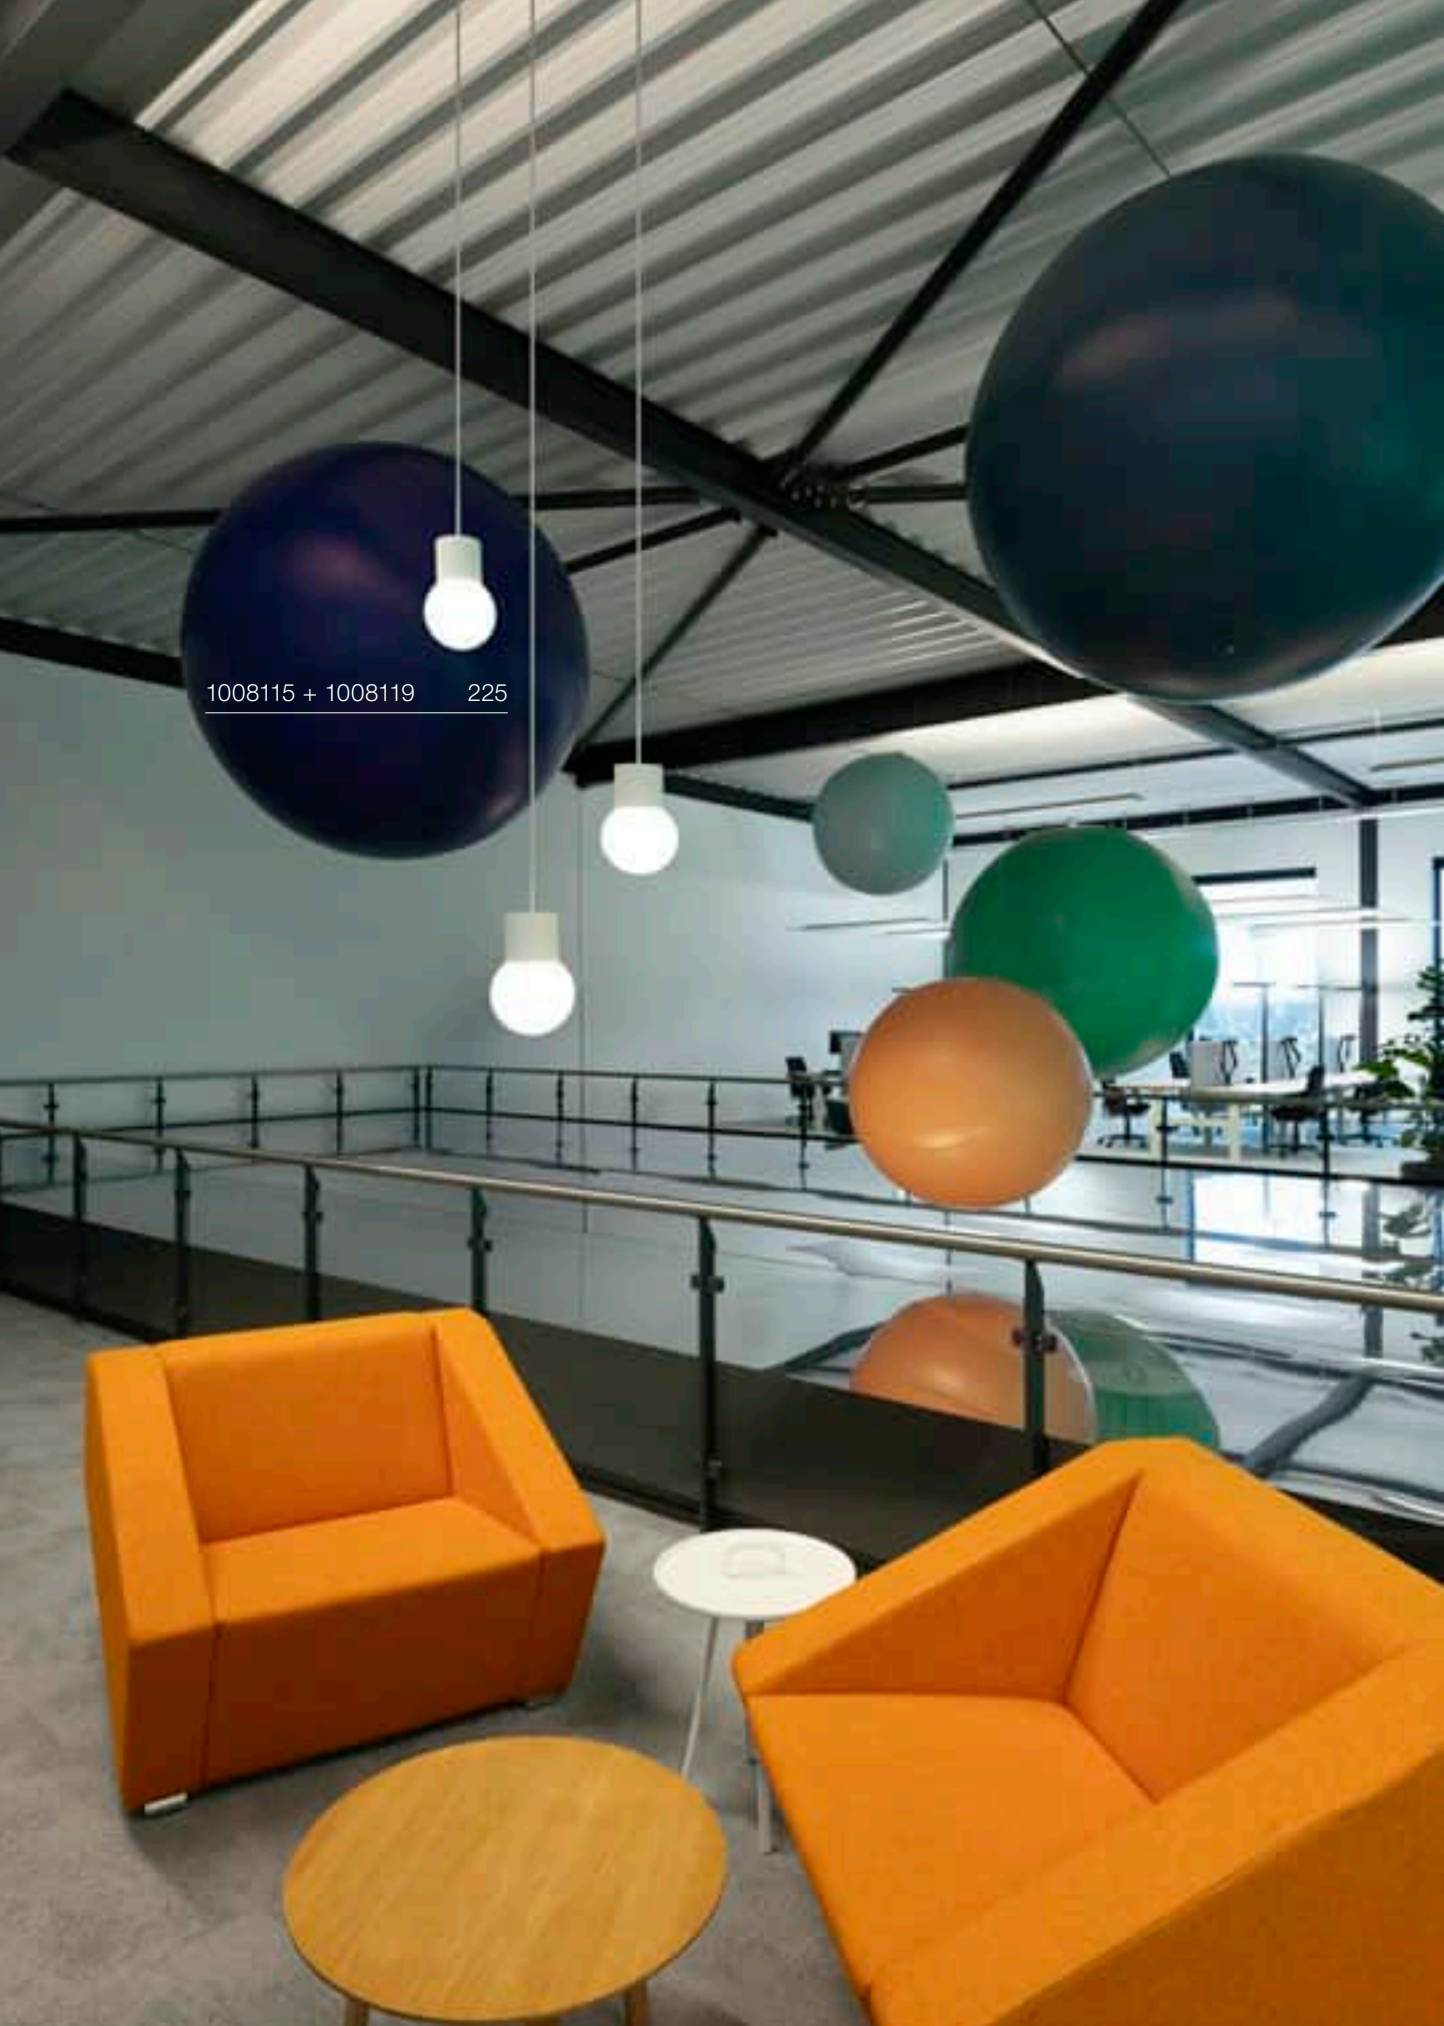
1008115 + 1008119 225

VARYT
PD, E14

MIX match

NEW





IP20 IK02 150

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xE14 | Max. Ø: 11 cm | L: 3.8 cm

Version	Prod. no.	GBP
black	1008114	94.00
white	1008115	94.00
brass (PVD)	1008117	120.00
chrome	1008116	102.00
copper (PVD)	1008118	120.00

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

C,L

Prod. no.: 1005285 | 8.00 GBP

VARYT
Glass shade for PD, WL, CL, TL

MIX match

NEW



IK
IK02

H: 12.8 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1008119	51.00

VARYT
Glass shade diamond
for PD, WL, CL, TL

MIX match

NEW



IK
IK02

H: 12.7 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
amber	1008023	69.00
smoke	1007858	69.00

VARYT
Glass shade pleated
for PD, WL, CL, TL

MIX match

NEW



IK
IK02

H: 13 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1007859	59.00

VARYT
Glass shade line
for PD, WL, CL, TL

MIX match

NEW

IK
IK02

H: 13.5 cm
Ø: 11.5 cm
Material: glass

Version	Prod. no.	GBP
white	1007860	64.00

WUD
PD, E27, ballshape

NEW





IP20 180

220-240V ~50/60Hz
Material: wood

• Open cable end

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
sand	1008044	151.00

G127 LED | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C.L

Prod. no.: 1005310 | 16.00 GBP

Product	Prod. no.	GBP
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
Recessed ceiling rose		
black	132600	23.00
white	132601	23.00
chrome	132605	25.00
gold	1002163	25.00
1-phase light adapter		
black	143120	13.00
grey	143124	13.00
white	143121	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00





WUD
PD, E27, half round

NEW





IP20 180

220-240V ~50/60Hz
Material: wood

• Open cable end

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
sand	1008045	151.00

LED Rusika Soft | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h



Prod. no.: 1008156 | 46.00 GBP

Product	Prod. no.	GBP
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
Recessed ceiling rose		
black	132600	23.00
white	132601	23.00
chrome	132605	25.00
gold	1002163	25.00
1-phase light adapter		
black	143120	13.00
grey	143124	13.00
white	143121	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00

WUD
PD, E27, conical

NEW





IP20 180

220-240V ~50/60Hz
Material: wood

• Open cable end

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
sand	1008046	129.00

LED Rusika Soft | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h



Prod. no.: 1008156 | 46.00 GBP

Product	Prod. no.	GBP
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
Recessed ceiling rose		
black	132600	23.00
white	132601	23.00
chrome	132605	25.00
gold	1002163	25.00
1-phase light adapter		
black	143120	13.00
grey	143124	13.00
white	143121	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00

WUD
PD, E27, cylindrical

NEW





IP20 180

220-240V ~50/60Hz
Material: wood

• Open cable end

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
sand	1008047	125.00

LED Tube 30 | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h



Prod. no.: 1008152 | 55.00 GBP

Product	Prod. no.	GBP
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
Recessed ceiling rose		
black	132600	23.00
white	132601	23.00
chrome	132605	25.00
gold	1002163	25.00
1-phase light adapter		
black	143120	13.00
grey	143124	13.00
white	143121	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00

SUN 20
PD, E27

NEW







220-240V ~50/60Hz
Material: aluminium

- Open cable end

SOCKET INSIDE <40 W

Base: 1xE27 Max. Ø: 4.5 cm

Version		Prod. no.		GBP
●	black	1008139	●	85.00
●	gold	1008138	●	82.00

LED T38 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005289 | 9.00 GBP

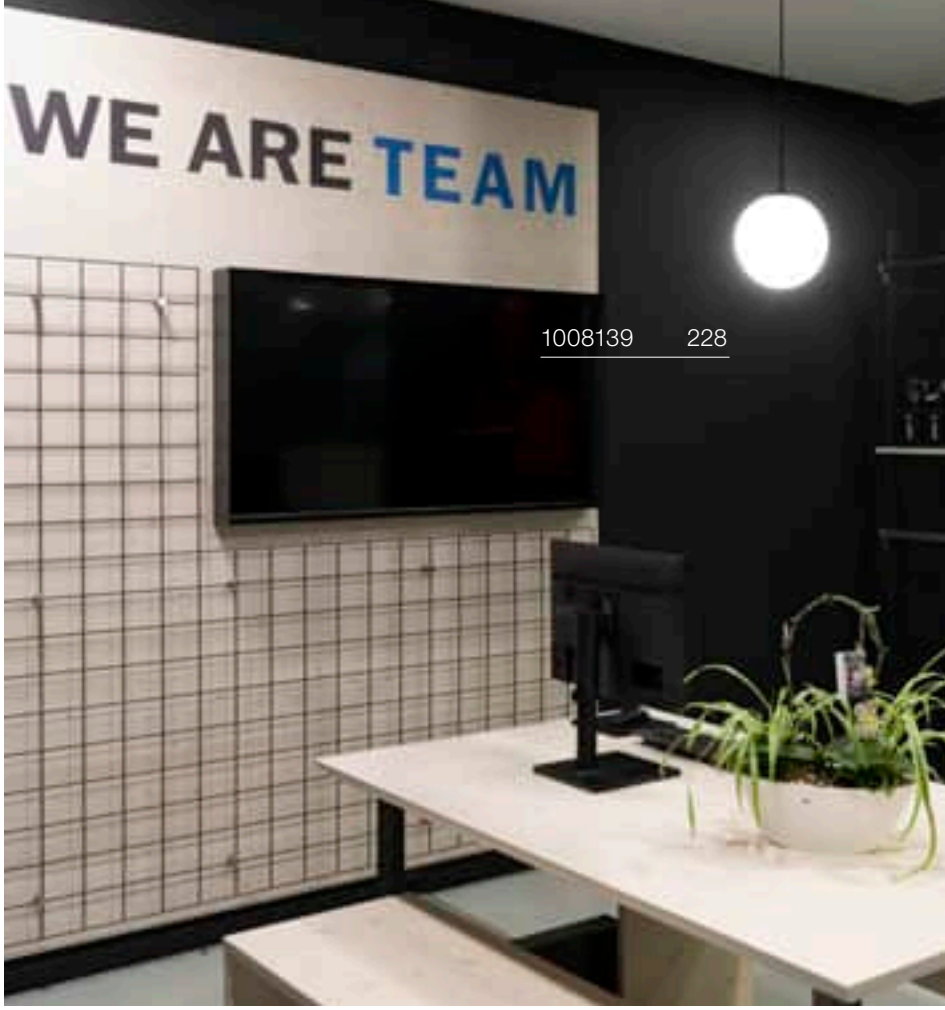

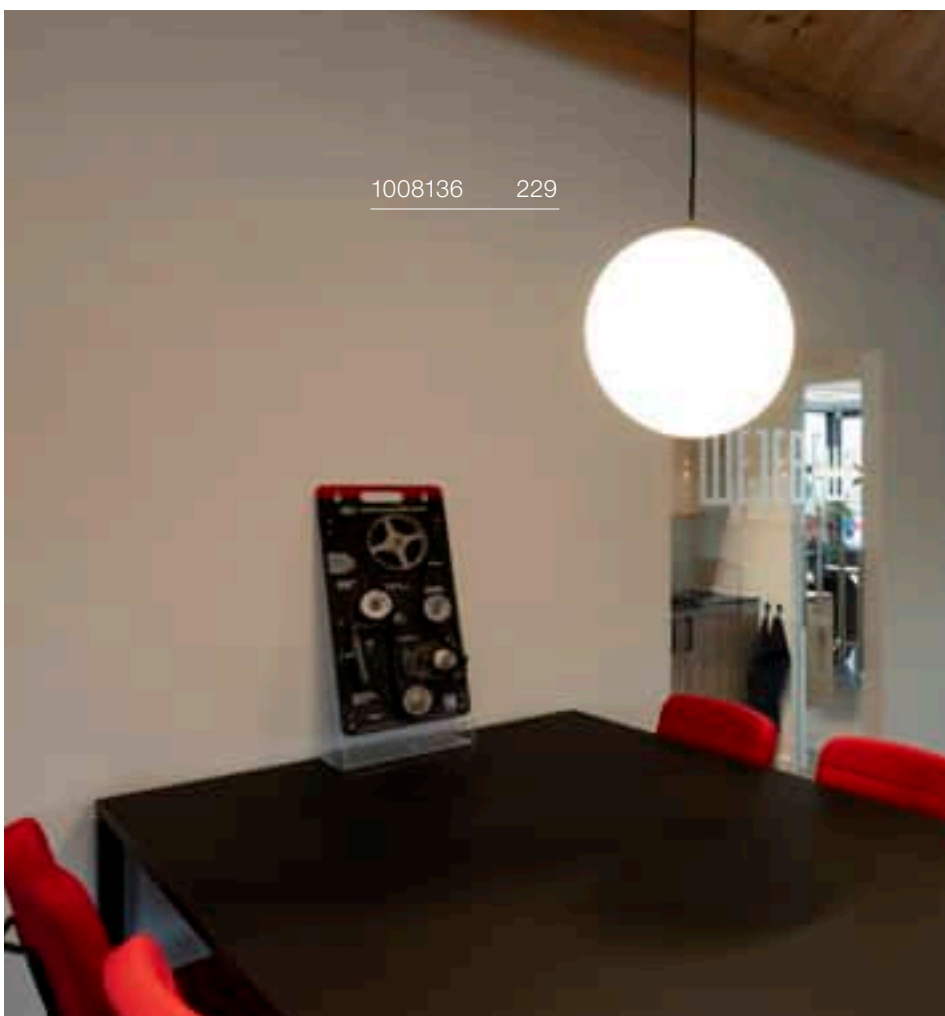



SUN 30
PD, E27

NEW





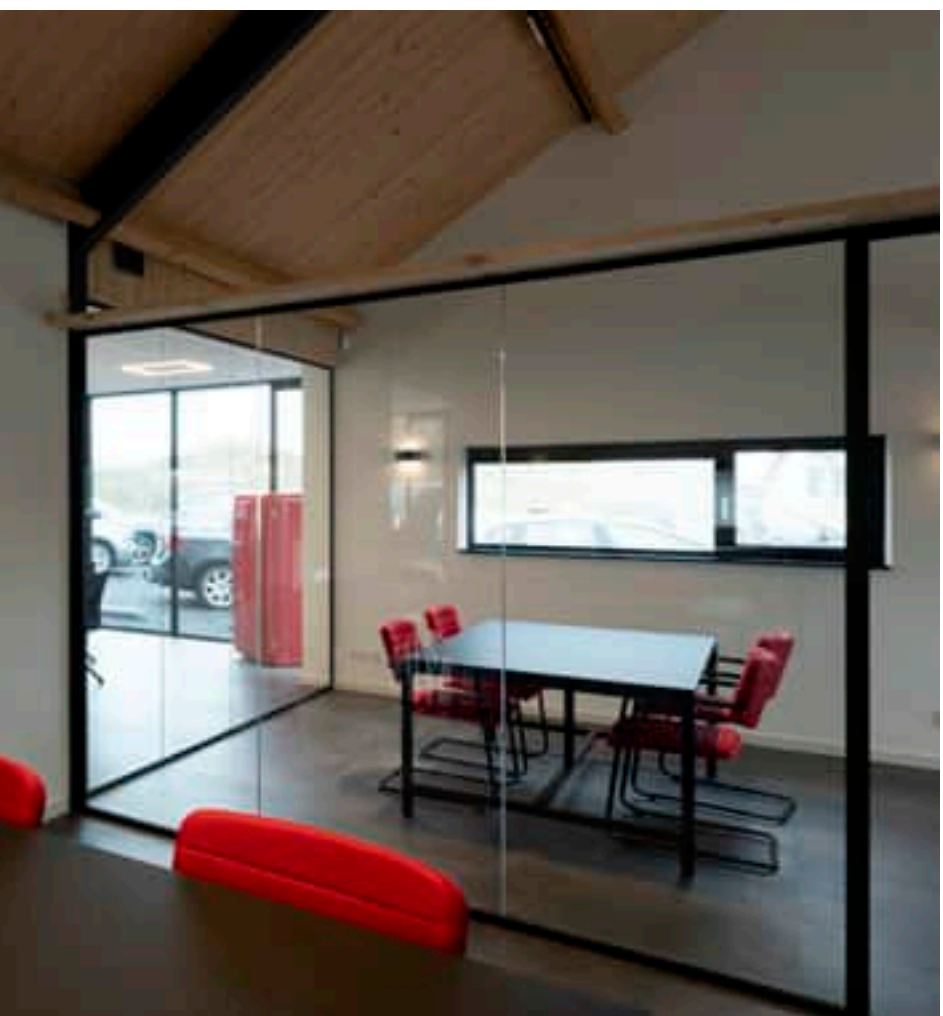

IP20 400

220-240V ~50/60Hz
Material: aluminium

- Open cable end

SOCKET INSIDE <40 W

Base: 1xE27 Max. Ø: 4.5 cm

Version	Prod. no.	GBP
black	1008137	128.00
gold	1008136	125.00

LED T38 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005289 | 9.00 GBP


1008504 231
1008502 231
1008506 231

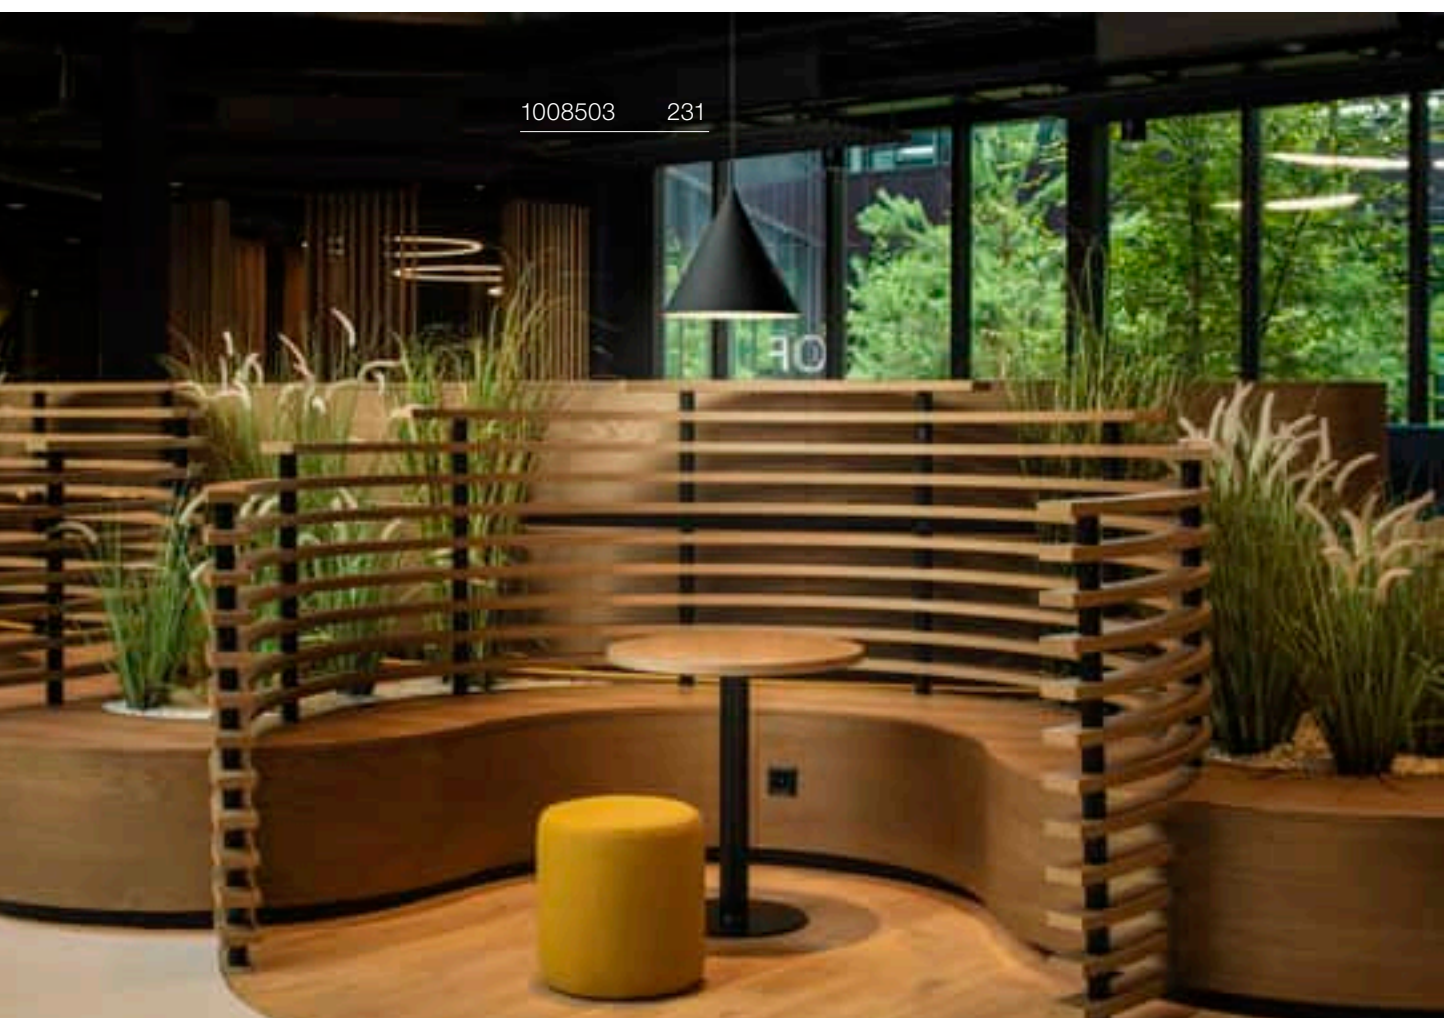
1008503 231

MAGICO 20
PD, E27

NEW





IP20 IK02 180

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Version	Prod. no.	GBP
black	1008500	163.00
black/gold	1008502	163.00
white	1008501	163.00

LED Tube 30 | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h

C,L



Prod. no.: 1008152 | 55.00 GBP

MAGICO 38
PD, E27

NEW



IP20 IK02 180

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Version	Prod. no.	GBP
black	1008503	171.00
black/gold	1008505	171.00
white	1008504	171.00

LED Rusika Soft | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h

C,L



Prod. no.: 1008156 | 46.00 GBP

MAGICO 55
PD, E27

NEW





IP20 IK02 180

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Version	Prod. no.	GBP
black	1008507	176.00
black/gold	1008508	176.00
white	1008506	176.00

E27 smokey grey | 8W | 330°
1900K | 400lm
8kWh/1000h

C



Prod. no.: 1008159 | 77.00 GBP

NUMINOS® S
PD





● black





○ white

IP 20 L80B50 250

200mA
220-240V ~50/60Hz
Total wattage: 8.6W
Material: aluminium/plastic

Version	GBP
All S versions	**121.00**
All S versions DALI	**170.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring S ○ white	**1006167**	**2.00**
Front ring S gold	**1008144**	**7.00**
Front ring S copper	**1008140**	**7.00**

		930lm	24°	16	**1004146**	
	2700K	944lm	36°	16	**1004147**	
		960lm	60°	19	**1004148**	
		1016lm	24°	13	**1004154**	
C	3000K	1037lm	36°	13	**1004155**	
		1042lm	60°	19	**1004156**	
		1074lm	24°	16	**1004162**	
	4000K	1092lm	36°	16	**1004163**	
		1098lm	60°	19	**1004164**	
		930lm	24°	16	**1004434**	
	2700K	944lm	36°	16	**1004435**	
		960lm	60°	19	**1004436**	
		1016lm	24°	13	**1004442**	
Dali	3000K	1037lm	36°	13	**1004443**	
		1042lm	60°	19	**1004444**	
		1074lm	24°	16	**1004450**	
	4000K	1092lm	36°	16	**1004451**	
		1098lm	60°	19	**1004452**	
		930lm	24°	16	**1004150**	
	2700K	944lm	36°	16	**1004151**	
		960lm	60°	19	**1004152**	
		1016lm	24°	13	**1004158**	
C	3000K	1037lm	36°	13	**1004159**	
		1042lm	60°	19	**1004160**	
		1074lm	24°	16	**1004166**	
	4000K	1092lm	36°	16	**1004167**	
		1098lm	60°	19	**1004168**	
		930lm	24°	16	**1004438**	
	2700K	944lm	36°	16	**1004439**	
		960lm	60°	19	**1004440**	
		1016lm	24°	13	**1004446**	
Dali	3000K	1037lm	36°	13	**1004447**	
		1042lm	60°	19	**1004448**	
		1074lm	24°	16	**1004454**	
	4000K	1092lm	36°	16	**1004455**	
		1098lm	60°	19	**1004456**	

NUMINOS® M
PD





IP 20 L80B50 250

350mA
220-240V ~50/60Hz
Total wattage: 14W
Material: aluminium/plastic



● black



○ white

Version	GBP
All M versions	**135.00**
All M versions DALI	**181.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring M ○ white	**1006168**	**3.00**
Front ring M ● gold	**1008145**	**8.00**
Front ring M ● copper	**1008141**	**8.00**

	2700K	1750lm	24°	16	**1004242**	
		1744lm	36°	16	**1004243**	
		1697lm	60°	22	**1004244**	
C	3000K	1804lm	24°	16	**1004250**	
		1790lm	36°	13	**1004251**	
		1749lm	60°	22	**1004252**	
	4000K	1931lm	24°	19	**1004258**	
		1927lm	36°	16	**1004259**	
		1872lm	60°	25	**1004260**	
	2700K	1750lm	24°	16	**1004530**	
		1744lm	36°	16	**1004531**	
		1697lm	60°	22	**1004532**	
Dali	3000K	1804lm	24°	16	**1004538**	
		1790lm	36°	13	**1004539**	
		1749lm	60°	22	**1004540**	
	4000K	1931lm	24°	19	**1004546**	
		1927lm	36°	16	**1004547**	
		1872lm	60°	25	**1004548**	
	2700K	1750lm	24°	16	**1004246**	
		1744lm	36°	16	**1004247**	
		1697lm	60°	22	**1004248**	
C	3000K	1804lm	24°	16	**1004254**	
		1790lm	36°	13	**1004255**	
		1749lm	60°	22	**1004256**	
	4000K	1931lm	24°	19	**1004262**	
		1927lm	36°	16	**1004263**	
		1872lm	60°	25	**1004264**	
	2700K	1750lm	24°	16	**1004534**	
		1744lm	36°	16	**1004535**	
		1697lm	60°	22	**1004536**	
Dali	3000K	1804lm	24°	16	**1004542**	
		1790lm	36°	13	**1004543**	
		1749lm	60°	22	**1004544**	
	4000K	1931lm	24°	19	**1004550**	
		1927lm	36°	16	**1004551**	
		1872lm	60°	25	**1004552**	

NUMINOS® L
PD





IP 20 L80B50 250

500mA
220-240V ~50/60Hz
Total wattage: 19 W
Material: aluminium/plastic



● black



○ white

Version	GBP
All L versions	**148.00**
All L versions DALI	**196.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring L ○ white	**1006169**	**3.00**
Front ring L ● gold	**1008146** ●	**9.00**
Front ring L ● copper	**1008142** ●	**9.00**

		2370lm	24°	19	**1004338**	
	2700K	2245lm	36°	19	**1004339**	
		2304lm	60°	22	**1004340**	
		2432lm	24°	13	**1004346**	
C	3000K	2320lm	36°	13	**1004347**	
		2373lm	60°	22	**1004348**	
		2694lm	24°	19	**1004354**	
	4000K	2557lm	36°	19	**1004355**	
		2601lm	60°	22	**1004356**	
		2370lm	24°	19	**1004626**	
	2700K	2245lm	36°	19	**1004627**	
		2304lm	60°	22	**1004628**	
		2432lm	24°	13	**1004634**	
Dali	3000K	2320lm	36°	13	**1004635**	
		2373lm	60°	22	**1004636**	
		2694lm	24°	19	**1004642**	
	4000K	2557lm	36°	19	**1004643**	
		2601lm	60°	22	**1004644**	
		2370lm	24°	19	**1004342**	
	2700K	2245lm	36°	19	**1004343**	
		2304lm	60°	22	**1004344**	
		2432lm	24°	13	**1004350**	
C	3000K	2320lm	36°	13	**1004351**	
		2373lm	60°	22	**1004352**	
		2694lm	24°	19	**1004358**	
	4000K	2557lm	36°	19	**1004359**	
		2601lm	60°	22	**1004360**	
		2370lm	24°	19	**1004630**	
	2700K	2245lm	36°	19	**1004631**	
		2304lm	60°	22	**1004632**	
		2432lm	24°	13	**1004638**	
Dali	3000K	2320lm	36°	13	**1004639**	
		2373lm	60°	22	**1004640**	
		2694lm	24°	19	**1004646**	
	4000K	2557lm	36°	19	**1004647**	
		2601lm	60°	22	**1004648**	

NUMINOS® XL
PD





IP 20 L80B50 250

700mA
220-240V ~50/60Hz
Total wattage: 26W
Material: aluminium/polycarbonate (PC)



● black



○ white

Version	GBP
All XL versions	**170.00**
All XL versions DALI	**218.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring XL ○ white	**1006170**	**4.00**
Front ring XL gold	**1008147**	**9.50**
Front ring XL copper	**1008143**	**9.50**

				UGR	Prod. no.	
C	2700K	3566lm	24°	19	**1005705**	
		3542lm	36°	19	**1005706**	
		3152lm	60°	25	**1005707**	
	3000K	3586lm	24°	19	**1005711**	
		3536lm	36°	19	**1005712**	
		3135lm	60°	25	**1005713**	
	4000K	3891lm	24°	19	**1005717**	
		3840lm	36°	19	**1005718**	
		3438lm	60°	25	**1005719**	
Dali	2700K	3566lm	24°	19	**1005777**	
		3542lm	36°	19	**1005778**	
		3152lm	60°	25	**1005779**	
	3000K	3586lm	24°	19	**1005783**	
		3536lm	36°	19	**1005784**	
		3135lm	60°	25	**1005785**	
	4000K	3891lm	24°	19	**1005789**	
		3840lm	36°	19	**1005790**	
		3438lm	60°	25	**1005791**	
C	2700K	3566lm	24°	19	**1005708**	
		3542lm	36°	19	**1005709**	
		3152lm	60°	25	**1005710**	
	3000K	3586lm	24°	19	**1005714**	
		3536lm	36°	19	**1005715**	
		3135lm	60°	25	**1005716**	
	4000K	3891lm	24°	19	**1005720**	
		3840lm	36°	19	**1005721**	
		3438lm	60°	25	**1005722**	
Dali	2700K	3566lm	24°	19	**1005780**	
		3542lm	36°	19	**1005781**	
		3152lm	60°	25	**1005782**	
	3000K	3586lm	24°	19	**1005786**	
		3536lm	36°	19	**1005787**	
		3135lm	60°	25	**1005788**	
	4000K	3891lm	24°	19	**1005792**	
		3840lm	36°	19	**1005793**	
		3438lm	60°	25	**1005794**	

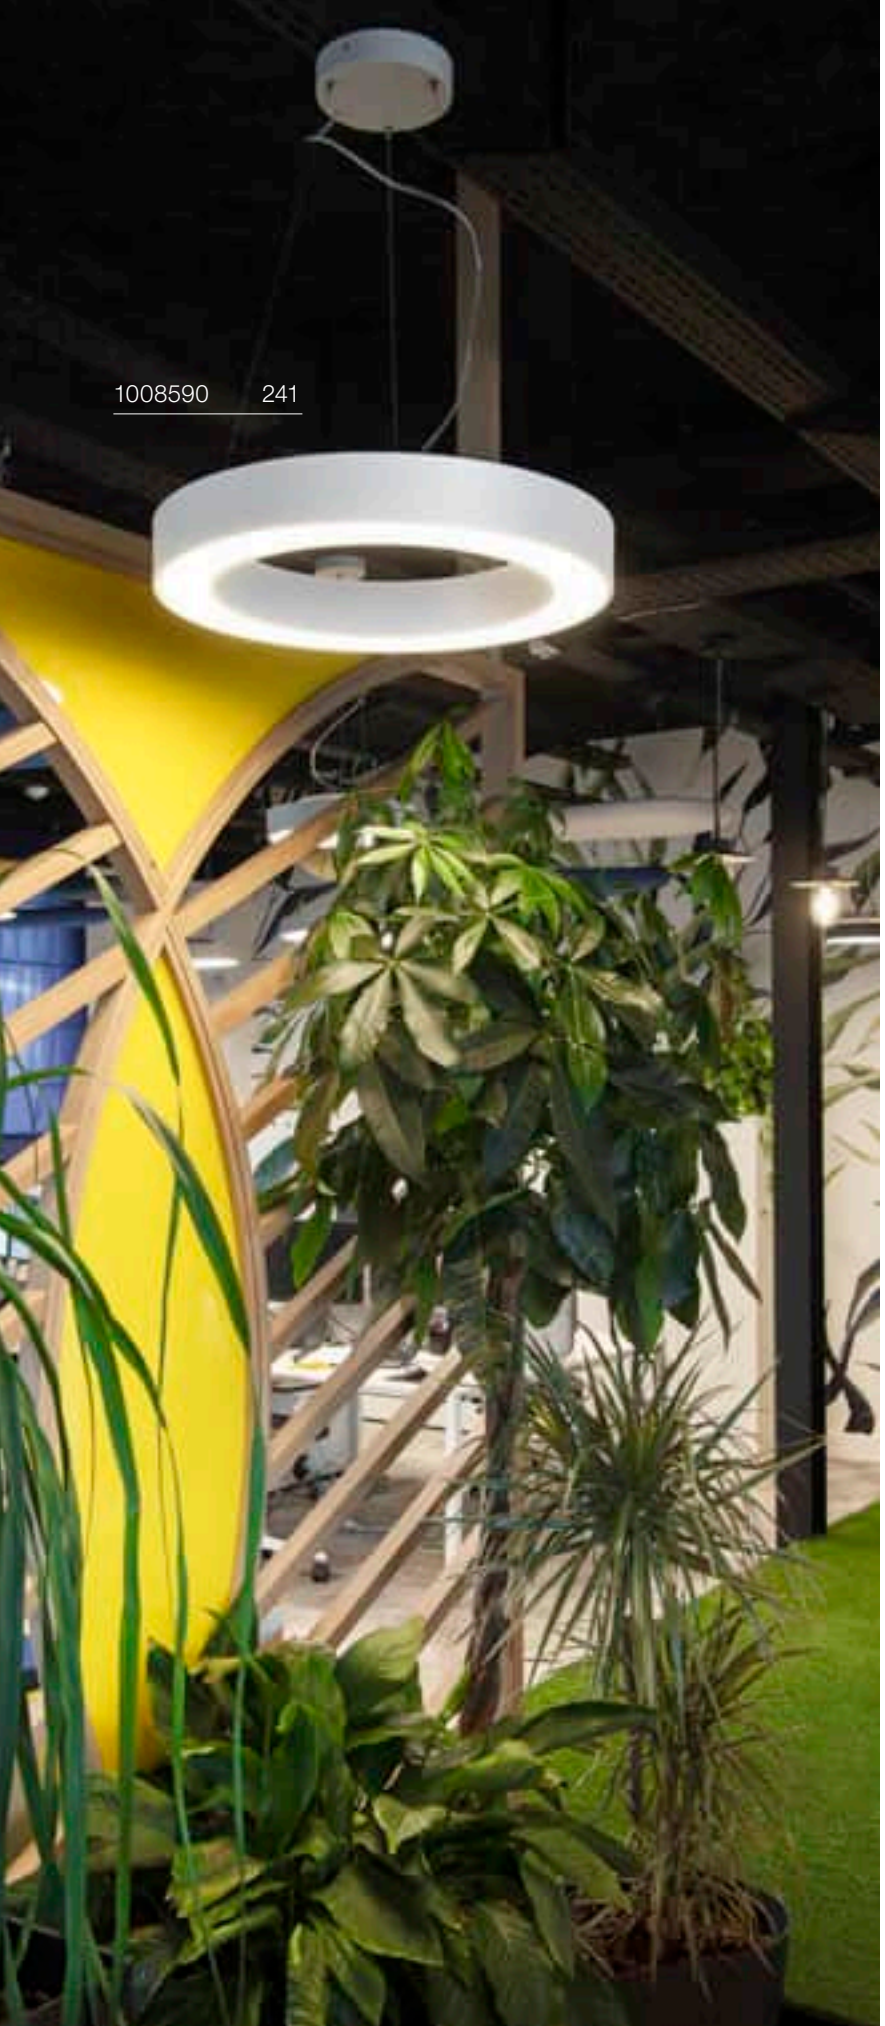

MEDO® RING 60
PD, DALI

CCT

DALI

NEW





Dali | IP20 | 110° | UGR 25 | L80B10 | 300 | 22

220-240V ~50/60 Hz | 700 mA
Total wattage: 26W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	3750lm | 3000K	4000lm | 4000K

Version	Prod. no.	GBP
● black	**1008589**	**670.00**
○ white	**1008590**	**670.00**

MEDO® RING 60
PD, PHASE

CCT

NEW





C | IP20 | 110° | UGR 25 | 50 000 Hours L80B10 | 300 | 30

220-240V ~50/60 Hz | 700 mA
Total wattage: 26W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	3750lm | 3000K	4000lm | 4000K

Version	Prod. no.	GBP
● black	1008591	644.00
○ white	1008592	644.00

MEDO® RING 90
PD, DALI

CCT

DALI

NEW





Dali | IP20 | 110° | UGR 25 | 50 000 Hours L80B10 | 300 | 22

220-240V ~50/60 Hz | 1200 mA
Total wattage: 42W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	5000lm | 3000K	5300lm | 4000K

Version	Prod. no.	GBP
● black	1008593	839.00
○ white	1008594	839.00

MEDO® RING 90
PD, PHASE

CCT

NEW





C | IP20 | 110° | UGR 25 | 50 000 Hours L80B10 | 300 | 30

220-240V ~50/60 Hz | 1200 mA
Total wattage: 43W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	5000lm | 3000K	5300lm | 4000K

Version	Prod. no.	GBP
● black	1008595	808.00
○ white	1008596	808.00

MEDO® PRO 30
CW, DALI, UGR<19





Dali | IP 50 | IK02 | 70° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	1250lm | 3000K	1250lm | 4000K

Version	Prod. no.	GBP
● black	**1007284**	**283.00**
○ white	**1007285**	**283.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 30
CW, PHASE, UGR<19





C | IP 50 | IK02 | 70° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	1250lm | 3000K	1250lm | 4000K

Version	Prod. no.	GBP
● black	**1007288**	**257.00**
○ white	**1007289**	**257.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

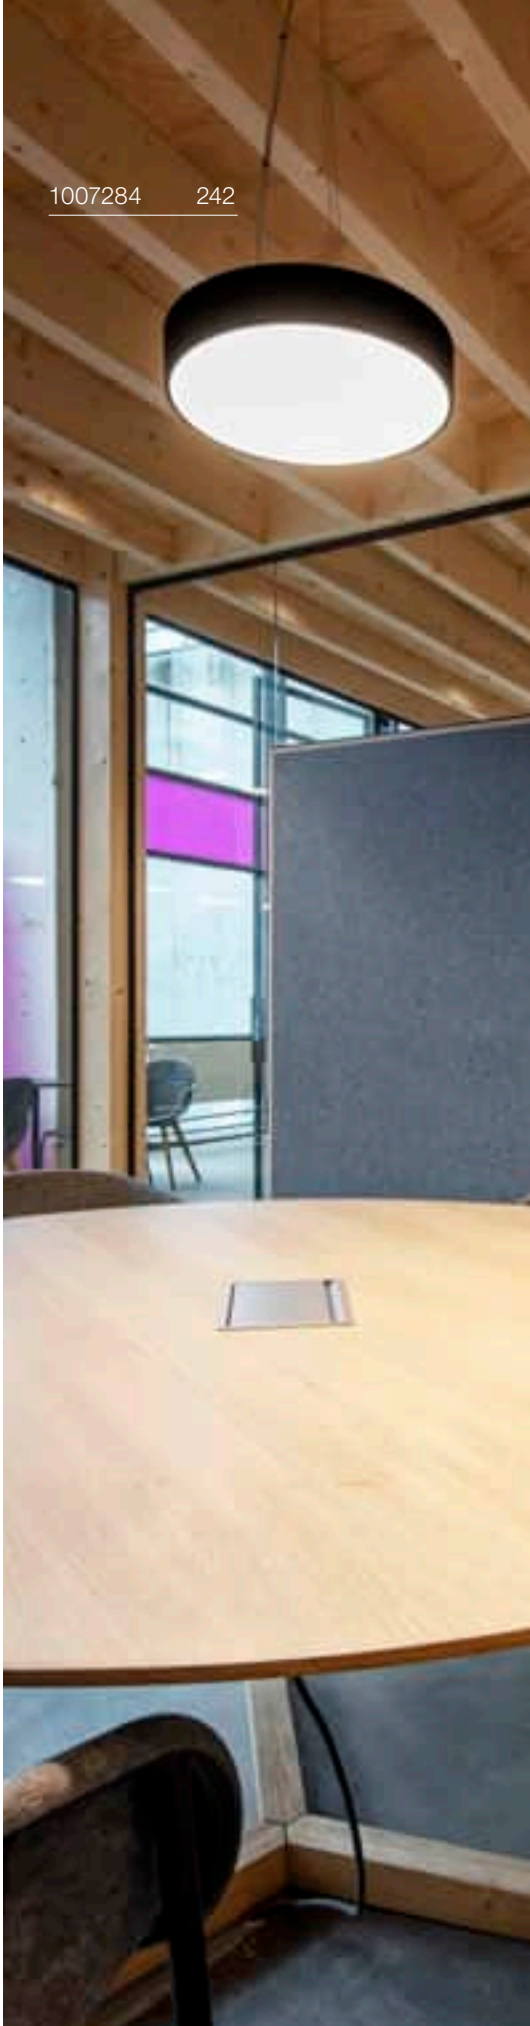

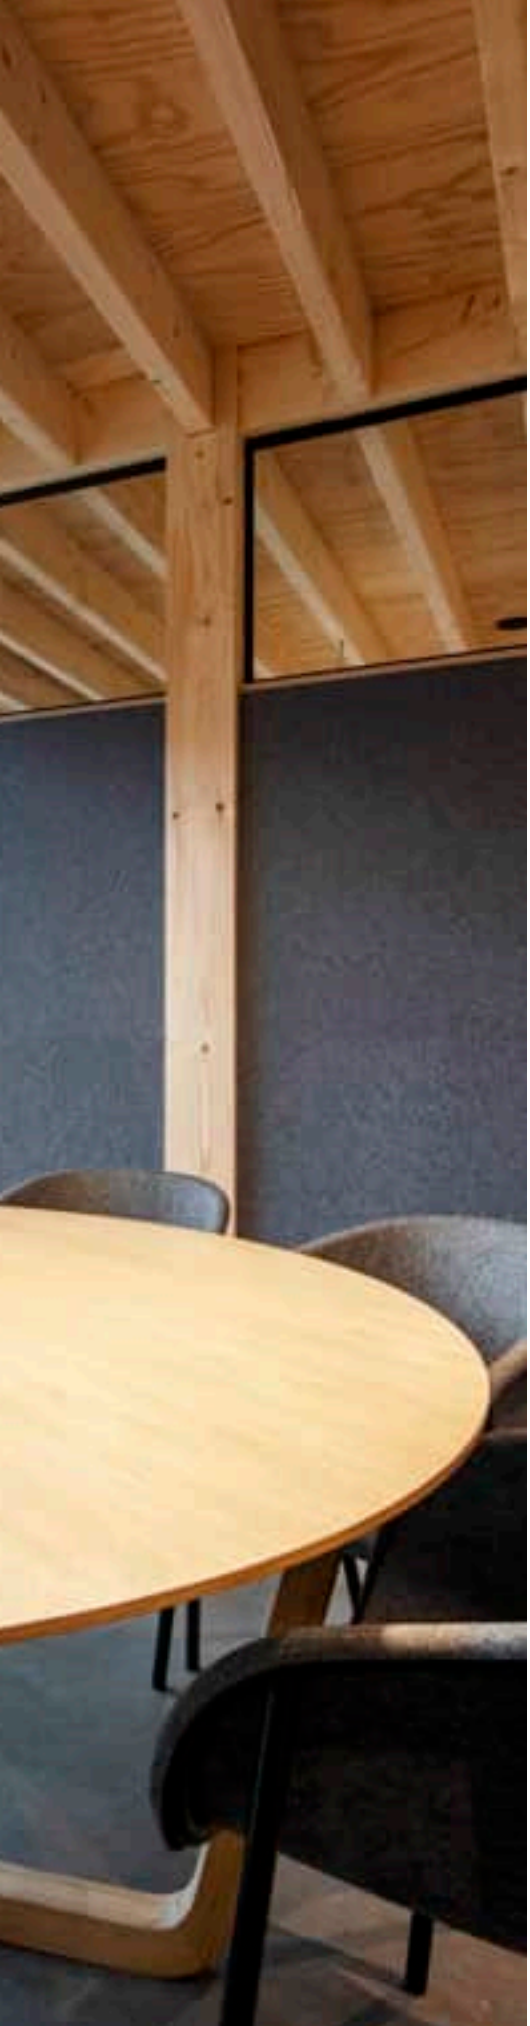

MEDO® PRO 40
CW, DALI, UGR<19





Dali | IP 50 | IK02 | 80° | UGR 19 | L80B10

20

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	2400lm | 3000K	2500lm | 4000K

Version	Prod. no.	GBP
● black	**1007292**	**343.00**
○ white	**1007293**	**343.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 40
CW, PHASE, UGR<19





C | IP 50 | IK02 | 80° | UGR 19 | L80B10

20

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	2400lm | 3000K	2500lm | 4000K

Version	Prod. no.	GBP
● black	**1007296**	**300.00**
○ white	**1007297**	**300.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, DALI, UGR<19





Dali | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5000lm | 3000K	5100lm | 4000K

Version	Prod. no.	GBP
● black	**1007300**	**600.00**
○ white	**1007301**	**600.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, PHASE, UGR<19





C | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 37W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5000lm | 3000K	5100lm | 4000K

Version	Prod. no.	GBP
● black	**1007304**	**540.00**
○ white	**1007305**	**540.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**









MEDO® PRO 90
CW, DALI, UGR<19

CCT





Dali | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 75W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	9400lm | 3000K	9700lm | 4000K

Version	Prod. no.	GBP
● black	**1007308**	**1,203.00**
○ white	**1007309**	**1,203.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 90
CW, PHASE, UGR<19

CCT





C | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 74W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	9400lm | 3000K	9700lm | 4000K

Version	Prod. no.	GBP
● black	**1007312**	**1,072.00**
○ white	**1007313**	**1,072.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 30
CW, DALI





Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	1350lm | 3000K	1350lm | 4000K

Version	Prod. no.	GBP
● black	**1007286**	**274.00**
○ white	**1007287**	**274.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 30
CW, PHASE

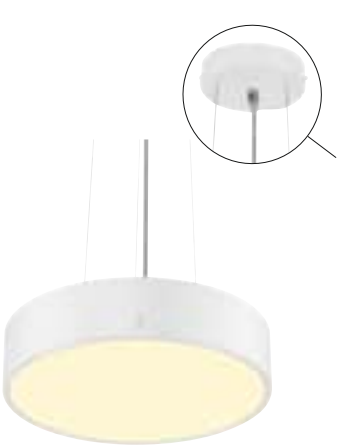



C | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	1350lm | 3000K	1350lm | 4000K

Version	Prod. no.	GBP
● black	**1007290**	**249.00**
○ white	**1007291**	**249.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

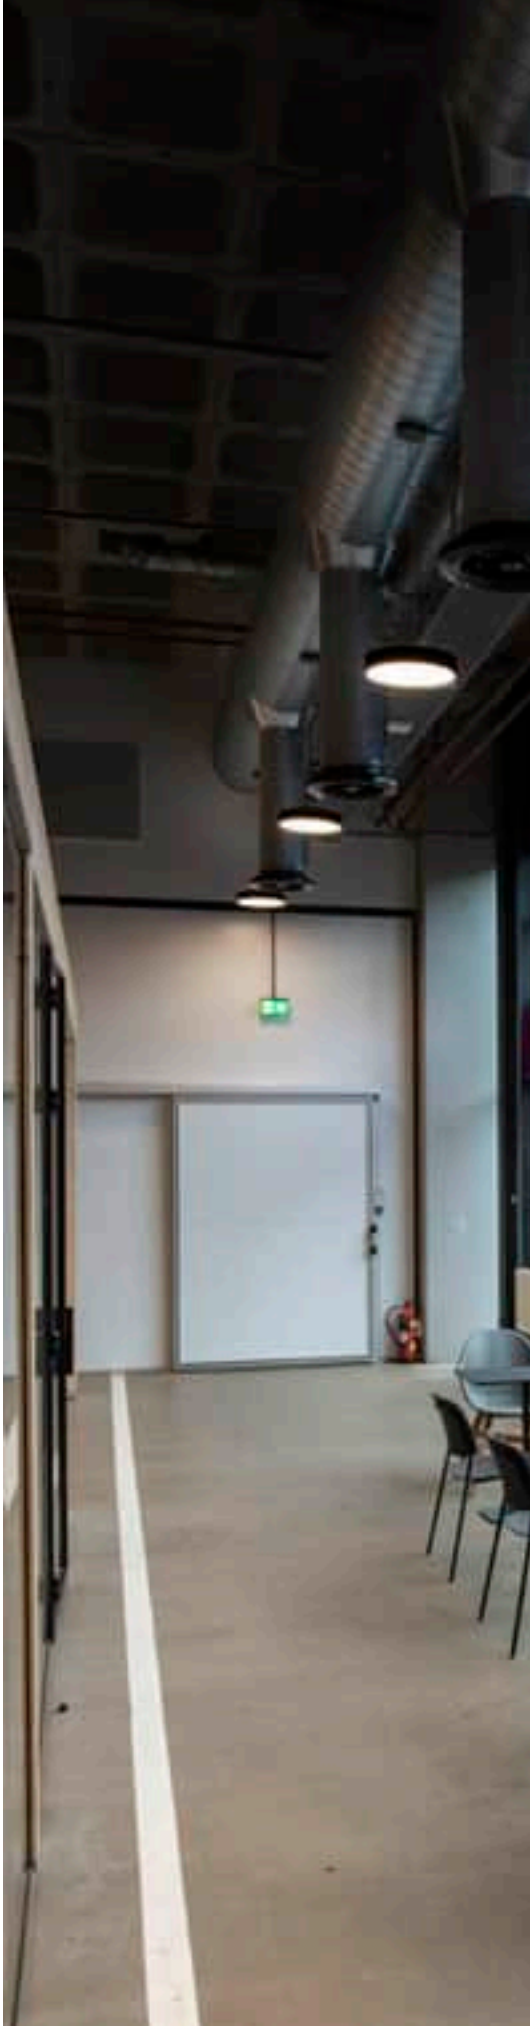



MEDO® PRO 40
CW, DALI









220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request



Down	2650lm | 3000K	2650lm | 4000K

Version	Prod. no.	GBP
● black	**1007294**	**335.00**
○ white	**1007295**	**335.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 40
CW, PHASE









220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request



Down	2650lm | 3000K	2650lm | 4000K

Version	Prod. no.	GBP
● black	**1007298**	**292.00**
○ white	**1007299**	**292.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, DALI





Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5450lm | 3000K	5500lm | 4000K

Version	Prod. no.	GBP
● black	**1007302**	**584.00**
○ white	**1007303**	**584.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, PHASE





C | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 37W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5450lm | 3000K	5500lm | 4000K

Version	Prod. no.	GBP
● black	**1007306**	**524.00**
○ white	**1007307**	**524.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**



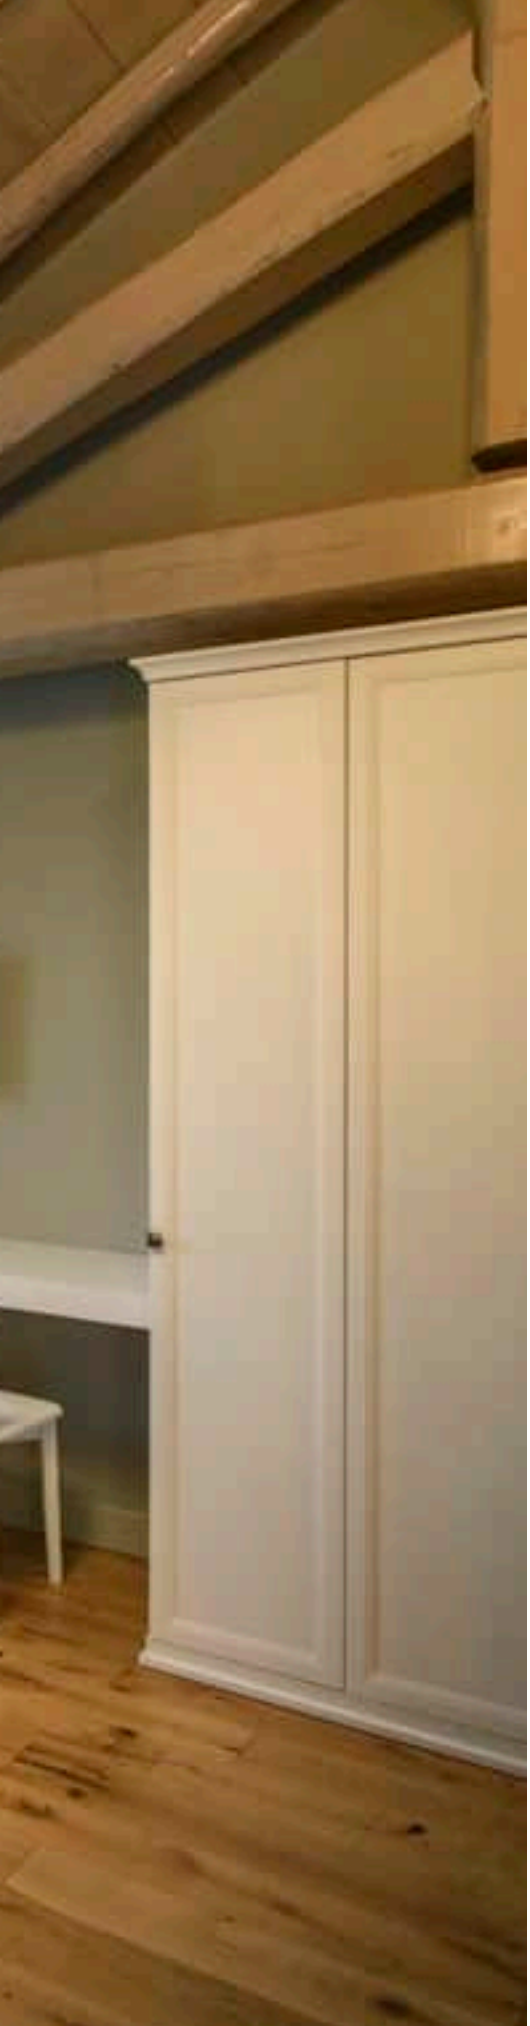

MEDO® PRO 90
CW, DALI





Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 75W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	11000lm | 3000K	11200lm | 4000K

Version	Prod. no.	GBP
● black	**1007310**	**1,186.00**
○ white	**1007311**	**1,186.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 90
CW, PHASE





C | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 74W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	11000lm | 3000K	11200lm | 4000K

Version	Prod. no.	GBP
● black	**1007314**	**1,057.00**
○ white	**1007315**	**1,057.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® 30
CW, PHASE





IP 50 | IK02 | 110° | 25 | L70B50

20

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium/steel

1000lm | 2700K | 1050lm | 3000K | 1150lm | 4000K

Version	Prod. no.	GBP
● black	**1007316**	**214.00**
○ white	**1007317**	**214.00**
● grey	**1007318**	**214.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**

MEDO® 40
CW, PHASE





IP 50 | IK02 | 110° | 25 | L70B50

20

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/steel

2000lm | 2700K | 2100lm | 3000K | 2250lm | 4000K

Version	Prod. no.	GBP
● black	**1007319**	**240.00**
○ white	**1007320**	**240.00**
● grey	**1007321**	**240.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**







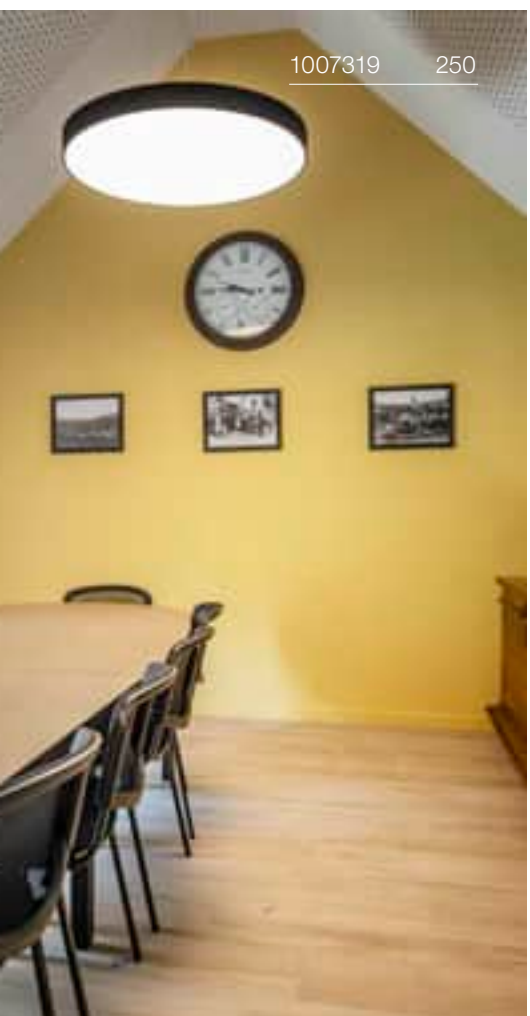

MEDO® 60
CW, PHASE





IP 50 | IK02 | 110° | UGR 22 | L70B50 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/steel

LED INSIDE | CRI 90

3850lm | 2700K | 4050lm | 3000K | 4300lm | 4000K

Version	Prod. no.	GBP
● black	**1007322**	**455.00**
○ white	**1007323**	**455.00**
● grey	**1007324**	**455.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**

MEDO® 90
CW, PHASE





IP 50 | IK02 | 110° | UGR 22 | L70B50 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 79W
Material: aluminium/steel

LED INSIDE | CRI 90

8000lm | 2700K | 8400lm | 3000K | 9000lm | 4000K

Version	Prod. no.	GBP
● black	**1007325**	**902.00**
○ white	**1007326**	**902.00**
● grey	**1007327**	**902.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**


1000726 253

MEDO®
CL, square, 1-10V





1-10V | IP 20 | IK02 | 105° | UGR 22 | 25 000 Hours L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic

LED INSIDE | CRI 80

Down 3800lm | 3000K

Version	Prod. no.	GBP
○ white	**1000726**	**428.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
○ white	**135251**	**39.00**
Suspension kit 5m		
○ white	**1001950**	**85.00**

MEDO®
CL, square, DALI





Dali | IP 20 | IK02 | 105° | UGR 22 | 25 000 Hours L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic

LED INSIDE | CRI 80

Down 3800 | 4000K

Version	Prod. no.	GBP
○ white	**1002882**	**471.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5m		
○ white	**135251**	**39.00**
Suspension kit 5m		
○ white	**1001950**	**85.00**

MEDO®
OVERVIEW






	MEDO® CW	**MEDO® PRO** CW	**MEDO® PRO** CW	**MEDO®** CL, SQUARE
Sizes	**30 | 40 | 60 | 90**	**30 | 40 | 60 | 90**	**30 | 40 | 60 | 90**	**60**
UGR	22 | 25	19 | 25	19 | 25	22
Control	Phase	Phase	DALI 2	1–10V **|** DALI 2
DC	-	-	✓	-
CCT Switch	2700K **|** 3000K **|** 4000K	3000K **|** 4000K	3000K **|** 4000K	-
EasyBase	✓	✓	✓	-
Federal Funding for Efficient Buildings (BEG)	-	✓	✓	-
Suspension kit	1,5 | 5 m (not included)	1,5 | 5 m (not included)	1,5 | 5 m (not included)	1,5 | 5 m (not included)

- Faster installation thanks to EasyBase
- Luminous efficacy from 120 lm/W
- Also suitable for demanding workplaces (e.g. offices and classrooms) thanks to prismatic optics

LED drivers are not included and must be ordered separately

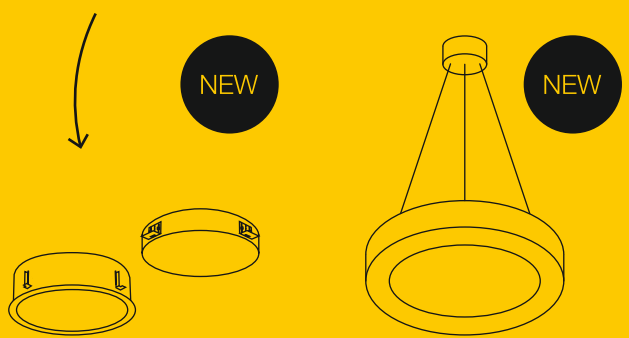

MEDO® RL, FRAMELESS | MOUNTING FRAME	**MEDO® RING** PD
30 | 40 | 60 | 90	**60 | 90**
19	25
*	Phase | DALI 2
*	- | ✓
3000K | 4000K	3000K | 4000K
-	-
✓	✓
-	3 m (included)

*Requires driver

Easy and fast to install thanks to EasyBase

CEILING LIGHTS



Screw EasyBase to the ceiling



Wire EasyBase

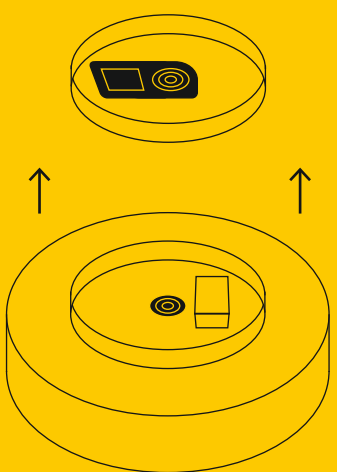

Select the colour temperature using the CCT switch on the light, look for the green markings

MEDO® 60 and MEDO® 90 are also attached using the safety chain provided



10007658 + 10007660 257

LALU®
PD, E27

MIX match





IP20 150

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 1xE27

Version	Prod. no.	GBP
● black	**1007658**	**77.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005305 | 17.00 GBP

LALU®
Lampshade, E27 Base, Mix&Match

MIX match



H: 3.5 cm
Ø: 33 cm
Material: aluminium

Version	Prod. no.	GBP
●● black/bronze	**1007659**	**74.00**
● bronze	**1007660**	**77.00**

LALU®
PD, LED Base, Mix&Match

MIX
match





IP 20 | IK03 | 40° | L80B20 | 150

220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

• Matching accessories can be found on page 260-261

LED INSIDE | CRI 90

Down 680lm | 3000K

Version	Prod. no.	GBP
● black	**1007518**	**145.00**
○ white	**1007519**	**145.00**
◐ bronze	**1007520**	**151.00**



1007550 + 10007541 259 + 261



LALU®
PD, LED Base, Mix&Match

MIX
match







220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

- Material thickness of mounting surface: max. 12 mm
- Matching accessories can be found on page 260-261

LED INSIDE | CRI 90

Down 680lm | 3000K

Version	Prod. no.	GBP
black	1007548	128.00
white	1007549	128.00
bronze	1007550	133.00

LALU® TETRA 14
Lampshade, Mix&Match

MIX match



H: 4.9 cm
Ø: 14 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007523	48.00
white/gold	1007522	48.00
bronze	1007521	50.00

LALU® TETRA 24
Lampshade, Mix&Match

MIX match



H: 6.7 cm
Ø: 24 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007526	62.00
white/gold	1007525	62.00
bronze	1007524	67.00

LALU® TETRA 36
Lampshade, Mix&Match

MIX match



H: 8.9 cm
Ø: 36 cm
Material: steel

- Not with LALU® PD 48V LED base can be combined

Version	Prod. no.	GBP
black/bronze	1007529	98.00
white/gold	1007528	98.00
bronze	1007527	109.00

LALU® CONE 15
Lampshade, Mix&Match

MIX match



H: 17 cm
Ø: 15.2 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007532	49.00
white/gold	1007531	49.00
bronze	1007530	56.00

LALU® PLATE 15
Lampshade, Mix&Match

MIX match



H: 1.5 cm
Ø: 15 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007544	37.00
white/gold	1007543	37.00
bronze	1007542	39.00

LALU® PLATE 22
Lampshade, Mix&Match

MIX match



H: 1.5 cm
Ø: 22 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007547	48.00
white/gold	1007546	48.00
bronze	1007545	51.00

LALU® ELYPSE 15
Lampshade, Mix&Match

MIX match



H: 1.4 cm
Ø: 15 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	**1007535**	**31.00**
white/gold	**1007534**	**31.00**
bronze	**1007533**	**37.00**

LALU® ELYPSE 22
Lampshade, Mix&Match

MIX match



H: 2.8 cm
Ø: 22 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	**1007538**	**49.00**
white/gold	**1007537**	**49.00**
bronze	**1007536**	**56.00**

LALU® ELYPSE 33
Lampshade, Mix&Match

MIX match



H: 3.5 cm
Ø: 33 cm
Material: steel

- Not with LALU® PD 48V LED base can be combined

Version	Prod. no.	GBP
black/bronze	**1007541**	**77.00**
white/gold	**1007540**	**77.00**
bronze	**1007539**	**82.00**

MIX & MATCH LALU®

LALU®
PD, LED BASE, PHASE

black	*1007518*
white	*1007519*
antique bronze	*1007520*



LALU®
PD, LED BASE, PHASE, RECESSED

black	*1007548*
white	*1007549*
antique bronze	*1007550*



LALU® TETRA 14

black	*1007523*
white	*1007522*
antique bronze	*1007521*



LALU® CONE 15

black	*1007532*
white	*1007531*
antique bronze	*1007530*



LALU® TETRA 24

black	*1007526*
white	*1007525*
antique bronze	*1007524*



LALU® TETRA 36

black	*1007529*
white	*1007528*
antique bronze	*1007527*

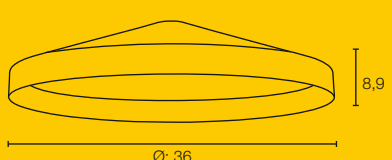

LALU®

PD, LED BASE, 48V, DALI

black	*1007749*
white	*1007748*
antique bronze	*1007747*



Not compatible with:
LALU® Elypse 33 and LALU® Tetra 36

LALU® ELYPSE 15

black	*1007535*
white	*1007534*
antique bronze	*1007533*



LALU® ELYPSE 22

black	*1007538*
white	*1007537*
antique bronze	*1007536*



LALU® ELYPSE 33

black	*1007541*
white	*1007540*
antique bronze	*1007539*



LALU® PLATE 15

black	*1007544*
white	*1007543*
antique bronze	*1007542*



LALU® PLATE 22

black	*1007547*
white	*1007546*
antique bronze	*1007545*



Mix and match products in the LALU® family to suit your taste. Perfectly coordinated, you can mix and match the shapes, sizes and colours or create a setup with multiple lights. Get creative – You can recognise SLV Mix & Match products by the following symbol:

MIX match


1007703 265

ONE® FLAT
PD, DALI, triple

CCT

DALI

NEW





Dali 2.0 | IP IP 20 | 50 000 Hours L80B10 | 300

220-240V ~50/60Hz | 1700mA
Total wattage: 58W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	3500lm | 2700K	3700lm | 3000K

Version	Prod. no.	GBP
black	1007701	986.00
black/brass	1007703	986.00
white	1007702	986.00

ONE® FLAT
PD, PHASE, single

CCT

NEW





C,L | IP IP20 | 50 000 Hours L80B10 | 180

220-240V ~50/60Hz | 600mA
Total wattage: 23W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	1300lm 1700lm 1900lm	2700K	1350lm 1750lm 2050lm	3000K

Version	Prod. no.	GBP
black 1300/1350lm	1007855	417.00
black/brass 1700/1750lm	1007857	417.00
white 1900/2050lm	1007856	417.00


1008003 267

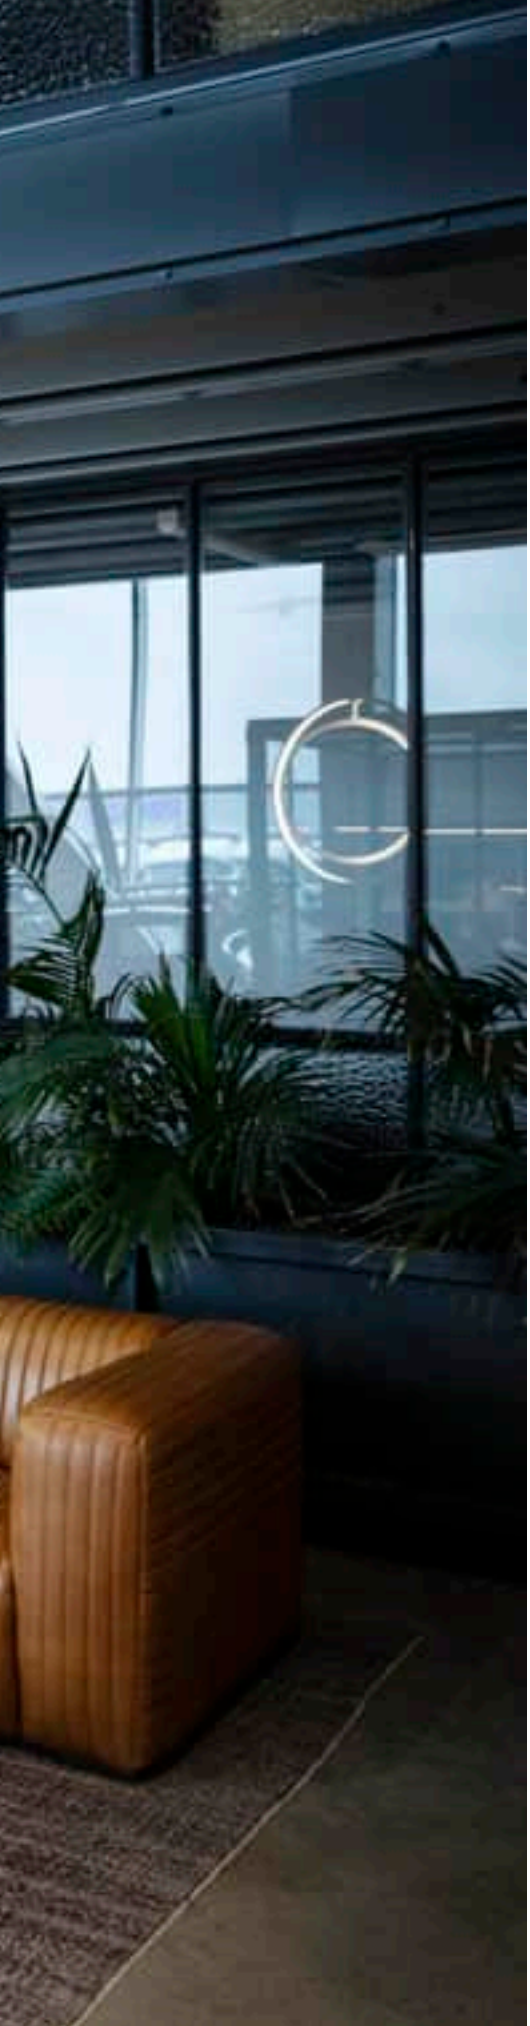

ONE® VERTICAL
PD, PHASE

CCT

NEW





C,L | IP 20 | 50 000 Hours L80B10 | 330° | 180

220-240V ~50/60Hz | 1050mA
Total wattage: 40W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	2400lm | 2700K	2550lm | 3000K

Version	Prod. no.	GBP
● black	1008002	416.00
○ white	1008003	416.00
● brass	1008004	416.00



1007665 269

ONE® CUBE
PD, DALI





Dali 2.0 | IP 20 | 44° | UGR 19 | L80B10 | 300

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54W
Material: aluminium/steel

LED INSIDE | CRI 90

Down — 4000lm | 3000K; 4300lm | 4000K

Version	Prod. no.	GBP
● black 4000lm | 3000K	**1007661**	**540.00**
● black 4300lm | 4000K	**1007663**	**539.00**
○ white 4000lm | 3000K	**1007662**	**540.00**
○ white 4300lm | 4000K	**1007664**	**539.00**

ONE® CUBE
PD, DALI, up/down





Dali 2.0 | IP 20 | 44° | 130° | UGR 19 | L80B10 | 300

220-240V ~50/60Hz | 2100mA
Total wattage: 80 W
Material: aluminium/steel

LED INSIDE | CRI 90

Up/Down — 6000lm | 3000K; 6500lm | 4000K

Version	Prod. no.	GBP
● black 6000lm | 3000K	**1007665**	**600.00**
● black 6500lm | 4000K	**1007671**	**600.00**
○ white 6000lm | 3000K	**1007666**	**600.00**
○ white 6500lm | 4000K	**1007672**	**600.00**

ONE®
Felt plate, acoustic felt,
for ONE® 80/ ONE® CUBE

NEW



H: 3.8 cm
Ø: 75.5 cm

- Fits in all ONE® light rings with Ø 80 cm

Version	Prod. no.	GBP
● grey	**1007746**	**94.00**


1005177 271

ONE® 60
PD, DALI





Dali 2.0 | IP 20 | L70B50 | 300

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	1480lm | 3000K	1550lm | 4000K

Version	Prod. no.	GBP
● black	**1002909**	**363.00**
○ white	**1002910**	**363.00**

ONE® 60
PD, DALI, up/down





Dali 2.0 | IP 20 | 130° | 130° | L70B50 | 300

220-240V ~50/60Hz | 600mA
Total wattage: 25W
Material: aluminium/steel

LED INSIDE | CRI 90

Up Down	400lm 400lm | 3000K	410lm 410lm | 4000K

Version	Prod. no.	GBP
● black	**1004761**	**459.00**
○ white	**1004762**	**459.00**

ONE® 60
PD, PHASE, up/down





C | 130° | 130° | L70B50 | 180

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

LED INSIDE | CRI 90

Up Down	410lm 410lm | 2700K	415lm 415lm | 3000K

Version	Prod. no.	GBP
● black	**1004759**	**416.00**
○ white	**1004760**	**416.00**
● brass	**1005177**	**433.00**


1004763 273

ONE® 80
PD, DALI





Dali 2.0 | IP IP 20 | 30 000 Hours L70B50 | 300

220-240V ~50/60Hz | 800mA
Total wattage: 32W
Material: aluminium/steel

INSIDE | CRI 90

Down	1930lm | 3000K	2140lm | 4000K

Version	Prod. no.	GBP
● black	**1002911**	**407.00**
○ white	**1002912**	**407.00**

ONE® 80
PD, DALI, up/down





Dali 2.0 | IP IP 20 | 130° | 130° | 30 000 Hours L70B50 | 300

220-240V ~50/60Hz | 800mA
Total wattage: 34W
Material: aluminium/steel

INSIDE | CRI 90

Up Down	615lm 615lm	3000K	635lm 635lm	4000K

Version	Prod. no.	GBP
● black	**1004763**	**546.00**
○ white	**1004764**	**546.00**

ONE®
Felt plate, acoustic felt,
for ONE® 80/ ONE® CUBE



H: 3.8 cm
Ø: 75.5 cm

- Fits in all ONE® light rings with Ø 80 cm

Version	Prod. no.	GBP
● grey	**1007746**	**94.00**

ONE® DOUBLE
PD, DALI, up/down





Dali | 130° | 130° | L80B10 | 300

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 55W
Material: aluminium/steel

LED INSIDE | CRI 90

Up	1050lm	3000K	1060lm	4000K
Down	1050lm		1060lm	

Version	Prod. no.	GBP
● black	**1004767**	**953.00**
○ white	**1004768**	**953.00**

ONE® DOUBLE
PD, PHASE, up/down





C | 130° | 130° | L80B10 | 180

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/steel

LED INSIDE | CRI 90

Up	615lm	2700K	635lm	3000K
Down	615lm		635lm	

Version	Prod. no.	GBP
● black	**1004765**	**710.00**
○ white	**1004766**	**710.00**
● brass	**1005178**	**728.00**

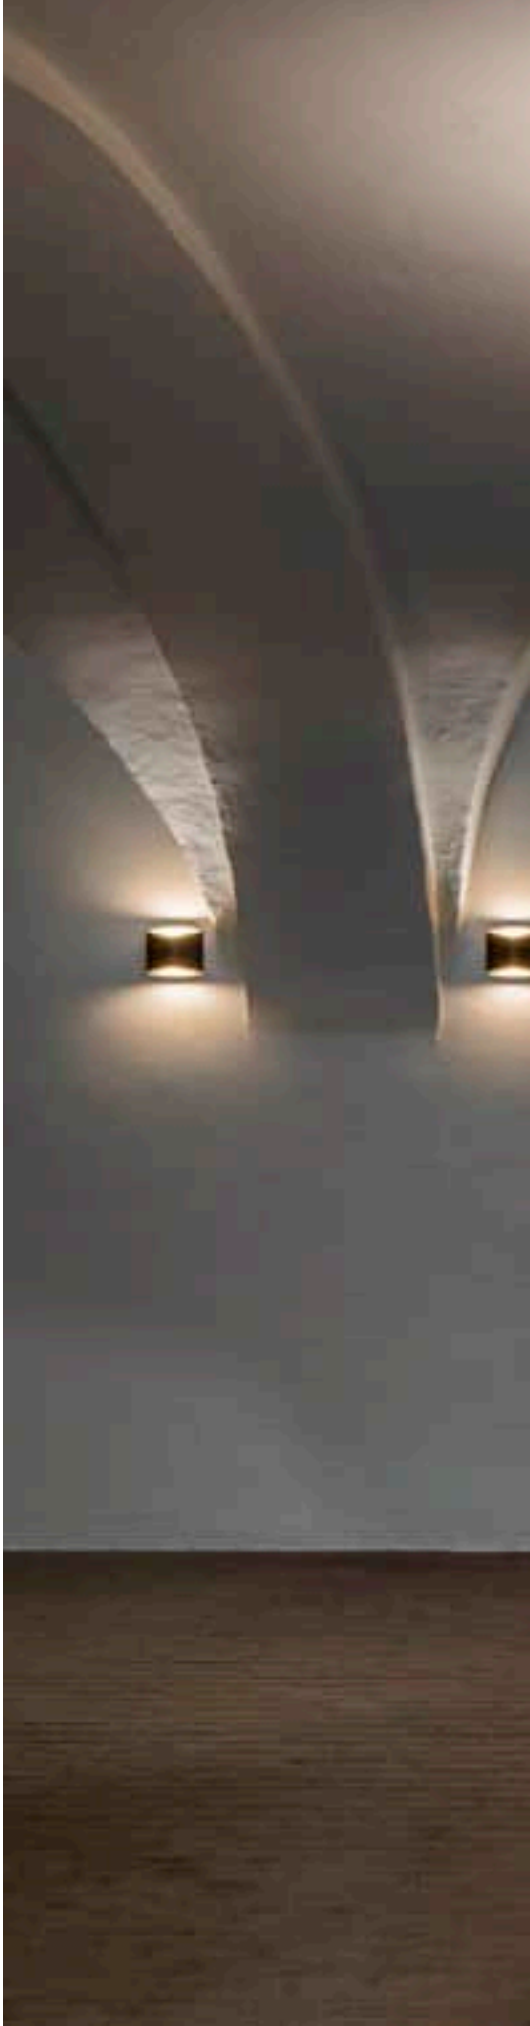



ONE® TRIPLE
PD, DALI





Dali 2.0 | IP 20 | L70B50 | 300

220-240V ~50/60Hz | 1700mA
Total wattage: 64W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	4040lm | 3000K	4200lm | 4000K

Version	Prod. no.	GBP
● black	**1002913**	**953.00**
○ white	**1002914**	**953.00**



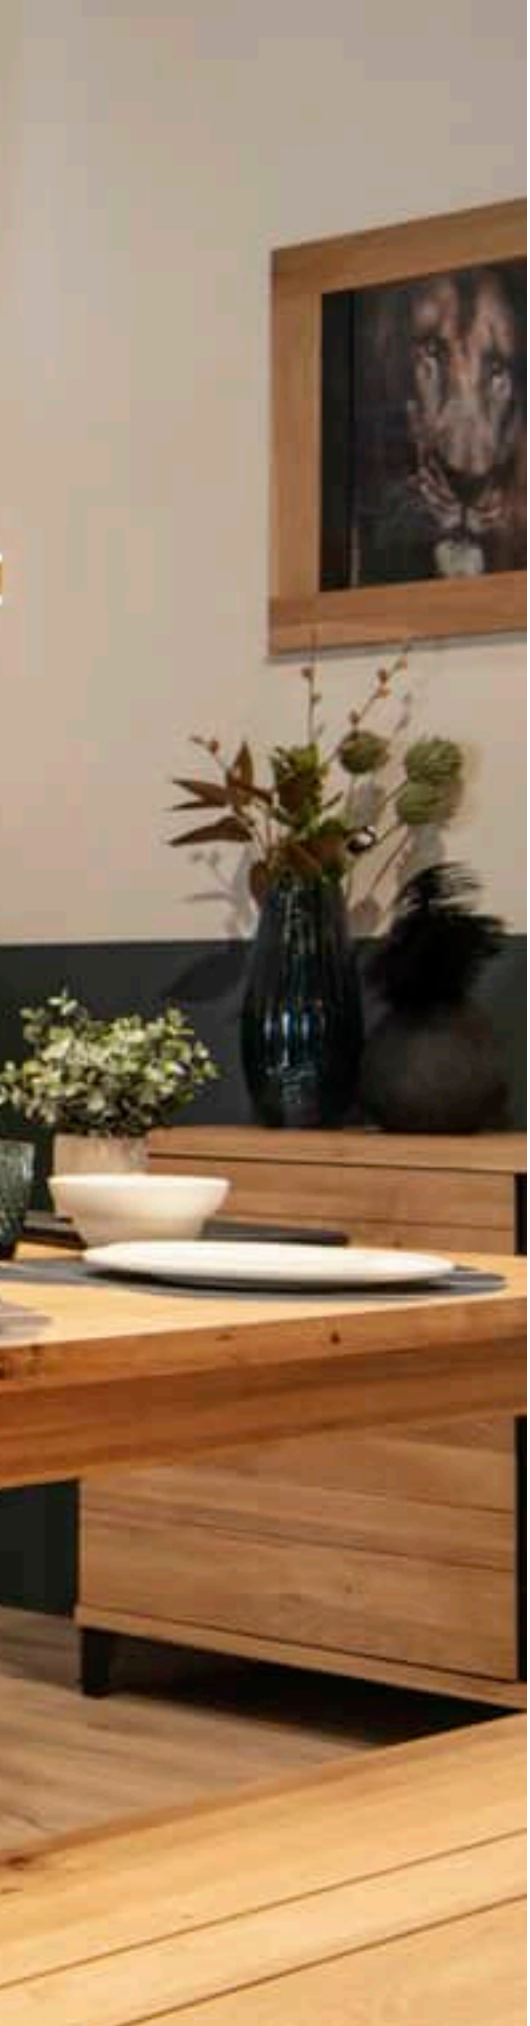

ONE® LINEAR 100
PD, PHASE, up/down

CCT





180 20

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

LED INSIDE CRI 90

Up	550lm	2700K	580lm	3000K
Down	700lm		670lm	

Version	Prod. no.	GBP
black	1006185	268.00
white	1006186	268.00
brass	1006187	286.00

ONE® LINEAR 140
PD, PHASE, up/down

CCT





180 20

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/steel

LED INSIDE CRI 90

Up	830lm	2700K	860lm	3000K
Down	980lm		1015lm	

Version	Prod. no.	GBP
black	1006188	316.00
white	1006189	316.00
brass	1006190	333.00


1007588 279

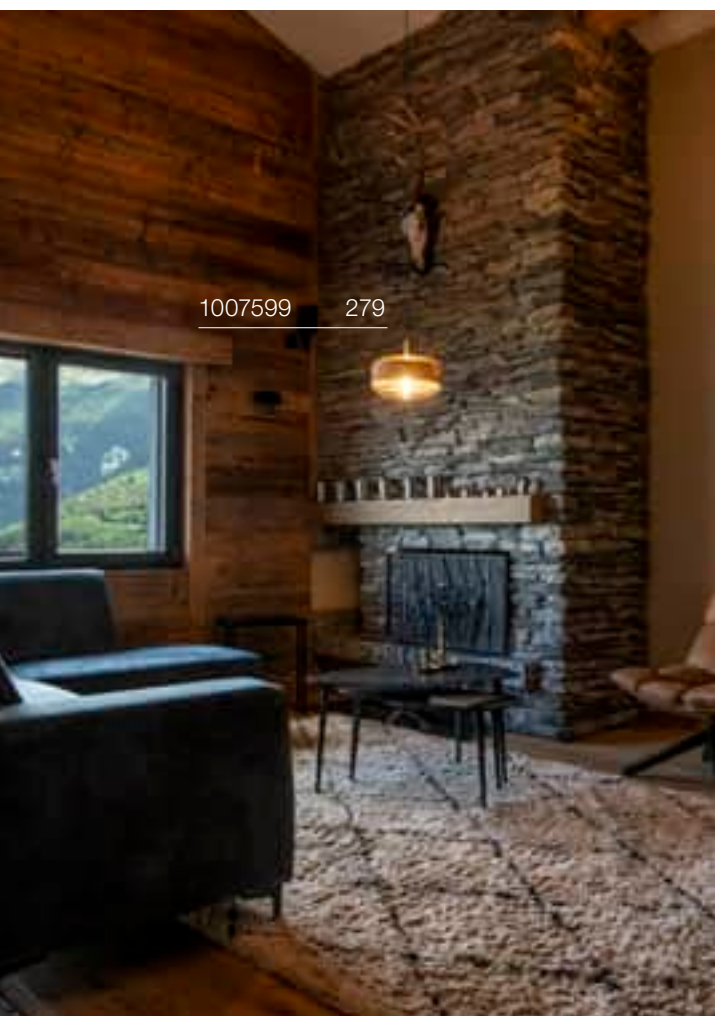
1007599 279


1007597 279

PANTILO ROPE 19
PD, E27



IP20 250 250

200-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 299

SOCKET INSIDE <15 W

Base: 1xE27 | Max. Ø: 10 cm | L: 11 cm

Version	Prod. no.	GBP
amber/gold	**1007597**	**171.00**
anthracite/silver	**1007596**	**171.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	**143120**	**13.00**
white	**143121**	**13.00**
grey	**143124**	**13.00**
3-phase light adapter		
black	**145990**	**17.00**
grey	**145994**	**17.00**
white	**1001542**	**17.00**
Surface-mounted ceiling rose		
black	**1004744**	**30.00**
white	**1004745**	**30.00**
gold	**1006377**	**32.00**
FITU single ceiling rose, round		
black	**132600**	**23.00**
white	**132601**	**23.00**
gold	**1002163**	**25.00**
chrome	**132605**	**25.00**

PANTILO ROPE 20
PD, E27

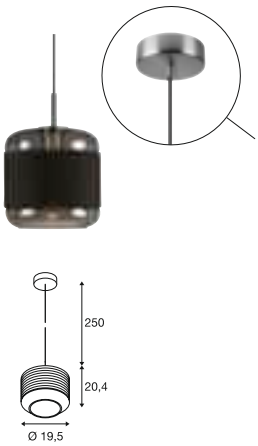

IP20 250

200-240V ~50/60Hz
Material: glass

SOCKET INSIDE <15 W

Base: 1xE27 | Max. Ø: 10 cm | L: 18 cm

Version	Prod. no.	GBP
amber/gold	**1007589**	**205.00**
anthracite/silver	**1007588**	**205.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

PANTILO ROPE 27
PD, E27

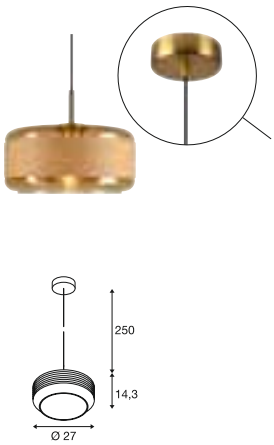

IP20 250

200-240V ~50/60Hz
Material: glass

SOCKET INSIDE <15 W

Base: 1xE27 | Max. Ø: 15 cm | L: 11 cm

Version	Prod. no.	GBP
amber/gold	**1007599**	**223.00**
anthracite/silver	**1007598**	**223.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP


1006400 281

PANTILO OVAL
PD, E27





IP 20 250

200-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 299

SOCKET INSIDE <15 W

Base: 1xE27

Version	Prod. no.	GBP
white	1006402	133.00
gold	1006403	151.00
chrome	1006398	151.00
copper	1006400	151.00

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	143120	13.00
white	143121	13.00
grey	143124	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
FITU single ceiling rose, round		
black	132600	23.00
white	132601	23.00
gold	1002163	25.00
chrome	132605	25.00

PANTILO 20
PD, E27





IP 20 250

200-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 299

SOCKET INSIDE <15 W

Base: 1xE27

Version	Prod. no.	GBP
white	1006396	133.00
gold	1006395	151.00
chrome	1003004	151.00
copper	1003005	151.00

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	143120	13.00
white	143121	13.00
grey	143124	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
FITU single ceiling rose, round		
black	132600	23.00
white	132601	23.00
gold	1002163	25.00
chrome	132605	25.00

PANTILO 28
PD, E27





IP 20 250

200-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 299

SOCKET INSIDE <15 W

Base: 1xE27

Version	Prod. no.	GBP
white	1006399	164.00
gold	1006397	181.00
chrome	1003006	181.00
copper	1003007	181.00

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	143120	13.00
white	143121	13.00
grey	143124	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
FITU single ceiling rose, round		
black	132600	23.00
white	132601	23.00
gold	1002163	25.00
chrome	132605	25.00


1007877 283



PANTILO CONVEX 29
PD, E27

NEW





IP20 250

220-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 299

SOCKET INSIDE 40 W

Base: E27 | Max. Ø: 10 cm | L: 20 cm

Version	Prod. no.	GBP
white	1007881	195.00
gold	1007880	212.00
chrome	1003443	212.00
copper	1007879	212.00

LED Tube 30 | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h

C,L



Prod. no.: 1008152 | 55.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	143120	13.00
white	143121	13.00
grey	143124	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
FITU single ceiling rose, round		
black	132600	23.00
white	132601	23.00
gold	1002163	25.00
chrome	132605	25.00

PANTILO CONVEX 40
PD, E27

NEW





IP20 150

220-240V ~50/60Hz
Material: glass

SOCKET INSIDE 40 W

Base: E27 | Max. Ø: 15 cm | L: 30 cm

Version	Prod. no.	GBP
white	1007878	294.00
gold	1007877	311.00
chrome	1003444	303.00
copper	1007876	311.00

E27 | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h

C,L



Prod. no.: 1008153 | 46.00 GBP


1008179 285

LIGHT EYE® 90
PD, QPAR51

NEW





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.35 cm

Version	Prod. no.	GBP
black	1008172	72.00
white	1008173	72.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005077 | 7.00 GBP

LIGHT EYE® 150
PD, QPAR111

NEW





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Version	Prod. no.	GBP
black	1008178	114.00
white	1008179	114.00

QPAR111 | 12W | 55°
2700K | 670lm | EEC=G
12kWh/1000h

C,L



Prod. no.: 1005297 | 73.00 GBP

LIGHT EYE® 90
Deco Ring Ø 5,7 cm

NEW



Material: steel/steel

Version	Prod. no.	GBP
black	1008186	8.00
white	1008187	8.00
gold	1008188	12.00

LIGHT EYE® 150
Deco Ring Ø 13,6 cm

NEW



Material: steel/steel

Version	Prod. no.	GBP
black	1008189	30.00
white	1008190	30.00
gold	1008192	39.00
chrome	1008191	39.00


1006438 287

ASTO TUBE

IP 20 250

220-240V ~50/60Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 1xGU10

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

ASTO TUBE
PD, single, GU 10





Version	Prod. no.	GBP
● black	1006431	52.00
○ white	1006432	52.00

ASTO TUBE
PD, double, GU 10





Version	Prod. no.	GBP
● black	1006433	95.00
○ white	1006434	95.00

ASTO TUBE
Decorative reflector



H: 3.95 cm
Ø: 6.75 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
◐ black/chrome	1007190	4.00
● gold	1006450	4.00
◑ chrome	1006449	4.00
● copper	1006451	4.00

ASTO TUBE
PD, triple, GU 10





Version	Prod. no.	GBP
● black	1006435	138.00
○ white	1006436	138.00

ASTO TUBE
PD, quadruple, GU 10





Version	Prod. no.	GBP
● black	1006437	168.00
○ white	1006438	168.00



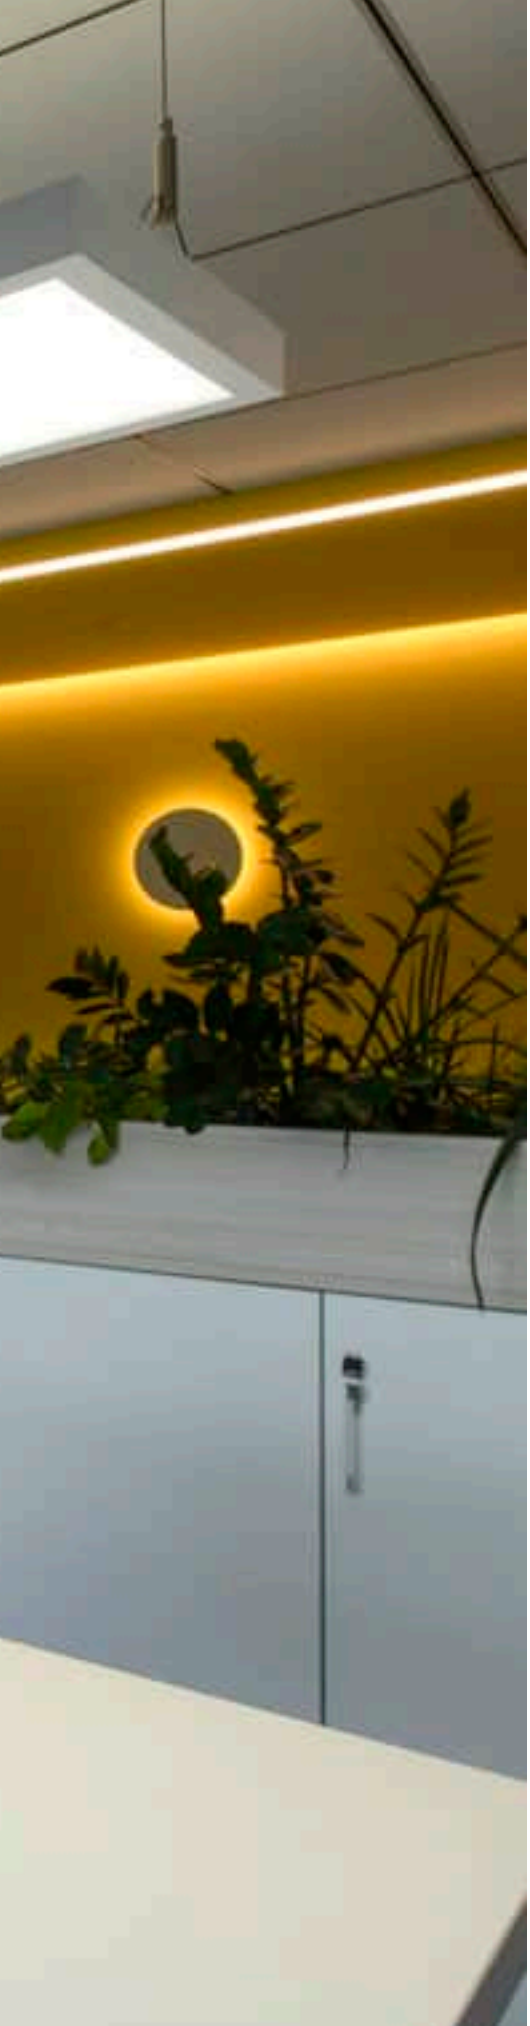

WORKLIGHT PRO 120
PD, DALI





Dali | IP 20 | IK03 | 80° | 115° | UGR 19 | L80B10 | 250

200-240V ~50/60Hz | 1200mA
Total wattage: 50W
Material: aluminium/steel

LED INSIDE | CRI 80

Up	2800lm	4000K
Down	3300lm	

Version	Prod. no.	GBP
● black	**1007468**	**428.00**
○ white	**1007469**	**428.00**
● grey	**1007470**	**428.00**

WORKLIGHT PRO 150
PD, DALI





Dali | IP 20 | IK03 | 80° | 115° | UGR 19 | L80B10 | 250

200-240V ~50/60Hz | 1400mA
Total wattage: 59W
Material: aluminium/steel

LED INSIDE | CRI 80

Up	3300lm	4000K
Down	3900lm	

Version	Prod. no.	GBP
● black	**1007471**	**514.00**
○ white	**1007472**	**514.00**
● grey	**1007473**	**514.00**

WORKLIGHT
PD, DALI





Dali | IP 20 | IK02 | 80° | 110° | UGR 19

L80B10 | 250

200-240V ~50/60Hz | 1550mA
Total wattage: 57W
Material: aluminium

LED INSIDE | CRI 80

Up Down	2000lm 3000lm	4000K

Version	Prod. no.	GBP
● black	**1007992**	**403.00**
○ white	**1007993**	**403.00**
◍ silver	**1006345**	**403.00**





PANEL 60
PD, round, DALI







120-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material:
aluminium/polymethylacrylate (PMMA)



Down

3150lm | 3000K
3350lm | 4000K

Version	Prod. no.	GBP
○ white 3150lm | 3000K	**1003044**	**278.00**
○ white 3350lm | 4000K	**1003045**	**278.00**
● grey 3150lm | 3000K	**1003046**	**278.00**
● grey 3350lm | 4000K	**1003047**	**278.00**

NOYA
PD, PHASE

CCT





IP 20 | 115° | L70B50 | 150

220-240V ~50/60Hz | 700mA
Total wattage: 32W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down	1861lm | 2700K	2025lm | 3000K

Version	Prod. no.	GBP
● black	**1003530**	**411.00**
○ white	**1003532**	**411.00**





GLENOS
PD, 1m, 1-10V







1-10V | IP 20 | UGR 28 | L70B50 | 200

220-240V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/plastic

LED INSIDE | CRI 80

Down — 2850lm | 3000K, 3300lm | 4000K

Version	Prod. no.	GBP
● black 2850lm | 3000K	**1001400**	**338.00**
● black 3300lm | 4000K	**1001403**	**338.00**

GLENOS
PD, 2m, 1-10V





1-10V | IP 20 | UGR 28 | L70B50 | 200

220-240V ~50/60Hz | 1000mA
Total wattage: 85W
Material: aluminium/plastic

LED INSIDE | CRI 80

Down — 5700lm | 3000K, 6600lm | 4000K

Version	Prod. no.	GBP
● black 5700lm | 3000K	**1001406**	**464.00**
● black 6600lm | 4000K	**1001409**	**464.00**


1001309 295

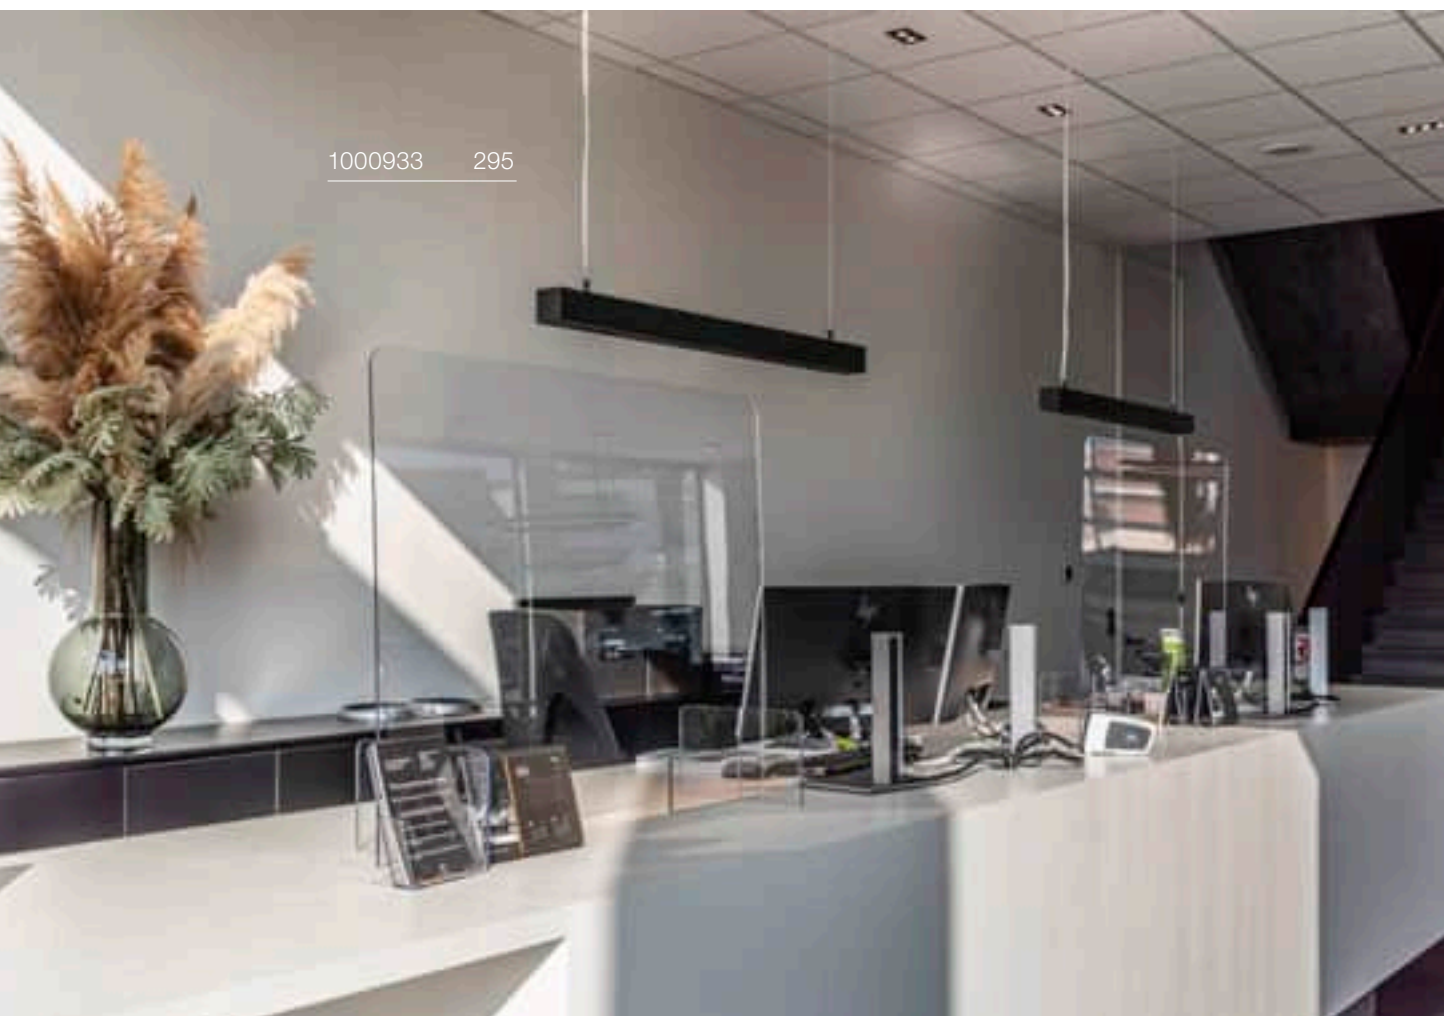
1000933 295

Q-LINE®
PD, 1m, BAP, PHASE







220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic



Down
2100lm | 3000K
2300lm | 4000K

Version	Prod. no.	GBP
● black 2100lm | 3000K	**1000927**	**416.00**
● black 2300lm | 4000K	**1000933**	**416.00**
○ white 2100lm | 3000K	**1000926**	**416.00**
○ white 2300lm | 4000K	**1000932**	**416.00**

Q-LINE®
PD, 2m, BAP, PHASE







220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic



Down
4200lm | 3000K
4600lm | 4000K

Version	Prod. no.	GBP
● black 4200lm | 3000K	**1000930**	**623.00**
● black 4600lm | 4000K	**1000936**	**623.00**
○ white 4200lm | 3000K	**1000929**	**623.00**
○ white 4600lm | 4000K	**1000935**	**623.00**

Q-LINE®
PD, DALI, single









220-240V ~50/60 Hz | 1150 mA
Total wattage: 46W
Material: aluminium/plastic PC



Down
4100lm | 3000K

Version	Prod. no.	GBP
● black	**1001309**	**498.00**
○ white	**1001310**	**498.00**

OCULUS
PD, single, PHASE

DIM TO WARM





IP 20 | 100° | L70B50 | 250

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

- Additional frosted lens included
- Matching accessories can be found on page 299
- Open cable end

LED INSIDE | CRI 90

Down 36lm | 2000K - 780lm | 3000K

Version	Prod. no.	GBP
black	**1004672**	**180.00**
white	**1004673**	**180.00**

Product	Prod. no.	GBP
1-phase light adapter		
black	**143120**	**13.00**
white	**143121**	**13.00**
grey	**143124**	**13.00**
3-phase light adapter		
black	**145990**	**17.00**
grey	**145994**	**17.00**
white	**1001542**	**17.00**
Surface-mounted ceiling rose		
black	**1004744**	**30.00**
white	**1004745**	**30.00**
gold	**1006377**	**32.00**
FITU single ceiling rose, round		
black	**132600**	**23.00**
white	**132601**	**23.00**
gold	**1002163**	**25.00**
chrome	**132605**	**25.00**



OCULUS
PD, DTW

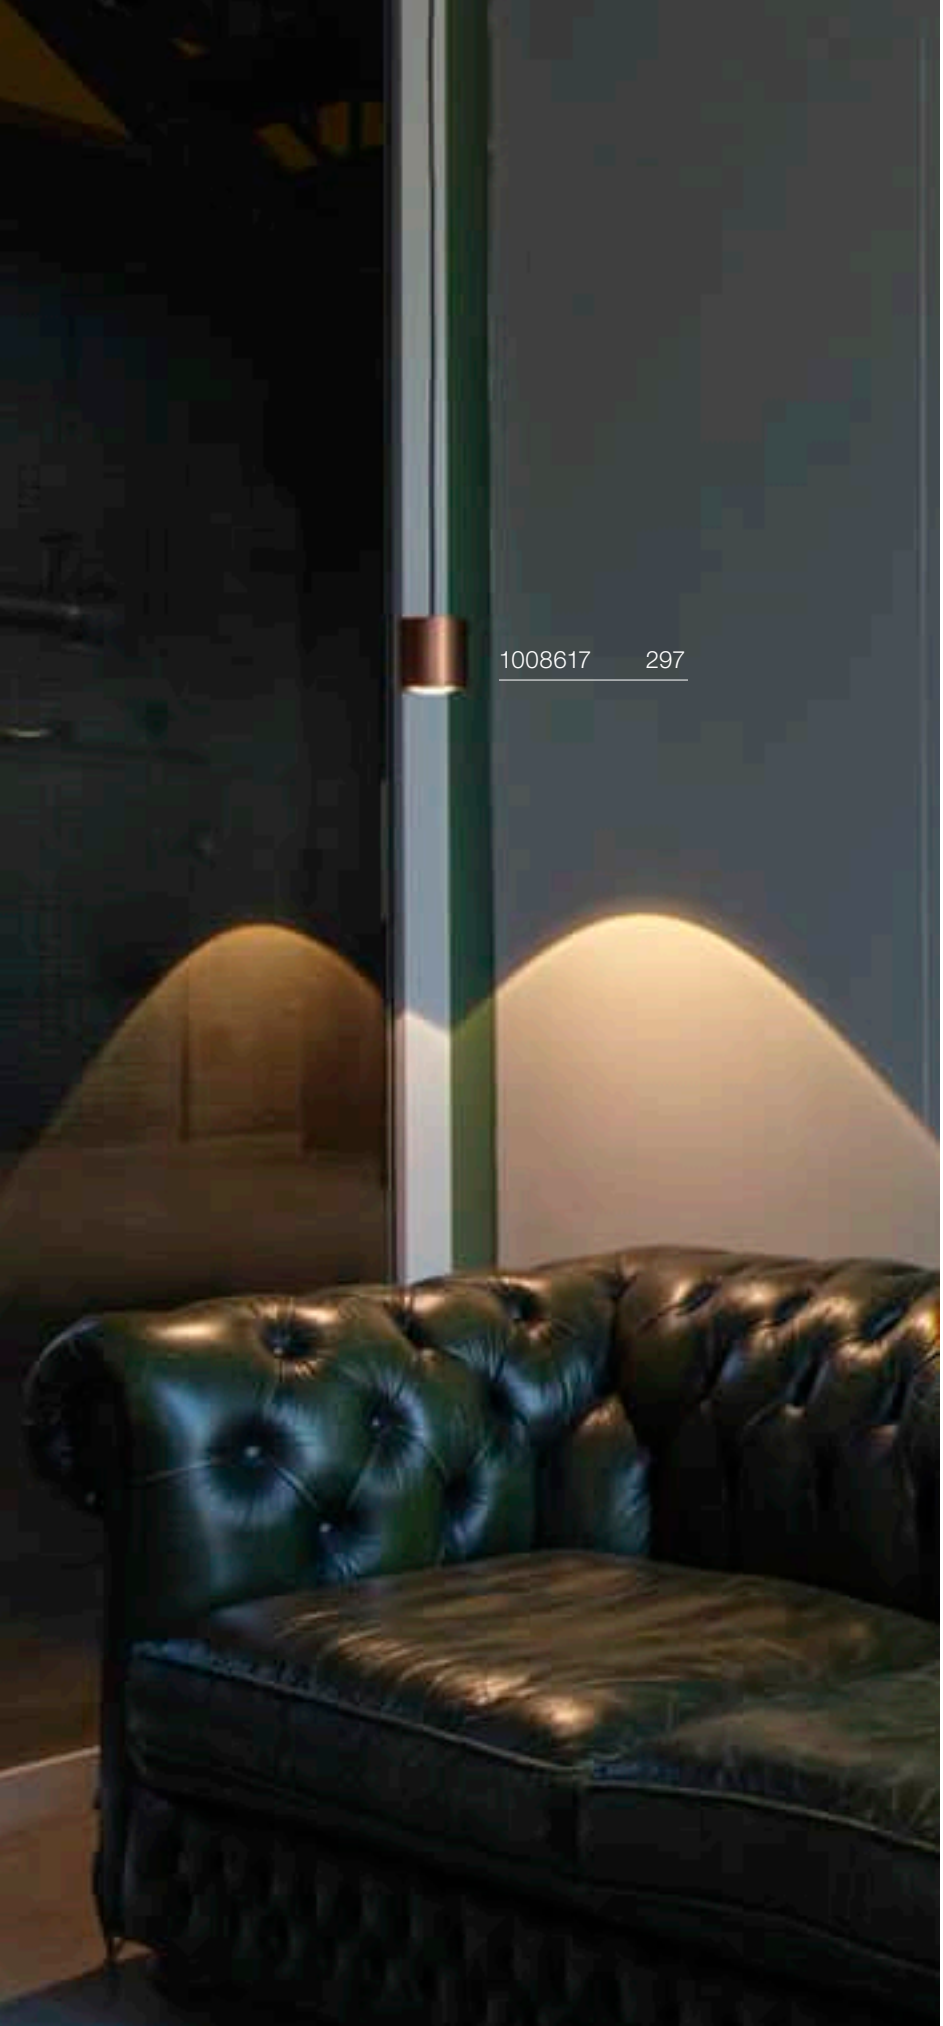

DIM TO WARM

NEW





IP20 IK02 100° L80B20 250

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11W
Material: aluminium

LED INSIDE CRI 90

Down	36lm | 2000K	-	780lm | 3000K

Version	Prod. no.	GBP
brass (PVD)	**1008616**	**254.00**
dark copper (PVD)	**1008617**	**254.00**
dark bronze (PVD)	**1008615**	**254.00**


NA DE INSTALLATIE
WERD ALLES KEURIG
OPGERUIMD.
zelfs het stof op de Rozijnen
werd AFGEDAAN
SAMAN
SAMEN IN TECHNIEK
ik ben zeer tevreden
NETTE, PROFESSIONELE
& Klantvriendelijke

FITU
PD, E27

MIX match





IP 20 | 500

220-240V ~50/60Hz
Material: aluminium

- Textile cable
- Open cable end

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
● black	132690	52.00
○ white	132691	52.00

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L



Prod. no.: 1005303 | 9.00 GBP

Fitu | single ceiling rose

16A max.
steel
H: 3.9 cm
Ø: 8.5 cm
including strain relief



Version	Prod. no.	GBP
● black	132600	23.00
○ white	132601	23.00
● gold	1002163	25.00
◑ chrome	132605	25.00

Fitu | triple ceiling rose

16A max.
steel
H: 5.4 cm
Ø: 22 cm
including strain relief



Version	Prod. no.	GBP
● black	132610	55.00
○ white	132611	55.00

Recessed ceiling rose

16A max.
Steel/polyamide 66 (PA 66)
H: 3.3 cm
Ø: 8.5 cm



Version	Prod. no.	GBP
● black	1004674	20.00
○ white	1004675	20.00
● gold	1006378	24.00

Surface-mounted ceiling rose

16A max.
steel
H: 2.6 cm
Ø: 9 cm



Version	Prod. no.	GBP
● black	1004744	30.00
○ white	1004745	30.00
● gold	1006377	32.00

1-phase light adapter

6A max.
polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 3.2 cm
max. mech. load 2 kg



Version	Prod. no.	GBP
● black	143120	13.00
○ white	143121	13.00
● grey	143124	13.00

Ceiling hook

aluminium
L: 4.6 cm
Ø: 1.8 cm



Version	Prod. no.	GBP
● black	132670	17.00
○ white	132671	17.00

Cable hook

aluminium
L: 3.1 cm
Ø: 1.4 cm



Version	Prod. no.	GBP
● black	132680	11.00
○ white	132681	11.00

3-phase light adapter

10A max.
plastic
L: 9.6 cm W: 3.5 cm H: 4.5 cm
max. mech. Load 5 kg



Version	Prod. no.	GBP
● black	145990	17.00
○ white	1001542	17.00
● grey	145994	17.00

FENDA
PD, E27

MIX match





IP 20 250

220-240V ~50/60Hz
Material: steel/plastic

- Matching accessories can be found on page 300-301
- Open cable end

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
black	132660	26.00
white	132661	26.00
chrome	132662	29.00

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	143120	13.00
white	143121	13.00
grey	143124	13.00
3-phase light adapter		
black	145990	17.00
grey	145994	17.00
white	1001542	17.00
Surface-mounted ceiling rose		
black	1004744	30.00
white	1004745	30.00
gold	1006377	32.00
FITU single ceiling rose, round		
black	132600	23.00
white	132601	23.00
gold	1002163	25.00
chrome	132605	25.00

FENDA
Glass shade 12,5 cm, round

MIX match



H: 20 cm
Ø: 12.5 cm
Material: glass

Version	Prod. no.	GBP
brown	1000773	56.00

FENDA
15 cm, round

MIX match



H: 40 cm
Ø: 15 cm
Material: textile/steel

Version	Prod. no.	GBP
grey	1004773	39.00



FENDA
30 cm, round

MIX match



H: 20 cm
Ø: 30 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	155592	61.00
white	155582	46.00
grey	1004774	46.00
beige	155583	46.00

FENDA
Ø 45 cm, round

MIX match



H: 28 cm
Ø: 45.5 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	156122	76.00
white	156111	72.00
grey	1004775	72.00
beige	156113	72.00

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 45.5 cm		
white	156100	39.00

FENDA
Ø 70 cm, round

MIX match



IP 20

H: 36 cm
Ø: 70 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	1000580	111.00
white	1000579	97.00

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 70 cm		
white	1000957	81.00

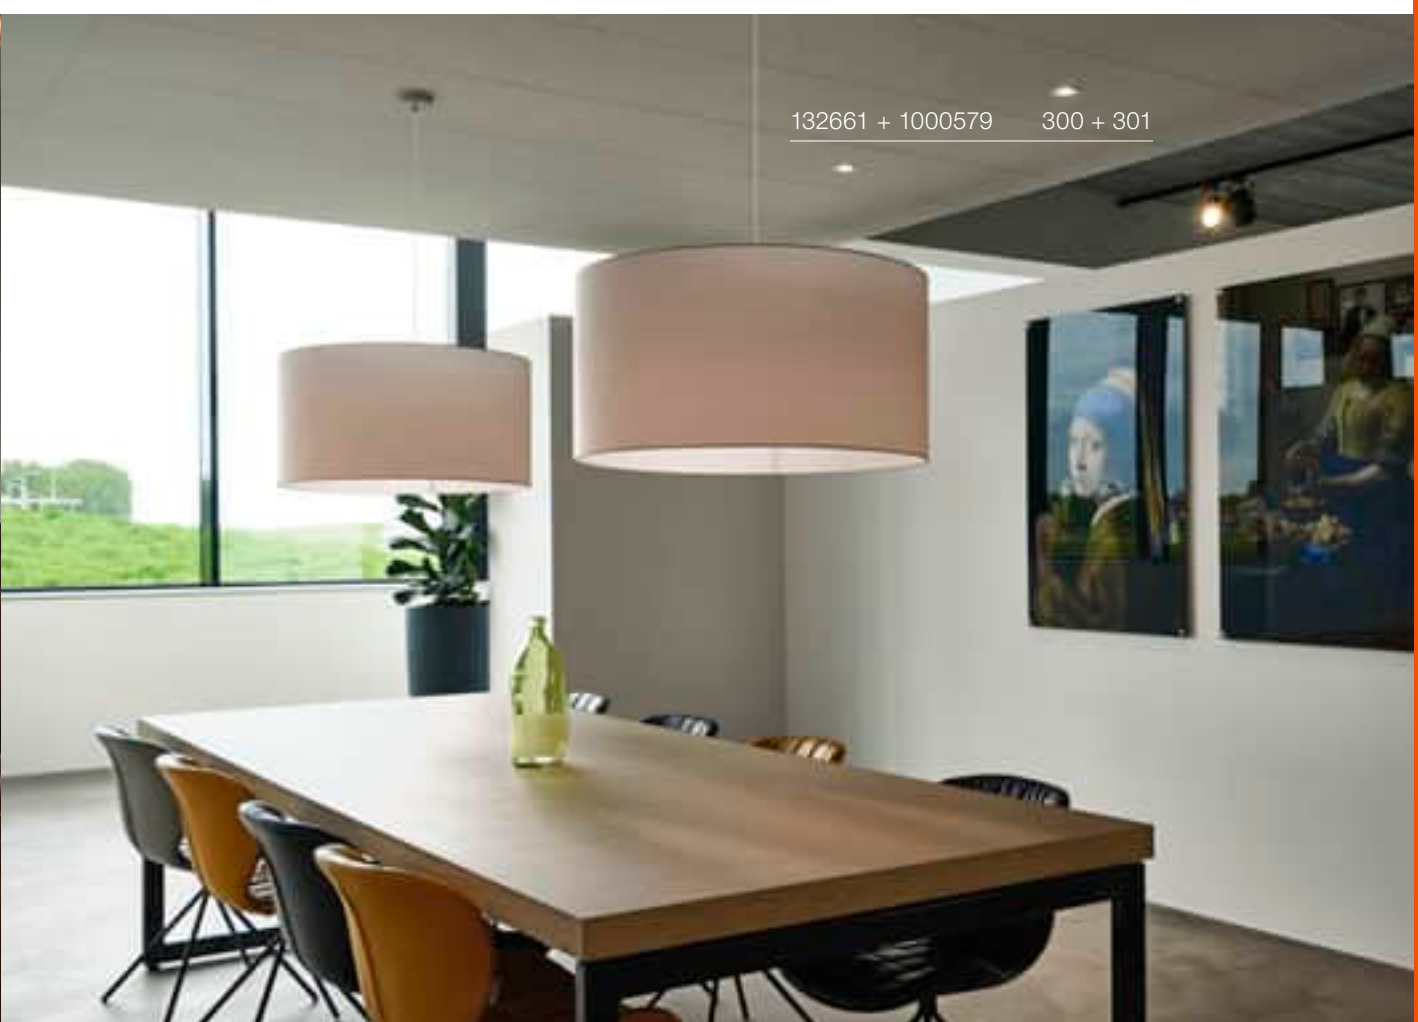

MIX & MATCH FENDA

FENDA TL
black | *155780*

FENDA FL
black | *155790*

FENDA TL
black | *155540*

FENDA FL
black | *155490*

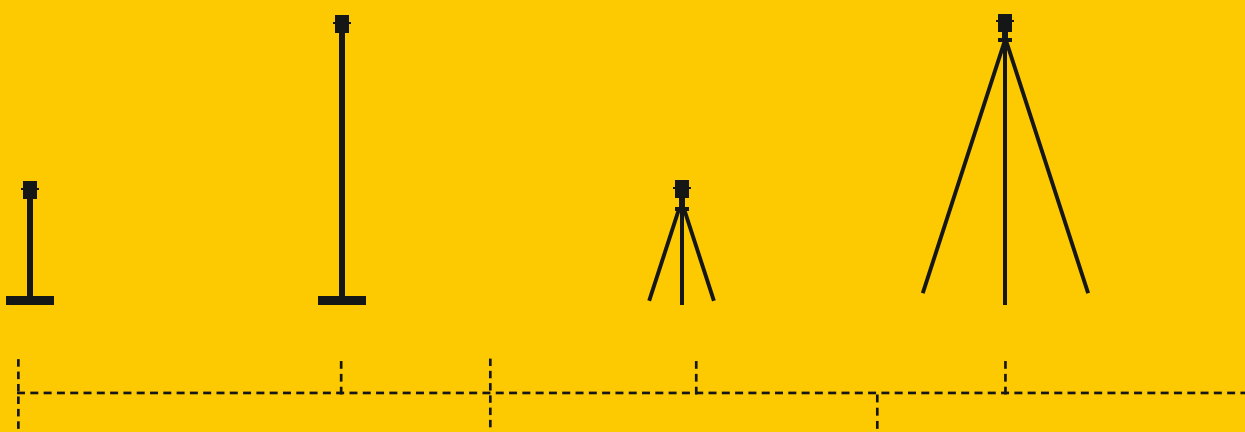







FENDA Ø15

black	*156152*
white	*156141*
beige	*156143*
grey	*1004773*

FENDA Ø30

black	*155592*
white	*155582*
beige	*155583*
grey	*1004774*

FENDA Ø45

black	*156122*
white	*156111*
beige	*156113*
grey	*1004775*



FITU PD

black | *132690*
white | *132691*

FENDA PD

black | *132660*
white | *132661*
chrome | *132662*

FENDA CL

black | *155550*
white | *155551*

FITU CRANE BASE

black | *1004682*









FENDA Ø70

black | *1000580*
white | *1000579*



FENDA Ø12,5

Glass Shade

brown | *1000773*



Combine the SLV Mix & Match products to suit your taste. Designed to work perfectly together, you can mix and match within the FENDA family or even combine the FENDA and FITU product families. You can recognise SLV Mix & Match products by the following symbol:

MIX match

HELIA AMBIENT 35
PD, PHASE

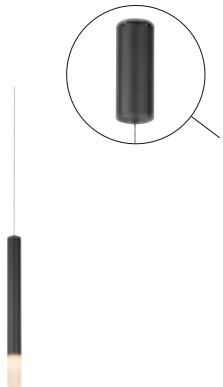



L70B50 200

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/acrylic

LED INSIDE CRI 90

Down 425lm | 3000K

Version	Prod. no.	GBP
● black	**1003436**	**188.00**

HELIA AMBIENT 35
PD

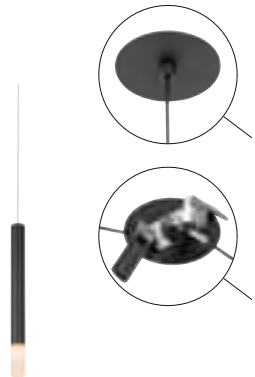



L70B50 200

500mA
Total wattage: 7.5W
Material: aluminium/acrylic

- Open cable end
- Incl. built-in rose
- ø built-in rose 68 mm
- Material thickness of mounting surface: max. 12 mm

LED INSIDE CRI 90

Down 425lm | 3000K

Version	Prod. no.	GBP
● black	**1003435**	**154.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227**	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229**	**61.00**

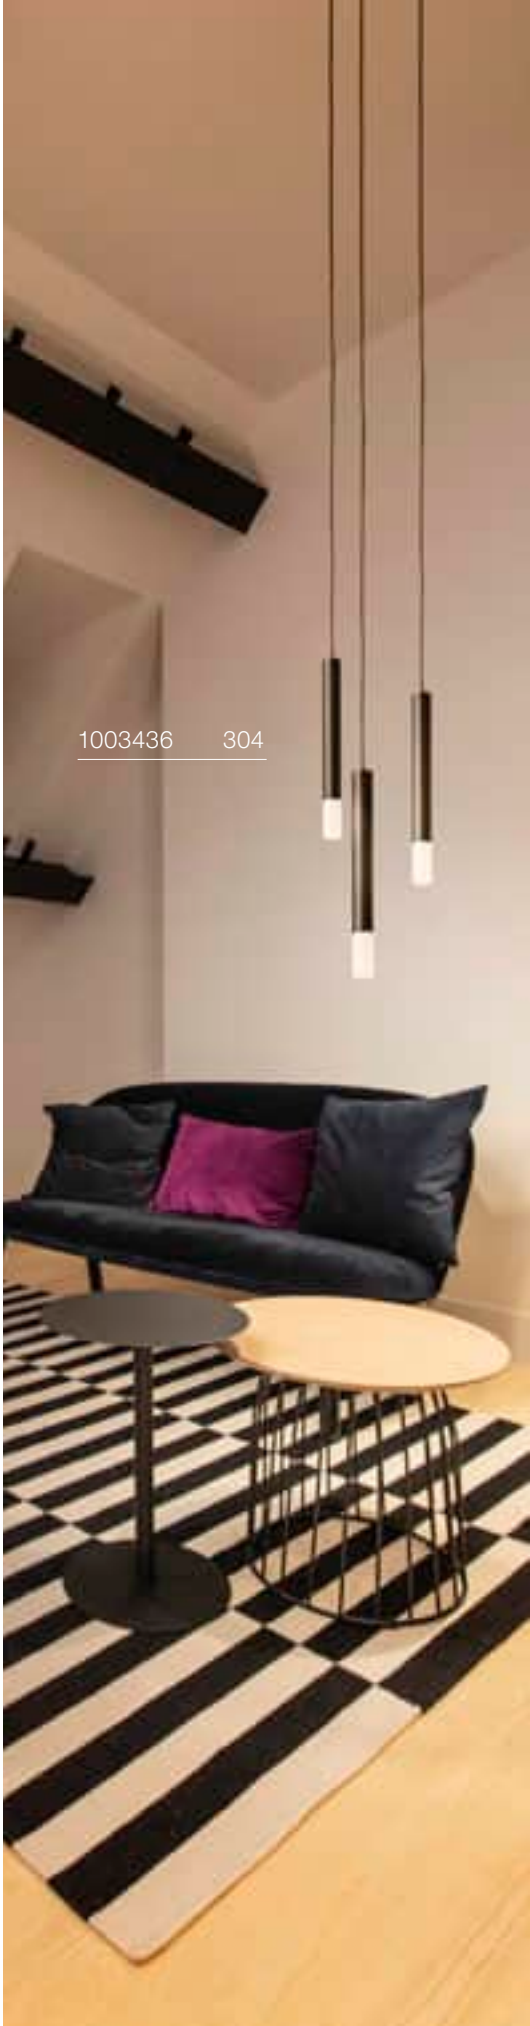



HELIA 30
PD, PHASE

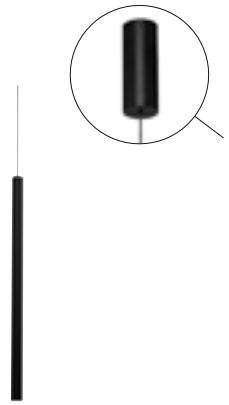





220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium

LED INSIDE CRI 90

Down 590lm | 3000K

Version	Prod. no.	GBP
● black	**152360**	**188.00**

HELIA 30
PD

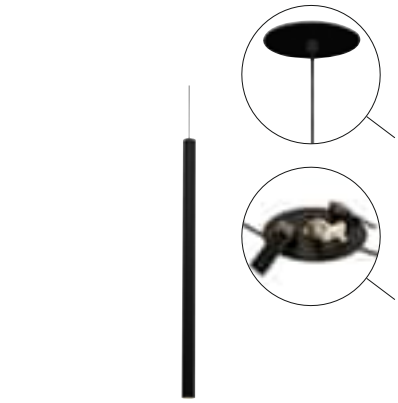







500mA
Total wattage: 7.5W
Material: aluminium

- Open cable end
- Incl. built-in rose
- ø built-in rose 68 mm
- Material thickness of mounting surface: max. 12 mm

LED INSIDE CRI 90

Down 500lm | 3000K

Version	Prod. no.	GBP
● black	**158400**	**154.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227**	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229**	**61.00**



153270 307



HELIA 40
PD, PHASE

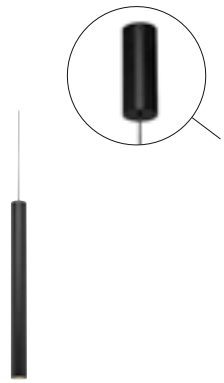





220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

LED INSIDE CRI 90

Down 730lm | 3000K

Version	Prod. no.	GBP
● black	**152370**	**214.00**

HELIA 40
PD

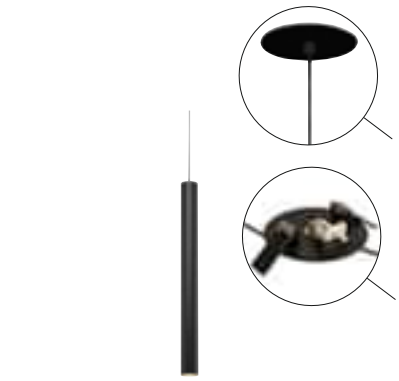





500mA
Total wattage: 9W
Material: aluminium

- Incl. built-in rose
- ø built-in rose 68 mm
- Material thickness of mounting surface: max. 12 mm

LED INSIDE CRI 90

Down 700lm | 3000K

Version	Prod. no.	GBP
● black	**158410**	**171.00**

⊕

Product	Prod. no.	GBP
LED driver 20W | 350mA/500mA | PHASE		
○ white	**1007227**	**35.00**
LED driver 25W | 150-700mA | DALI dimmable		
○ white	**1007229**	**61.00**


149388 309

ASTINA
PD, QPAR51



IP 20 250

220-240V ~50/60Hz
Material: aluminium

- Matching accessories can be found on page 299
- Open cable end

SOCKET INSIDE <10 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1002939**	**101.00**
○ white	**1002937**	**101.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
● black	**143120**	**13.00**
○ white	**143121**	**13.00**
● grey	**143124**	**13.00**
3-phase light adapter		
● black	**145990**	**17.00**
● grey	**145994**	**17.00**
○ white	**1001542**	**17.00**
Fitu single ceiling rose, round		
● black	**132600**	**23.00**
○ white	**132601**	**23.00**
◑ chrome	**132605**	**25.00**
Fitu triple ceiling rose, round		
● black	**132610**	**55.00**
○ white	**132611**	**55.00**

ENOLA B
PD, QPAR51



IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**151850**	**95.00**
○ white	**151851**	**95.00**
● gold	**151853**	**99.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

ENOLA
PD, E27



IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <50 W

Base: 1xE27 max. Ø: 9 cm | L: 18 cm

Version	Prod. no.	GBP
● black	**1008135**	**70.00**
○ white	**1008133**	**70.00**
● gold	**1008134**	**81.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h



Prod. no.: 1005302 | 11.00 GBP

ANELA
PD, PHASE





IP 20 | 28° | L70B50 | 150

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Reflector not included
- Luminous flux with reflector 1000809 = 500lm

LED INSIDE | CRI 90

Down	220lm | 3000K	750lm |

Version	Prod. no.	GBP
● black	**1000813**	**163.00**

Product	Prod. no.	GBP
Reflector 28°		
● gold	**1000809**	**17.00**



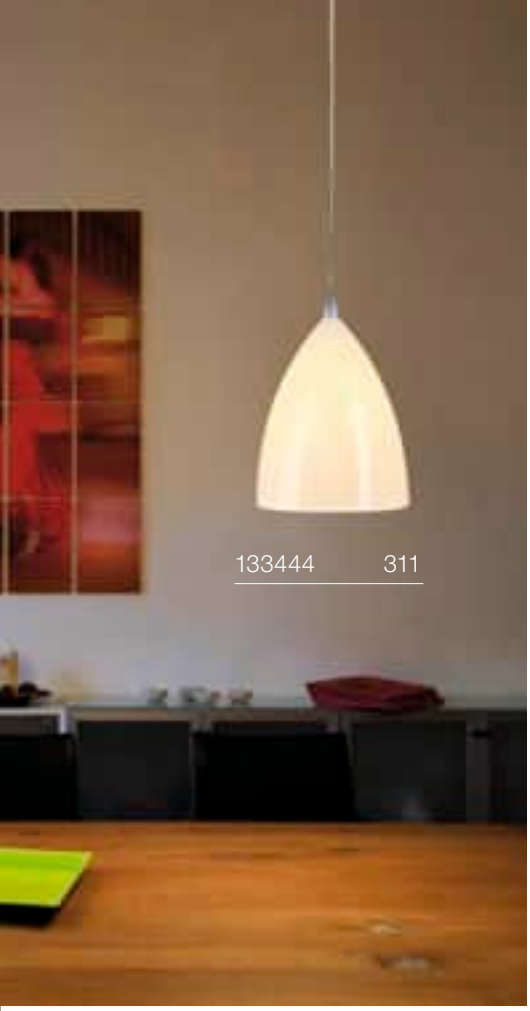

TONGA®
PD, E14





IP 20 150

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <60 W

Base: 1xE14	Max. Ø: 5.1 cm	L: 13 cm

Version	Prod. no.	GBP
grey	**133444**	**111.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

Prod. no.: 1005285 | 8.00 GBP

QUADRASS
PD, E27



IP 20 250

220-240V ~50/60Hz
Material: steel/glass

- Matching accessories can be found on page 299
- Open cable end

SOCKET INSIDE <40 W

Base: 1xE27	max. Ø: 6.5 cm	L: 18 cm

Version	Prod. no.	GBP
chrome	**1003432**	**90.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h

Prod. no.: 1005302 | 11.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
white	**143121**	**13.00**
3-phase light adapter		
white	**1001542**	**17.00**
Fitu | single ceiling rose		
white	**132601**	**23.00**

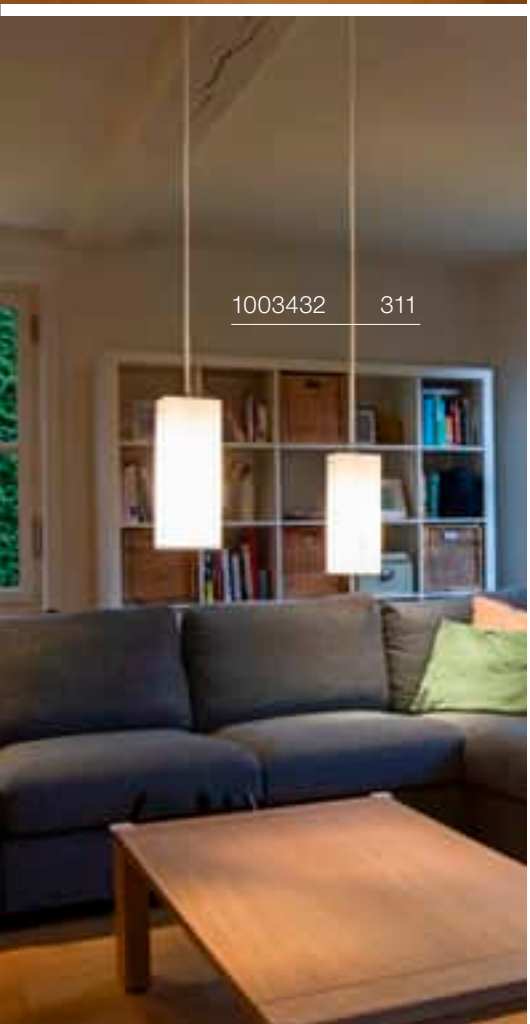


133050 313

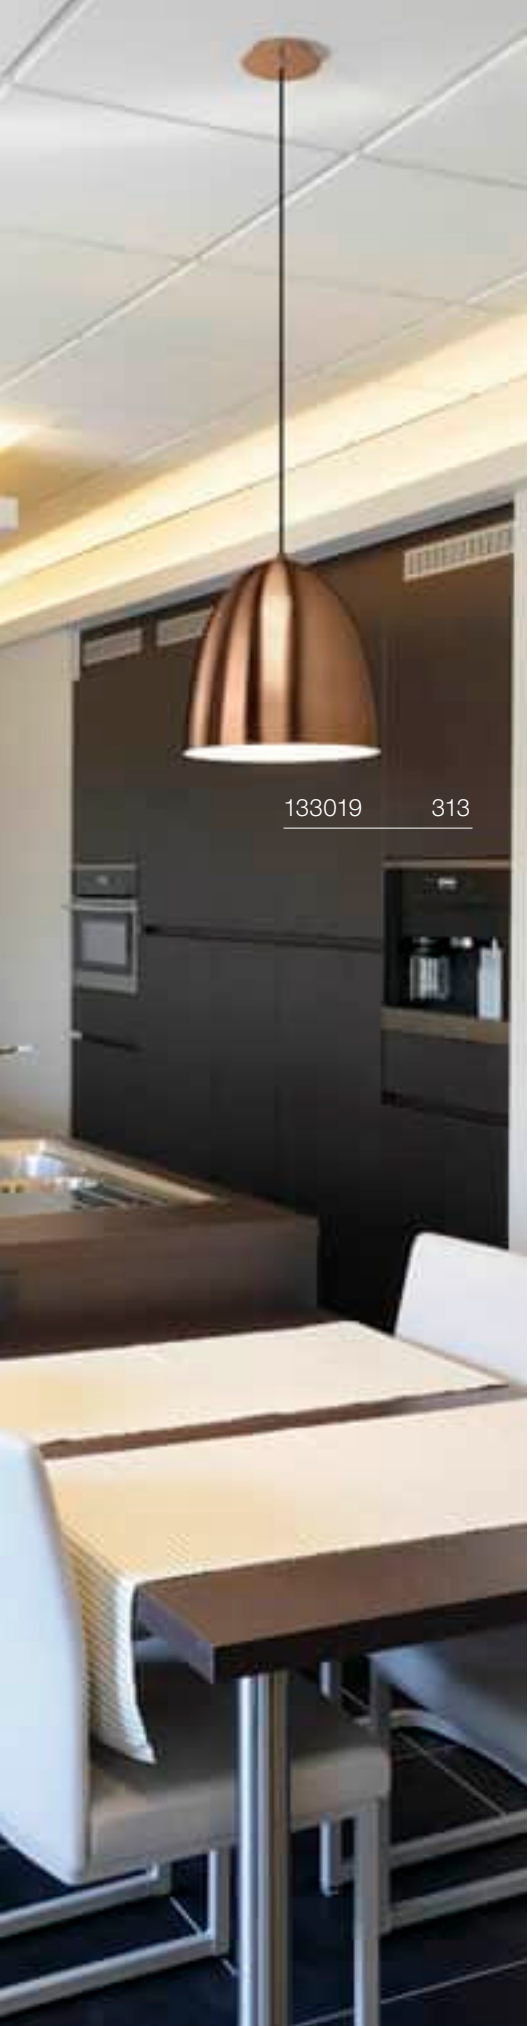

PARA CONE 20
PD, E27







IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable

SOCKET INSIDE <50 W

Base: 1xE27

Version	Prod. no.	GBP
black/gold	**1008129**	**101.00**
copper / white	**1008130**	**141.00**

E27 | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h

Prod. no.: 1008153 | 46.00 GBP

PARA CONE 30
PD, E27







IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable

SOCKET INSIDE <50 W

Base: 1xE27

Version	Prod. no.	GBP
black/gold	**1008131**	**170.00**
copper / white	**1008132**	**191.00**

LED Rusika Soft | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h

Prod. no.: 1008156 | 46.00 GBP


1002949 315
1002951 315
1002950 315

PHELIA 10
PD, E27





IP 20 200

220-240V ~50/60Hz
Material: aluminium

- Textile cable

SOCKET INSIDE <23 W

Base: 1xE27

Version	Prod. no.	GBP
black/gold	**1002951**	**113.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h



Prod. no.: 1005305 | 17.00 GBP

PHELIA 20
PD, E27





IP 20 200

220-240V ~50/60Hz
Material: aluminium

- Textile cable

SOCKET INSIDE <23 W

Base: 1xE27

Version	Prod. no.	GBP
black/gold	**1002949**	**139.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h



Prod. no.: 1005302 | 11.00 GBP

PHELIA 30
PD, E27





IP 20 200

220-240V ~50/60Hz
Material: aluminium

- Textile cable

SOCKET INSIDE <23 W

Base: 1xE27

Version	Prod. no.	GBP
black/gold	**1002950**	**161.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h



Prod. no.: 1005265 | 23.00 GBP

FORCHINI 50
PD, E27





IP 20 150

220-240V ~50/60Hz
Material: GRP

- Textile cable

SOCKET INSIDE <40 W

Base: 1xE27 max. L: 20 cm

Version	Prod. no.	GBP
black/gold	**1008535**	**196.00**

LED Rusika Soft | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h



Prod. no.: 1008156 | 46.00 GBP

FORCHINI 70
PD, E27





IP 20 150

220-240V ~50/60Hz
Material: GRP

- Textile cable

SOCKET INSIDE <40 W

Base: 1xE27 max. L: 20 cm

Version	Prod. no.	GBP
black/gold	**1008538**	**347.00**

LED Tube 30 | 6W | 330°
2200K | 570lm | EEC=F
6kWh/1000h



Prod. no.: 1008152 | 55.00 GBP

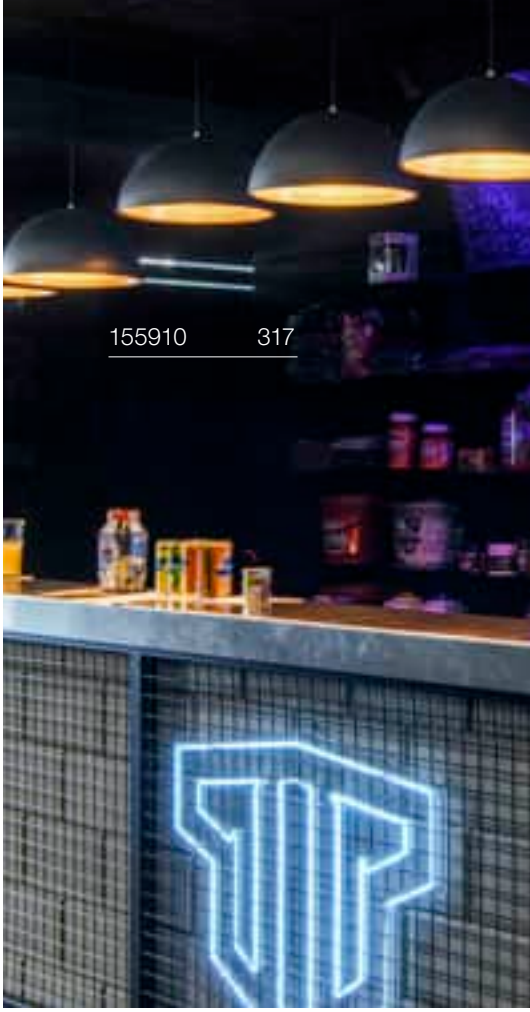







FORCHINI M 40
PD, E27





IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable

SOCKET INSIDE <40 W

Base: 1xE27 max. L: 15.2 cm

Version	Prod. no.	GBP
black/gold	**1008536**	**196.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005305 | 17.00 GBP

FORCHINI M 50
PD, E27





IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable

SOCKET INSIDE <40 W

Base: 1xE27 max. L: 18 cm

Version	Prod. no.	GBP
black/gold	**1008537**	**216.00**

E27 | 8W | 330°
1900K | 400lm | EEC=F
6kWh/1000h

C

Prod. no.: 1008159 | 77.00 GBP


165410 318


165400 319


165390 319

ROTOBALL 25
PD, E27





IP 20 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

SOCKET INSIDE <24 W

Base: 1xE27 max. Ø: 7 cm

Version	Prod. no.	GBP
○ white	**165390**	**139.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h



Prod. no.: 1005302 | 11.00 GBP

ROTOBALL 40
PD, E27





IP 20 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

SOCKET INSIDE <24 W

Base: 1xE27 max. Ø: 9.5 cm

Version	Prod. no.	GBP
○ white	**165410**	**156.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h



Prod. no.: 1005302 | 11.00 GBP

ROTOBALL 50
PD, E27





IP 20 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

SOCKET INSIDE <24 W

Base: 1xE27 max. Ø: 9.5 cm

Version	Prod. no.	GBP
○ white	**165400**	**191.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h



Prod. no.: 1005302 | 11.00 GBP

PARA DOME
PD, E27





IP 20 250

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE <150 W

Base: 1xE27 max. Ø: 7 cm

Version	Prod. no.	GBP
black	1005214	71.00
grey	1005215	71.00

LED E27 | 11W | 330°
2700K | 1250lm | EEC=E
11kWh/1000h

Prod. no.: 1008162 | 72.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
black	143120	13.00
3-phase light adapter		
black	145990	17.00
Surface-mounted ceiling rose		
black	1004744	30.00
Recessed ceiling rose		
black	1004674	20.00
Ceiling rose		
black	210060	28.00
Fitu | single ceiling rose		
black	132600	23.00

PARA DOME
Shade



IP 20

H: 20.6 cm
Ø: 30.8 cm
Material: aluminium

Version	Prod. no.	GBP
black	1005216	86.00
black/gold	1006410	86.00
grey	1005217	86.00

PARA DOME
Shade



IP 20

H: 20 cm
Ø: 31.5 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
transparent	1005218	86.00





PARA 380
PD, E27





IP 20 150

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <20 W

Base: 1xE27

Version	Prod. no.	GBP
● black	**165359**	**142.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h

C,L

Prod. no.: 1005302 | 11.00 GBP



QUIMERA | 329



LYGANT | 331



LYGANT | 331



SOCKET

VARYT | 333



VARYT | 333



VARYT | 333



VARYT | 333



VARYT | 333



SOCKET

SUN | 334



SOCKET

SUN | 335



NUMINOS® S | 336



NUMINOS® M | 338



NUMINOS® L | 340



NUMINOS® XL | 342



MEDO® PRO 30 | 344



MEDO® PRO 40 | 345



MEDO® PRO 60 | 346



MEDO® PRO 90 | 347

MEDO® PRO 30 | 348

MEDO® PRO 40 | 349

MEDO® PRO 60 | 350

MEDO® PRO 90 | 351



MEDO® 30 | 352



MEDO® 40 | 352



MEDO® 60 | 353



MEDO® 90 | 353



ONE LINEAR 50 | 354



ONE LINEAR 70 | 355



ONE 40 | 357



ONE 60 | 357

TRUKKO | 358

TRUKKO | 358



TRUKKO | 359

TRUKKO 60 | 359

TRUKKO 90 | 359

SEDO 14 | 360

SEDO 21 | 360



ARLINA 60 | 361



ARLINA 130 | 361



MARYLIN 40 | 363

MARYLIN 60 | 363

MARYLIN 90 | 363



SOCKET

WL 106 | 364



SOCKET

WL 106 | 364



SOCKET

MIBO UP/DOWN | 365



LED

MAGANDA | 365



LED

DORISA 30 | 367



LED

DORISA 50 | 367



LED

DORISA 60 | 367



LED

Q-LINE® | 368

LED

L-LINE 60 | 369



LED

L-LINE 120 | 369



SOCKET

PANTILO ROPE | 373



SOCKET

ASTO TUBE | 375



SOCKET

ASTO TUBE | 375



LED

MANA BASE | 377



MANA BASE | 378



MANA 40 | 378



MANA 60 | 378

NEW



MANA 40 | 379

NEW

MANA 40 | 379

NEW



MANA 40 | 379

NEW



MANA 60 | 379

NEW



MANA 60 | 379

NEW



MANA 60 | 379

MANA | 381



MANA | 381

LED

MANA | 383



MANA | 383



LED

OCULUS | 385



LED

OCULUS | 385

NEW



LED

OCULUS | 385



SOCKET

PLASTRA | 386



SOCKET

PLASTRA | 386



SOCKET

PLASTRA | 387

SOCKET

PLASTRA | 387



SOCKET

PLASTRA | 389

LED

PLASTRA | 389



LED

PLASTRA | 389



SOCKET

PLASTRA | 390



SOCKET

PLASTRA 101 | 391

SOCKET

PLASTRA | 391

SOCKET

PLASTRA 104 | 391

LED

LOGS IN | 392



LOGS IN | 392

LOGS IN L | 393



LOGS IN L | 393



QUAD FRAME 14 | 395



QUAD FRAME 19 | 395



ASSO 300 | 396

ASSO 300 | 397



OSSA 180 | 397



ASSO 300 | 397



CARISO | 398



CARISO | 398



CHROMBO | 399

DIRETO 60 | 401

DIRETO 90 | 401



DENA 30 | 402

BASKET | 402



QUADRASS | 403



QUADRASS SPOT | 403



FITU | 404



FITU CUBE | 404



THEO UP/DOWN | 405



SOLID CUBE | 405



ENOLA B | 407



ENOLA B | 407

ASTINA UP/DOWN | 407



FENDA | 408



FENDA | 408



KENKUA SPOT | 409



COUPA FLEX | 409



KARPO MAGN | 410



KARPO MAGN | 410



KARPO 30 | 411



KARPO | 411



SOMNILA SPOT | 412



SOMNILA SPOT | 413

SOMNILA FLEX | 413

SOMNILA FLEX | 413



DIO FLEX PLATE | 415



DIO FLEX PLATE | 415



PHELIA | 416

MERADO FLOOD | 416

DISPLAY ADL 50 | 417



LED

DECONA 30 | 418



LED

DECONA 42 | 419



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 420



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 421



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 422



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 423



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 424



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 425



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 426



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



SOCKET

PURI 2.0 | 427



PURI 2.0 | 429



PURI 2.0I | 429



PURI 2.0 | 429



SOCKET

PURI | 431



SOCKET

PURI | 431



SOCKET

PURI | 431



SOCKET

PURI | 431



SOCKET

AVO | 433



SOCKET

AVO | 433



SOCKET

AVO | 433

SOCKET

AVO | 433

SOCKET

ASTO | 435



SOCKET

ASTO | 435



SOCKET

ASTO | 435



SOCKET

ASTO | 435



SOCKET

PANTILO
ROPE 19 | 437



SOCKET

PANTILO
ROPE 27 | 437



LED

CYFT WAVE | 439



LED

CYFT | 439

NEW



SOCKET

KAMI | 441



SOCKET

ASTO TUBE | 443



SOCKET

ASTO TUBE | 443



SOCKET

ASTO TUBE | 443



SOCKET

ASTO TUBE | 443



LED

OCULUS | 445



LED

KARPO 30 | 445

NEW



LED

NOBLO® | 447

NEW



LED

NOBLO® | 447

NEW



LED

NOBLO® | 447

NEW



LED

NOBLO® | 449

NEW

LED

NOBLO® | 449

NEW

LED

NOBLO® | 449



LED

KALU | 451



LED

KALU | 451



LED

KALU | 451



LED

KALU | 451



SOCKET

KALU | 453



SOCKET

KALU | 453



SOCKET

KALU | 453



SOCKET

KALU | 453



SOCKET

ENOLA B | 455



SOCKET

ENOLA B | 455



SOCKET

ENOLA B | 455



SOCKET

ALTRA DICE | 456



LED

SPOT 79 | 457



LED

INDA 12 | 457

LED

SENSER 12 | 459

LED

SENSER 18 | 459



LED

SENSER 24 | 459

LED

SENSER 12 | 461

LED

SENSER 18 | 461



LED

SENSER 24 | 461

LED

SIMA | 462

LED

SIMA | 462

SIMA | 463

SIMA | 463

LIPSY® 30 | 465

LIPSY® 40 | 465

LIPSY® 50 | 465

LIPSY® 30 | 467

LIPSY® 40 | 467

LIPSY® 50 | 467

LIPSY® 40 | 468

LIPSY® 50 | 468



SOCKET
MELAN | 469

BATTEN 60 | 471

BATTEN 120 | 471



LONG GRILL | 473

SIGHT 60 | 475



SIGHT 115 | 475


1008036 329

QUIMERA
WL, PHASE

CCT

NEW





C | IP20 | IK03 | 350° | L80B50

220-240V ~50/60Hz | 700mA
Total wattage: 8.2W
Material: aluminium/glass

LED INSIDE | CRI 90

Down	320lm | 2700K	330lm | 3000K

Version	Prod. no.	GBP
brass (PVD)	**1008036**	**309.00**
dark copper (PVD)	**1008037**	**309.00**
dark bronze (PVD)	**1008035**	**309.00**


1007619 331

LYGANT
WL, single





IP44 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 8W
Material: aluminium

LED INSIDE CRI 90

Down 560lm | 3000K

Version	Prod. no.	GBP
black	**1007614**	**214.00**
white	**1007613**	**214.00**
brass (PVD)	**1007612**	**240.00**
chrome	**1007615**	**240.00**

LYGANT
WL, double





IP44 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

LED INSIDE CRI 90

Down 800lm | 3000K

Version	Prod. no.	GBP
black	**1007618**	**308.00**
white	**1007617**	**308.00**
brass (PVD)	**1007616**	**331.00**
chrome	**1007619**	**331.00**



1008107 + 1007859 333

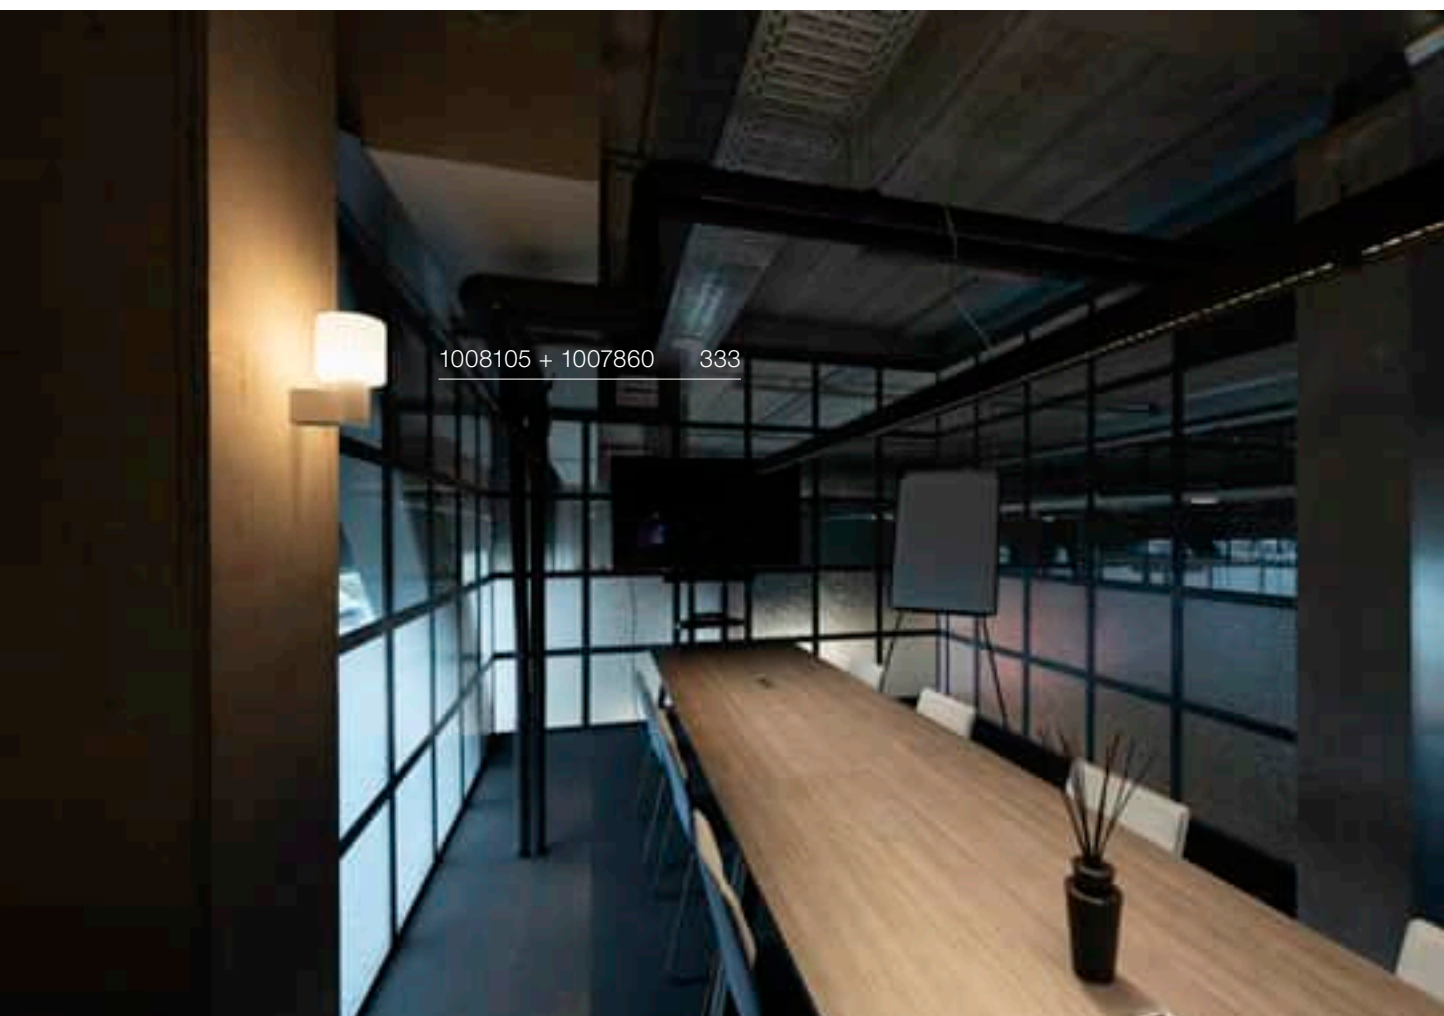

1008105 + 1007860 333

VARYT

NEW





IP20 IK02

220-240V ~50/60 Hz
Material: steel

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Version	Prod. no.	GBP
black	1008104	77.00
white	1008105	77.00
brass (PVD)	1008107	102.00
chrome	1008106	85.00
copper (PVD)	1008108	102.00

VARYT
Glass shade for PD, WL, CL, TL

MIX match

NEW



IK02

H: 12.8 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1008119	51.00

VARYT
Glass shade diamond for PD, WL, CL, TL

MIX match

NEW



IK02

H: 12.7 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
amber	1008023	69.00
smoke	1007858	69.00

VARYT
Glass shade line for PD, WL, CL, TL

MIX match

NEW



IK02

H: 13 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1007859	59.00

VARYT
Glass shade pleated for PD, WL, CL, TL

MIX match

NEW

IK02

H: 13.5 cm
Ø: 11.5 cm
Material: glass

Version	Prod. no.	GBP
white	1007860	64.00

SUN
WL, G9 square

NEW





IP20 IK02

220-240V ~50/60 Hz
Material: glass

SOCKET INSIDE 40 W

Base: 1xG69 | max. Ø: 1.9 cm | L: 6 cm

Version	Prod. no.	GBP
● black	**1008123** ●	**94.00**

G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h



Prod. no.: 1005286 | 8.00 GBP

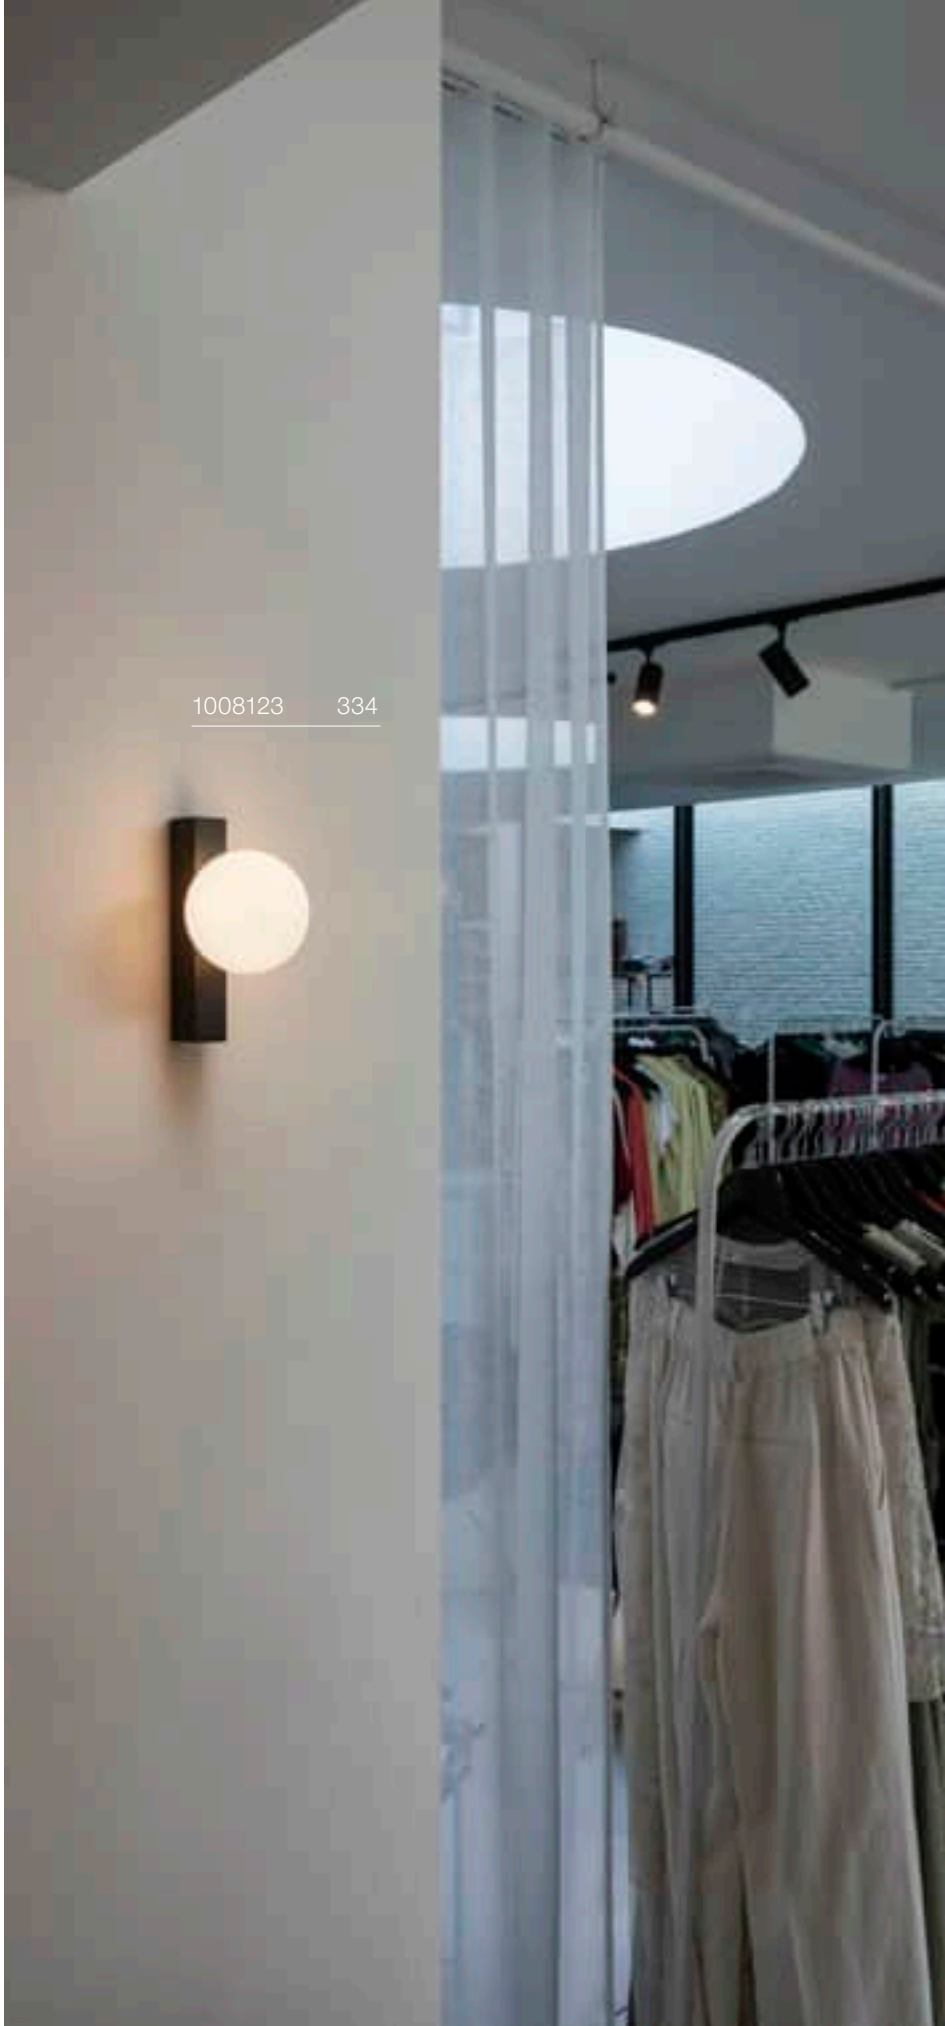

SUN
WL, G9 rounded

NEW







IP20 IK02

220-240V ~50/60 Hz
Material: glass

SOCKET INSIDE 40 W

Base: 1xG69 | max. Ø: 1.9 cm | L: 6 cm

Version	Prod. no.	GBP
● black	**1008124** ●	**94.00**

LED QT14 | 3.6W | 300°
2700K | 450lm | EEC=E
4kWh/1000h

Prod. no.: 1007455 | 8.00 GBP

NUMINOS® S
CW





● black





○ white

IP 20 L80B50 350° 90°

INSIDE

200mA
220-240V ~50/60Hz
Total wattage: 8.6W
Material: aluminium/plastic

Version	GBP
All S versions	**99.00**
All S versions DALI	**142.00**

Note:
Decorative ring also available in white, gold and copper



⊕

Version	Prod. no.	GBP
Front ring S ○ white	**1006167**	**2.00**
Front ring S ● gold	**1008144** ●	**7.00**
Front ring S ● copper	**1008140** ●	**7.00**

		930lm	24°	16	**1004098**	
	2700K	944lm	36°	16	**1004099**	
		960lm	60°	19	**1004100**	
		1016lm	24°	13	**1004106**	
C	3000K	1037lm	36°	13	**1004107**	
		1042lm	60°	19	**1004108**	
		1074lm	24°	16	**1004114**	
	4000K	1092lm	36°	16	**1004115**	
		1098lm	60°	19	**1004116**	
		930lm	24°	16	**1004386**	
	2700K	944lm	36°	16	**1004387**	
		960lm	60°	19	**1004388**	
		1016lm	24°	13	**1004394**	
Dali	3000K	1037lm	36°	13	**1004395**	
		1042lm	60°	19	**1004396**	
		1074lm	24°	16	**1004402**	
	4000K	1092lm	36°	16	**1004403**	
		1098lm	60°	19	**1004404**	
		930lm	24°	16	**1004102**	
	2700K	944lm	36°	16	**1004103**	
		960lm	60°	19	**1004104**	
		1016lm	24°	13	**1004110**	
C	3000K	1037lm	36°	13	**1004111**	
		1042lm	60°	19	**1004112**	
		1074lm	24°	16	**1004118**	
	4000K	1092lm	36°	16	**1004119**	
		1098lm	60°	19	**1004120**	
		930lm	24°	16	**1004390**	
	2700K	944lm	36°	16	**1004391**	
		960lm	60°	19	**1004392**	
		1016lm	24°	13	**1004398**	
Dali	3000K	1037lm	36°	13	**1004399**	
		1042lm	60°	19	**1004400**	
		1074lm	24°	16	**1004406**	
	4000K	1092lm	36°	16	**1004407**	
		1098lm	60°	19	**1004408**	

NUMINOS® M
CW





● black





○ white

IP 20 L80B50 350° 90°

INSIDE

350mA
220-240V ~50/60Hz
Total wattage: 14W
Material: aluminium/plastic

Version	GBP
All M versions	**125.00**
All M versions DALI	**169.00**

Note:
Decorative ring also available in white, gold and copper



⊕

Version	Prod. no.	GBP
Front ring M ○ white	**1006168**	**3.00**
Front ring M ● gold	**1008145** ●	**8.00**
Front ring M ● copper	**1008141** ●	**8.00**

		1750lm	24°	16	**1004194**	
	2700K	1744lm	36°	16	**1004195**	
		1697lm	60°	22	**1004196**	
		1804lm	24°	16	**1004202**	
C	3000K	1790lm	36°	13	**1004203**	
		1749lm	60°	22	**1004204**	
		1931lm	24°	19	**1004210**	
	4000K	1927lm	36°	16	**1004211**	
		1872lm	60°	25	**1004212**	
		1750lm	24°	16	**1004482**	
	2700K	1744lm	36°	16	**1004483**	
		1697lm	60°	22	**1004484**	
		1804lm	24°	16	**1004490**	
Dali	3000K	1790lm	36°	13	**1004491**	
		1749lm	60°	22	**1004492**	
		1931lm	24°	19	**1004498**	
	4000K	1927lm	36°	16	**1004499**	
		1872lm	60°	25	**1004500**	
		1750lm	24°	16	**1004198**	
	2700K	1744lm	36°	16	**1004199**	
		1697lm	60°	22	**1004200**	
		1804lm	24°	16	**1004206**	
C	3000K	1790lm	36°	13	**1004207**	
		1749lm	60°	22	**1004208**	
		1931lm	24°	19	**1004214**	
	4000K	1927lm	36°	16	**1004215**	
		1872lm	60°	25	**1004216**	
		1750lm	24°	16	**1004486**	
	2700K	1744lm	36°	16	**1004487**	
		1697lm	60°	22	**1004488**	
		1804lm	24°	16	**1004494**	
Dali	3000K	1790lm	36°	13	**1004495**	
		1749lm	60°	22	**1004496**	
		1931lm	24°	19	**1004502**	
	4000K	1927lm	36°	16	**1004503**	
		1872lm	60°	25	**1004504**	

NUMINOS® L
CW





● black





○ white

IP 20 L80B50 350° 90° CRI 90

LED INSIDE

500mA
220-240V ~50/60Hz
Total wattage: 19 W
Material: aluminium/plastic

Version	GBP
All L versions	133.00
All L versions DALI	185.00

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring L ○ white	1006169	3.00
Front ring L ● gold	1008146 ●	9.00
Front ring L ● copper	1008142 ●	9.00

				UGR	Prod. no.	
C	2700K	2370lm	24°	19	**1004290**	
		2245lm	36°	19	**1004291**	
		2304lm	60°	22	**1004292**	
	3000K	2432lm	24°	13	**1004298**	
		2320lm	36°	13	**1004299**	
		2373lm	60°	22	**1004300**	
	4000K	2694lm	24°	19	**1004306**	
		2557lm	36°	19	**1004307**	
		2601lm	60°	22	**1004308**	
Dali	2700K	2370lm	24°	19	**1004578**	
		2245lm	36°	19	**1004579**	
		2304lm	60°	22	**1004580**	
	3000K	2432lm	24°	13	**1004586**	
		2320lm	36°	13	**1004587**	
		2373lm	60°	22	**1004588**	
	4000K	2694lm	24°	19	**1004594**	
		2557lm	36°	19	**1004595**	
		2601lm	60°	22	**1004596**	
C	2700K	2370lm	24°	19	**1004294**	
		2245lm	36°	19	**1004295**	
		2304lm	60°	22	**1004296**	
	3000K	2432lm	24°	13	**1004302**	
		2320lm	36°	13	**1004303**	
		2373lm	60°	22	**1004304**	
	4000K	2694lm	24°	19	**1004310**	
		2557lm	36°	19	**1004311**	
		2601lm	60°	22	**1004312**	
Dali	2700K	2370lm	24°	19	**1004582**	
		2245lm	36°	19	**1004583**	
		2304lm	60°	22	**1004584**	
	3000K	2432lm	24°	13	**1004590**	
		2320lm	36°	13	**1004591**	
		2373lm	60°	22	**1004592**	
	4000K	2694lm	24°	19	**1004598**	
		2557lm	36°	19	**1004599**	
		2601lm	60°	22	**1004600**	

NUMINOS® XL
CW





● black





○ white

IP 20 L80B50 350° 90°

INSIDE

700mA
220-240V ~50/60Hz
Total wattage: 26W
Material: aluminium/polycarbonate (PC)

Version	GBP
All XL versions	**142.00**
All XL versions DALI	**202.00**

Note:
Decorative ring also available in white, gold and copper



Version	Prod. no.	GBP
Front ring XL ○ white	**1006170**	**4.00**
Front ring XL ● gold	**1008147** ●	**9.50**
Front ring XL ● copper	**1008143** ●	**9.50**

	3566lm	24°	19	**1006083**	
2700K	3542lm	36°	19	**1006084**	
	3152lm	60°	25	**1006085**	
	3586lm	24°	19	**1006089**	
3000K	3536lm	36°	19	**1006090**	
	3135lm	60°	25	**1006091**	
	3891lm	24°	19	**1006095**	
4000K	3840lm	36°	19	**1006096**	
	3438lm	60°	25	**1006097**	
	3566lm	24°	19	**1005741**	
2700K	3542lm	36°	19	**1005742**	
	3152lm	60°	25	**1005743**	
	3586lm	24°	19	**1005747**	
3000K	3536lm	36°	19	**1005748**	
	3135lm	60°	25	**1005749**	
	3891lm	24°	19	**1005753**	
4000K	3840lm	36°	19	**1005754**	
	3438lm	60°	25	**1005755**	
	3566lm	24°	19	**1006086**	
2700K	3542lm	36°	19	**1006087**	
	3152lm	60°	25	**1006088**	
	3586lm	24°	19	**1006092**	
3000K	3536lm	36°	19	**1006093**	
	3135lm	60°	25	**1006094**	
	3891lm	24°	19	**1006098**	
4000K	3840lm	36°	19	**1006099**	
	3438lm	60°	25	**1006100**	
	3566lm	24°	19	**1005744**	
2700K	3542lm	36°	19	**1005745**	
	3152lm	60°	25	**1005746**	
	3586lm	24°	19	**1005750**	
3000K	3536lm	36°	19	**1005751**	
	3135lm	60°	25	**1005752**	
	3891lm	24°	19	**1005756**	
4000K	3840lm	36°	19	**1005757**	
	3438lm	60°	25	**1005758**	

MEDO® PRO 30
CW, DALI, UGR<19





IP 50 | IK02 | 70° | 19 | L80B10

20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

Down	1250lm | 3000K	1250lm | 4000K

Version	Prod. no.	GBP
● black	**1007284**	**283.00**
○ white	**1007285**	**283.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 30
CW, PHASE, UGR<19





IP 50 | IK02 | 70° | 19 | L80B10

20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

Down	1250lm | 3000K	1250lm | 4000K

Version	Prod. no.	GBP
● black	**1007288**	**257.00**
○ white	**1007289**	**257.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**



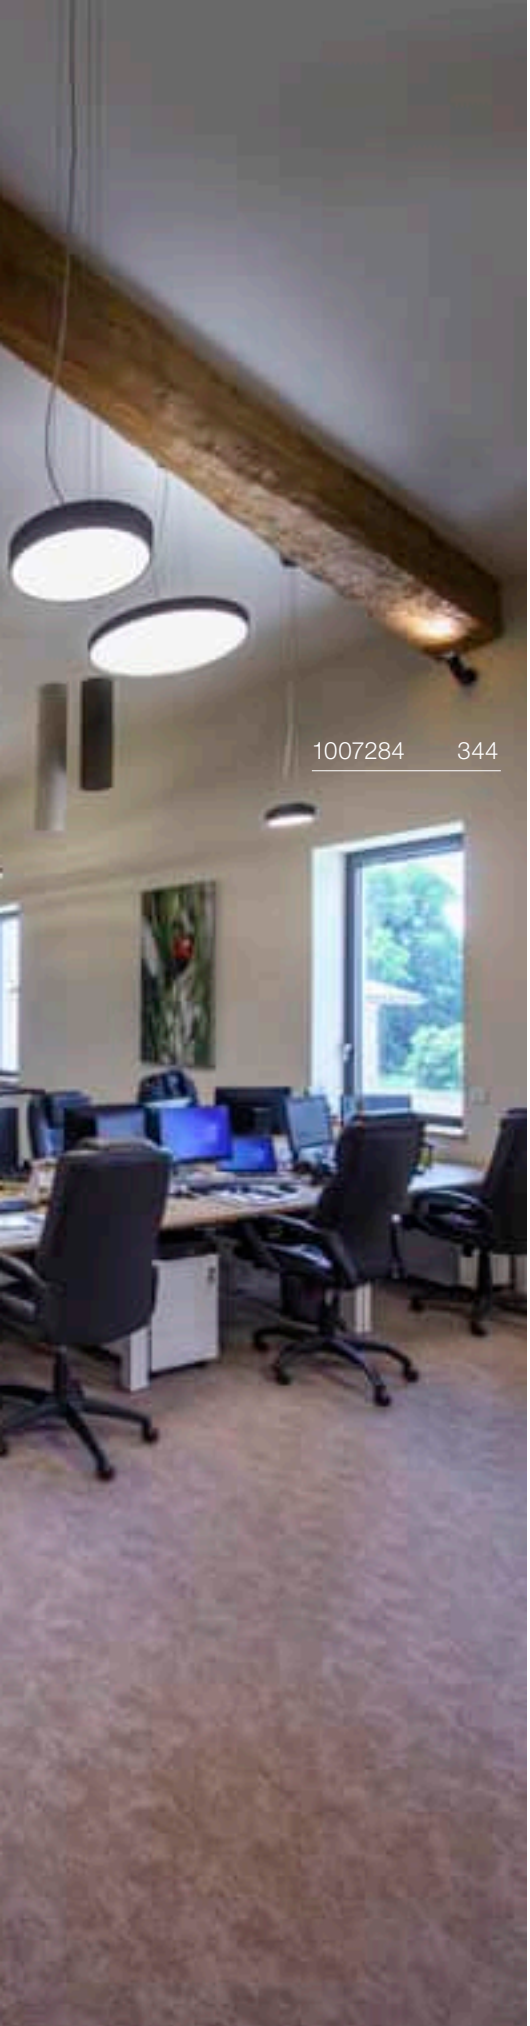

MEDO® PRO 40
CW, DALI, UGR<19

CCT





Dali | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 50 000 Hours

20

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	2400lm | 3000K	2500lm | 4000K

Version	Prod. no.	GBP
● black	**1007292**	**343.00**
○ white	**1007293**	**343.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 40
CW, PHASE, UGR<19

CCT





C | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 50 000 Hours

20

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	2400lm | 3000K	2500lm | 4000K

Version	Prod. no.	GBP
● black	**1007296**	**300.00**
○ white	**1007297**	**300.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, DALI, UGR<19

CCT





Dali | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5000lm | 3000K	5100lm | 4000K

Version	Prod. no.	GBP
● black	**1007300**	**600.00**
○ white	**1007301**	**600.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, PHASE, UGR<19

CCT





C | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 37W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5000lm | 3000K	5100lm | 4000K

Version	Prod. no.	GBP
● black	**1007304**	**540.00**
○ white	**1007305**	**540.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**





MEDO® PRO 90
CW, DALI, UGR<19

CCT





Dali | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 75W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	9400lm | 3000K	9700lm | 4000K

Version	Prod. no.	GBP
● black	**1007308**	**1,203.00**
○ white	**1007309**	**1,203.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 90
CW, PHASE, UGR<19

CCT





C | IP 50 | IK02 | 80° | UGR 19 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 74W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	9400lm | 3000K	9700lm | 4000K

Version	Prod. no.	GBP
● black	**1007312**	**1,072.00**
○ white	**1007313**	**1,072.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 30
CW, DALI



Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	1350lm | 3000K	1350lm | 4000K

Version	Prod. no.	GBP
● black	**1007286**	**274.00**
○ white	**1007287**	**274.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 30
CW, PHASE



C | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 10W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	1350lm | 3000K	1350lm | 4000K

Version	Prod. no.	GBP
● black	**1007290**	**249.00**
○ white	**1007291**	**249.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**







MEDO® PRO 40
CW, DALI

CCT

DALI



Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10

20

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	2650lm | 3000K	2650lm | 4000K

Version	Prod. no.	GBP
● black	1007294	335.00
○ white	1007295	335.00

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
Suspension kit 5 m		
● black	1001952	85.00
○ white	1001950	85.00

MEDO® PRO 40
CW, PHASE

CCT



C | IP 50 | IK02 | 110° | UGR 25 | L80B10

20

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	2650lm | 3000K	2650lm | 4000K

Version	Prod. no.	GBP
● black	1007298	292.00
○ white	1007299	292.00

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
Suspension kit 5 m		
● black	1001952	85.00
○ white	1001950	85.00



MEDO® PRO 60
CW, DALI



Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5450lm | 3000K	5500lm | 4000K

Version	Prod. no.	GBP
● black	**1007302**	**584.00**
○ white	**1007303**	**584.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 60
CW, PHASE



C | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 37W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	5450lm | 3000K	5500lm | 4000K

Version	Prod. no.	GBP
● black	**1007306**	**524.00**
○ white	**1007307**	**524.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**









MEDO® PRO 90
CW, DALI

CCT

DALI



Dali | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 50 000 Hours

20

220-240V ~50/60Hz | 1000mA
Total wattage: 75W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	11000lm | 3000K	11200lm | 4000K

Version	Prod. no.	GBP
● black	**1007310**	**1,186.00**
○ white	**1007311**	**1,186.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® PRO 90
CW, PHASE

CCT



C | IP 50 | IK02 | 110° | UGR 25 | L80B10 | 50 000 Hours

20

220-240V ~50/60Hz | 1000mA
Total wattage: 74W
Material: aluminium/steel

• Also available in a DC version on request

LED INSIDE | CRI 90

Down	11000lm | 3000K	11200lm | 4000K

Version	Prod. no.	GBP
● black	**1007314**	**1,057.00**
○ white	**1007315**	**1,057.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**

MEDO® 30
CW, PHASE

CCT





C | IP 50 | IK02 | 110° | UGR 25 | L70B50 | 20

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium/steel

LED INSIDE CRI 90

1000lm | 2700K | 1050lm | 3000K | 1150lm | 4000K

Version	Prod. no.	GBP
● black	**1007316**	**214.00**
○ white	**1007317**	**214.00**
● grey	**1007318**	**214.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**

MEDO® 40
CW, PHASE

CCT





C | IP 50 | IK02 | 110° | UGR 25 | L70B50 | 20

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/steel

LED INSIDE CRI 90

2000lm | 2700K | 2100lm | 3000K | 2250lm | 4000K

Version	Prod. no.	GBP
● black	**1007319**	**240.00**
○ white	**1007320**	**240.00**
● grey	**1007321**	**240.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**

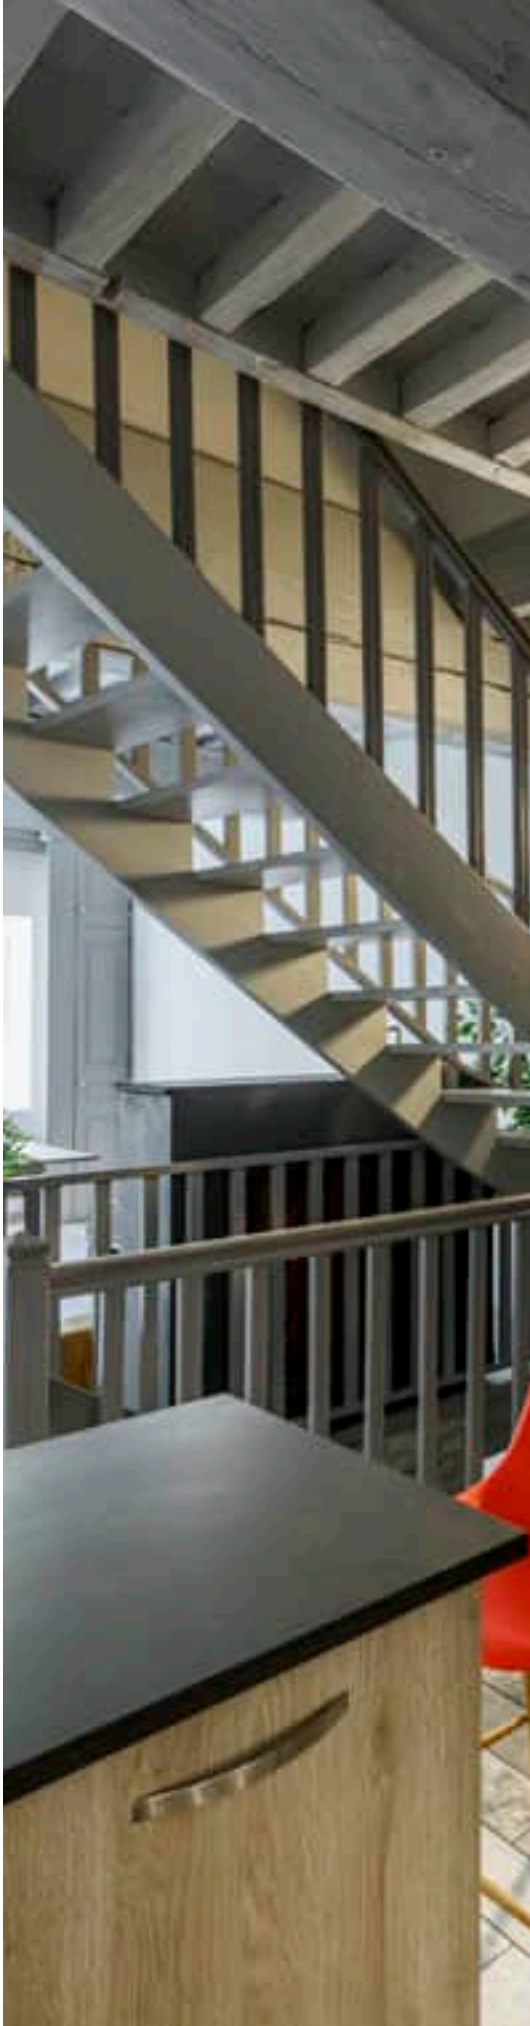

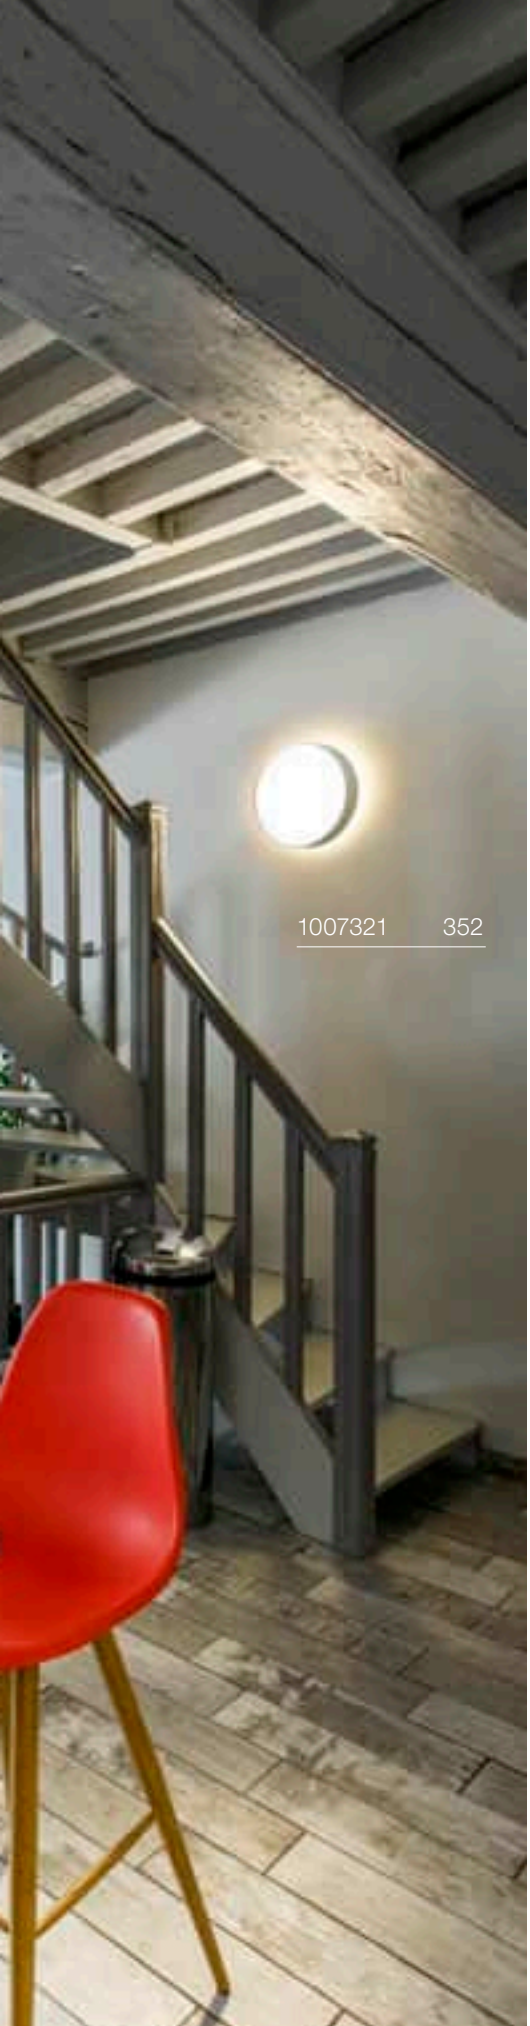

MEDO® 60
CW, PHASE

CCT





C | IP 50 | IK02 | 110° | UGR 22 | L70B50 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/steel

LED INSIDE | CRI 90

3850lm | 2700K | 4050lm | 3000K | 4300lm | 4000K

Version	Prod. no.	GBP
● black	**1007322**	**455.00**
○ white	**1007323**	**455.00**
● grey	**1007324**	**455.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**

MEDO® 90
CW, PHASE

CCT





C | IP 50 | IK02 | 110° | UGR 22 | L70B50 | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 79W
Material: aluminium/steel

LED INSIDE | CRI 90

8000lm | 2700K | 8400lm | 3000K | 9000lm | 4000K

Version	Prod. no.	GBP
● black	**1007325**	**902.00**
○ white	**1007326**	**902.00**
● grey	**1007327**	**902.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
● black	**1001952**	**85.00**
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**

ONE LINEAR 50
WL, PHASE, up/down

CCT

NEW







IP44 120° 120° L80B10

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/acrylic

LED INSIDE CRI 90

Up Down	450lm	2700K	500lm	3000K

Version	Prod. no.	GBP
white/black 3150lm | 3000K	**1008084**	**172.00**
white 3350lm | 4000K	**1008085**	**172.00**
white / brass 3150lm | 3000K	**1008086**	**172.00**

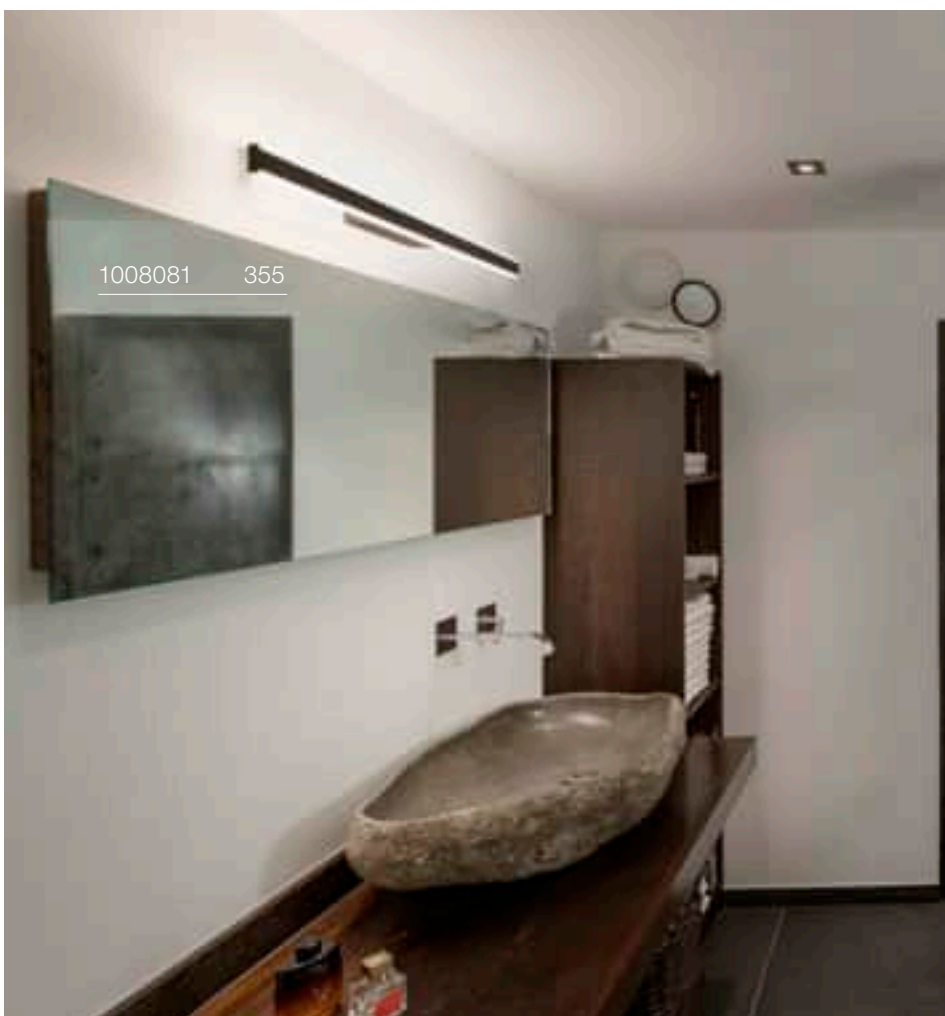



ONE LINEAR 70
WL, PHASE, up/down

CCT

NEW







C;L | IP44 | 120° | 120° | 50 000 Hours L80B10

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/acrylic

LED INSIDE | CRI 90

Up Down	495lm	2700K	550lm	3000K

Version	Prod. no.	GBP
white/black 990/1100lm	**1008081**	**206.00**
white 1250/1350lm	**1008082**	**206.00**
white / brass 1250/1350lm	**1008083**	**206.00**


1002919 357

ONE 40
CW, DALI





Dali 2.0 | IP 20 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	700lm | 3000K	730lm | 4000K

Version	Prod. no.	GBP
● black	**1002915**	**295.00**
○ white	**1002917**	**295.00**

ONE 60
CW, DALI

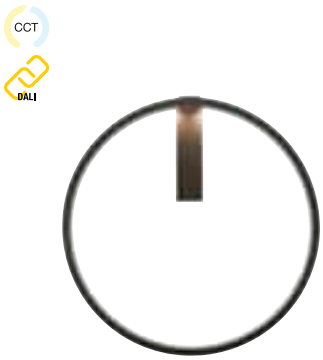



Dali 2.0 | IP 20 | L70B50

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

LED INSIDE | CRI 90

Down	1350lm | 3000K	1430lm | 4000K

Version	Prod. no.	GBP
● black	**1002918**	**355.00**
○ white	**1002919**	**355.00**

TRUKKO
WL,rectangular

CCT





IP 44 L70B50

220-240V ~50/60Hz | 24V
Total wattage: 25W
Material: glass/ABS

- incl. mirror heating and memory function
- Light colour can be adjusted via touch function

LED INSIDE CRI 90

1080lm	3000K	1290lm	4000K	1250lm	6500K

Version	Prod. no.	GBP
silver/opaque	**1004730**	**329.00**

TRUKKO
WL, round

CCT







IP 44 L70B50

220-240V ~50/60Hz | 24V
Total wattage: 25W
Material: glass/ABS

- incl. mirror heating and memory function
- Light colour can be adjusted via touch function

LED INSIDE CRI 90

730lm 1270lm	3000K	710lm 1260lm	4000K	720lm 1260lm	6500K

Version	Prod. no.	GBP
silver/opaque 1270/1260/1260lm	**1004731**	**343.00**
black 730/710/720lm	**1007201**	**343.00**





TRUKKO 80
WL, round

CCT







IP 44 L70B50

220-240V ~50/60Hz | 24V
Total wattage: 23W
Material: glass/ABS

- incl. mirror heating and memory function
- Light colour can be adjusted via touch function

INSIDE CRI 90

730lm 1100lm	3000K	740lm 1130lm	4000K	790lm 1210lm	6500K

Version	Prod. no.	GBP
silver/opaque 1100/1130/1210lm	**1007200**	**481.00**
black 730/740/790lm	**1007202**	**481.00**

TRUKKO 60
WL





IP 44 IK03 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/plastic

INSIDE CRI 90

Down	750lm | 3000K

Version	Prod. no.	GBP
chrome	**149762**	**139.00**

TRUKKO 90
WL





IP 44 IK03 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/plastic

INSIDE CRI 90

Down	1040lm | 3000K

Version	Prod. no.	GBP
chrome	**149772**	**164.00**

SEDO 14
WL





IP20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

CRI 80

Down 1300lm | 3000K

Version	Prod. no.	GBP
white	**151781**	**208.00**
aluminium	**151786**	**217.00**

SEDO 21
WL





IP 20 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/glass

CRI 80

Down 2500lm | 3000K

Version	Prod. no.	GBP
white	**151791**	**251.00**
aluminium	**151796**	**260.00**









ARLINA 60
WL





IP20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 23W
Material: aluminium/glass

LED INSIDE CRI 80

Down 1550lm | 3000K

Version	Prod. no.	GBP
aluminium	**1002239**	**217.00**

ARLINA 130
WL





IP20 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium

LED INSIDE CRI 80

Down 2400lm | 3000K

Version	Prod. no.	GBP
aluminium	**1002240**	**279.00**


1002191 363

MARYLIN 40
WL

CCT





IP 44 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 9.8W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	890lm | 3000K	980lm | 4000K

Version	Prod. no.	GBP
chrome	**1002190**	**196.00**

MARYLIN 60
WL

CCT





IP 44 120° L70B50

200-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	1170lm | 3000K	1280lm | 4000K

Version	Prod. no.	GBP
chrome	**1002191**	**246.00**

MARYLIN 90
WL

CCT





IP 44 120° L70B50

220-240V ~50/60Hz | 600mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	1800lm | 3000K	1990lm | 4000K

Version	Prod. no.	GBP
chrome	**1002192**	**296.00**

WL 106
E14





IP44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <40 W

Base: 1xE14	Max. Ø: 3.6 cm	L: 11 cm

Version	Prod. no.	GBP
chrome/white	**1002228**	**78.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

Prod. no.: 1005285 | 8.00 GBP

WL 106
E14





IP44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <40 W

Base: 2xE14	Max. Ø: 3.6 cm	L: 11 cm

Version	Prod. no.	GBP
chrome	**1002229**	**139.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

Prod. no.: 1005285 | 8.00 GBP





MIBO UP/DOWN
WL, QT14





IP 21

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <25 W

Base: 2xG69

Version	Prod. no.	GBP
chrome	**151282**	**77.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h

Prod. no.: 1005286 | 8.00 GBP

MAGANDA
WL

CCT







IP 44 IK02 L70B50 90°

100-240V ~50/60Hz | 12V
Total wattage: 4.8W
Material: steel/glass

- Light colour can be adjusted via the housing switch

LED INSIDE CRI 90

45.4lm | 2700K | 48lm | 3000K | 51lm | 4000K

Version	Prod. no.	GBP
chrome	**1004971**	**171.00**


1003507 367

DORISA 30
WL





IP 44 110° L70B50

200-240V ~50Hz | 340mA
Total wattage: 5.2W
Material: aluminium/plastic

- Clamping range: 0-6 mm
- Can be converted to a mirror light by removing the bracket

LED INSIDE CRI 80

Down 300lm | 4000K

Version	Prod. no.	GBP
chrome	**1000777**	**99.00**

DORISA 50
WL





IP 44 110° L70B50

200-240V ~50Hz | 340mA
Total wattage: 6.6W
Material: aluminium/plastic

- Clamping range: 0-6 mm
- Can be converted to a mirror light by removing the bracket

LED INSIDE CRI 80

Down 370lm | 4000K

Version	Prod. no.	GBP
chrome	**1000780**	**109.00**

GLENOS® 60
WL





IP 20 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down 1170lm | 3000K | 4000K

Version	Prod. no.	GBP
black	**1003506**	**156.00**
white	**1003507**	**156.00**
grey	**1003508**	**156.00**

Q-LINE®
WL





IP 20 110° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 45W
Material: aluminium/acrylic

LED INSIDE CRI 80

Down 3800lm | 3000K

Version	Prod. no.	GBP
● black	**1000669**	**398.00**
○ white	**1000668**	**398.00**
● grey	**1000670**	**398.00**

1000669 368

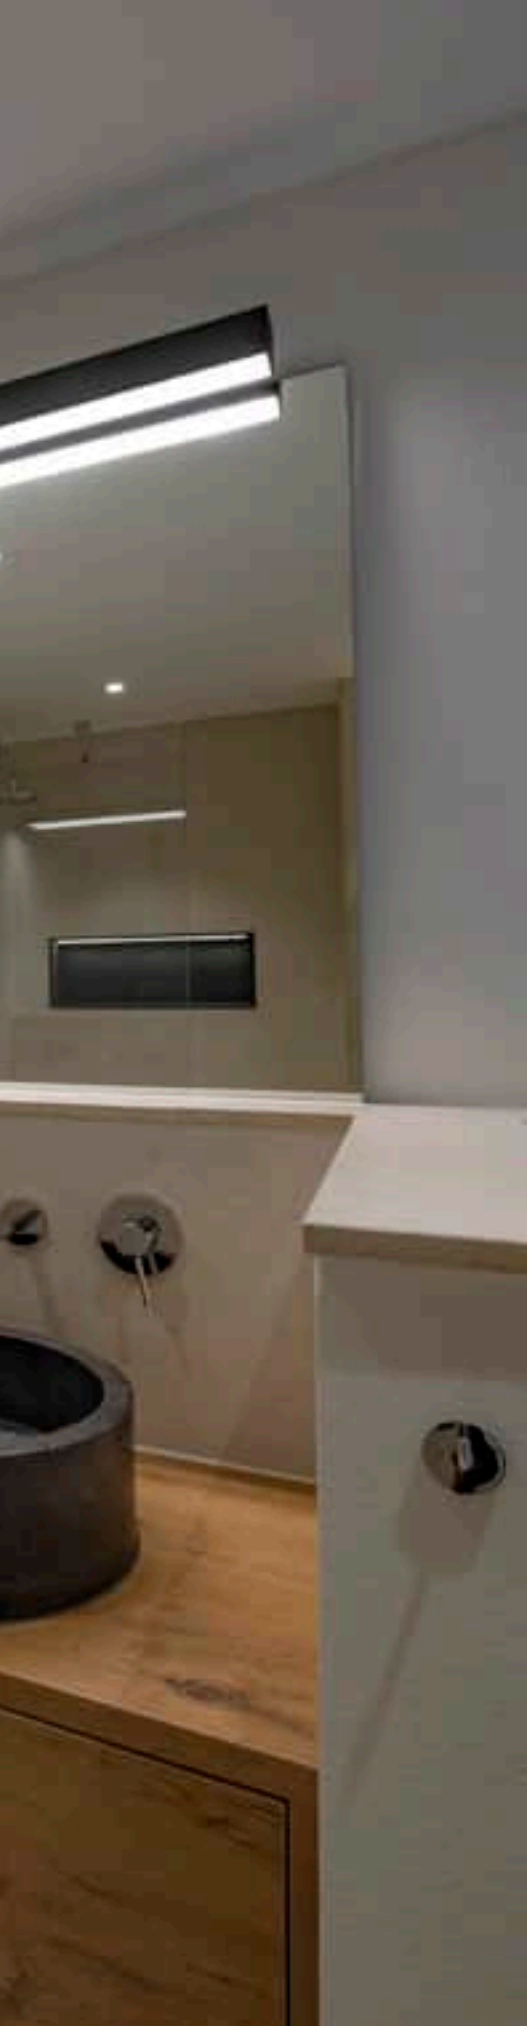

L-LINE 60
WL



IP 44 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 10W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down 820lm | 3000K

Options	Prod. no.	GBP
white	**1001299**	**205.00**
silver	**1001300**	**205.00**

L-LINE 120
WL





IP 44 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 18.5W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down 1650lm | 3000K

Options	Prod. no.	GBP
white	**1001303**	**284.00**
silver	**1001304**	**284.00**

PROTECTED AREA IN THE BATHROOM

Corresponding protected areas are defined for safe lighting in the bathroom. For areas outside these protection zones, i.e. wherever it is unlikely that the bathroom light will come into contact with water, such as the ceiling in the bathroom, no protection rating is prescribed.

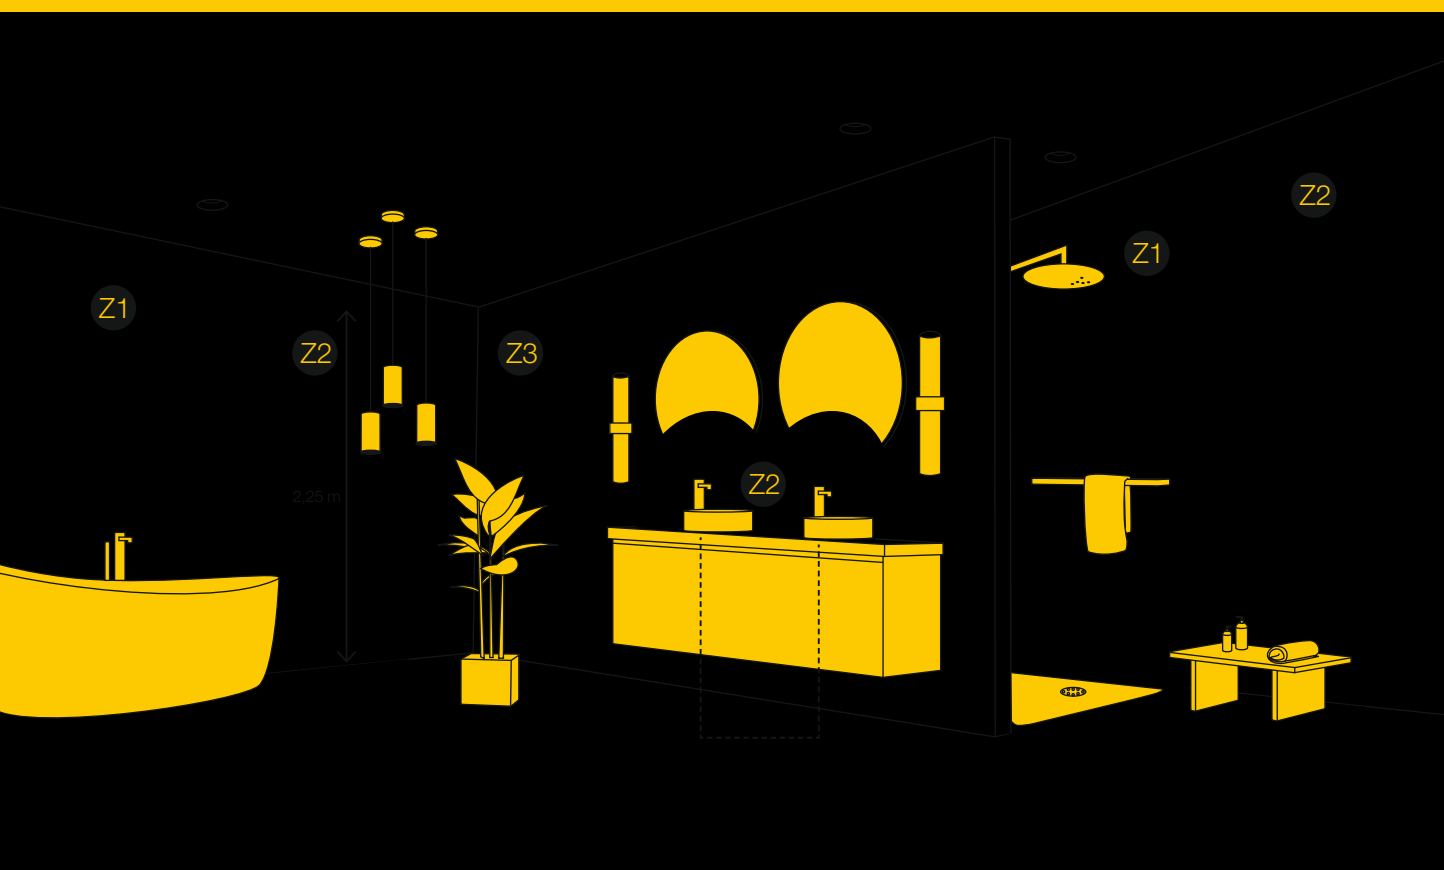

Z1 ZONE 1

Minimum IP65

Z2 ZONE 2

Minimum IP44

Z3 ZONE 3

Minimum IP21

Lighting in a modern feel-good environment should be functional, restorative and safe, so it is vital to choose the right IP rating depending on where the light will be used.

The abbreviation IP stands for Ingress Protection. The first digit in these standardised IP codes indicates the protection against solid objects, the second digit indicates protection against moisture. It is the latter that is particularly important for bathrooms and outdoor areas.

FOREIGN OBJECTS		WATER	
No protection	0	0	No protection
Protection against larger solid foreign bodies from a diameter of 50 mm	1	1	Protection against vertically falling water droplets
Protection against medium solid foreign bodies from a diameter of 12.5 mm	2	2	Protection against falling water droplets if the housing is tilted up to 15°
Protection against smaller solid foreign bodies from a diameter of 2.5 mm	3	3	Protection against spraying water falling at up to 60° from the vertical
Protection against very small solid foreign bodies from a diameter of 1 mm	4	4	Protection against water splashing from all sides
Protection against dust in large, harmful quantities	5	5	Protection against water jets (from a nozzle) from any angle
Completely dust-tight	6	6	Protection against powerful water jets
		7	Protection against temporary immersion
		8	Protection against continuous immersion

EXAMPLE IP 65:
The product has maximum dust protection at level 6 and high protection against water jets at level 5. It can therefore be classified as dust-tight and water-resistant.



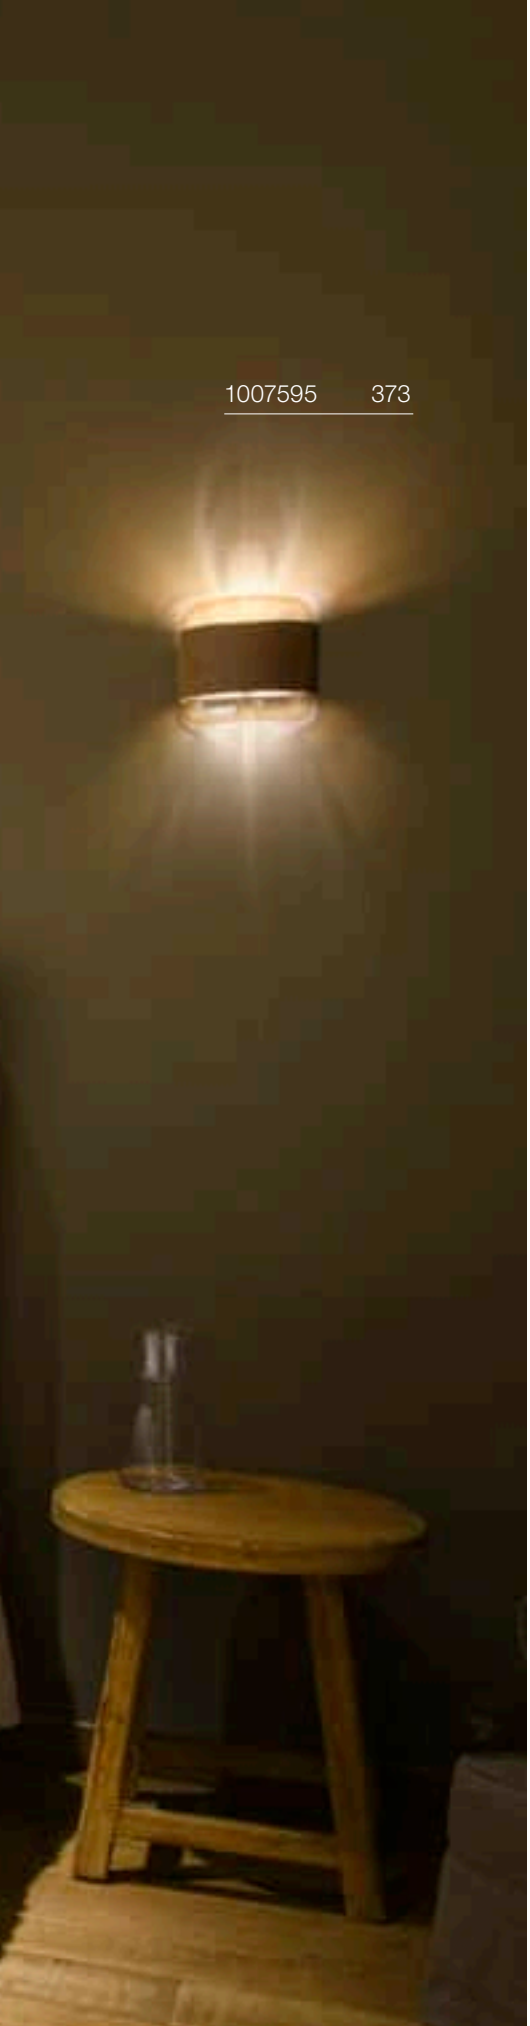

PANTILO ROPE
WL, G9





IP20

200-240V ~50/60Hz
Material: glass

SOCKET INSIDE <15 W

Base: 1xG69 | Max. Ø: 3 cm | L: 6 cm

Version	Prod. no.	GBP
amber/gold	**1007595**	**154.00**
anthracite/silver	**1007594**	**154.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h

Prod. no.: 1005286 | 8.00 GBP


1006441 375

ASTO TUBE
WL, single, GU10





IP 20

220-240V ~50/60Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1006441**	**52.00**
○ white	**1006442**	**52.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

ASTO TUBE
WL, up/down, GU10





IP 20

220-240V ~50/60Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**1006443**	**69.00**
○ white	**1006444**	**69.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

ASTO TUBE
Decorative reflector



H: 3.95 cm
Ø: 6.75 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
● black/chrome	**1007190**	**4.00**
● gold	**1006450**	**4.00**
● chrome	**1006449**	**4.00**
● copper	**1006451**	**4.00**


1006319 + 1004663 377 + 379
1004969 + 1004660 378

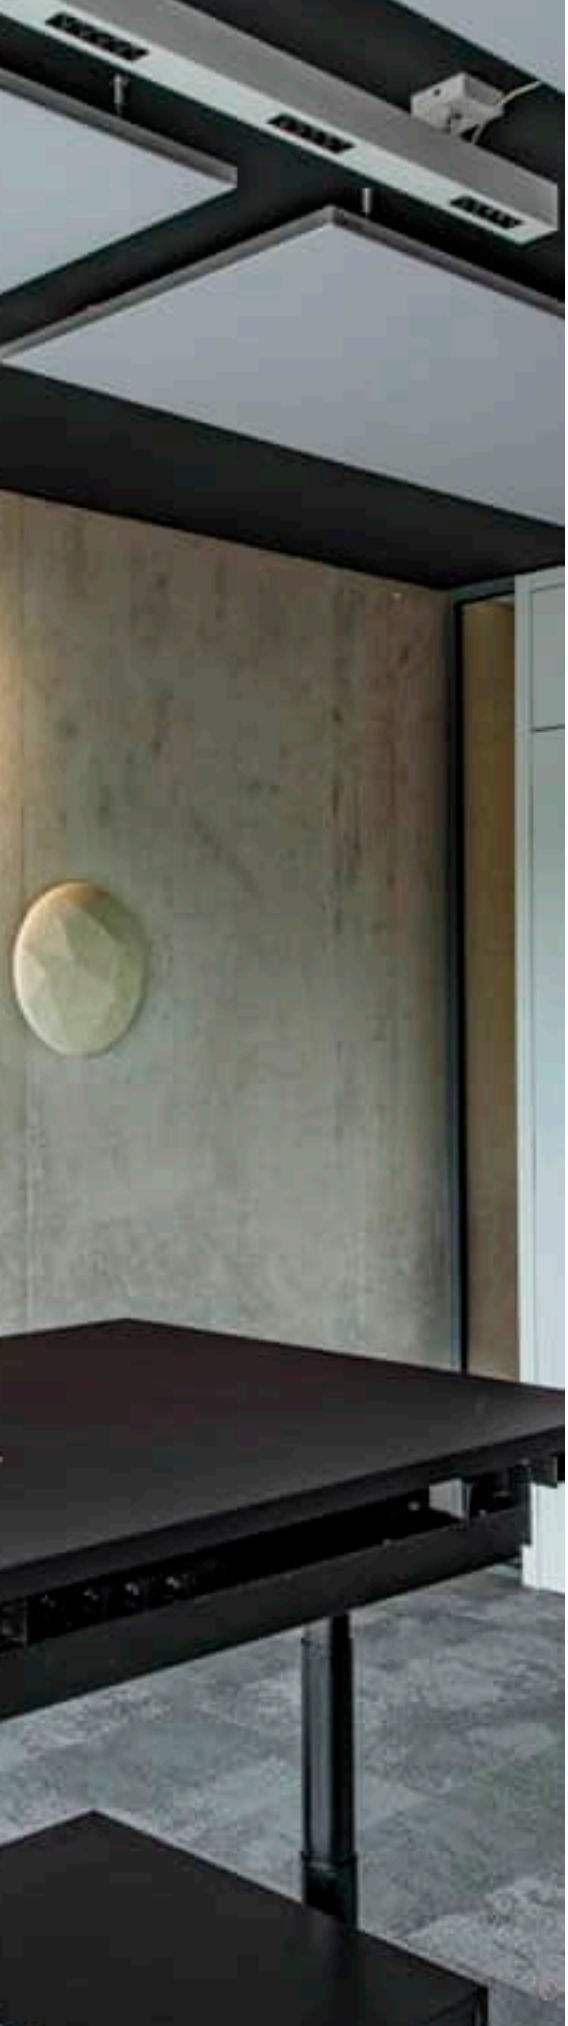

MANA BASE
WL, round, PHASE

CCT





IP 65 L80B50 68

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)

• Matching accessories can be found on page 378-379

LED INSIDE CRI 90

Down	800lm | 2700K	820lm | 3000K

Version	Prod. no.	GBP
anthracite	**1006319**	**163.00**

Product	Prod. no.	GBP
Shade		
rust	**1006317**	**51.00**
rust	**1006318**	**51.00**



MANA BASE
round





Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round shades in the MANA series

Version	Prod. no.	GBP
anthracite	**1004969**	**23.00**

MANA 40
Shade, round, acoustic felt



IP 20

H: 6 cm
Ø: 40 cm
Material: felt/aluminium

Version	Prod. no.	GBP
grey	**1004661**	**85.00**
beige	**1004660**	**85.00**

MANA 60
Shade, round, acoustic felt



IP 20

H: 6 cm
Ø: 60 cm
Material: felt/aluminium

Version	Prod. no.	GBP
grey	**1004663**	**125.00**
beige	**1004662**	**125.00**



MANA 40
Shade, round



IP20

H: 2.2 cm
Ø: 40 cm
Material: steel

Version	Prod. no.	GBP
● black	1008201	68.00

MANA 40
Shade, round



IP20

H: 2.2 cm
Ø: 40 cm
Material: steel

Version	Prod. no.	GBP
○ white	1008203	68.00

MANA 40
Shade, round, moon structure



IP20

H: 2.2 cm
Ø: 40 cm
Material: steel

Version	Prod. no.	GBP
● gold	1008205	85.00

MANA 60
Shade, round



IP20

H: 4.2 cm
Ø: 60 cm
Material: steel

Version	Prod. no.	GBP
● black	1008202	108.00

MANA 60
Shade, round



IP20

H: 4.2 cm
Ø: 60 cm
Material: steel

Version	Prod. no.	GBP
○ white	1008204	108.00

MANA 60
Shade, round, moon structure



IP20

H: 4.2 cm
Ø: 60 cm
Material: steel

Version	Prod. no.	GBP
● gold	1008206	125.00



MANA
WL, Base, PHASE





IP 20 L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 8.3W
Material: aluminium/steel

Down	42lm | 2000K	- 520lm | 3000K

Version	Prod. no.	GBP
white	**1000613**	**125.00**

MANA
Shade



IP 20

L: 12 cm H: 10 cm D: 9 cm
Material: wood

- suitable with 1000613

Version	Prod. no.	GBP
white	**1000618**	**44.00**
grey/brown	**1000616**	**44.00**



1000614 + 1000621 383

MANA
WL, Base, PHASE





IP 20 L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/steel

CRI 90

Down	70lm | 2000K -	700lm | 3000K

Version	Prod. no.	GBP
white	**1000614**	**145.00**

MANA
Shade



IP 20

L: 29 cm H: 9.5 cm D: 7 cm
Material: wood

- suitable with 1000614

Version	Prod. no.	GBP
white	**1000623**	**53.00**
grey/brown	**1000621**	**53.00**


1006307 385

OCULUS
WL, single, PHASE





IP20 | 100° | L80B20

220-240V ~50/60Hz | 350mA
Total wattage: 8W

LED INSIDE | CRI 90

Down 57lm | 2000K - 570lm | 3000K

Version	Prod. no.	GBP
● black	1006307	197.00
○ white	1006308	197.00

OCULUS
WL up/down, PHASE





IP 20 | IK02 | 100° | 100° | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/glass

• Additional frosted lens included

LED INSIDE | CRI 90

Up
Down 22lm | 2000K - 555lm | 3000K

Version	Prod. no.	GBP
● black	1004670	214.00
○ white	1004671	214.00

OCULUS
WL up/down, DTW

NEW





IP20 | IK02 | 100° | 100° | L70B50

220-240V ~50/60 Hz | 700 mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 90

Down 22lm | 2000K - 550lm | 3000K

Version	Prod. no.	GBP
brass (PVD)	1008613	318.00
dark copper (PVD)	1008614	318.00
dark bronze (PVD)	1008612	318.00

PLASTRA
WL, Cube, QT14





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <42 W

Base: 1xG69

Version	Prod. no.	GBP
○ white	**148018**	**47.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h



Prod. no.: 1005286 | 8.00 GBP

PLASTRA
WL, cubes





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE 15 W

Base: 2xG69 | Max. Ø: 7 cm | L: 4 cm

Version	Prod. no.	GBP
○ white	**1004733**	**51.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h



Prod. no.: 1005286 | 8.00 GBP









PLASTRA
WL, rectangular, QT-DE12





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <20 W

Base: 1xR7s 118mm

Version	Prod. no.	GBP
white	**1002238**	**68.00**

LED R7s | 15W | 330°
3000K | 2000lm | EEC=E
15kWh/1000h

Prod. no.: 1005288 | 25.00 GBP

PLASTRA
WL, E14





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <40 W

Base: 1xE14

Version	Prod. no.	GBP
white	**148010**	**45.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

Prod. no.: 1005285 | 8.00 GBP


1004732 389

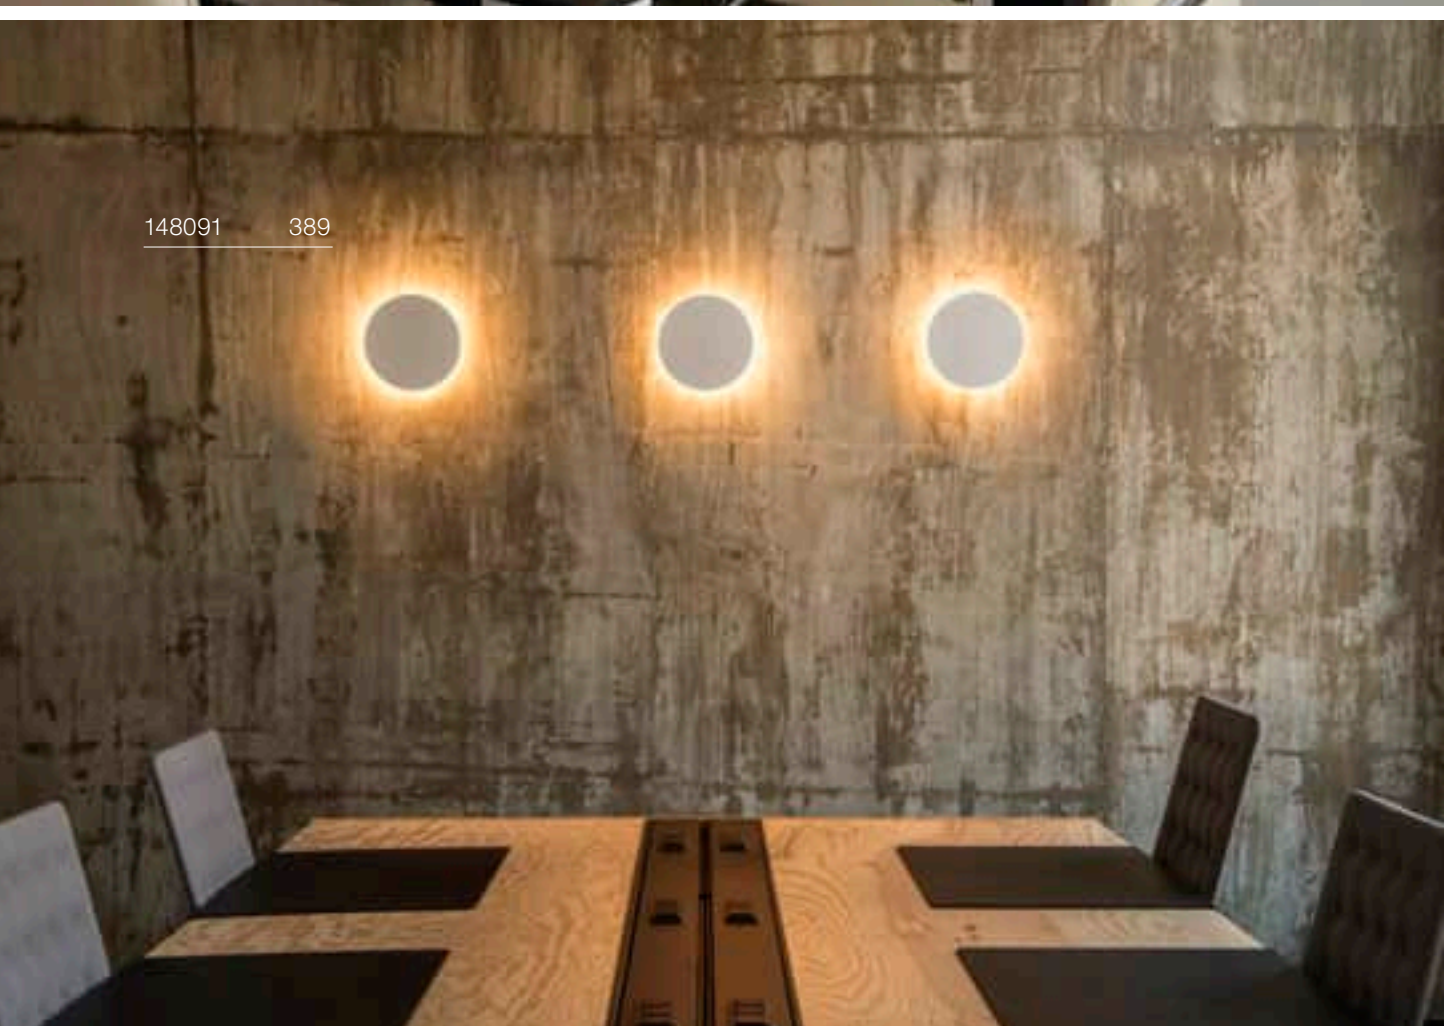
148091 389

PLASTRA
WL, semicircular





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE 20 W

Base: 1xR7s 118mm max. Ø: 2 cm | L: 11.8 cm

Version	Prod. no.	GBP
○ white	**1004732**	**63.00**

LED R7s | 15W | 330°
3000K | 2000lm | EEC=E
15kWh/1000h

Prod. no.: 1005288 | 25.00 GBP

PLASTRA
WL, round shield



IP 20 L70B50

100-240V ~50/60Hz | 12V
Total wattage: 6.5W
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

LED INSIDE CRI 80

Down 375lm | 3000K

Version	Prod. no.	GBP
○ white	**148091**	**145.00**

PLASTRA
WL, square





IP 20 L70B50

100-240V ~50/60Hz | 12V
Total wattage: 10.5W
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

LED INSIDE CRI 80

Down 650lm | 3000K

Version	Prod. no.	GBP
○ white	**148019**	**186.00**



PLASTRA
WL, QPAR51





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <35 W

Base: 2xGU10

Version	Prod. no.	GBP
○ white	**148060**	**58.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP



PLASTRA 101
WL, E14





IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <40 W

Base: 1xE14 | max. Ø: 4.5 cm | L: 11 cm

Version	Prod. no.	GBP
○ white	**148013**	**47.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

C,L



Prod. no.: 1005285 | 8.00 GBP

PLASTRA
WL, Curve, QT-DE12



IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <100 W

Base: 1xR7s 78mm

Version	Prod. no.	GBP
○ white	**148012**	**63.00**

LED R7s | 9W | 330°
3000K | 1050lm | EEC=E
9kWh/1000h

L



Prod. no.: 1005287 | 21.00 GBP

PLASTRA 104
WL, QT14



IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE <42 W

Base: 1xG69

Version	Prod. no.	GBP
○ white	**148016**	**47.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h



Prod. no.: 1005286 | 8.00 GBP

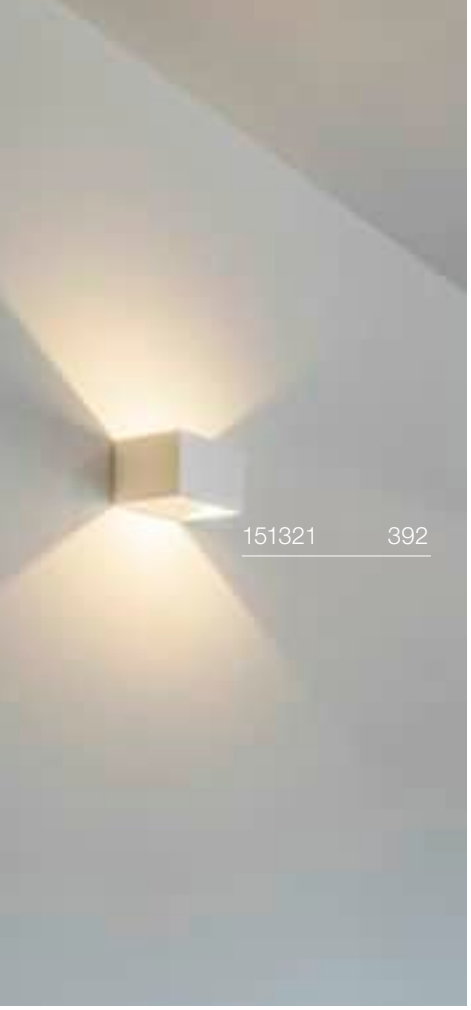



LOGS IN
WL





IP 20 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium

LED INSIDE CRI 90

Up/Down	300lm 470lm	3000K	

Version	Prod. no.	GBP
black/gold 300lm	**151320**	**102.00**
white 470lm	**151321**	**102.00**

LOGS IN
WL, PHASE

DIM TO WARM





IP 20 L70B50

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium

LED INSIDE CRI 90

Up/Down	43lm 69lm	2000K	-	430lm 690lm	3000K

Version	Prod. no.	GBP
black/gold 43-430lm	**1000638**	**137.00**
white 69-690lm	**1000639**	**137.00**
aluminium/white 69-690lm	**1000640**	**137.00**



LOGS IN L
WL, PHASE



IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium

INSIDE CRI 90

Up/Down	1100lm 1600lm	3000K	

Version	Prod. no.	GBP
black/gold 1100lm	**1002842**	**176.00**
white 1600lm	**1002844**	**176.00**
aluminium/white 1600lm	**1002843**	**176.00**

LOGS IN L
WL, PHASE

DIM TO WARM





IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium

INSIDE CRI 90

Up/Down	100lm 140lm	2000K	-	1000lm 1390lm	3000K

Version	Prod. no.	GBP
black/gold 100-1000lm	**1002928**	**236.00**
white 140-1390lm	**1002929**	**236.00**



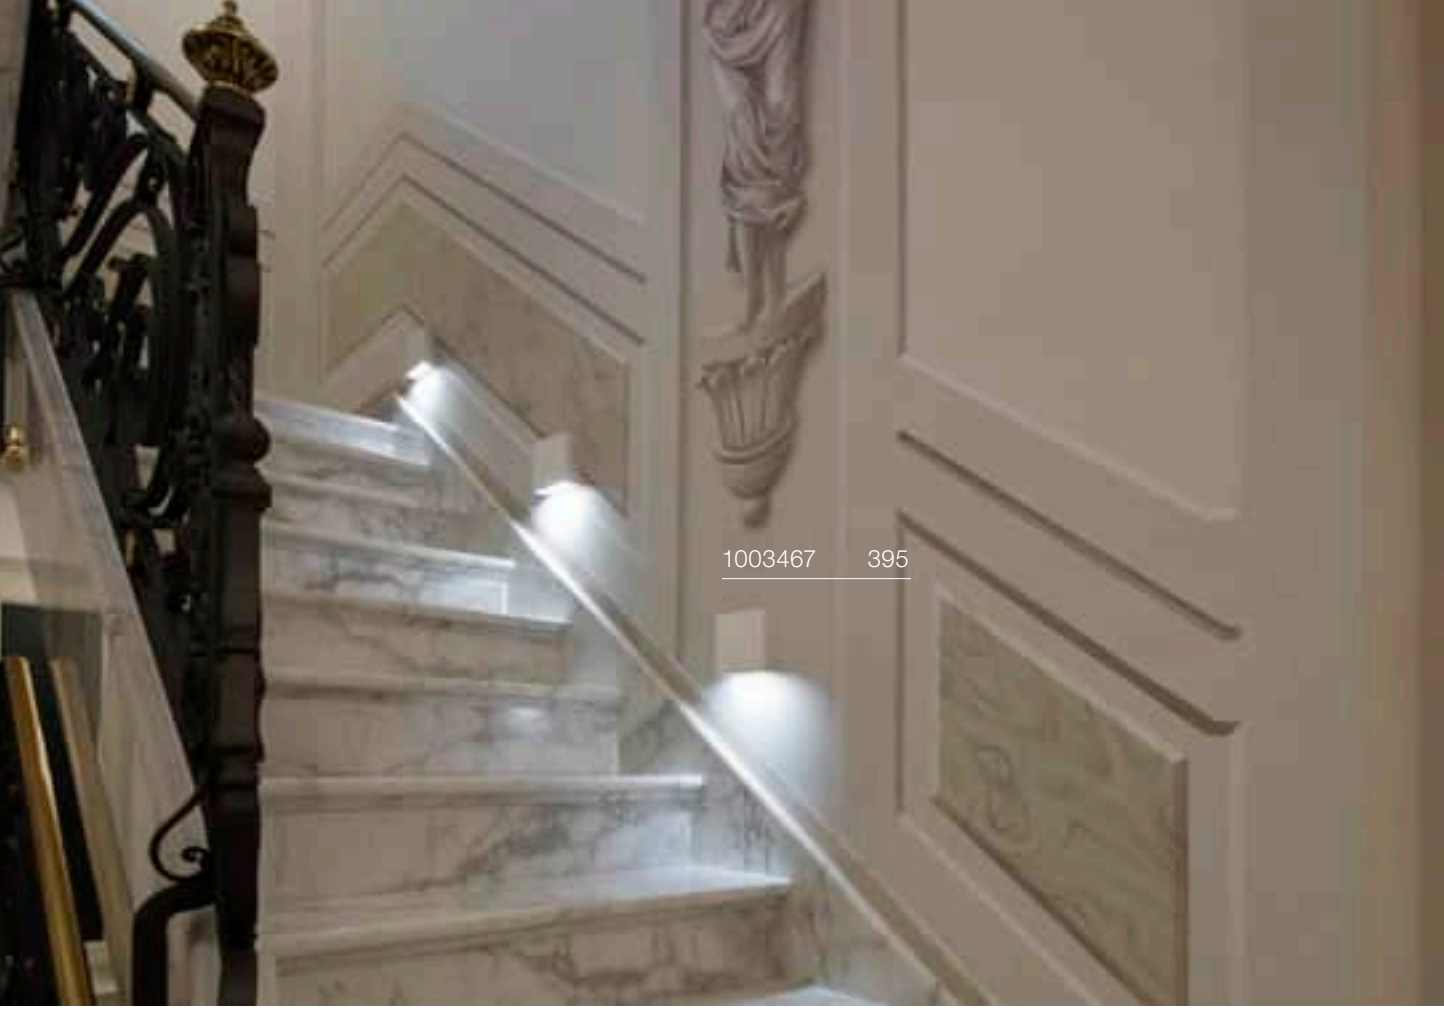

1003467 395

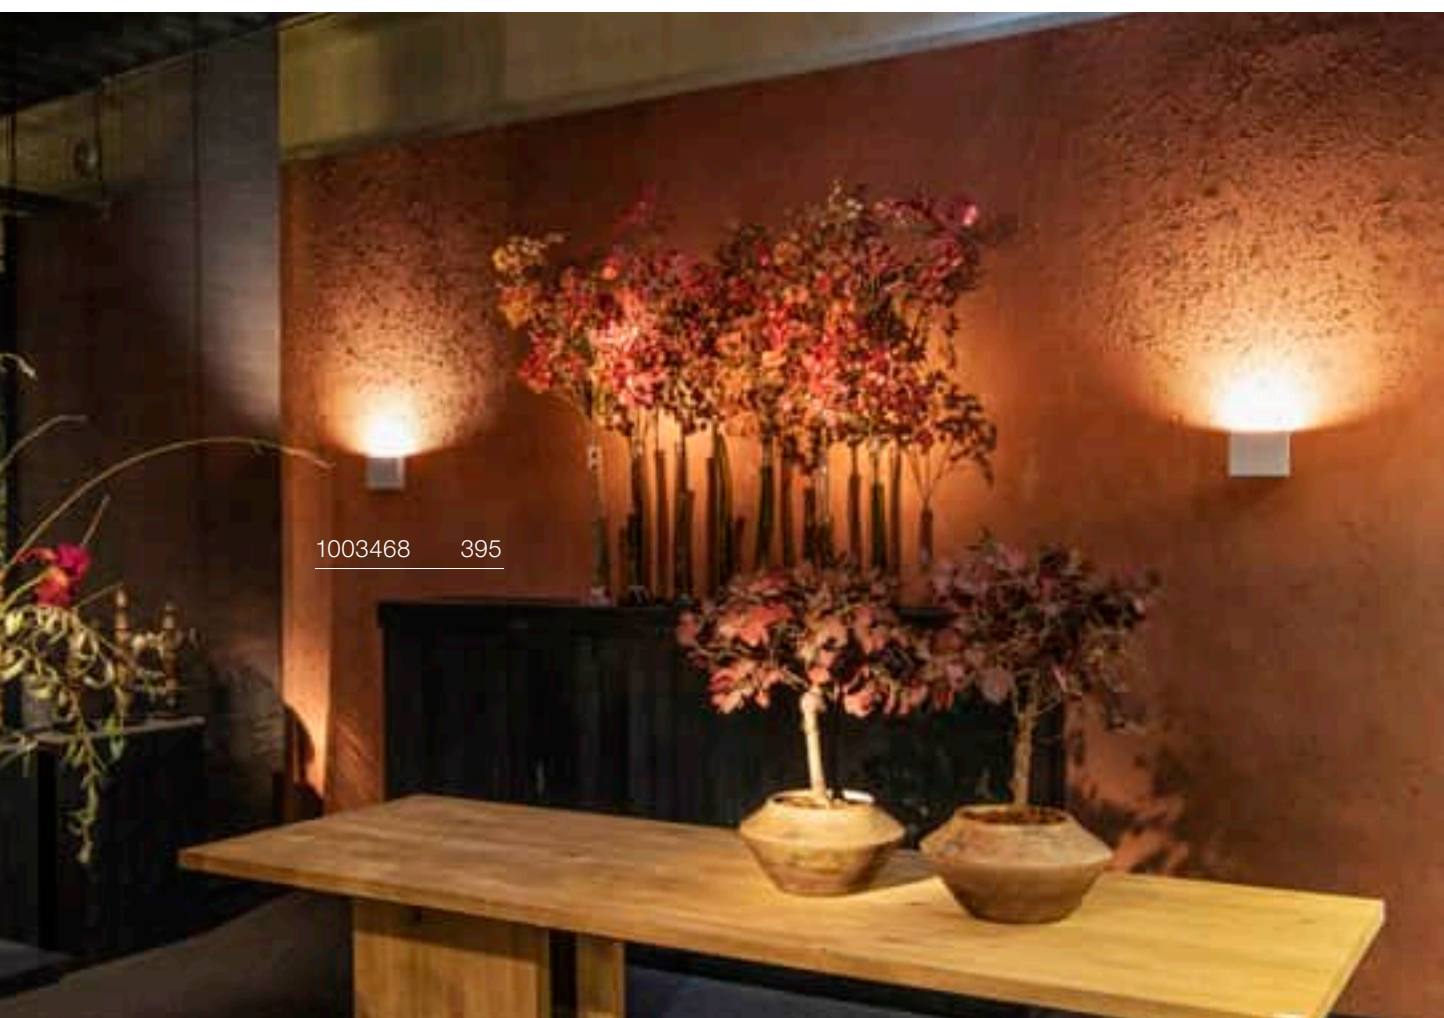

1003468 395

QUAD FRAME 14
WL

CCT





IP20 | 95° | L70B50 | 10

100-240V ~50/60Hz | 350mA
Total wattage: 4.4W
Material: aluminium

LED INSIDE | CRI 90

Down	165lm | 2700K	175lm | 3000K

Version	Prod. no.	GBP
○ white	**1003467**	**85.00**

QUAD FRAME 19
WL

CCT





IP20 | 100° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down	580lm | 2700K	640lm | 3000K

Version	Prod. no.	GBP
○ white	**1003468**	**103.00**



ASSO 300
WL, PHASE







IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/steel

LED INSIDE CRI 80

Up/Down 975lm | 3000K

Version	Prod. no.	GBP
white	**151271**	**185.00**
aluminium/white	**151275**	**194.00**

ASSO 300
WL, PHASE

DIM TO WARM





C,L | IP 20 | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/steel

LED INSIDE | CRI 90

Up/Down 135lm | 2000K - 1340lm | 3000K

Version	Prod. no.	GBP
○ white	**1000634**	**217.00**

OSSA 180
WL, QT-DE12





IP 20 | UGR 23

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE | <100 W

Base: 1xR7s 78mm

Version	Prod. no.	GBP
● black	**151450**	**83.00**
○ white	**151451**	**83.00**

LED R7s | 9W | 330°
3000K | 1050lm | EEC=E
9kWh/1000h



Prod. no.: 1005287 | 21.00 GBP

OSSA 300
WL, QT-DE12





IP 20 | UGR 23

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE | <120 W

Base: 1xR7s 118mm

Version	Prod. no.	GBP
● black	**151410**	**101.00**
○ white	**151411**	**101.00**

LED R7s | 15W | 330°
3000K | 2000lm | EEC=E
15kWh/1000h



Prod. no.: 1005288 | 25.00 GBP

CARISO
WL, PHASE





IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/steel

LED INSIDE CRI 80

Up/Down	250lm | 2700K 560lm | 3000K	

Version	Prod. no.	GBP
black/gold		
250lm | 2700K	**151710**	**145.00**
white		
560lm | 3000K	**151711**	**142.00**

CARISO
WL, PHASE





IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/steel

LED INSIDE CRI 90

Up/Down	100lm | 2000K	-	1030lm | 3000K

Version	Prod. no.	GBP
black/gold		
58-580lm | 1700-2700K	**151740**	**248.00**
white		
100-1030lm | 2000-3000K	**151741**	**240.00**

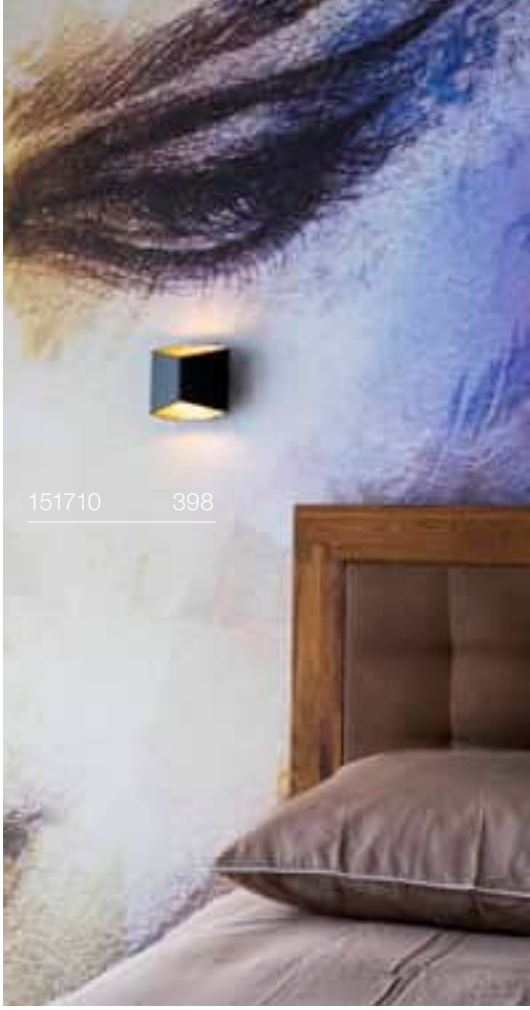



CHROMBO
WL, PHASE

NEW





1003317 399

IP20 120° L70B50

220-240V ~50/60Hz | 200mA
Total wattage: 8W
Material: steel/glass

LED INSIDE CRI 90

Down 790lm | 3000K

Version	Prod. no.	GBP
● black	**1008071**	**147.00**
○ white	**1003316**	**147.00**


1004740 401


1004743 401

DIRETO 60
WL, PHASE

CCT





IP 20 | 180° | 180° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium

LED INSIDE | CRI 90

Up	590lm	2700K	625lm	3000K
Down				

Version	Prod. no.	GBP
● black	**1004740**	**171.00**
○ white	**1004741**	**171.00**

DIRETO 90
WL, PHASE

CCT







IP 20 | 180° | 180° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium

LED INSIDE | CRI 90

Up	840lm	2700K	880lm	3000K
Down				

Version	Prod. no.	GBP
● black	**1004742**	**205.00**
○ white	**1004743**	**205.00**

DENA 30
WL, E14





IP 20

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <40 W

Base: 2xE14 | max. Ø: 5.1 cm | L: 9.6 cm

Version	Prod. no.	GBP
aluminium	**147529**	**89.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h



Prod. no.: 1005285 | 8.00 GBP

BASKET
WL, E27



IP 20

220-240V ~50/60Hz
Material: glass

SOCKET INSIDE <60 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 15.2 cm

Version	Prod. no.	GBP
white	**151591**	**84.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h



Prod. no.: 1005289 | 9.00 GBP







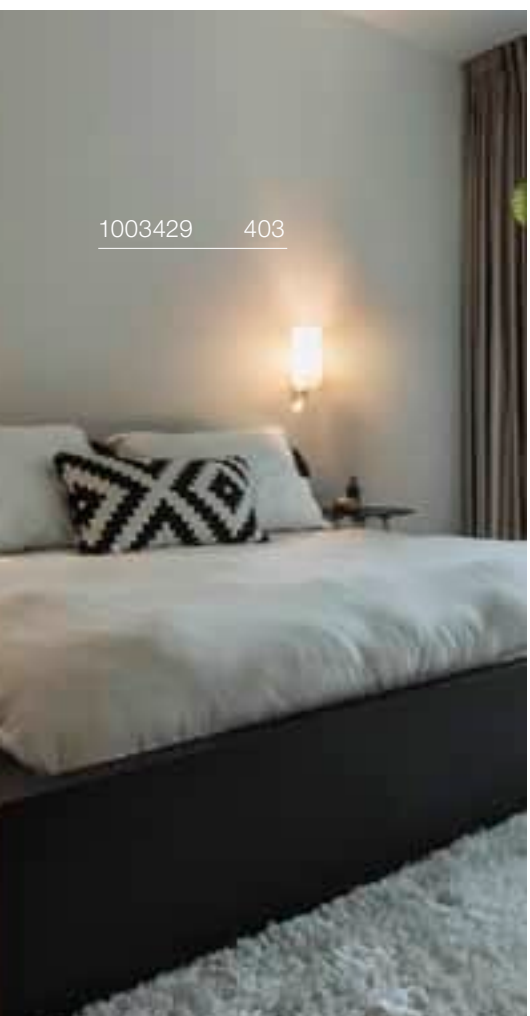

QUADRASS
WL, E27





IP 20

220-240V ~50/60Hz
Material: steel/glass

SOCKET INSIDE <40 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 18 cm

Version	Prod. no.	GBP
● black	**1003430**	**121.00**
○ white	**1003431**	**121.00**

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h



Prod. no.: 1005302 | 11.00 GBP

QUADRASS SPOT
WL, E27





IP20 | 25° | L70B50 | 200° | 100°

100-240V ~50/60Hz | 700mA
Total wattage: 2W
Material: steel/glass

- Switch on light housing
- Lightbulbs can be switched on/off separately

LED INSIDE CRI 80

Down | 200lm | 3000K

SOCKET INSIDE <40 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 18 cm

Version	Prod. no.	GBP
● black	**1003428**	**181.00**
○ white	**1003429**	**181.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h



Prod. no.: 1005303 | 9.00 GBP

FITU
Wall bracket

MIX match





IP 20

Material: steel

• See page 299 for matching pendant lights

Version	Prod. no.	GBP
● black	**1004682**	**55.00**

FITU CUBE
WL, E27

MIX match





IP 20

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <20 W

Base: 1xE27 Max. Ø: 12.5 cm

Version	Prod. no.	GBP
● black	**1004738**	**69.00**
○ white	**1004739**	**69.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005305 | 17.00 GBP

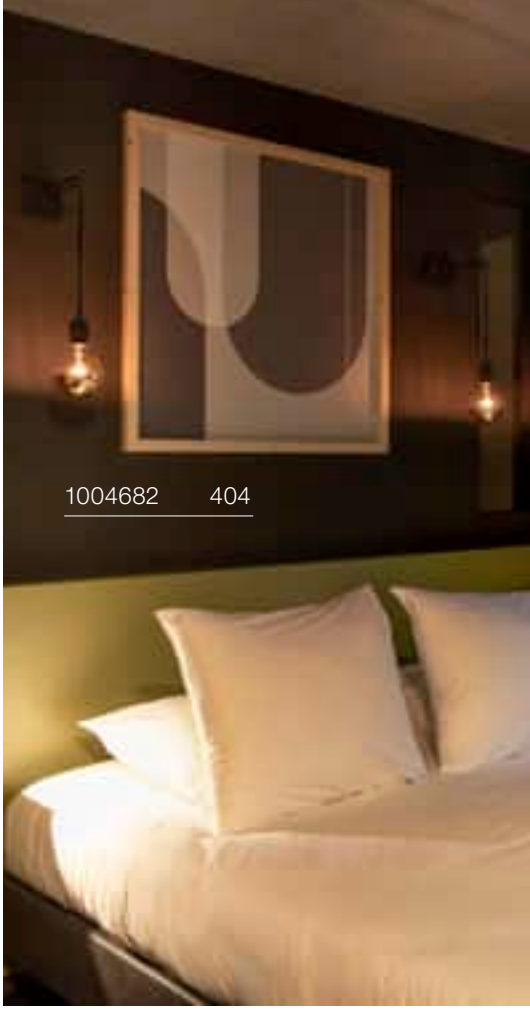

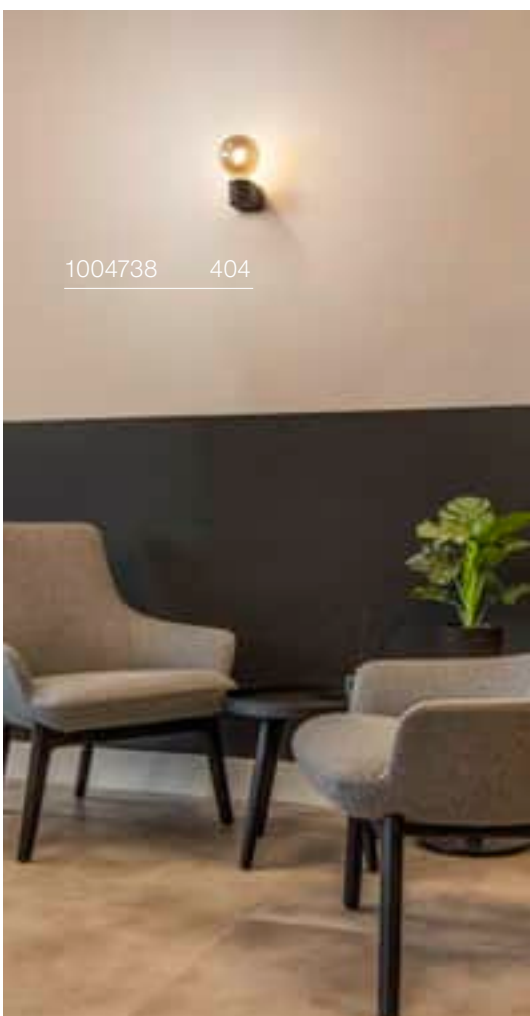

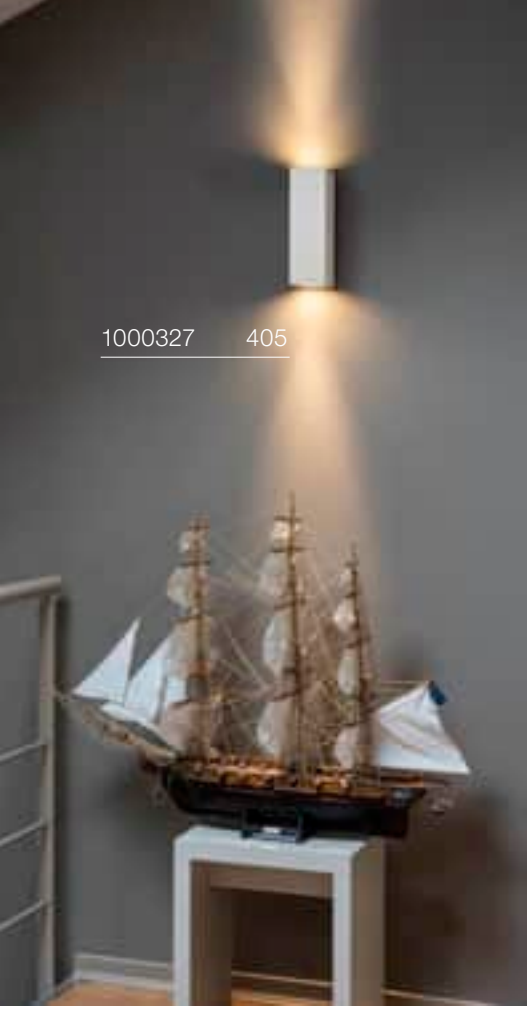



THEO UP/DOWN
WL, QPAR51





IP 20

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 2xGU10

Version	Prod. no.	GBP
anthracite	**1000330**	**94.00**
white	**1000327**	**94.00**
aluminium	**1000329**	**102.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

SOLID CUBE
WL, QT14





IP 20

220-240V ~50/60Hz
Material: concrete

SOCKET INSIDE <25 W

Base: 1xG69

Version	Prod. no.	GBP
grey	**1000910**	**84.00**
black	**1000911**	**84.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h



Prod. no.: 1005286 | 8.00 GBP


151803 406

ENOLA B
WL, QPAR51





IP 20 350° 90°

220-240V ~50/60Hz
Material: aluminium/steel

• Switch on light housing

SOCKET INSIDE <50 W

Base: 1xGU10 max. L: 6 cm

Version	Prod. no.	GBP
● black	**1000729**	**70.00**
○ white	**1000730**	**70.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA B
WL, QPAR51





IP 20

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <50 W

Base: 2xGU10 max. L: 8.5 cm

Version	Prod. no.	GBP
● black	**151800**	**81.00**
○ white	**151801**	**81.00**
● gold	**151803**	**90.00**

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h



Prod. no.: 1005080 | 7.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ASTINA UP/DOWN
WL, QPAR51





IP 20

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <10 W

Base: 2xGU10

Version	Prod. no.	GBP
● black	**1002933**	**97.00**
○ white	**1002931**	**97.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

FENDA
WL, Base, E27

MIX
match





IP 20

220-240V ~50/60Hz
Material: steel/plastic

SOCKET INSIDE <40 W

Base: 1xE27	max. Ø: 5.1 cm	L: 20 cm

Version	Prod. no.	GBP
white	**1001272**	**45.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h



Prod. no.: 1005289 | 9.00 GBP

FENDA
Half shade

MIX
match



W: 23 cm H: 30 cm D: 12 cm
Material: textile/steel

Version	Prod. no.	GBP
black	**1001273**	**34.00**
black/copper	**1001274**	**39.00**
white	**1001275**	**34.00**
beige	**1001276**	**34.00**

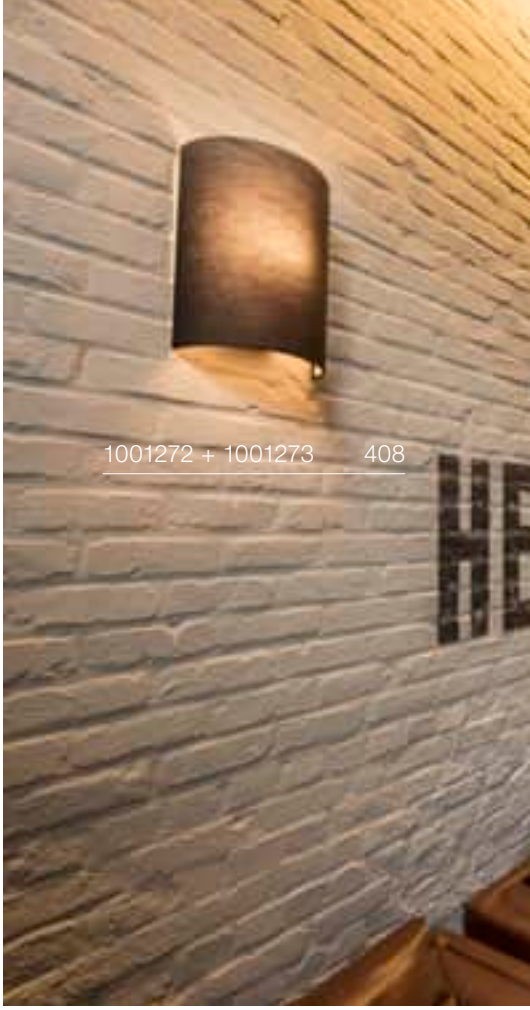







KENKUA SPOT
WL, E27





IP 20 | 25° | L70B50 | 180° | 180°

100-240V ~50/60Hz | 700mA
Total wattage: 2W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

LED INSIDE | CRI 80

Down 200lm | 3000K

SOCKET INSIDE | <40 W

Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

Version	Prod. no.	GBP
chrome	**1002855**	**177.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

COUPA FLEX
WL





IP20 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 3.4W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

LED INSIDE | CRI 80

Down 240lm | 3000K

SOCKET INSIDE | <42 W

Base: 1xG69 max. L: 9 cm

Version	Prod. no.	GBP
chrome	**149452**	**177.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h

Prod. no.: 1005286 | 8.00 GBP

KARPO MAGN
CW, single, PHASE





IP20 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: steel/aluminium

- Light head position can be adjusted via the magnetic bracket

LED INSIDE CRI 90

Down 350lm | 3000K

Version	Prod. no.	GBP
● black	**1004706**	**169.00**

KARPO GOOSE
WL





Switch 40° L70B50

220-240V ~50/60Hz | 12V
Total wattage: 5.8W
Material: aluminium/steel

- Light can be dimmed via switch on the light head

LED INSIDE CRI 90

Down 380lm / 420lm | 3000K

Version	Prod. no.	GBP
● black 380lm	**1006162**	**154.00**
○ white 420lm	**1006161**	**154.00**



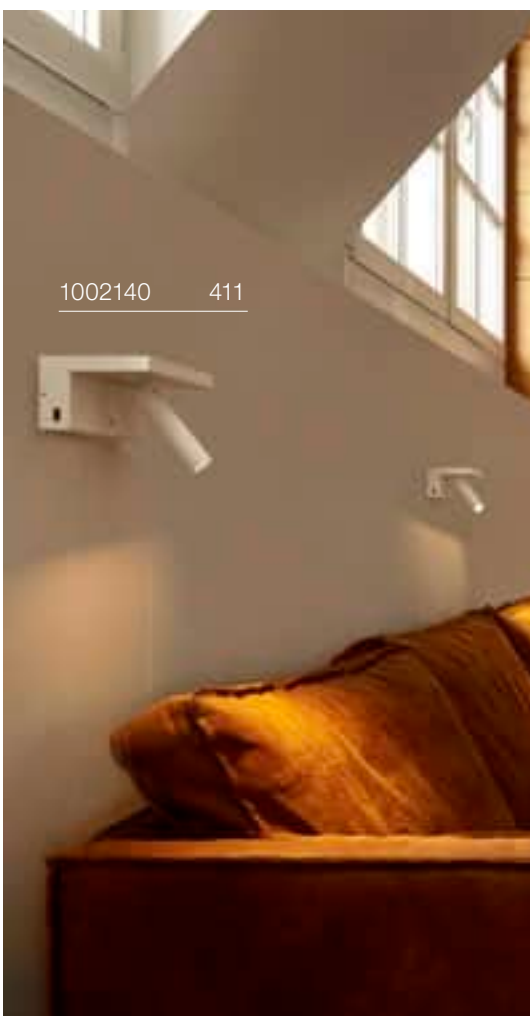





KARPO 30
WL, single





IP 20 | 40° | L70B50 | 350° | 90°

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/steel

- Switch on light housing

LED INSIDE | CRI 90

Down | 370lm 400lm | 3000K

Version	Prod. no.	GBP
● black 370lm	**152340**	**108.00**
○ white 400lm	**152341**	**108.00**

KARPO
WL





Switch | IP 20 | 40° | L70B50 | 180° | 90°

220-240V ~50/60Hz | 500mA
Total wattage: 6.8W
Material: aluminium

- 2 USB connections 1.5 A max
- 3 dimming levels via switch on base

LED INSIDE | CRI 90

Down | 390lm | 3000K

Version	Prod. no.	GBP
○ white	**1002140**	**208.00**





SOMNILA SPOT
WL, left









100-240V ~50/60Hz | 12V
Total wattage: 15W
Material: aluminium/steel

- 1 USB connection
- Light sources can be switched on/off separately on the housing



Down 120lm | 3000K

Version	Prod. no.	GBP
● black 490lm	**1003455**	**199.00**
○ white 770lm	**1003457**	**199.00**

SOMNILA SPOT
WL, right







IP 20 | 110° | 340° | L70B50

100-240V ~50/60Hz | 12V
Total wattage: 15W
Material: aluminium/steel

- 1 USB connection
- Light sources can be switched on/off separately on the housing

LED INSIDE | CRI 90

Down | 120lm | 3000K

Version	Prod. no.	GBP
● black 490lm	**1003456**	**199.00**
○ white 770lm	**1003458**	**199.00**

SOMNILA FLEX
WL, left





IP 20 | 110° | L70B50

100-240V ~50/60Hz | 12V
Material: aluminium

- Light sources can be switched on/off separately on the housing.

LED INSIDE | CRI 90

Down | 120lm | 3000K

Version	Prod. no.	GBP
○ white	**1003459**	**208.00**

SOMNILA FLEX
WL, right





IP 20 | 110° | L70B50

100-240V ~50/60Hz | 12V
Material: aluminium

- Light sources can be switched on/off separately on the housing.

LED INSIDE | CRI 90

Down | 120lm | 3000K

Version	Prod. no.	GBP
○ white	**1003460**	**208.00**



1002608 415

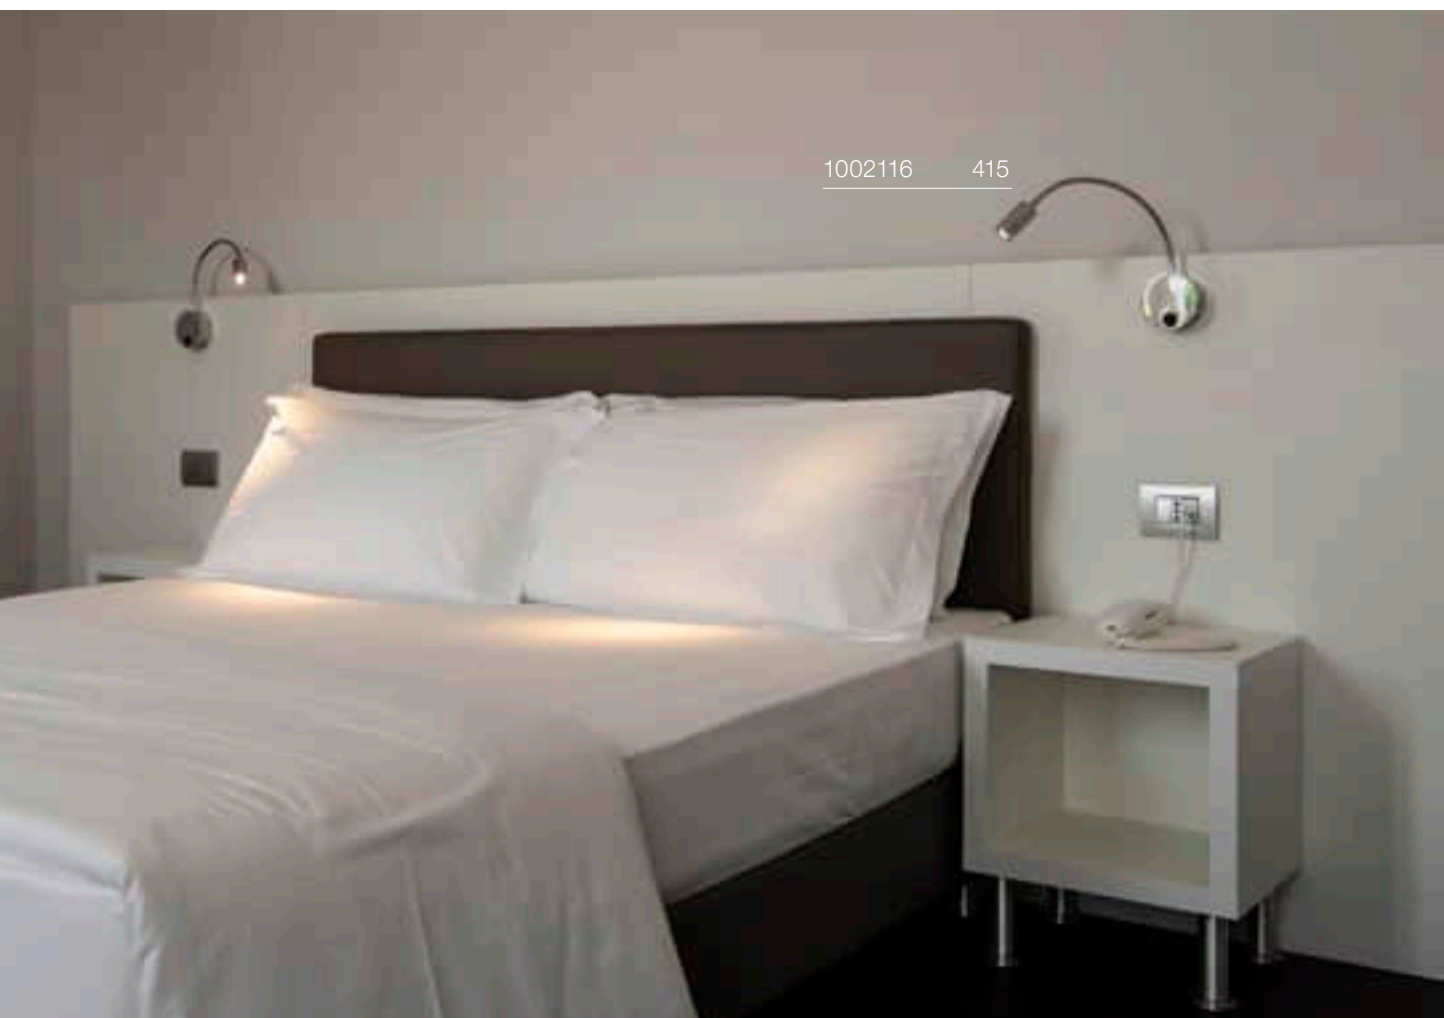

1002116 415

DIO FLEX PLATE
WL QPAR51





IP 20

220-240V ~50/60Hz
Material: aluminium

• Switch on light housing

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
● black	**1002608**	**49.00**
○ white	**1002607**	**49.00**
◑ chrome	**146692**	**57.00**

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h

Prod. no.: 1005080 | 7.00 GBP

DIO FLEX PLATE
WL





IP 20 45° L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 1.9W
Material: aluminium/glass

• Switch on light housing

LED INSIDE CRI 80

Down 100lm | 2700K 3000K

Version	Prod. no.	GBP
● black 2700K	**1002430**	**86.00**
● black 3000K	**1002431**	**86.00**
○ white 2700K	**1002117**	**86.00**
○ white 3000K	**1002118**	**86.00**
◑ chrome 3000K	**146682**	**91.00**

PHELIA
WL, QPAR51





IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: aluminium/steel

• Switch on light body

SOCKET INSIDE | <10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 10.5 cm

Version	Prod. no.	GBP
● black	**148540**	**113.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

MERADO FLOOD
WL, PHASE





C | IP 20 | L70B50 | 360° | 90° | 20

220-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium

LED INSIDE | CRI 80

Down	3000lm | 3000K 3200lm | 4000K

Version	Prod. no.	GBP
○ white 3000lm | 3000K	**1001468**	**212.00**
○ white 3200lm | 4000K	**1001472**	**212.00**





DISPLAY ADL 50
QPAR51







220-240V ~50/60Hz
Material: aluminium/brass

- Open cable end connection box incl.
- Open cable end

SOCKET INSIDE <50 W

Base: 1xGU10

Version	Prod. no.	GBP
white	**1002860**	**42.00**
chrome	**146332**	**54.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L

Prod. no.: 1005273 | 9.00 GBP





DECONA 30
CW, PHASE

CCT

NEW





IP44 IK02 L80B50

220-240V ~50/60 Hz
Total wattage: 18W
Material: aluminium/PC

LED INSIDE CRI 90

Down	1600lm | 2700K	1600lm | 3000K

Version	Prod. no.	GBP
black 1450/1450lm	**1008578**	**102.00**
black/gold 1560/1560lm	**1008580**	**102.00**
white 1600/1600lm	**1008577**	**102.00**
white/gold 1530/1530lm	**1008579**	**102.00**

DECONA 42
CW, PHASE

CCT

NEW





IP44 IK02 L80B50

220-240V ~50/60 Hz | 300
Total wattage: 23W
Material: aluminium/PC

LED INSIDE CRI 90

Down	2020lm | 2700K	2020lm | 3000K

Version	Prod. no.	GBP
● black 2260/2260lm	**1008582**	**128.00**
●● black/gold 2170/2170lm	**1008584**	**128.00**
○ white 2140/2140lm	**1008581**	**128.00**
○● white/gold 2020/2020lm	**1008583**	**128.00**

DECONA
Mounting frame 310 mm

H: 7.5 cm
Ø: 31.3 cm
Material: aluminium

Version	Prod. no.	GBP
○ white	**1008585**	**51.00**

DECONA
Mounting frame 430 mm

H: 7.5 cm
Ø: 43.3 cm
Material: aluminium

Version	Prod. no.	GBP
○ white	**1008586**	**60.00**

DECONA
Suspension kit 1.50 m



L: 150 cm
Material: steel

Version	Prod. no.	GBP
● black	**1008587**	**24.00**
○ white	**1008588**	**24.00**

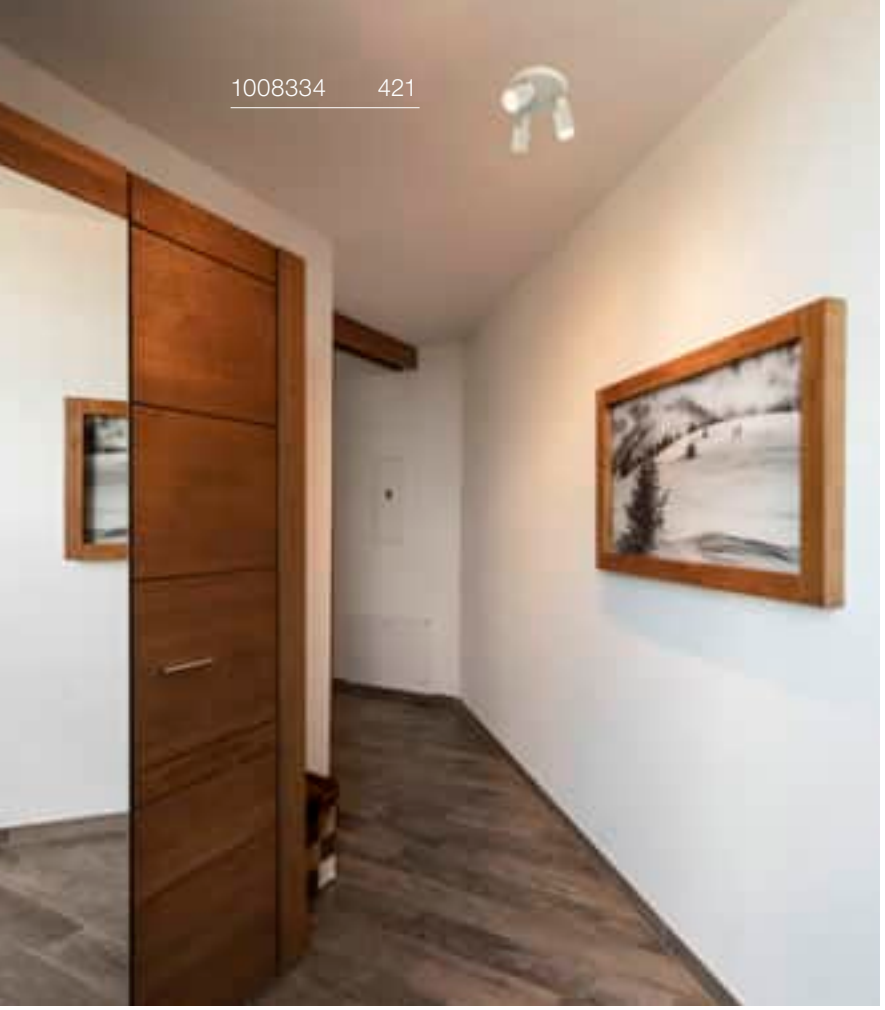

NEW

PURI 2.0
Tube

IP20 IK06 350° 90°

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4xGU10 max. Ø: 5.1 cm | L: 5.5 cm

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005075 | 7.00 GBP



PURI 2.0
Tube CW, Double Asym., QPAR51





Version	Prod. no.	GBP
black	1008308	81.00
black/gold	1008309	81.00
white	1008310	81.00
grey	1008311	81.00

PURI 2.0
Tube CW, Single, QPAR51





Version	Prod. no.	GBP
black	1008284	39.00
black/gold	1008285	39.00
white	1008286	39.00
grey	1008287	39.00

PURI 2.0
Tube CW, Switch, Single, QPAR51





Version	Prod. no.	GBP
black	1008296	47.00
black/gold	1008297	47.00
white	1008298	47.00
grey	1008299	47.00

PURI 2.0
Tube CW, Double Long, QPAR51





Version	Prod. no.	GBP
black	1008361	68.00
black/gold	1008362	68.00
white	1008363	68.00
grey	1008364	68.00

PURI 2.0
Tube CW, Triple Long, QPAR51





Version	Prod. no.	GBP
black	1008320	102.00
black/gold	1008321	102.00
white	1008322	102.00
grey	1008323	102.00

PURI 2.0
Tube CW, Triple Round, QPAR51





Version	Prod. no.	GBP
black	1008332	120.00
black/gold	1008333	120.00
white	1008334	120.00
grey	1008335	120.00

PURI 2.0
Tube CW, Quadruple Long, QPAR51





Version	Prod. no.	GBP
black	1008344	145.00
black/gold	1008345	145.00
white	1008346	145.00
grey	1008347	145.00



NEW

PURI 2.0
Cone

IP20 IK06 350° 90°

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h



Prod. no.: 1005080 | 7.00 GBP



PURI 2.0
Cone CW, Double Asym., QPAR51





Version	Prod. no.	GBP
black	1008312	81.00
black/gold	1008313	81.00
white	1008314	81.00
grey	1008315	81.00

PURI 2.0
Cone CW, Single, QPAR51





Version	Prod. no.	GBP
black	1008288	39.00
black/gold	1008289	39.00
white	1008290	39.00
grey	1008291	39.00

PURI 2.0
Cone CW, Switch, Single, QPAR51





Version	Prod. no.	GBP
black	1008300	47.00
black/gold	1008301	47.00
white	1008302	47.00
grey	1008303	47.00

PURI 2.0
Cone CW, Double Long, QPAR51





Version	Prod. no.	GBP
black	1008365	68.00
black/gold	1008366	68.00
white	1008367	68.00
grey	1008368	68.00

PURI 2.0
Cone CW, Triple Long, QPAR51





Version	Prod. no.	GBP
black	1008324	102.00
black/gold	1008325	102.00
white	1008326	102.00
grey	1008327	102.00

PURI 2.0
Cone CW, Triple Round, QPAR51





Version	Prod. no.	GBP
black	1008336	120.00
black/gold	1008337	120.00
white	1008338	120.00
grey	1008339	120.00

PURI 2.0
Cone CW, Quadruple Long, QPAR51





Version	Prod. no.	GBP
black	1008348	145.00
black/gold	1008349	145.00
white	1008350	145.00
grey	1008351	145.00



NEW

PURI 2.0
Dome

IP20 IK06 350° 90°

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4xGU10 max. Ø: 5.1 cm | L: 5.5 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h

Prod. no.: 1005079 | 7.00 GBP



PURI 2.0
Dome CW, Double Asym., QPAR51





Version	Prod. no.	GBP
black	1008316	81.00
black/gold	1008317	81.00
white	1008318	81.00
grey	1008319	81.00

PURI 2.0
Dome CW, Single, QPAR51





Version	Prod. no.	GBP
black	1008292	39.00
black/gold	1008293	39.00
white	1008294	39.00
grey	1008295	39.00

PURI 2.0
Dome CW, Switch, Single, QPAR51





Version	Prod. no.	GBP
black	1008304	47.00
black/gold	1008305	47.00
white	1008306	47.00
grey	1008307	47.00

PURI 2.0
Dome CW, Double Long, QPAR51





Version	Prod. no.	GBP
black	1008369	68.00
black/gold	1008370	68.00
white	1008371	68.00
grey	1008372	68.00

PURI 2.0
Dome CW, Triple Long, QPAR51





Version	Prod. no.	GBP
black	1008328	102.00
black/gold	1008329	102.00
white	1008330	102.00
grey	1008331	102.00

PURI 2.0
Dome CW, Triple Round, QPAR51





Version	Prod. no.	GBP
black	1008340	120.00
black/gold	1008341	120.00
white	1008342	120.00
grey	1008343	120.00

PURI 2.0
Dome CW, Quadruple Long, QPAR51





Version	Prod. no.	GBP
black	1008352	145.00
black/gold	1008353	145.00
white	1008354	145.00
grey	1008355	145.00



1008233 426

NEW

PURI 2.0
Basic

MIX match

IP20 IK06 350° 90°

220-240V ~50/60 Hz
Material: aluminium

- Matching shades can be found on page 429

SOCKET INSIDE 6 W

Base: 1-4xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

PURI 2.0
Basic CW, Double Asym., QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008233	68.00
○ white	1008232	68.00

PURI 2.0
Basic CW, Single, QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008229	34.00
○ white	1008228	34.00

PURI 2.0
Basic CW, Switch, Single, QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008231	42.00
○ white	1008230	42.00

PURI 2.0
Basic CW, Double Long, QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008241	68.00
○ white	1008240	68.00

PURI 2.0
Basic CW, Triple Long, QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008235	85.00
○ white	1008234	85.00

PURI 2.0
Basic CW, Triple Round, QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008237	102.00
○ white	1008236	102.00

PURI 2.0
Basic CW, Quadruple Long, QPAR51

MIX match





Version	Prod. no.	GBP
● black	1008239	125.00
○ white	1008238	125.00

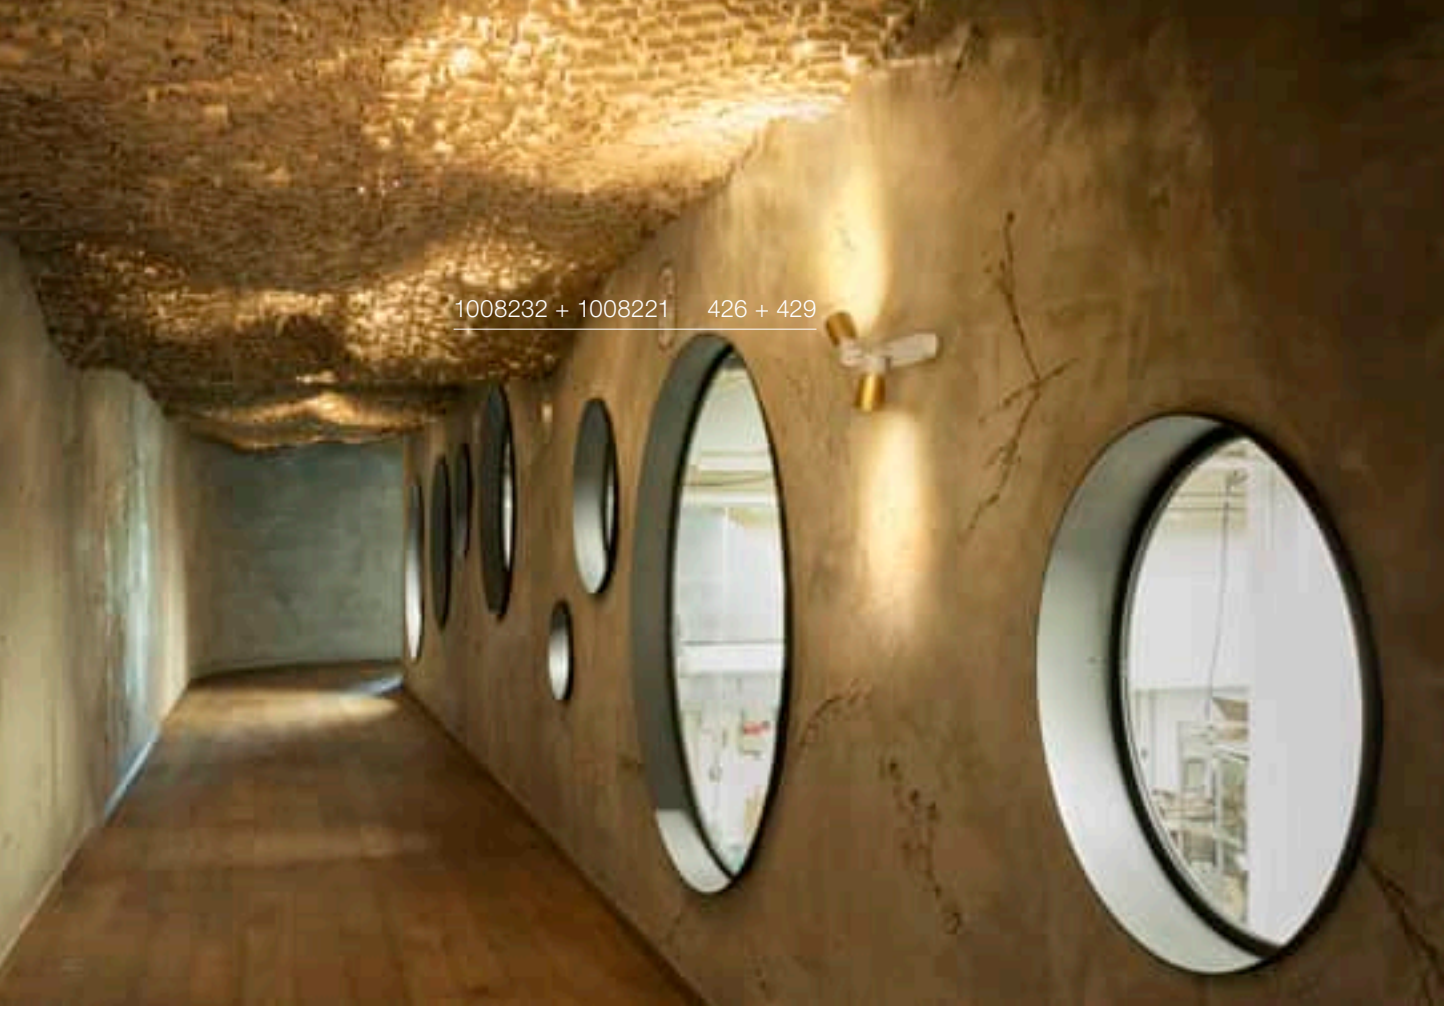

1008232 + 1008221 426 + 429



1008238 + 1008219 426 + 429



1008238 + 1008219 426 + 429

PURI 2.0
Tube Shade

MIX match

NEW



H: 6.5 cm
Ø: 5.5 cm
Material: aluminium

Version	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
aluminium	1008376	8.00
grey	1008215	8.00
bronze	1008217	8.00

PURI 2.0
Cone Shade

MIX match

NEW



H: 6.5 cm
Ø: 5.5 cm
Material: aluminium

Version	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
aluminium	1008377	8.00
grey	1008220	8.00
bronze	1008222	8.00

PURI 2.0
Dome Shade

MIX match

NEW



H: 6.5 cm
Ø: 5.5 cm
Material: aluminium

Version	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
aluminium	1008378	8.00
grey	1008225	8.00
bronze	1008227	8.00


1002030 431

PURI
CW

IP 20 | 350° | 85°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring included

SOCKET INSIDE <50 W

Base: 1-4xGU10

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

PURI
CW, single, QPAR51





Version	Prod. no.	GBP
● black	**147360**	**34.00**
○ white	**147361**	**34.00**

PURI
CW, double, QPAR51





Version	Prod. no.	GBP
● black	**147370**	**68.00**
○ white	**147371**	**68.00**

PURI
CW, triple, QPAR51





Version	Prod. no.	GBP
● black	**147380**	**94.00**
○ white	**147381**	**94.00**

PURI
CW, quad, QPAR51





Version	Prod. no.	GBP
● black	**1002029**	**137.00**
○ white	**1002030**	**137.00**



1000892 433

AVO

IP 20 320° 90°

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <50 W

Base: 1-4xGU10

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

AVO
CW, single, QPAR51





Version	Prod. no.	GBP
● black	**1000886**	**39.00**
○ white	**1000887**	**39.00**

AVO
CW, double, QPAR51





Version	Prod. no.	GBP
● black	**1000889**	**81.00**
○ white	**1000890**	**81.00**

AVO
CW, triple, QPAR51





Version	Prod. no.	GBP
● black	**1000892**	**101.00**
○ white	**1000893**	**101.00**

AVO
CW, quad, QPAR51





Version	Prod. no.	GBP
● black	**1000895**	**121.00**
○ white	**1000896**	**121.00**



147443 435

ASTO

IP 20 330° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <75 W

Base: 2xGU10

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005075 | 7.00 GBP

ASTO
CW, single, QPAR51





Version	Prod. no.	GBP
aluminium	**147441**	**31.00**

ASTO
CW, double, QPAR51





Version	Prod. no.	GBP
aluminium	**147442**	**61.00**

ASTO
CW, triple, QPAR51





Version	Prod. no.	GBP
aluminium	**147443**	**82.00**

ASTO
CW, quad, QPAR51





Version	Prod. no.	GBP
aluminium	**147444**	**103.00**


1007591 437

PANTILO ROPE 19
CW, E27





IP 20 IK02

200-240V ~50/60Hz
Material: glass

SOCKET INSIDE <15 W

Base: 1xE27 | max. Ø: 10 cm | L: 11 cm

Version	Prod. no.	GBP
amber/gold	**1007592**	**137.00**
anthracite/silver	**1007593**	**137.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005305 | 17.00 GBP

PANTILO ROPE 27
CW, E27





IP20 IK02

200-240V ~50/60Hz
Material: glass

SOCKET INSIDE <15 W

Base: 1xE27 | max. Ø: 15 cm | L: 11 cm

Version	Prod. no.	GBP
amber/gold	**1007591**	**171.00**
anthracite/silver	**1007590**	**171.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005305 | 17.00 GBP



1007608 + 1007610 439

CYFT WAVE
CW, PHASE

CCT

NEW





C | IP65 | IK05 | UGR 22 | L70B50 | 200

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium

LED INSIDE | CRI 90

240lm | 2700K | 260lm | 3000K | 280lm | 4000K

Version	Prod. no.	GBP
● black	1008024 ●	170.00

CYFT
CW, PHASE

CCT





C | IP 44 | IK05 | UGR 22 | L70B50 | 200

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium/acrylic

LED INSIDE | CRI 90

330lm | 2700K | 350lm | 3000K | 380lm | 4000K

Version	Prod. no.	GBP
● black	1007608	171.00

CYFT
Decorative ring

NEW



H: 2.45 cm
Ø: 13.1 cm
Material: steel

Version	Prod. no.	GBP
○ white	1007611	15.00
● brass	1007610	26.00
◑ chrome	1007609	21.00
● bronze	1008025 ●	25.00
◑ nickel	1008026 ●	22.00



1007718 441



KAMI
CW, single, QPAR51

NEW





IP20 IK02 340° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5.1 cm

Version	Prod. no.	GBP
black	1007721	55.00
black/gold	1007717	55.00
white	1007720	55.00
white/black	1007718	55.00
white/gold	1007716	55.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005077 | 7.00 GBP

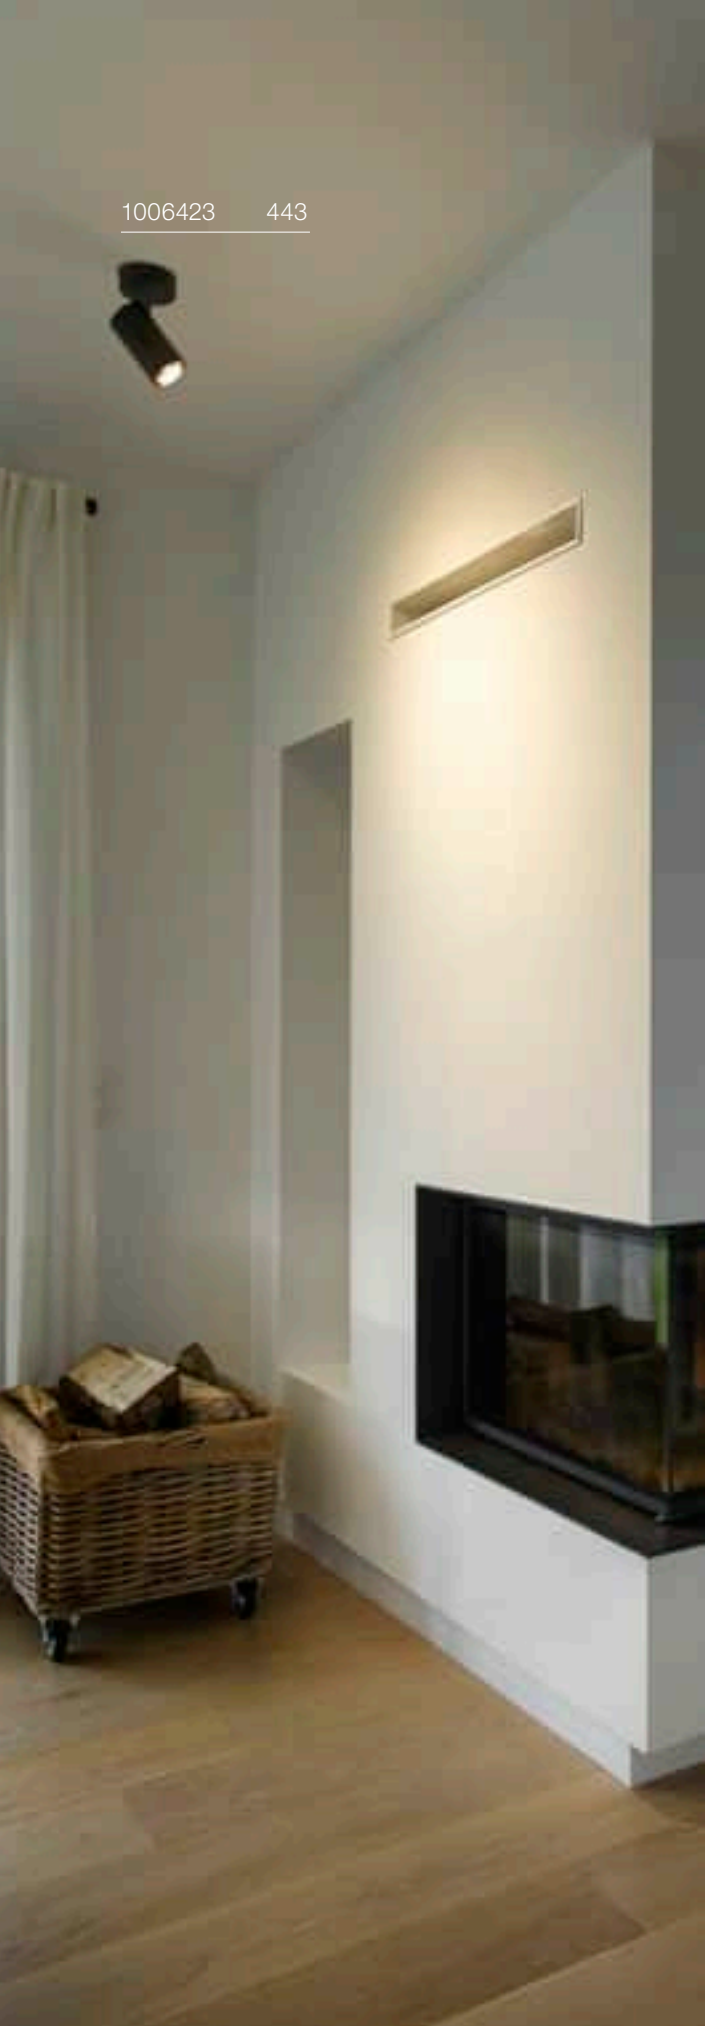

1006423 443



1006428 443

ASTO TUBE

IP 20 350° 90°

220-240V ~50/60Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 1-4xGU10

ASTO TUBE
CW, single, GU10





Version	Prod. no.	GBP
● black	1006423	43.00
○ white	1006424	43.00

ASTO TUBE
CW, double, GU10





Version	Prod. no.	GBP
● black	1006425	82.00
○ white	1006426	82.00

ASTO TUBE
Decorative reflector



H: 3.95 cm
Ø: 6.75 cm
Material: polycarbonate (PC)

Version	Prod. no.	GBP
● black/chrome	1007190	4.00
● gold	1006450	4.00
● chrome	1006449	4.00
● copper	1006451	4.00

ASTO TUBE
CW, triple, GU10





Version	Prod. no.	GBP
● black	1006427	116.00
○ white	1006428	116.00

ASTO TUBE
CW, quadruple, GU10





Version	Prod. no.	GBP
● black	1006429	142.00
○ white	1006430	142.00



1004664 445

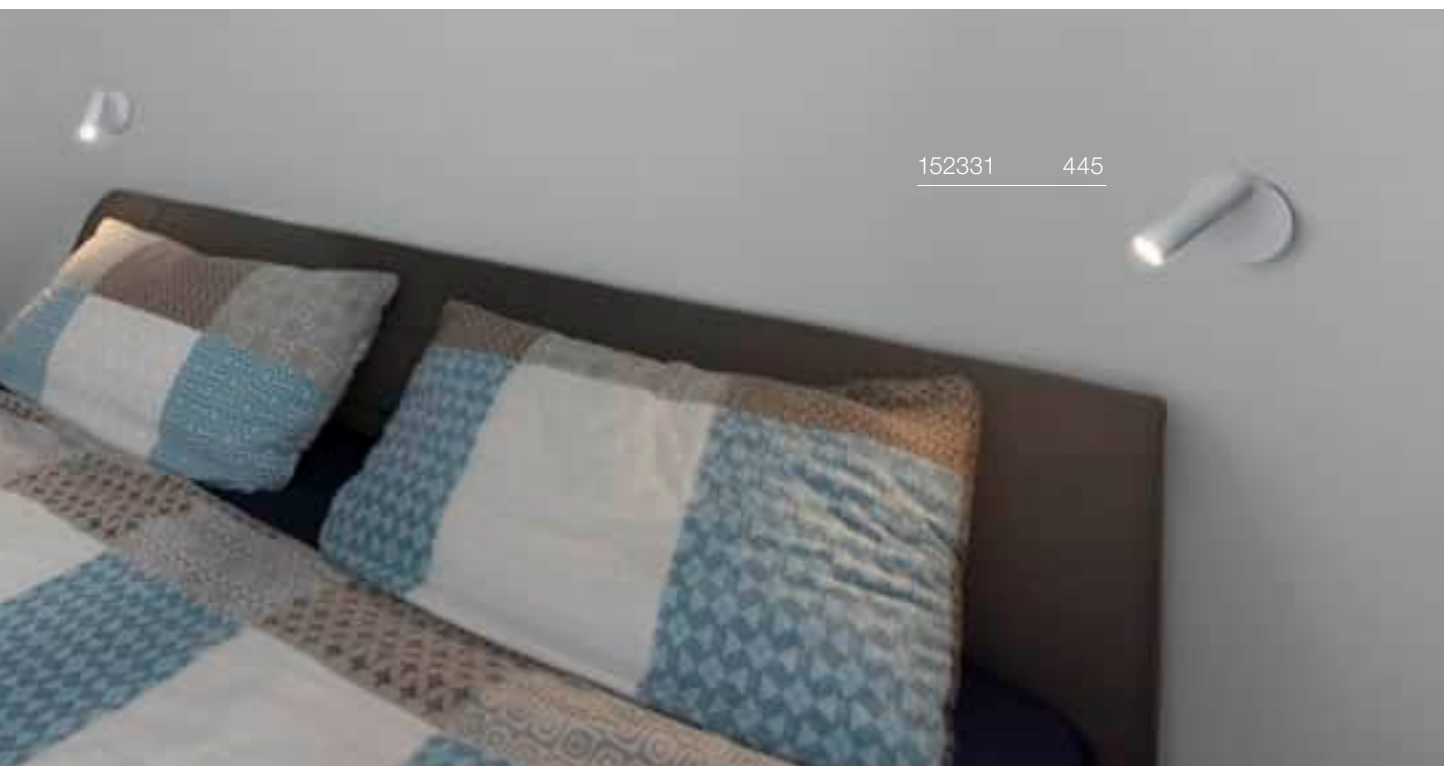

152331 445

OCULUS
CW, PHASE

DIM TO WARM





IP 20 | 100° | L70B50 | 160° | 180°

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

• Additional frosted lens included

LED INSIDE | CRI 90

Down 36lm | 2000K - 780lm | 3000K

Version	Prod. no.	GBP
● black	**1004664**	**219.00**
○ white	**1004665**	**219.00**

KARPO 30
CW, single





IP 20 | 40° | L70B50 | 350° | 90°

220-240V ~50/60Hz | 500mA
Total wattage: 9.3W
Material: aluminium/steel

LED INSIDE | CRI 90

Down 560lm / 680lm | 3000K

Version	Prod. no.	GBP
● black		
560lm	**152330**	**111.00**
○ white		
680lm	**152331**	**111.00**


1008703 447

NOBLO®
CW single, PHASE, DTW

NEW





C | IP20 | 36° | L70B50 | 355° | 90°

220-240V ~50/60 Hz | 350
Total wattage: 8W
Material: aluminium/steel

LED INSIDE | CRI 90

Down 10lm | 2000K - 450lm | 3000K

Version	Prod. no.	GBP
black	1008706	102.00
white	1008703	102.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO®
CW double, PHASE, DTW

NEW





C,L | IP20 | 36° | L70B50 | 355° | 90°

220-240V ~50/60 Hz | 350
Total wattage: 15W
Material: aluminium/steel

LED INSIDE | CRI 90

Down 10lm | 2000K - 940lm | 3000K

Version	Prod. no.	GBP
black	1008707	163.00
white	1008704	163.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO®
CW triple, PHASE, DTW

NEW





C,L | IP20 | 36° | L70B50 | 355° | 90°

220-240V ~50/60 Hz | 350
Total wattage: 22W
Material: aluminium/steel

LED INSIDE | CRI 90

Down 10lm | 2000K - 1360lm | 3000K

Version	Prod. no.	GBP
black	1008708	240.00
white	1008705	240.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00


1008711 449

NOBLO®
CW single, PHASE

NEW





C | IP20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60 Hz | 150
Total wattage: 6W
Material: aluminium/steel

LED INSIDE | CRI 90

Down | 740lm \| 2700K 750lm \| 3000K

Version	Prod. no.	GBP
● black 750lm | 3000K	1008712	102.00
● black 740lm | 2700K	1008718	102.00
○ white 750lm | 3000K	1008709	102.00
○ white 740lm | 2700K	1008715	102.00

⊕

Product	Prod. no.	GBP
Dekoring		
● black	1008482	5.00
○ white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO®
CW double, PHASE

NEW





C,L | IP20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60 Hz | 300
Total wattage: 12W
Material: aluminium/steel

LED INSIDE | CRI 90

Down | 1450lm \| 2700K 1460lm \| 3000K

Version	Prod. no.	GBP
● black 1460lm | 3000K	1008713	163.00
● black 1450lm | 2700K	1008719	163.00
○ white 1460lm | 3000K	1008710	163.00
○ white 1450lm | 2700K	1008716	163.00

⊕

Product	Prod. no.	GBP
Dekoring		
● black	1008482	5.00
○ white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO®
CW triple, PHASE

NEW





C,L | IP20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60 Hz | 500
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE | CRI 90

Down | 2350lm \| 2700K 2360lm \| 3000K

Version	Prod. no.	GBP
● black 2360lm | 3000K	1008714	240.00
● black 2350lm | 2700K	1008720	240.00
○ white 2360lm | 3000K	1008711	240.00
○ white 2350lm | 2700K	1008717	240.00

⊕

Product	Prod. no.	GBP
Dekoring		
● black	1008482	5.00
○ white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00


1000131 451
Rabobank Venlo
energa

KALU

IP 20 60° L70B50 340°

120°

220-240V ~50/60Hz | 350mA
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	1000lm 2000lm 3000lm 4000lm	3000K

KALU
CW, single, PHASE





Version	Prod. no.	GBP
● black		
1000lm | 3000K | 17W	**1000127**	**137.00**
○ white		
1000lm | 3000K | 17W	**1000128**	**137.00**

KALU
CW, double, PHASE





Version	Prod. no.	GBP
● black		
2000lm | 3000K | 31W	**1000129**	**225.00**
○ white		
2000lm | 3000K | 31W	**1000130**	**225.00**

KALU
CW, triple, PHASE





Version	Prod. no.	GBP
● black		
3000lm | 3000K | 44W	**1000131**	**342.00**
○ white		
3000lm | 3000K | 44W	**1000132**	**342.00**

KALU
CW, quad, PHASE





Version	Prod. no.	GBP
● black		
4000lm | 3000K | 60W	**1000135**	**424.00**
○ white		
4000lm | 3000K | 60W	**1000136**	**424.00**

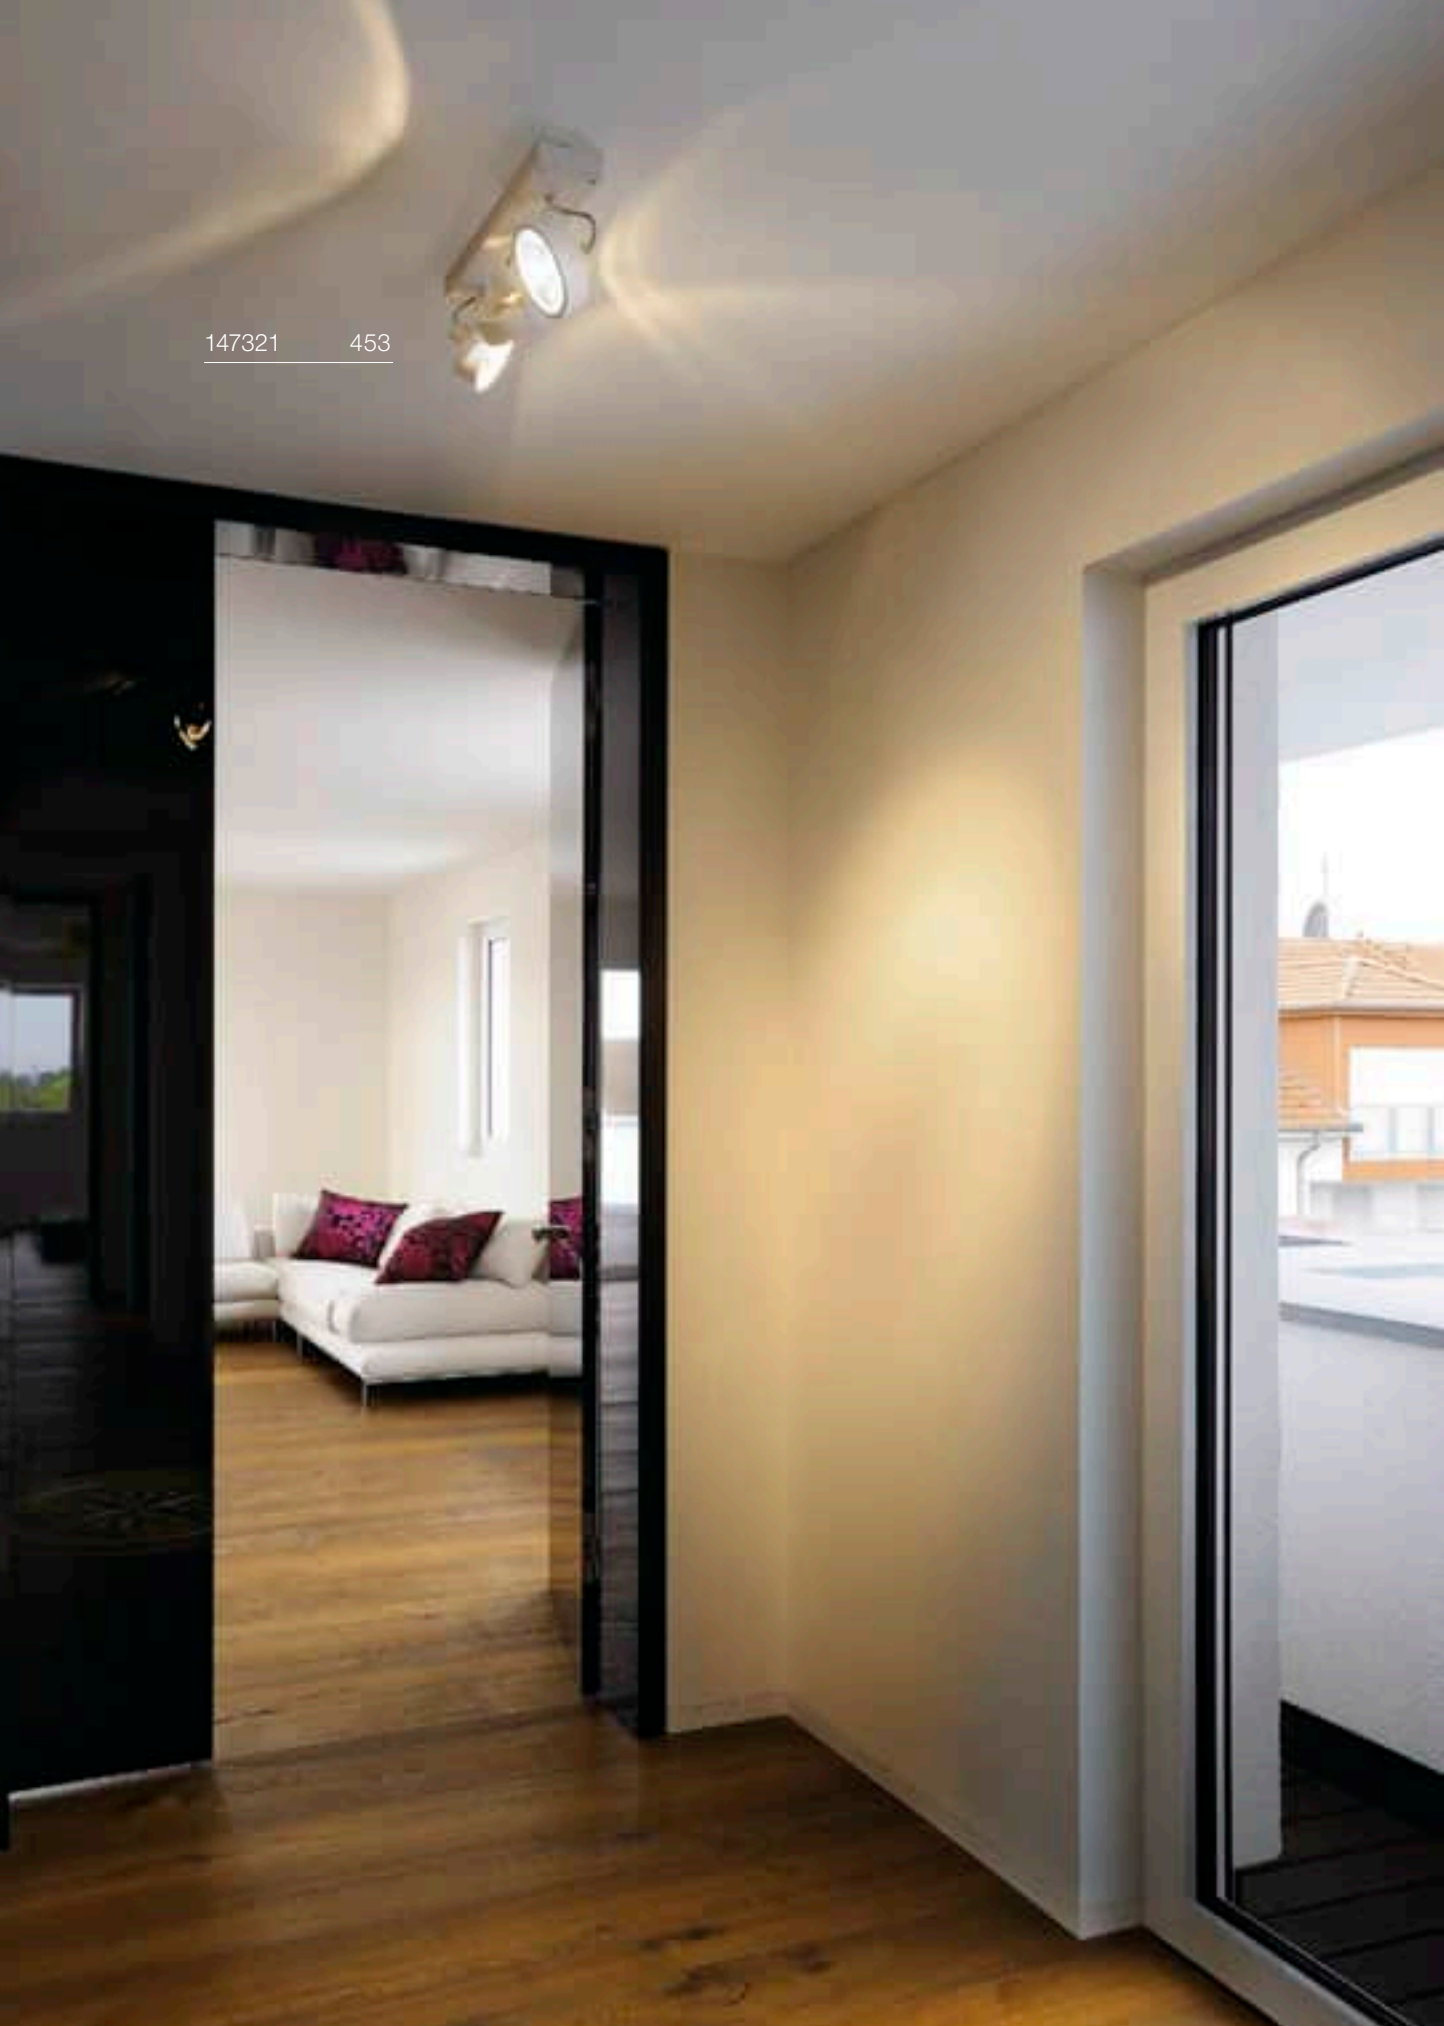
147321 453

KALU

IP 20 350° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <75 W

Base: 1xGU10

QPAR111 | 8W | 38°
2700K | 680lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005274 | 26.00 GBP

KALU
CW, single, QPAR111





Version	Prod. no.	GBP
● black	**1000702**	**65.00**
○ white	**147301**	**65.00**
◍ aluminium	**147306**	**67.00**

KALU
CW, double, QPAR111





Version	Prod. no.	GBP
● black	**1000703**	**128.00**
○ white	**147311**	**128.00**
◍ aluminium	**147316**	**137.00**

KALU
CW, triple, QPAR111





Version	Prod. no.	GBP
● black	**1000704**	**177.00**
○ white	**147321**	**177.00**
◍ aluminium	**147326**	**187.00**

KALU
CW, quad, QPAR111





Version	Prod. no.	GBP
● black	**1002023**	**248.00**
○ white	**1002024**	**248.00**
◍ aluminium	**1002025**	**257.00**


152010 455
PIANTE E FIORI

ENOLA B
CW, single, QPAR51





IP 20 350° 100°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light colour included.
- Optional black decorative ring available as an accessory.

SOCKET INSIDE <50 W

Base: 1xGU10 max. L: 6.7 cm

Version	Prod. no.	GBP
● black	**152010**	**63.00**
○ white	**152011**	**63.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA B
CW, double, QPAR51





IP 20 350° 100°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light colour included.
- Optional black decorative ring available as an accessory.

SOCKET INSIDE <50 W

Base: 2xGU10 max. L: 6.7 cm

Version	Prod. no.	GBP
● black	**152020**	**108.00**
○ white	**152021**	**108.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA B
CW, double, QPAR51





IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light colour included.
- Optional black decorative ring available as an accessory.

SOCKET INSIDE <50 W

Base: 2xGU10 max. L: 8 cm

Version	Prod. no.	GBP
● black	**151830**	**134.00**
○ white	**151831**	**134.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**



ALTRA DICE
CW, double, QPAR51







220-240V ~50/60Hz
Material: aluminium/steel



Base: 2xGU10

Version	Prod. no.	GBP
● black	**1002215**	**94.00**
○ white	**151531**	**94.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h





Prod. no.: 1005273 | 9.00 GBP



SPOT 79
CW, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Version	Prod. no.	GBP
● black	**132020**	**29.00**
○ white	**132021**	**29.00**
● grey	**132024**	**29.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

INDA
CW, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Version	Prod. no.	GBP
● black	**147550**	**56.00**
○ white	**147551**	**56.00**
● aluminium	**147559**	**60.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP



SENSER 12
CW, square, PHASE



C | IP 20 | IK02 | UGR 29 | L70B50

220-240V ~50/60Hz | 200mA
Total wattage: 8.4W
Material: aluminium

LED INSIDE | CRI 90

Down 460lm | 3000K

Version	Prod. no.	GBP
○ white	**1003017**	**64.00**

SENSER 18
CW, square, PHASE



C | IP 20 | IK02 | UGR 27 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 13W
Material: aluminium

LED INSIDE | CRI 90

Down 840lm | 3000K

Version	Prod. no.	GBP
○ white	**1003018**	**68.00**

SENSER 24
CW, square, PHASE





C | IP 20 | IK02 | UGR 26 | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 90

Down 1140lm | 3000K
1240lm | 4000K

Version	Prod. no.	GBP
○ white 1140lm | 3000K	**1003019**	**73.00**
○ white 1240lm | 4000K	**1004705**	**73.00**


1003016 461

SENSER 12
CW, round, PHASE



C | IP 20 | IK02 | UGR 30 | L70B50

220-240V ~50/60Hz | 200mA
Total wattage: 8.4W
Material: aluminium

LED INSIDE | CRI 90

Down — 460lm | 3000K; 470lm | 4000K

Version	Prod. no.	GBP
○ white 460lm | 3000K | 8.4W	**1003014**	**64.00**
○ white 470lm | 4000K | 8.2W	**1004700**	**64.00**

SENSER 18
CW, round, PHASE





C | IP 20 | IK02 | UGR 29 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 13W
Material: aluminium

LED INSIDE | CRI 90

Down — 830lm | 3000K; 990lm | 4000K

Version	Prod. no.	GBP
○ white 830lm | 3000K | 13W	**1003015**	**68.00**
○ white 990lm | 4000K | 12W	**1004701**	**68.00**

SENSER 24
CW, round, PHASE





C | IP 20 | IK02 | UGR 27 | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 90

Down — 1140lm | 3000K; 1300lm | 4000K

Version	Prod. no.	GBP
○ white 1140lm | 3000K | 15W	**1003016**	**73.00**
○ white 1300lm | 4000K | 15W	**1004702**	**73.00**

SIMA
CW, round, Sensor

MR





IP 44 IK02 120° L70B50 12

220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)

LED INSIDE CRI 90

Down 2200lm | 3000K

Version	Prod. no.	GBP
○ white	**1005086**	**151.00**

SIMA
CW, round, PHASE





C IP 44 IK02 120° L70B50 12

220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)

LED INSIDE CRI 90

Down 2200lm | 3000K

Version	Prod. no.	GBP
○ white	**1005085**	**131.00**



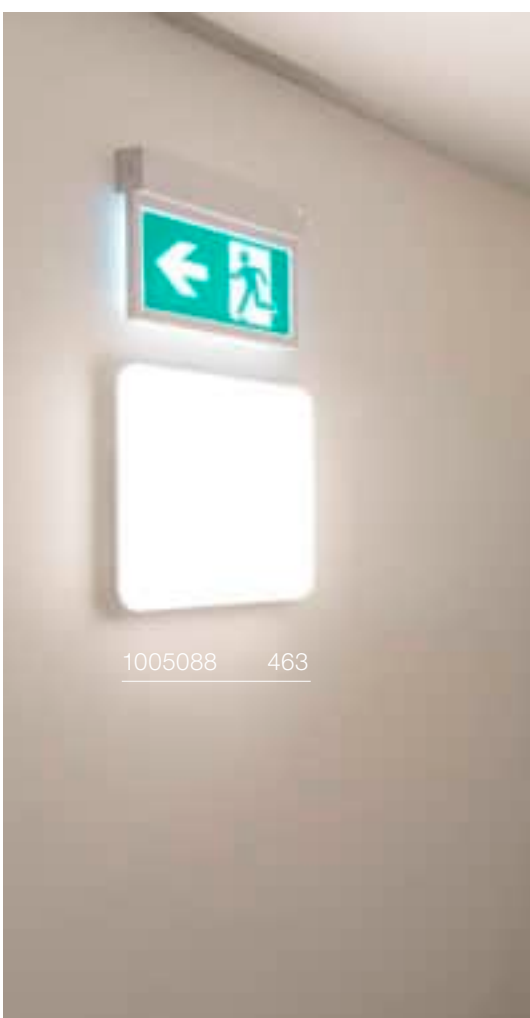

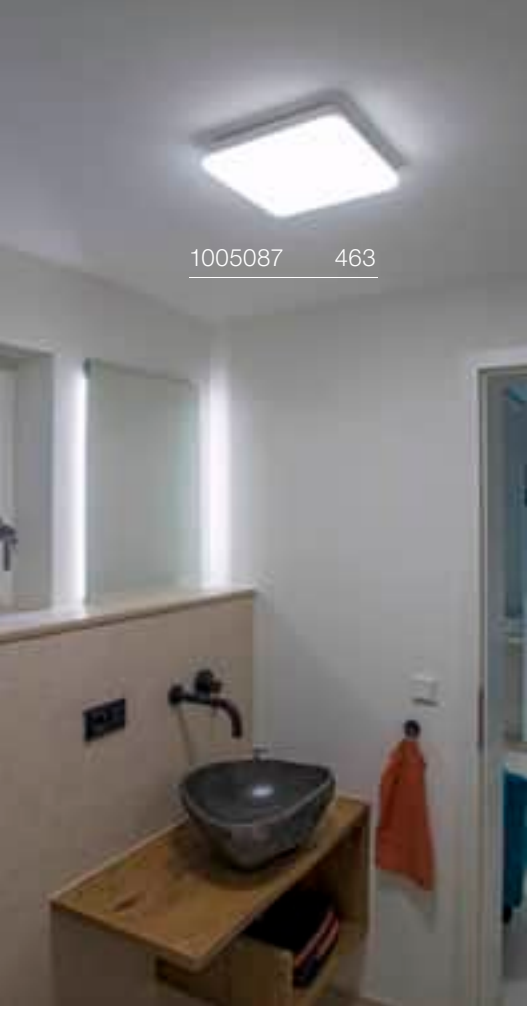



SIMA
CW, square, Sensor

MR



IP 44 IK02 120° L70B50 12

220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)

LED INSIDE CRI 90

Down 2200lm | 3000K

Version	Prod. no.	GBP
○ white	**1005088**	**151.00**

SIMA
CW, square, PHASE



C IP 44 IK02 120° L70B50 12

220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)

LED INSIDE CRI 90

Down 2200lm | 3000K

Version	Prod. no.	GBP
○ white	**1005087**	**131.00**



1002021 465

LIPSY® 30
CW, Dome

CCT







IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 13.5W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	1550lm | 3000K	1600lm | 4000K

Version	Prod. no.	GBP
○ white	**1002020**	**78.00**

LIPSY® 40
CW, Dome

CCT





IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 17.5W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	2050lm | 3000K	2200lm | 4000K

Version	Prod. no.	GBP
○ white	**1002021**	**96.00**

LIPSY® 50
CW, Dome

CCT





IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down	2500lm | 3000K	2700lm | 4000K

Version	Prod. no.	GBP
○ white	**1002022**	**104.00**



1002076 467

LIPSY® 30
CW, Drum

CCT





IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 13.5W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	1600lm | 3000K	1650lm | 4000K

Version	Prod. no.	GBP
○ white	**1002075**	**86.00**

LIPSY® 40
CW, Drum

CCT





IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 17.5W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	2100lm | 3000K	2300lm | 4000K

Version	Prod. no.	GBP
○ white	**1002076**	**96.00**

LIPSY® 50
CW, Drum

CCT





IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	2450lm | 3000K	2600lm | 4000K

Version	Prod. no.	GBP
○ white	**1002077**	**104.00**





LIPSY® 40
CW, Drum, DALI





Dali 2.0 | IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	2100lm | 3000K	2300lm | 4000K

Version	Prod. no.	GBP
○ white	**1002940**	**173.00**

LIPSY® 50
CW, Drum, DALI





Dali 2.0 | IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	2450lm | 3000K	2600lm | 4000K

Version	Prod. no.	GBP
○ white	**1002941**	**182.00**



MELAN
CW, E27





IP 20

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <60 W

Base: 1xE27 | Max. Ø: 7 cm | L: 16 cm

Version	Prod. no.	GBP
aluminium	**155236**	**105.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005303 | 9.00 GBP



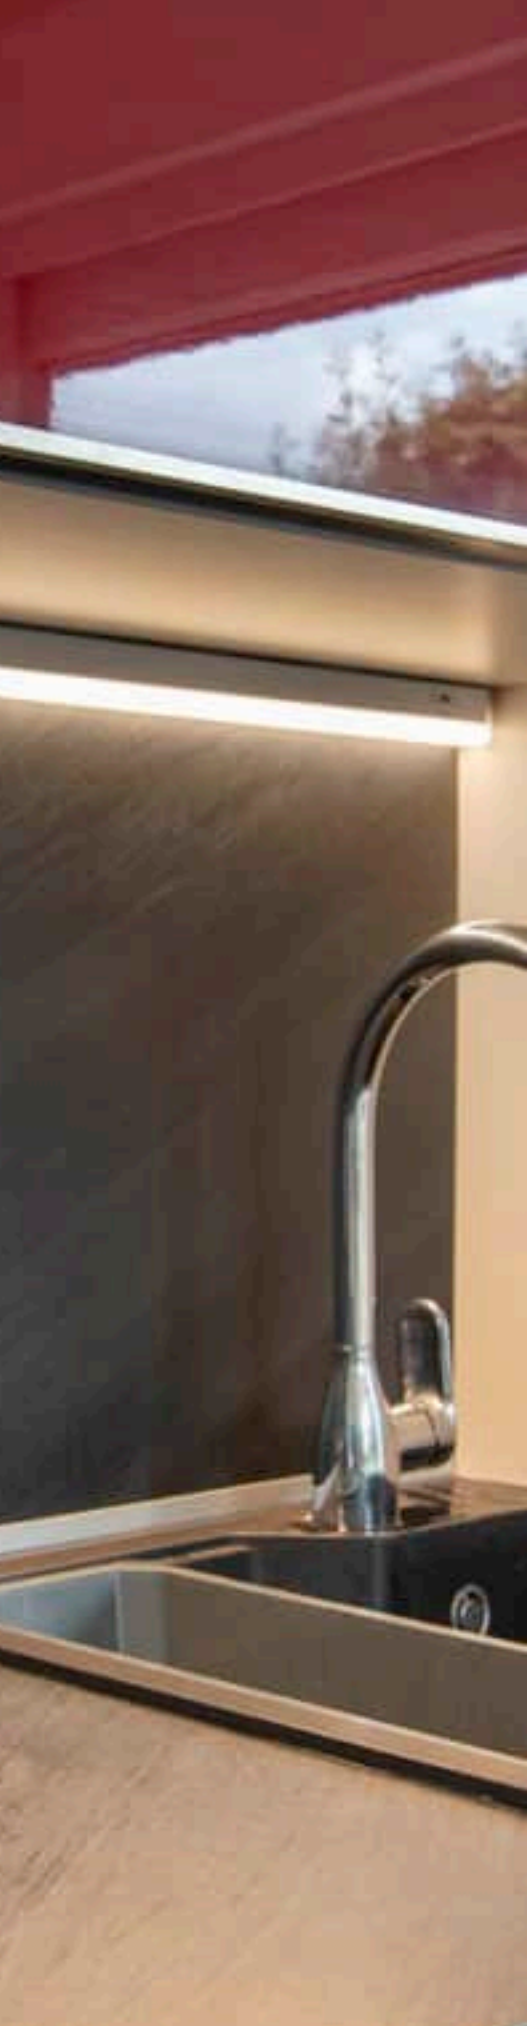

BATTEN 60
CW

CCT







IP 20 | IK02 | L70B50 | 10

220-240V ~50/60Hz | 110mA
Total wattage: 9W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included

LED INSIDE | CRI 90

Down	940lm | 3000K	980lm | 4000K

Version	Prod. no.	GBP
○ white	**1006123**	**46.00**

⊕

Product	Prod. no.	GBP
Direct connector		
○ white	**1006128**	**3.00**
Feed-in		
○ white	**1006125**	**9.00**
Mounting brackets, 2-pack		
○ white	**1006126**	**2.00**
Connector		
○ white	**1006127**	**5.00**

BATTEN 120
CW

CCT







IP 20 | IK02 | L70B50 | 5

220-240V ~50/60Hz | 220mA
Total wattage: 18W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included

LED INSIDE | CRI 90

Down	1900lm | 3000K	1960lm | 4000K

Version	Prod. no.	GBP
○ white	**1006124**	**57.00**

⊕

Product	Prod. no.	GBP
Direct connector		
○ white	**1006128**	**3.00**
Feed-in		
○ white	**1006125**	**9.00**
Mounting brackets, 2-pack		
○ white	**1006126**	**2.00**
Connector		
○ white	**1006127**	**5.00**



1001020 473

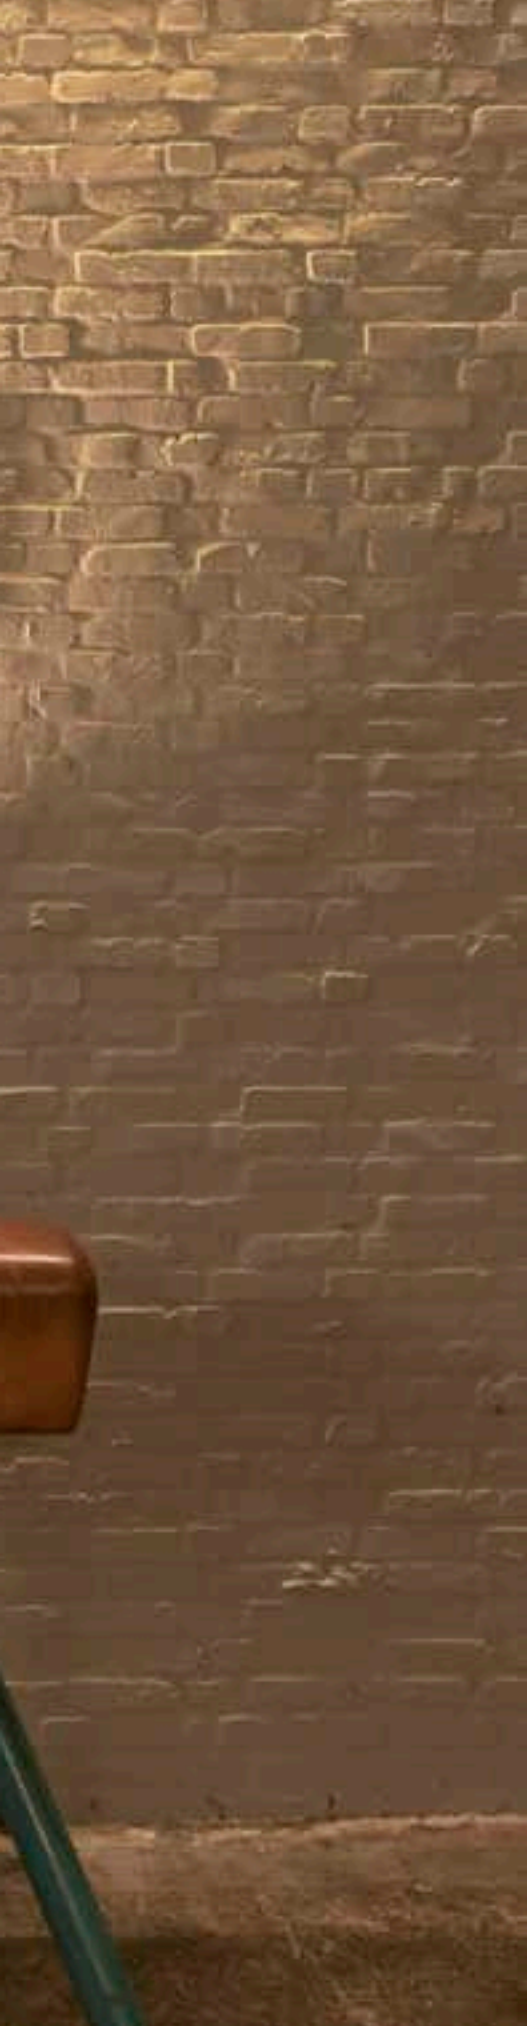

LONG GRILL
CW







220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic

LED INSIDE | CRI 80

Down 1600lm | 3000K

Version	Prod. no.	GBP
● black	**1001020**	**255.00**
○ white	**1001019**	**255.00**



SIGHT 60
CW







IP 20 | IK02 | 120° | 28 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic

- Switch on light housing

LED INSIDE | CRI 80

Down 1490lm | 3000K

Version	Prod. no.	GBP
● black	**1001283**	**199.00**
○ white	**1001284**	**199.00**

SIGHT 115
CW





IP 20 | IK02 | 120° | 28 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 38W
Material: aluminium/acrylic

LED INSIDE | CRI 80

Down 3100lm | 3000K

Version	Prod. no.	GBP
● black	**1001286**	**278.00**
○ white	**1001287**	**278.00**



1008109 + 1007860 478 + 479



SOCKET

VARYT | 478



VARYT | 479



VARYT | 479



VARYT | 479



VARYT | 479



QUIMERA | 481



ONE STRAIGHT | 483



ONE BOW | 483



VINOLINA ONE | 485



VINOLINA | 485



VINOLINA TWO | 487



TAHA | 489



SOCKET

TINY SUN | 491



SOCKET

LITTLE SUN | 491



WORKLIGHT PRO | 492



WORKLIGHT PRO | 492

WORKLIGHT | 493



WORKLIGHT | 493



SOCKET

FENDA | 495



SOCKET

FENDA | 495



SOCKET

FENDA | 495



SOCKET

FENDA | 497



FENDA | 497

FENDA | 497



FENDA | 497



FENDA | 497



KARPO | 498

KARPO | 498



SOCKET

PHELIA | 499

VARYT
TL, E14

MIX match

NEW







IP20 IK02 200

220-240V ~50/60 Hz
Material: aluminium

- DE Euro plug and switch

SOCKET INSIDE 6 W

Base: 1xE14 | Max. Ø: 11 cm | L: 3.8 cm

Version	Prod. no.	GBP
black	1008743	77.00
white	1008744	77.00
brass (PVD)	1008746	102.00
chrome	1008745	85.00
copper (PVD)	1008747	102.00

C35 | 4.2W | 320°
2700K | 380lm | EEC=F
5kWh/1000h

C,L

Prod. no.: 1005284 | 6.00 GBP

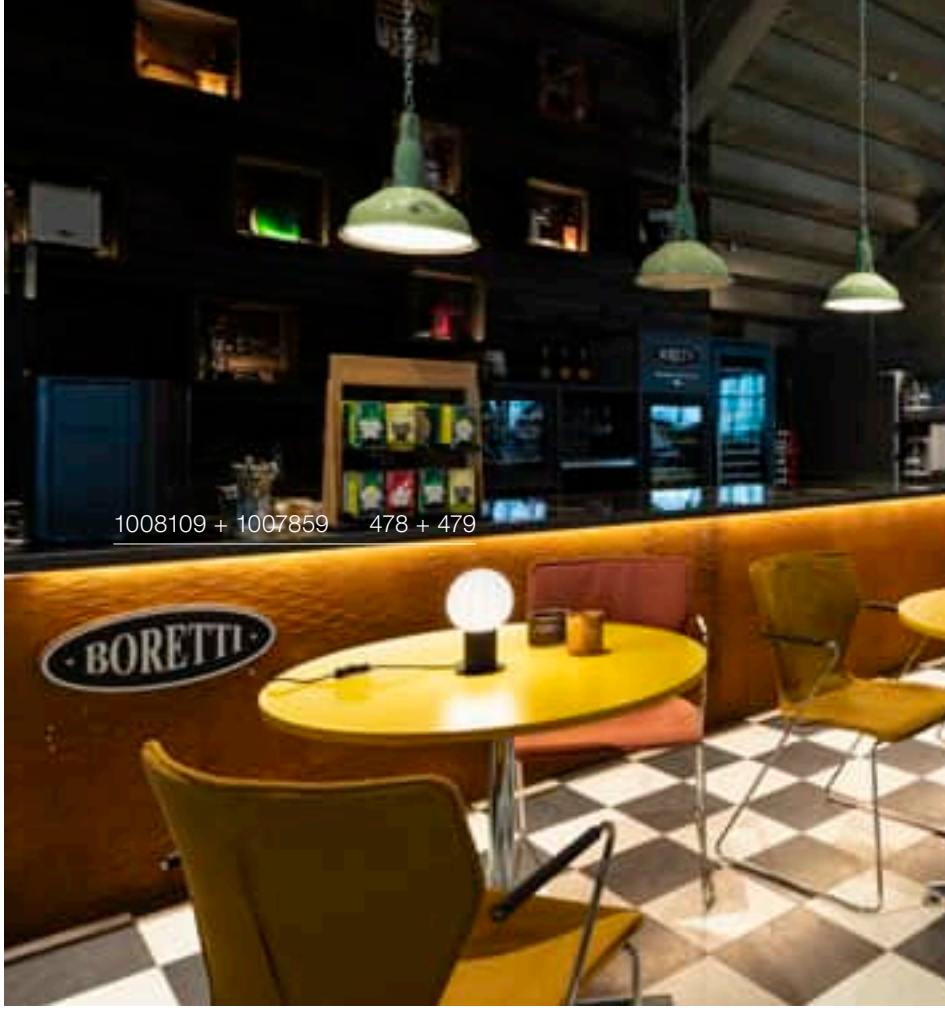

1008109 + 1007859 478 + 479



1008110 + 1008119 478 + 479



VARYT
Glass shade for PD, WL, CL, TL

MIX match

NEW



IK02

H: 12.8 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1008119	51.00

VARYT
Glass shade diamond
for PD, WL, CL, TL

MIX match

NEW



IK02

H: 12.7 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
amber	1008023	69.00
smoke	1007858	69.00

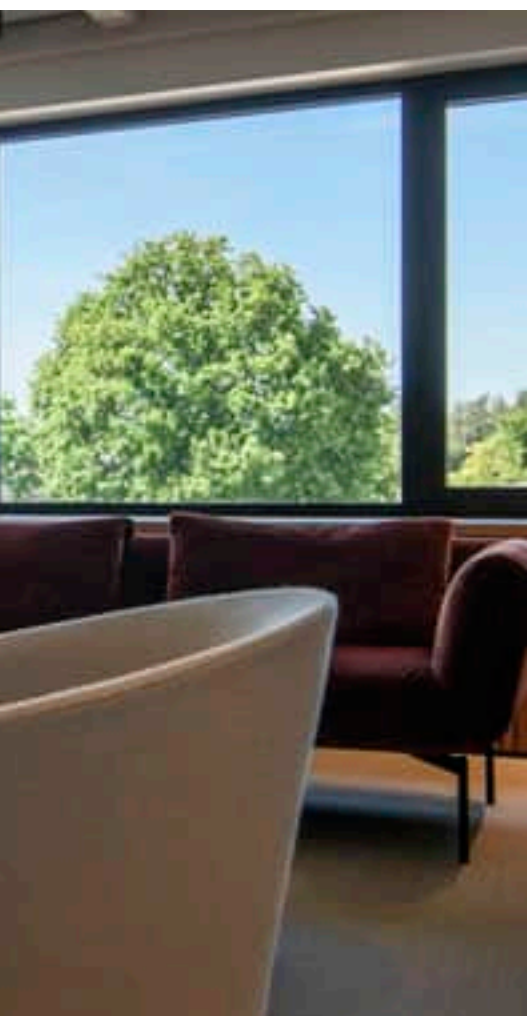

VARYT
Glass shade line
for PD, WL, CL, TL

MIX match

NEW



IK02

H: 13 cm
Ø: 12 cm
Material: glass

Version	Prod. no.	GBP
white	1007859	59.00

VARYT
Glass shade pleated
for PD, WL, CL, TL

MIX match

NEW

IK02

H: 13.5 cm
Ø: 11.5 cm
Material: glass

Version	Prod. no.	GBP
white	1007860	64.00


1008033 223
1008038 481



QUIMERA
TL

CCT

NEW





IP20 IK04 360° L80B50 260

220-240V ~50/60Hz | 350mA
Total wattage: 4.3W
Material: aluminium/glass

LED INSIDE CRI 90

Down	110lm | 2700K	120lm | 3000K

Version	Prod. no.	GBP
brass (PVD)	1008741	283.00
dark copper (PVD)	1008742	283.00
dark bronze (PVD)	1008740	283.00


1006353 483


1006355 483
1006352 483

ONE STRAIGHT
FL

CCT





Switch | 140° | 140° | UGR 22 | L80B50 | 77° | 250

220-240V ~50/60Hz | 24V
Total wattage: 22W
Material: steel/polycarbonate (PC)

• Euro plug

LED INSIDE | CRI 90

Up	600lm	2700K	600lm	3000K
Down	600lm		600lm	

Version	Prod. no.	GBP
black	**1007966**	**729.00**
black/brass	**1007964**	**729.00**
white	**1007965**	**729.00**

ONE BOW
FL

CCT





Switch | 140° | 140° | UGR 22 | L80B50 | 60° | 120° | 250

220-240V ~50/60Hz | 24V
Total wattage: 22W
Material: steel/polycarbonate (PC)

• Euro plug

LED INSIDE | CRI 90

Up	600lm	2700K	600lm	3000K
Down	600lm		600lm	

Version	Prod. no.	GBP
black	**1007963**	**1,072.00**
black/brass	**1007961**	**1,072.00**
white	**1007962**	**1,072.00**



1007357 485

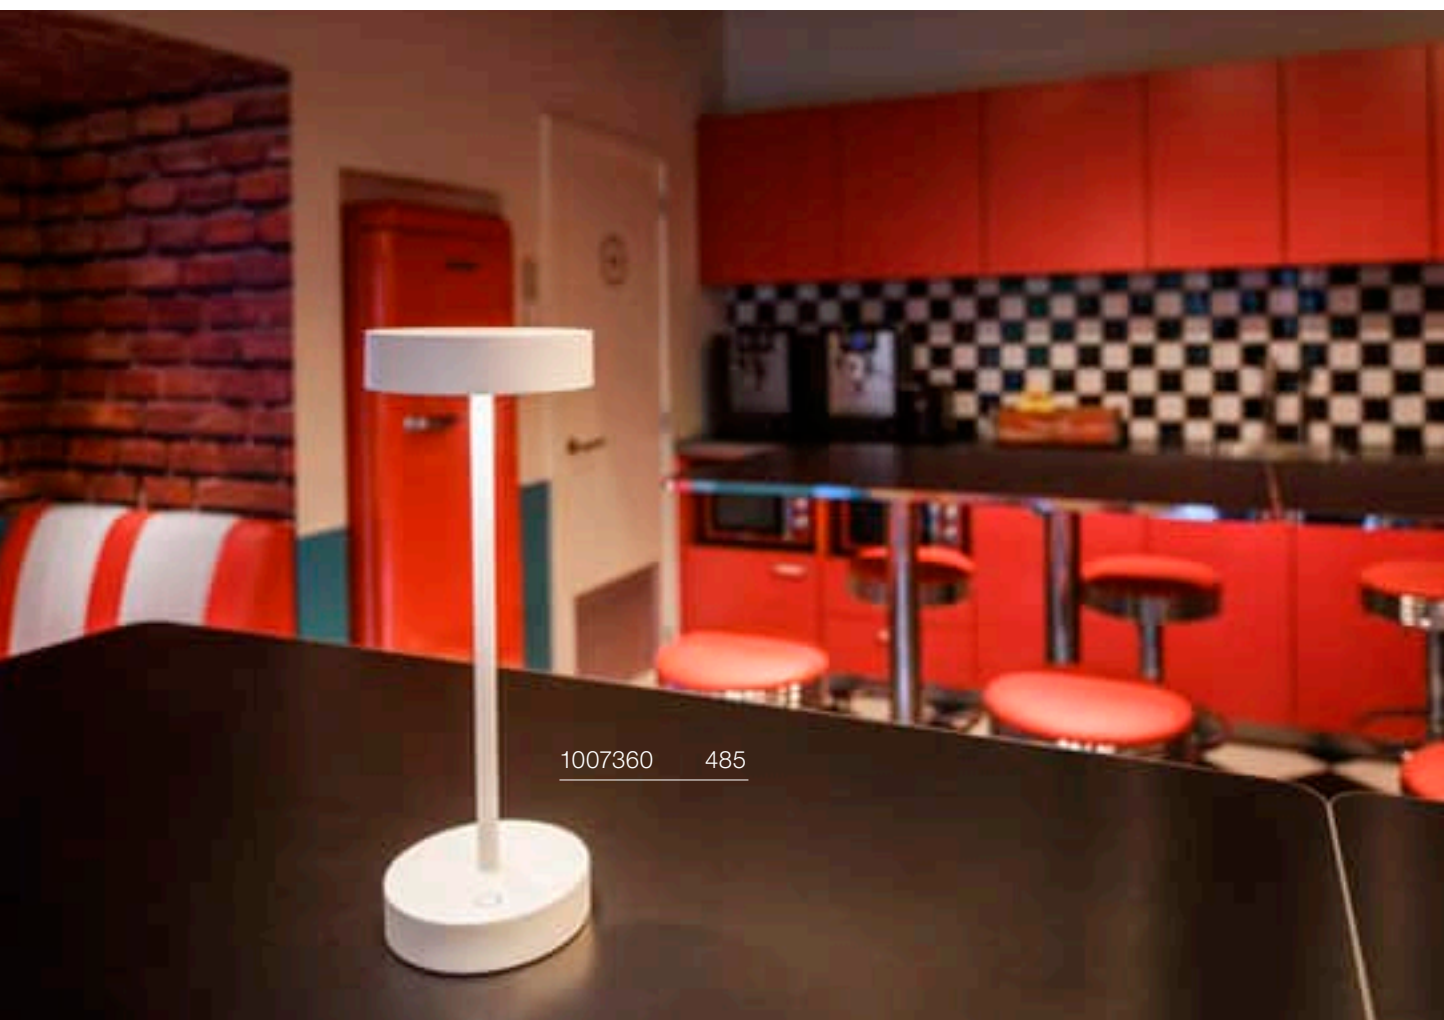

1007360 485

VINOLINA ONE
TL, Battery





Touch | IP54 | L80B10

5V battery operation
Total wattage: 2.5W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A

LED INSIDE | CRI 80

Down	125lm | 2700K

Version	Prod. no.	GBP
● black	**1007359**	**85.00**
○ white	**1007357**	**85.00**
● rust	**1007358**	**85.00**

VINOLINA
TL, Battery

CCT





Touch | IP54 | L80B10

5V battery operation
Total wattage: 2.2W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A

LED INSIDE | CRI 80

Down	130lm | 2700K	130lm | 3000K

Version	Prod. no.	GBP
● black	**1007362**	**85.00**
○ white	**1007360**	**85.00**
● rust	**1007361**	**85.00**


1007696 487

VINOLINA TWO
TL, Battery, DTW

CCT





Touch | IP65 | IK03 | L70B50

5V battery operation
Total wattage: 2W
Material: aluminium/plastic

- Running time 10h
- Charging time 5h
- Charging station for one light included

LED INSIDE | CRI 80

140lm | 2200K	170lm | 2700K	190lm | 3000K

Version	Prod. no.	GBP
black	**1007693**	**85.00**
white	**1007692**	**85.00**
sand	**1007697**	**85.00**
rust	**1007695**	**85.00**
red	**1007694**	**85.00**
lime green	**1007696**	**85.00**

VINOLINA TWO
Charging base

NEW



IP20 | IK04

220-240V ~50/60Hz | 5V
Total wattage: 37W
Material: plastic / plastic

L: 46.2 cm
W: 32.6 cm
H: 5 cm

- Charging base for max. 6 VINOLINA TWO
- Connection cable available separately

Version	Prod. no.	GBP
black	**1007698**	**120.00**

VINOLINA TWO
IEC connection cable with safety plug

NEW



IP 20

L: 180 cm

Version	Prod. no.	GBP
black	**1008029**	**13.00**


1007380 489

TAHA
Light set, battery-powered







100-240V ~50/60Hz | 5V battery operation
Total wattage: 5W
Max. U-out driver: 5V DC
Material: aluminium/plastic

- 3 dimming levels
- Plug-in power supply



Down 200lm | 2700K

Version	Prod. no.	GBP
● black	**1007980**	**137.00**


1007366 491

TINY SUN
TL





IP 20 1.8

220-240V ~50/60Hz
Material: steel

- Euro plug and switch
- Textile cable

SOCKET INSIDE <3.6 W

Base: 1xG69 | Max. Ø: 1.9 cm | L: 6 cm

Version	Prod. no.	GBP
copper	**1007983**	**85.00**
bronze	**1007982**	**85.00**

LED QT14 | 3.6W | 300°
2700K | 450lm | EEC=E
4kWh/1000h



Prod. no.: 1007455 | 8.00 GBP

LITTLE SUN
TL





IP 20 1.8

220-240V ~50/60Hz
Material: steel

- Euro plug and switch
- Textile cable

SOCKET INSIDE <3.6 W

Base: 1xG69 | Max. Ø: 1.9 cm | L: 6 cm

Version	Prod. no.	GBP
copper	**1007952**	**94.00**
bronze	**1007951**	**94.00**

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h



Prod. no.: 1005286 | 8.00 GBP

WORKLIGHT PRO
FL, single





Touch | IP 20 | IK03 | 75° | 115° | UGR 14

50 000 Hours L80B10 | 250

200-240V ~50/60Hz | 48V
Total wattage: 100W
Material: aluminium/steel

- Safety plug
- Sensor included

LED INSIDE | CRI 80

Up 10700lm
Down 2300lm | 4000K

Version	Prod. no.	GBP
● black	**1007996**	**815.00**
○ white	**1008031**	**815.00**
● grey	**1008019**	**815.00**

WORKLIGHT PRO
FL, double

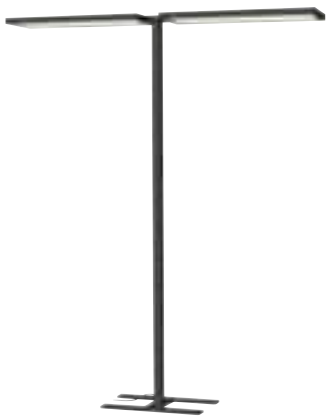



Touch | IP 20 | IK03 | 75° | 115° | UGR 16

50 000 Hours L80B10 | 250

200-240V ~50/60Hz | 48V
Total wattage: 150W
Material: aluminium/steel

- Safety plug
- Sensor included

LED INSIDE | CRI 80

Up 15600m
Down 4400lm | 4000K

Version	Prod. no.	GBP
● black	**1008020**	**1,501.00**
○ white	**1008021**	**1,501.00**
● grey	**1008022**	**1,501.00**









WORKLIGHT
FL



Touch | IP 20 | IK02 | 80° | 110° | UGR 19 | L80B10 | 250

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Safety plug

LED INSIDE | CRI 80

Up	3800lm	4000K
Down	3800lm	

Version	Prod. no.	GBP
● black	**1007988**	**686.00**
○ white	**1007989**	**686.00**
◌ silver	**1007994**	**686.00**

WORKLIGHT
TL





Touch | IP 20 | IK02 | 80° | 110° | UGR 19 | L80B10 | 250

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Clamping range of 6-40 mm
- Safety plug

LED INSIDE | CRI 80

Up	3800lm	4000K
Down	3800lm	

Version	Prod. no.	GBP
● black	**1007990**	**600.00**
○ white	**1007991**	**600.00**
◌ silver	**1007995**	**600.00**


132660 + 1000580 300 + 497
155790 + 155592 495 + 497
155780 + 155592 495 + 497

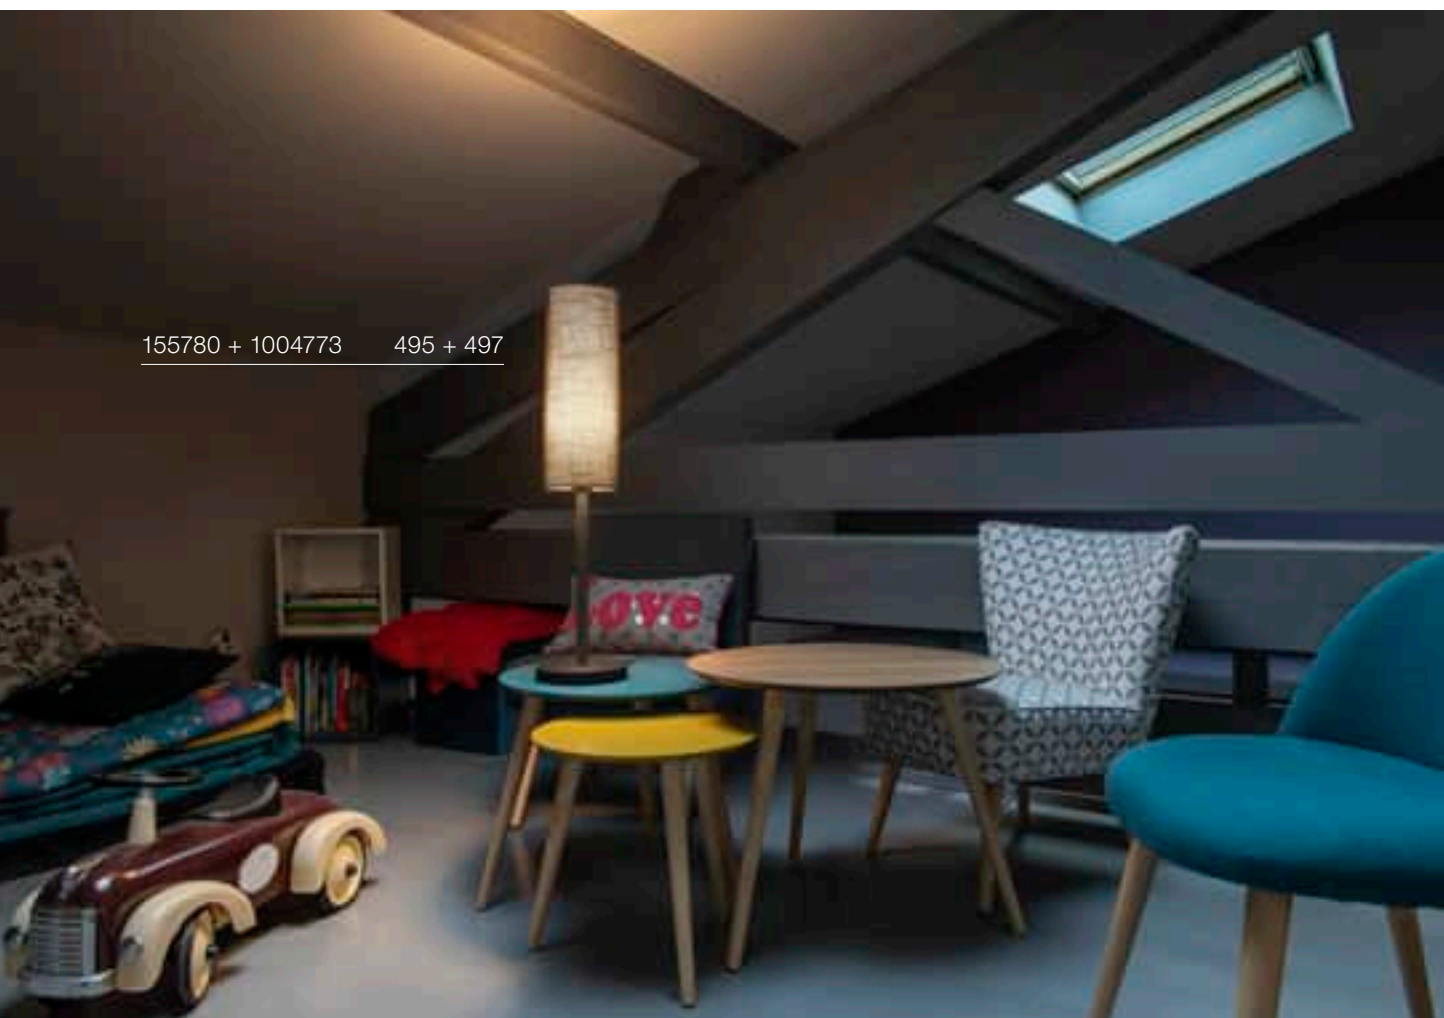
155780 + 1004773 495 + 497

FENDA
TL, E27

MIX match

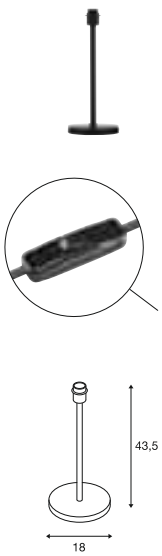

IP 20 IK03 200

220-240V ~50/60Hz
Material: steel

- Euro plug and switch
- Matching lampshades can be found on page 497

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
● black	1007938	69.00

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005303 | 9.00 GBP

FENDA
FL, E27

MIX match

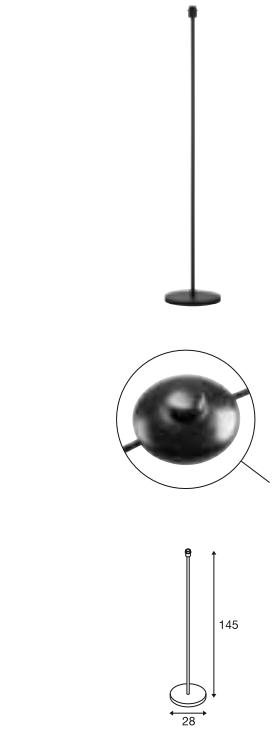

IP 20 IK03 200

220-240V ~50/60Hz
Material: steel/plastic

- Euro plug and switch
- Matching lampshades can be found on page 497

SOCKET INSIDE <60 W

Base: 1xE27

Version	Prod. no.	GBP
● black	1007939	121.00

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005303 | 9.00 GBP

FENDA
TL, E27

MIX match

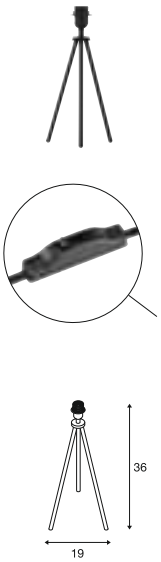

IP 20 IK03 180

220-240V ~50/60Hz
Material: aluminium/plastic

- Euro plug and switch
- Matching lampshades can be found on page 497

SOCKET INSIDE <40 W

Base: 1xE27

Version	Prod. no.	GBP
● black	1007937	69.00

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

Prod. no.: 1005265 | 23.00 GBP



155490 + 1004775 497

FENDA
FL, E27

MIX match

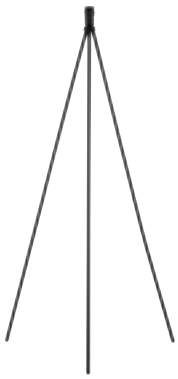



IP 20 IK03 330

220-240V ~50/60Hz
Material: aluminium

- Switch on light body
- Euro plug

SOCKET INSIDE <40 W

Base: 1xE27

Version	Prod. no.	GBP
black	1007936	114.00

LED E27 | 13.2W | 220°
2700K | 1300lm | EEC=F
13kWh/1000h

C,L

Prod. no.: 1005302 | 11.00 GBP

FENDA
15 cm, round

MIX match



H: 40 cm
Ø: 15 cm
Material: textile/steel

Version	Prod. no.	GBP
grey	1004773	39.00

FENDA
30 cm, round

MIX match

H: 20 cm
Ø: 30 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	155592	61.00
white	155582	46.00
grey	1004774	46.00
beige	155583	46.00

FENDA
Ø 45 cm, round

MIX match



H: 28 cm
Ø: 45.5 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	156122	76.00
white	156111	72.00
grey	1004775	72.00
beige	156113	72.00

FENDA
Ø 70cm, round

MIX match



H: 36 cm
Ø: 70 cm
Material: textile/steel

Version	Prod. no.	GBP
black/copper	1000580	111.00
white	1000579	97.00

KARPO
TL





Switch | IP 20 | 40° | 30 000 Hours L70B50 | 330° | 90°

230

200-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: aluminium

- Switch on light body
- Plug-in power supply

LED INSIDE | CRI 90

Down | 360lm 430lm | 3000K

Version	Prod. no.	GBP
● black 360lm	**1007946**	**160.00**
○ white 430lm	**1007945**	**160.00**

KARPO
FL



Switch | IP 20 | 40° | 30 000 Hours L70B50 | 330° | 90°

230

200-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: aluminium

- Switch on light body
- Plug-in power supply

LED INSIDE | CRI 90

Down | 360lm 430lm | 3000K

Version	Prod. no.	GBP
● black 360lm	**1007948**	**208.00**
○ white 430lm	**1007947**	**208.00**

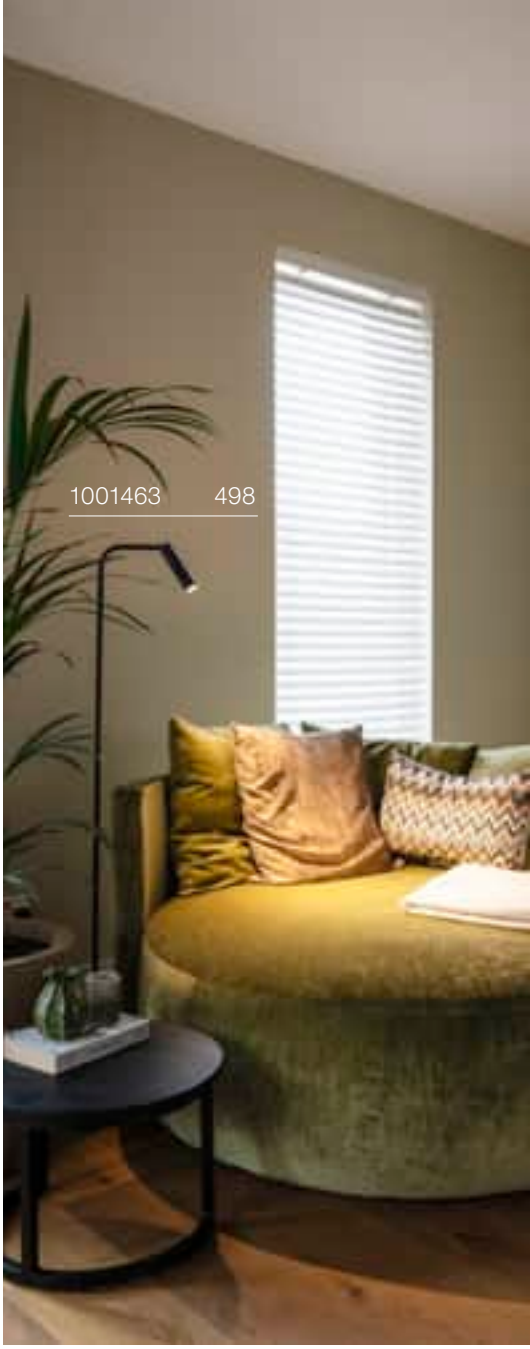



146010 498

PHELIA
FL, E27









IP 20 | IK03 | 350° | 90° | 200

220-240V ~50/60Hz
Material: aluminium/steel

- Switch on light body
- Safety plug and switch

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 5.3 cm | L: 18 cm

Version	Prod. no.	GBP
● black	**1007967**	**208.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L



Prod. no.: 1005303 | 9.00 GBP


1008456 531



NUMINOS® XS | 514



NUMINOS® S | 516



NUMINOS® XS | 518



NUMINOS® S | 520

IN-LINE 22 | 523

IN-LINE 22 | 523

IN-LINE 44 | 525



IN-LINE 44 | 525



IN-LINE 24 | 527



IN-LINE 46 | 527

NEW



GRIP! S | 529

NEW



GRIP! S | 529

NEW



GRIP! S | 529

NEW



GRIP! S | 531

NEW



GRIP! S | 531

NEW



GRIP! S | 531

NEW



LALU® PD | 533



LALU®
TETRA 14 | 534



LALU®
TETRA 24 | 534



LALU®
ELYPSE 15 | 535



LALU®
PLATE 15 | 535



LALU®
CONE 15 | 535



LALU®
ELYPSE 22 | 535



LALU®
PLATE 22 | 535



1006623 + 1006617 525 + 523

48V TRACK

DALI surface-mounted track



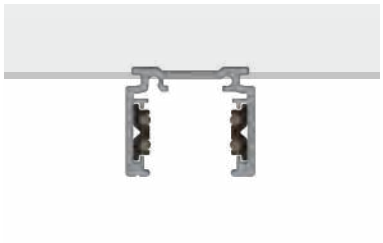

	1 m	1 m	2 m	2 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Max. mech. load	5 kg	5 kg	10 kg	10 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 2,62 x 2,26	100 x 2,62 x 2,26	200 x 2,62 x 2,26	200 x 2,62 x 2,26
Prod. no.	**1006541**	**1006542**	**1006543**	**1006544**
GBP	**43.00**	**43.00**	**73.00**	**73.00**

	3 m	3 m	4 m	4 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Max. mech. load	15 kg	15 kg	20 kg	20 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	Aluminium
L x W x H (cm)	300 x 2,62 x 2,26	300 x 2,62 x 2,26	400 x 2,62 x 2,26	400 x 2,62 x 2,26
Prod. no.	**1006545**	**1006546**	**1006547**	**1006548**
GBP	**114.00**	**114.00**	**155.00**	**155.00**

48V TRACK

DALI surface-mounted track
Planning assistance and accessories at a glance

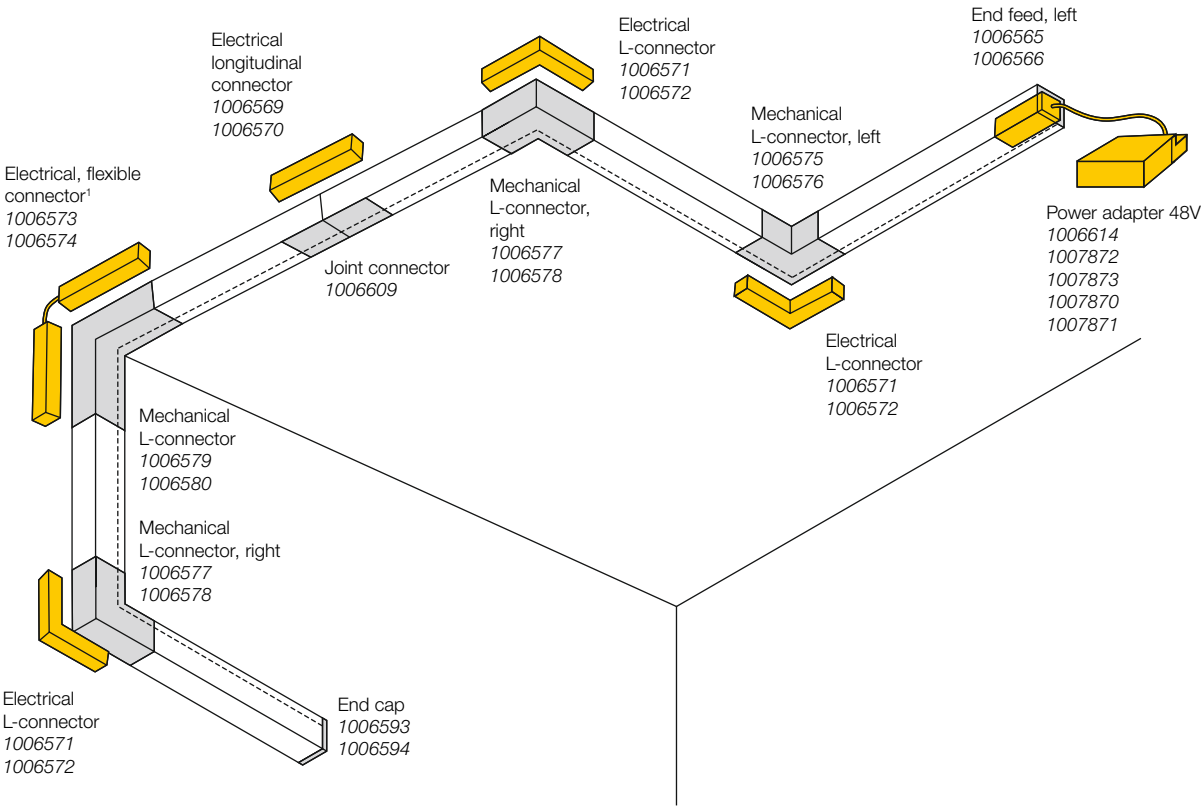

[1] Please note that electrical and mechanical connectors must always be installed together.



End feed, left
16 A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white		**1006566**	**13.00 GBP**



End feed, right
16 A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white		**1006568**	**13.00 GBP**



L-connector mechanical, for standard surface-mounted track, right (for ceiling installation)
aluminium
L: 7.1 cm | W: 7.1 cm | H: 2.19 cm

● black	Prod. no.	**1006577**	**19.00 GBP**
○ white		**1006578**	**19.00 GBP**



L-connector mechanical, for standard surface-mounted track, left (for ceiling installation)
aluminium
L: 7.1 cm | W: 7.1 cm | H: 2.19 cm

● black	Prod. no.	**1006575**	**19.00 GBP**
○ white		**1006576**	**19.00 GBP**



L-connector mechanical, for surface-mounted track, standard, stereo, (wall/ceiling)
aluminium
L: 8.4 cm | W: 2.62 cm | H: 8.4 cm

● black	Prod. no.	**1006579**	**19.00 GBP**
○ white		**1006580**	**19.00 GBP**



Electric L-connector, DALI
16 A max. | polycarbonate (PC)
L: 11.4 cm | W: 11.4 cm | H: 1.9 cm

● black	Prod. no.	**1006571**	**24.00 GBP**
○ white		**1006572**	**24.00 GBP**



Electric longitudinal connector, DALI
16 A max. | polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006569**	**19.00 GBP**
○ white		**1006570**	**19.00 GBP**



Flexible connector, electrical, DALI
16 A max. | polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**25.00 GBP**
○ white		**1006574**	**25.00 GBP**



Transformer housing incl. end feed right, DALI
polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm

● black	Prod. no.	**1007137**	**31.00 GBP**
○ white		**1007138**	**31.00 GBP**



Transformer housing incl. end feed left, DALI
polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm

● black	Prod. no.	**1007083**	**31.00 GBP**
○ white		**1007084**	**31.00 GBP**



Power adapter 48V | 60W
polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white	Prod. no.	**1006613**	**51.00 GBP**



Power adapter 150W | 48V
Metal/polycarbonate (PC)
L: 19.05 cm | W: 8.8 cm | H: 3.55 cm

● black	Prod. no.	**1006614**	**111.00 GBP**



Cover, 20 mm for standard track assembly, 2 m
Aluminium/polycarbonate (PC)
L: 200 cm | W: 2 cm | H: 0.6 cm

● black	Prod. no.	**1006611**	**9.00 GBP**
○ white		**1006612**	**9.00 GBP**



End cap for surface-mounted track, standard
polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 2.2 cm

● black	Prod. no.	**1006593**	**4.00 GBP**
○ white		**1006594**	**4.00 GBP**



Track reinforcement plate for surface-mounted track
steel
L: 5 cm | W: 1.32 cm | H: 0.25 cm

● grey	Prod. no.	**1006609**	**8.00 GBP**



Track reinforcement plate with mounting set, 3m wire rope
steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006603**	**19.00 GBP**
○ white		**1006604**	**19.00 GBP**



Track reinforcement plate with mounting set, 1 m rod
steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006601**	**19.00 GBP**
○ white		**1006602**	**19.00 GBP**



Pendant suspension, 1 m rod
steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white		**1006606**	**16.00 GBP**



Pendant suspension, 3 m wire rope
steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white		**1006608**	**16.00 GBP**



Mounting bracket
aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white		**1006600**	**7.00 GBP**



Intrack LED driver 48VDC | 250W, incl. DALI through-wirable
polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.35 cm

● black	Prod. no.	**1007872**	**120.00 GBP**
○ white		**1007873**	**120.00 GBP**



Intrack LED driver 48VDC | 100W, incl. DALI through-wirable
polycarbonate (PC)
L: 29.75 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1007870**	**94.00 GBP**
○ white		**1007871**	**94.00 GBP**


1006726 + 1006623 + 1006617 517 + 525 + 523

48V TRACK

DALI surface-mounted track, deep



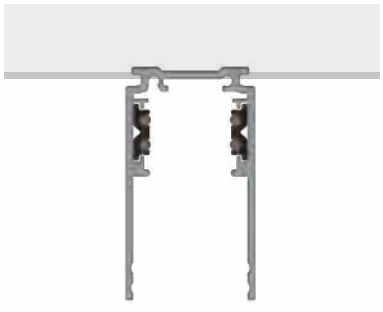

	1 m	1 m	2 m	2 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Max. mech. load	5 kg	5 kg	10 kg	10 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 2,62 x 4,72	100 x 2,62 x 4,72	200 x 2,62 x 4,72	200 x 2,62 x 4,72
Prod. no.	**1006549**	**1006550**	**1006551**	**1006552**
GBP	**51.00**	**51.00**	**99.00**	**99.00**

	3 m	3 m	4 m	4 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Max. mech. load	15 kg	15.29 kg	20 kg	20 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 2,62 x 4,72	300 x 2,62 x 4,72	400 x 2,62 x 4,72	400 x 2,62 x 4,72
Prod. no.	**1006553**	**1006554**	**1006555**	**1006556**
GBP	**146.00**	**146.00**	**196.00**	**196.00**

48V TRACK

DALI surface-mounted track, deep
Planning assistance and accessories at a glance

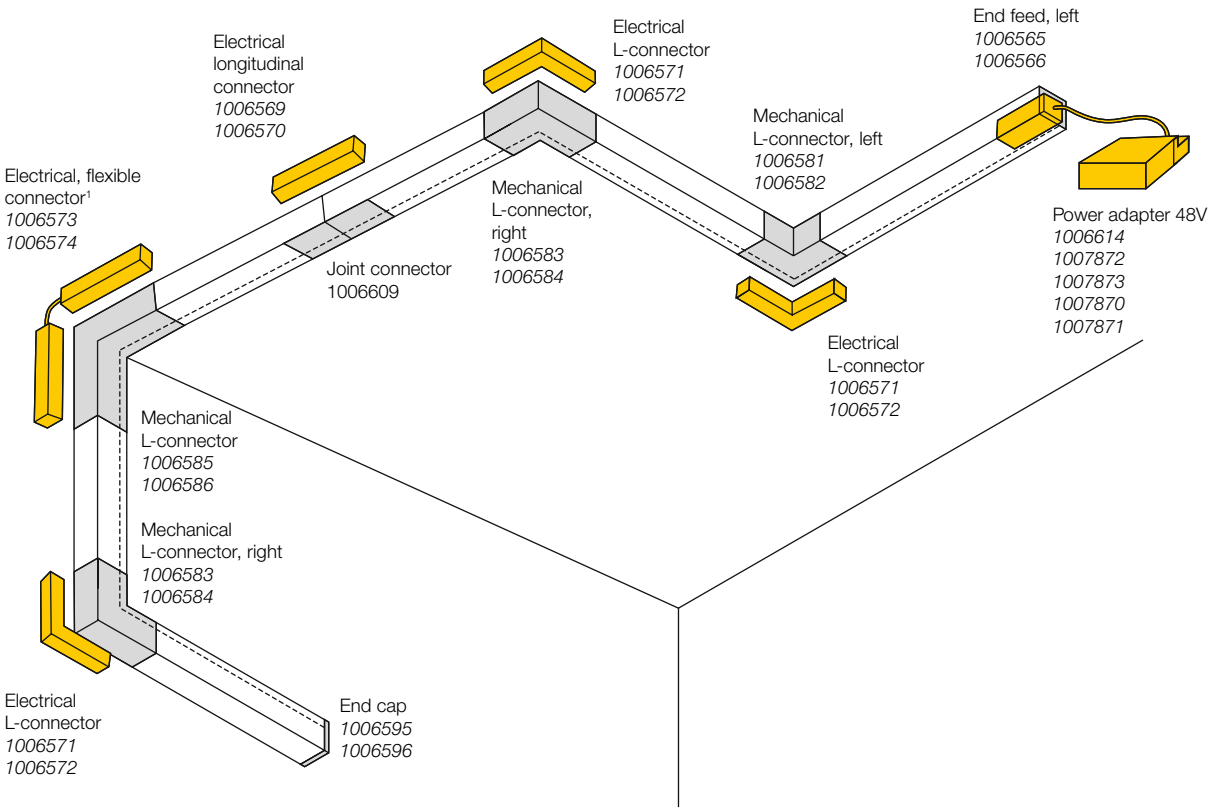

[1] Please note that electrical and mechanical connectors must always be installed together.



End feed, left
16 A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006565** **13.00 GBP**
○ white **1006566** **13.00 GBP**



End feed, right
16 A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006567** **13.00 GBP**
○ white **1006568** **13.00 GBP**



L-connector mechanical, for surface-mounted track, deep, left (for ceiling installation)
aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

● black	Prod. no.	**1006581**	**25.00 GBP**
○ white		**1006582**	**25.00 GBP**



L-connector mechanical, for surface-mounted track, deep, right (for ceiling installation)
aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

● black	Prod. no.	**1006583**	**25.00 GBP**
○ white		**1006584**	**25.00 GBP**



L-connector mechanical, for surface-mounted track, deep, stereo (wall/ceiling)
aluminium
L: 8.4 cm | W: 8.4 cm | H: 4.7 cm

● black	Prod. no.	**1006585**	**25.00 GBP**
○ white		**1006586**	**25.00 GBP**



Electric L-connector, DALI
16 A max. | polycarbonate (PC)
L: 11.4 cm | W: 11.4 cm | H: 1.9 cm

● black	Prod. no.	**1006571**	**24.00 GBP**
○ white		**1006572**	**24.00 GBP**



Electric longitudinal connector, DALI
16 A max. | polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006569**	**19.00 GBP**
○ white		**1006570**	**19.00 GBP**



Flexible connector, electrical, DALI
16 A max. | polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**25.00 GBP**
○ white		**1006574**	**25.00 GBP**



Transformer housing incl. end feed left, DALI
polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm

● black	Prod. no.	**1007083**	**31.00 GBP**
○ white		**1007084**	**31.00 GBP**



Transformer housing incl. end feed right, DALI
polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm

● black	Prod. no.	**1007137**	**31.00 GBP**
○ white		**1007138**	**31.00 GBP**



Power adapter 48V | 60W
polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white	Prod. no.	**1006613**	**51.00 GBP**



Power adapter 150W | 48V
Metal/polycarbonate (PC)
L: 19.05 cm | W: 8.8 cm | H: 3.55 cm

● black	Prod. no.	**1006614**	**111.00 GBP**



Track cover, 26 mm, for surface-mounted track deep and recessed track, 2 m
polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black	Prod. no.	**1007188**	**11.00 GBP**
○ white		**1007189**	**11.00 GBP**



End cap for surface-mounted track, deep
polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 4.7 cm

● black	Prod. no.	**1006595**	**6.00 GBP**
○ white		**1006596**	**6.00 GBP**



Track reinforcement plate for surface-mounted track
steel
L: 5 cm | W: 1.32 cm | H: 0.25 cm

● grey	Prod. no.	**1006609**	**8.00 GBP**



Track reinforcement plate with mounting set, 3 m wire rope
steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006603**	**19.00 GBP**
○ white		**1006604**	**19.00 GBP**



Track reinforcement plate with mounting set, 1 m rod
steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006601**	**19.00 GBP**
○ white		**1006602**	**19.00 GBP**



Pendant suspension, 1m rod
steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white		**1006606**	**16.00 GBP**



Pendant suspension, 3m wire rope
steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white		**1006608**	**16.00 GBP**



Mounting bracket
aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white		**1006600**	**7.00 GBP**



Intrack LED driver 48VDC | 250W, incl. DALI through-wirable
polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.35 cm

● black	Prod. no.	**1007872**	**120.00 GBP**
○ white		**1007873**	**120.00 GBP**



Intrack LED driver 48VDC | 100W, incl. DALI through-wirable
polycarbonate (PC)
L: 29.75 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1007870**	**94.00 GBP**
○ white		**1007871**	**94.00 GBP**



1006783 + 1006672 + 1006635 519 + 515 + 525

48V TRACK

DALI recessed track



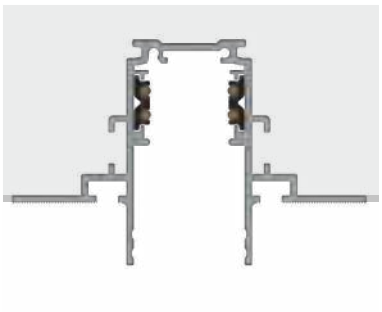

	1 m	1 m	2 m	2 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Max. mech. load	5.09 kg	5 kg	10 kg	10 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 7,4 x 4,7	100 x 7,4 x 4,7	200 x 7,4 x 4,7	200 x 7,4 x 4,7
Prod. no.	**1006557**	**1006558**	**1006559**	**1006560**
GBP	**68.00**	**68.00**	**119.00**	**119.00**

	3 m	3 m	4 m	4 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Max. mech. load	15 kg	15 kg	20.38 kg	20 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 7,4 x 4,7	300 x 7,4 x 4,7	400 x 7,4 x 4,7	400 x 7,4 x 4,7
Prod. no.	**1006561**	**1006562**	**1006563**	**1006564**
GBP	**153.00**	**153.00**	**220.00**	**220.00**

48V TRACK

DALI recessed track
Planning assistance and accessories at a glance

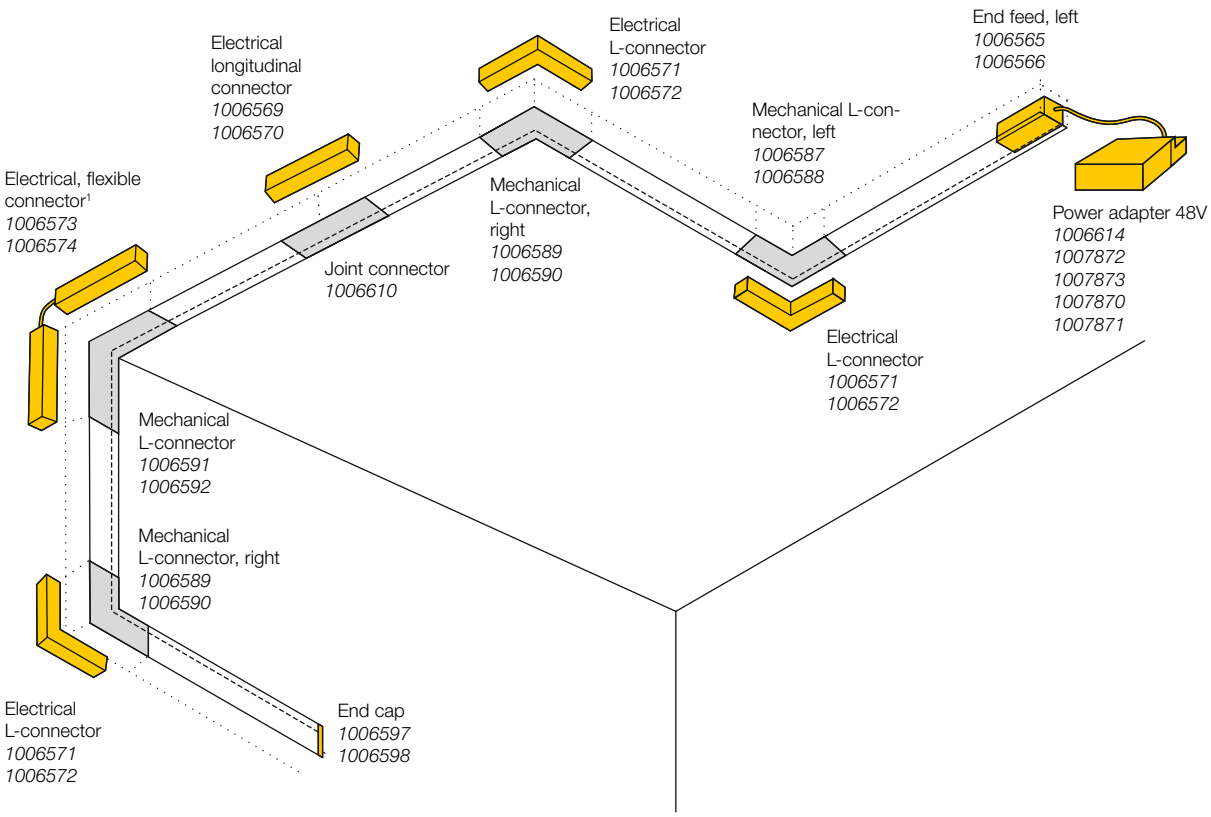

[1] Please note that electrical and mechanical connectors must always be installed together.



End feed, left
16 A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white		**1006566**	**13.00 GBP**



End feed, right
16 A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white		**1006568**	**13.00 GBP**



L-connector mechanical, for recessed track, deep, left (for ceiling installation)
aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.69 cm

● black	Prod. no.	**1006587**	**28.00 GBP**
○ white		**1006588**	**28.00 GBP**



L-connector mechanical, for recessed track, deep, right (for ceiling installation)
aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.69 cm

● black	Prod. no.	**1006589**	**28.00 GBP**
○ white		**1006590**	**28.00 GBP**



L-connector mechanical, for recessed track, deep, stereo, (wall/ceiling)
aluminium
L: 8.1 cm | W: 7.4 cm | H: 8.1 cm

● black	Prod. no.	**1006591**	**28.00 GBP**
○ white		**1006592**	**28.00 GBP**



Electric L-connector, DALI
16 A max. | polycarbonate (PC)
L: 11.4 cm | W: 11.4 cm | H: 1.9 cm

● black	Prod. no.	**1006571**	**24.00 GBP**
○ white		**1006572**	**24.00 GBP**



Electric longitudinal connector, DALI
16 A max. | polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006569**	**19.00 GBP**
○ white		**1006570**	**19.00 GBP**



Flexible connector, electrical, DALI
16 A max. | polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**25.00 GBP**
○ white		**1006574**	**25.00 GBP**



Transformer housing incl. end feed left, DALI
polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm

● black	Prod. no.	**1007083**	**31.00 GBP**
○ white		**1007084**	**31.00 GBP**



Transformer housing incl. end feed right, DALI
polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm

● black	Prod. no.	**1007137**	**31.00 GBP**
○ white		**1007138**	**31.00 GBP**



Power adapter 48V | 60W
polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white	Prod. no.	**1006613**	**51.00 GBP**



Power adapter 150W | 48V
Metal/polycarbonate (PC)
L: 19.05 cm | W: 8.8 cm | H: 3.55 cm

● black	Prod. no.	**1006614**	**111.00 GBP**



Track cover, 26 mm, for surface-mounted track deep and recessed track, 2 m
polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black	Prod. no.	**1007188**	**11.00 GBP**
○ white		**1007189**	**11.00 GBP**



End cap for recessed track
polycarbonate (PC)
L: 3.4 cm | W: 0.2 cm | H: 4.7 cm

● black	Prod. no.	**1006597**	**4.00 GBP**
○ white		**1006598**	**4.00 GBP**



Track reinforcement plates set for recessed track
steel
L: 6.3 cm | W: 0.76 cm | H: 0.25 cm

● grey	Prod. no.	**1006610**	**8.00 GBP**



Track reinforcement plate with mounting set, 3m wire rope
steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006603**	**19.00 GBP**
○ white		**1006604**	**19.00 GBP**



Track reinforcement plate with mounting set, 1m rod
steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006601**	**19.00 GBP**
○ white		**1006602**	**19.00 GBP**



Pendant suspension, 1m rod
steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white		**1006606**	**16.00 GBP**



Pendant suspension, 3m wire rope
steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white		**1006608**	**16.00 GBP**



Mounting bracket
aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white		**1006600**	**7.00 GBP**



Intrack LED driver 48VDC | 250W, incl. DALI through-wirable
polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.35 cm

● black	Prod. no.	**1007872**	**120.00 GBP**
○ white		**1007873**	**120.00 GBP**



Intrack LED driver 48VDC | 100W, incl. DALI through-wirable
polycarbonate (PC)
L: 29.75 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1007870**	**94.00 GBP**
○ white		**1007871**	**94.00 GBP**

NUMINOS® XS
48V, DALI





IP 20 IK02 L80B50 350° 90°

CRI 90 LED INSIDE

48V
200mA
Total wattage: 8.7W
Material: aluminium/polycarbonate (PC)

Version	GBP
All XS versions	**151.00**



● black



● black



○ white



● chrome



○ white



● black



○ white



● chrome

		640lm	20°	16	**1006651**	
	2700K	620lm	40°	22	**1006654**	
		640lm	55°	25	**1006657**	
		700lm	20°	16	**1006669**	
Dali 2.0	3000K	670lm	40°	22	**1006672**	
		690lm	55°	25	**1006675**	
		720lm	20°	16	**1006687**	
	4000K	700lm	40°	22	**1006690**	
		710lm	55°	25	**1006693**	
		670lm	20°	16	**1006652**	
	2700K	650lm	40°	22	**1006655**	
		670lm	55°	25	**1006658**	
		730lm	20°	16	**1006670**	
Dali 2.0	3000K	700lm	40°	22	**1006673**	
		720lm	55°	25	**1006676**	
		750lm	20°	16	**1006688**	
	4000K	730lm	40°	22	**1006691**	
		740lm	55°	25	**1006694**	
		670lm	20°	16	**1006653**	
	2700K	650lm	40°	22	**1006656**	
		670lm	55°	25	**1006659**	
		730lm	20°	16	**1006671**	
Dali 2.0	3000K	700lm	40°	22	**1006674**	
		720lm	55°	25	**1006677**	
		750lm	20°	16	**1006689**	
	4000K	730lm	40°	22	**1006692**	
		740lm	55°	25	**1006695**	
		640lm	20°	16	**1006660**	
	2700K	620lm	40°	22	**1006663**	
		640lm	55°	25	**1006666**	
		700lm	20°	16	**1006678**	
Dali 2.0	3000K	670lm	40°	22	**1006681**	
		690lm	55°	25	**1006684**	
		720lm	20°	16	**1006696**	
	4000K	700lm	40°	22	**1006699**	
		710lm	55°	25	**1006702**	
		670lm	20°	16	**1006661**	
	2700K	650lm	40°	22	**1006664**	
		670lm	55°	25	**1006667**	
		730lm	20°	16	**1006679**	
Dali 2.0	3000K	700lm	40°	22	**1006682**	
		720lm	55°	25	**1006685**	
		750lm	20°	16	**1006697**	
	4000K	730lm	40°	22	**1006700**	
		740lm	55°	25	**1006703**	
		670lm	20°	16	**1006662**	
	2700K	650lm	40°	22	**1006665**	
		670lm	55°	25	**1006668**	
		730lm	20°	16	**1006680**	
Dali 2.0	3000K	700lm	40°	22	**1006683**	
		720lm	55°	25	**1006686**	
		750lm	20°	16	**1006698**	
	4000K	730lm	40°	22	**1006701**	
		740lm	55°	25	**1006704**	

NUMINOS® S
48V, DALI





IP 20 IK02 L80B50 350° 90°

CRI 90 LED INSIDE

48V
250mA
Total wattage: 16W
Material: aluminium/polycarbonate (PC)

Version	GBP
All S versions	**159.00**



● black



● black



○ white



● chrome



○ white



● black



○ white



● chrome

		1000lm	20°	19	**1006705**	
	2700K	970lm	40°	16	**1006708**	
		960lm	55°	19	**1006711**	
		1060lm	20°	19	**1006723**	
Dali 2.0	3000K	1030lm	40°	19	**1006726**	
		1030lm	55°	22	**1006729**	
		1280lm	20°	22	**1006741**	
	4000K	1150lm	40°	19	**1006744**	
		1130lm	55°	19	**1006747**	
		1020lm	20°	19	**1006706**	
	2700K	1050lm	40°	19	**1006709**	
		1030lm	55°	22	**1006712**	
		1120lm	20°	19	**1006724**	
Dali 2.0	3000K	1120lm	40°	19	**1006727**	
		1120lm	55°	22	**1006730**	
		1350lm	20°	22	**1006742**	
	4000K	1230lm	40°	19	**1006745**	
		1220lm	55°	22	**1006748**	
		960lm	20°	19	**1006707**	
	2700K	1000lm	40°	16	**1006710**	
		980lm	55°	19	**1006713**	
		1050lm	20°	19	**1006725**	
Dali 2.0	3000K	1050lm	40°	19	**1006728**	
		1050lm	55°	22	**1006731**	
		1350lm	20°	22	**1006743**	
	4000K	1200lm	40°	19	**1006746**	
		1170lm	55°	22	**1006749**	
		1000lm	20°	19	**1006714**	
	2700K	970lm	40°	16	**1006717**	
		960lm	55°	19	**1006720**	
		1060lm	20°	19	**1006732**	
Dali 2.0	3000K	1030lm	40°	19	**1006735**	
		1030lm	55°	22	**1006738**	
		1280lm	20°	22	**1006750**	
	4000K	1150lm	40°	19	**1006753**	
		1130lm	55°	19	**1006756**	
		1020lm	20°	19	**1006715**	
	2700K	1050lm	40°	19	**1006718**	
		1030lm	55°	22	**1006721**	
		1120lm	20°	19	**1006733**	
Dali 2.0	3000K	1120lm	40°	19	**1006736**	
		1120lm	55°	22	**1006739**	
		1350lm	20°	22	**1006751**	
	4000K	1230lm	40°	19	**1006754**	
		1220lm	55°	22	**1006757**	
		960lm	20°	19	**1006716**	
	2700K	1000lm	40°	16	**1006719**	
		980lm	55°	19	**1006722**	
		1050lm	20°	19	**1006734**	
Dali 2.0	3000K	1050lm	40°	19	**1006737**	
		1050lm	55°	22	**1006740**	
		1350lm	20°	22	**1006752**	
	4000K	1200lm	40°	19	**1006755**	
		1170lm	55°	22	**1006758**	

NUMINOS® XS
48V, DALI





IP 20 IK02 L80B50 150

CRI 90 INSIDE

48V
200mA
Total wattage: 8.7W
Material: aluminium/polycarbonate (PC)

Version	GBP
All XS versions	**168.00**



● black



● black



○ white



● chrome



○ white



● black



○ white



● chrome

		640lm	20°	16	**1006759**	
	2700K	620lm	40°	22	**1006762**	
		640lm	55°	25	**1006765**	
		700lm	20°	16	**1006777**	
Dali 2.0	3000K	670lm	40°	22	**1006780**	
		690lm	55°	25	**1006783**	
		720lm	20°	16	**1006795**	
	4000K	700lm	40°	22	**1006798**	
		710lm	55°	25	**1006801**	
		670lm	20°	16	**1006760**	
	2700K	650lm	40°	22	**1006763**	
		670lm	55°	25	**1006766**	
		730lm	20°	16	**1006778**	
Dali 2.0	3000K	700lm	40°	22	**1006781**	
		720lm	55°	25	**1006784**	
		750lm	20°	16	**1006796**	
	4000K	730lm	40°	22	**1006799**	
		740lm	55°	25	**1006802**	
		670lm	20°	16	**1006761**	
	2700K	650lm	40°	22	**1006764**	
		670lm	55°	25	**1006767**	
		730lm	20°	16	**1006779**	
Dali 2.0	3000K	700lm	40°	22	**1006782**	
		720lm	55°	25	**1006785**	
		750lm	20°	16	**1006797**	
	4000K	730lm	40°	22	**1006800**	
		740lm	55°	25	**1006803**	
		640lm	20°	16	**1006768**	
	2700K	620lm	40°	22	**1006771**	
		640lm	55°	25	**1006774**	
		700lm	20°	16	**1006786**	
Dali 2.0	3000K	670lm	40°	22	**1006789**	
		690lm	55°	25	**1006792**	
		720lm	20°	16	**1006804**	
	4000K	700lm	40°	22	**1006807**	
		710lm	55°	25	**1006810**	
		670lm	20°	16	**1006769**	
	2700K	650lm	40°	22	**1006772**	
		670lm	55°	25	**1006775**	
		730lm	20°	16	**1006787**	
Dali 2.0	3000K	700lm	40°	22	**1006790**	
		720lm	55°	25	**1006793**	
		750lm	20°	16	**1006805**	
	4000K	730lm	40°	22	**1006808**	
		740lm	55°	25	**1006811**	
		670lm	20°	16	**1006770**	
	2700K	650lm	40°	22	**1006773**	
		670lm	55°	25	**1006776**	
		730lm	20°	16	**1006788**	
Dali 2.0	3000K	700lm	40°	22	**1006791**	
		720lm	55°	25	**1006794**	
		750lm	20°	16	**1006806**	
	4000K	730lm	40°	22	**1006809**	
		740lm	55°	25	**1006812**	

NUMINOS® S
48V, DALI





IP 20 IK02 L80B50 150

CRI 90 INSIDE

48V
250mA
Total wattage: 16W
Material: aluminium/polycarbonate (PC)

Version	GBP
All S versions	**176.00**



● black



● black



○ white



● chrome



○ white



● black



○ white



● chrome

	1000lm	20°	19	**1006813**	
2700K	970lm	40°	16	**1006816**	
	960lm	55°	19	**1006819**	
	1060lm	20°	19	**1006831**	
3000K	1030lm	40°	19	**1006834**	
	1030lm	55°	22	**1006837**	
	1280lm	20°	22	**1006849**	
4000K	1150lm	40°	19	**1006852**	
	1130lm	55°	19	**1006855**	
Dali 2.0					
	1020lm	20°	19	**1006814**	
2700K	1050lm	40°	19	**1006817**	
	1030lm	55°	22	**1006820**	
	1120lm	20°	19	**1006832**	
3000K	1120lm	40°	19	**1006835**	
	1120lm	55°	22	**1006838**	
	1350lm	20°	22	**1006850**	
4000K	1230lm	40°	19	**1006853**	
	1220lm	55°	22	**1006856**	
Dali 2.0					
	960lm	20°	19	**1006815**	
2700K	1000lm	40°	16	**1006818**	
	980lm	55°	19	**1006821**	
	1050lm	20°	19	**1006833**	
3000K	1050lm	40°	19	**1006836**	
	1050lm	55°	22	**1006839**	
	1350lm	20°	22	**1006851**	
4000K	1200lm	40°	19	**1006854**	
	1170lm	55°	22	**1006857**	
Dali 2.0					
	1000lm	20°	19	**1006822**	
2700K	970lm	40°	16	**1006825**	
	960lm	55°	19	**1006828**	
	1060lm	20°	19	**1006840**	
3000K	1030lm	40°	19	**1006843**	
	1030lm	55°	22	**1006846**	
	1280lm	20°	22	**1006858**	
4000K	1150lm	40°	19	**1006861**	
	1130lm	55°	19	**1006864**	
Dali 2.0					
	1020lm	20°	19	**1006823**	
2700K	1050lm	40°	19	**1006826**	
	1030lm	55°	22	**1006829**	
	1120lm	20°	19	**1006841**	
3000K	1120lm	40°	19	**1006844**	
	1120lm	55°	22	**1006847**	
	1350lm	20°	22	**1006859**	
4000K	1230lm	40°	19	**1006862**	
	1220lm	55°	22	**1006865**	
Dali 2.0					
	960lm	20°	19	**1006824**	
2700K	1000lm	40°	16	**1006827**	
	980lm	55°	19	**1006830**	
	1050lm	20°	19	**1006842**	
3000K	1050lm	40°	19	**1006845**	
	1050lm	55°	22	**1006848**	
	1350lm	20°	22	**1006860**	
4000K	1200lm	40°	19	**1006863**	
	1170lm	55°	22	**1006866**	
Dali 2.0					

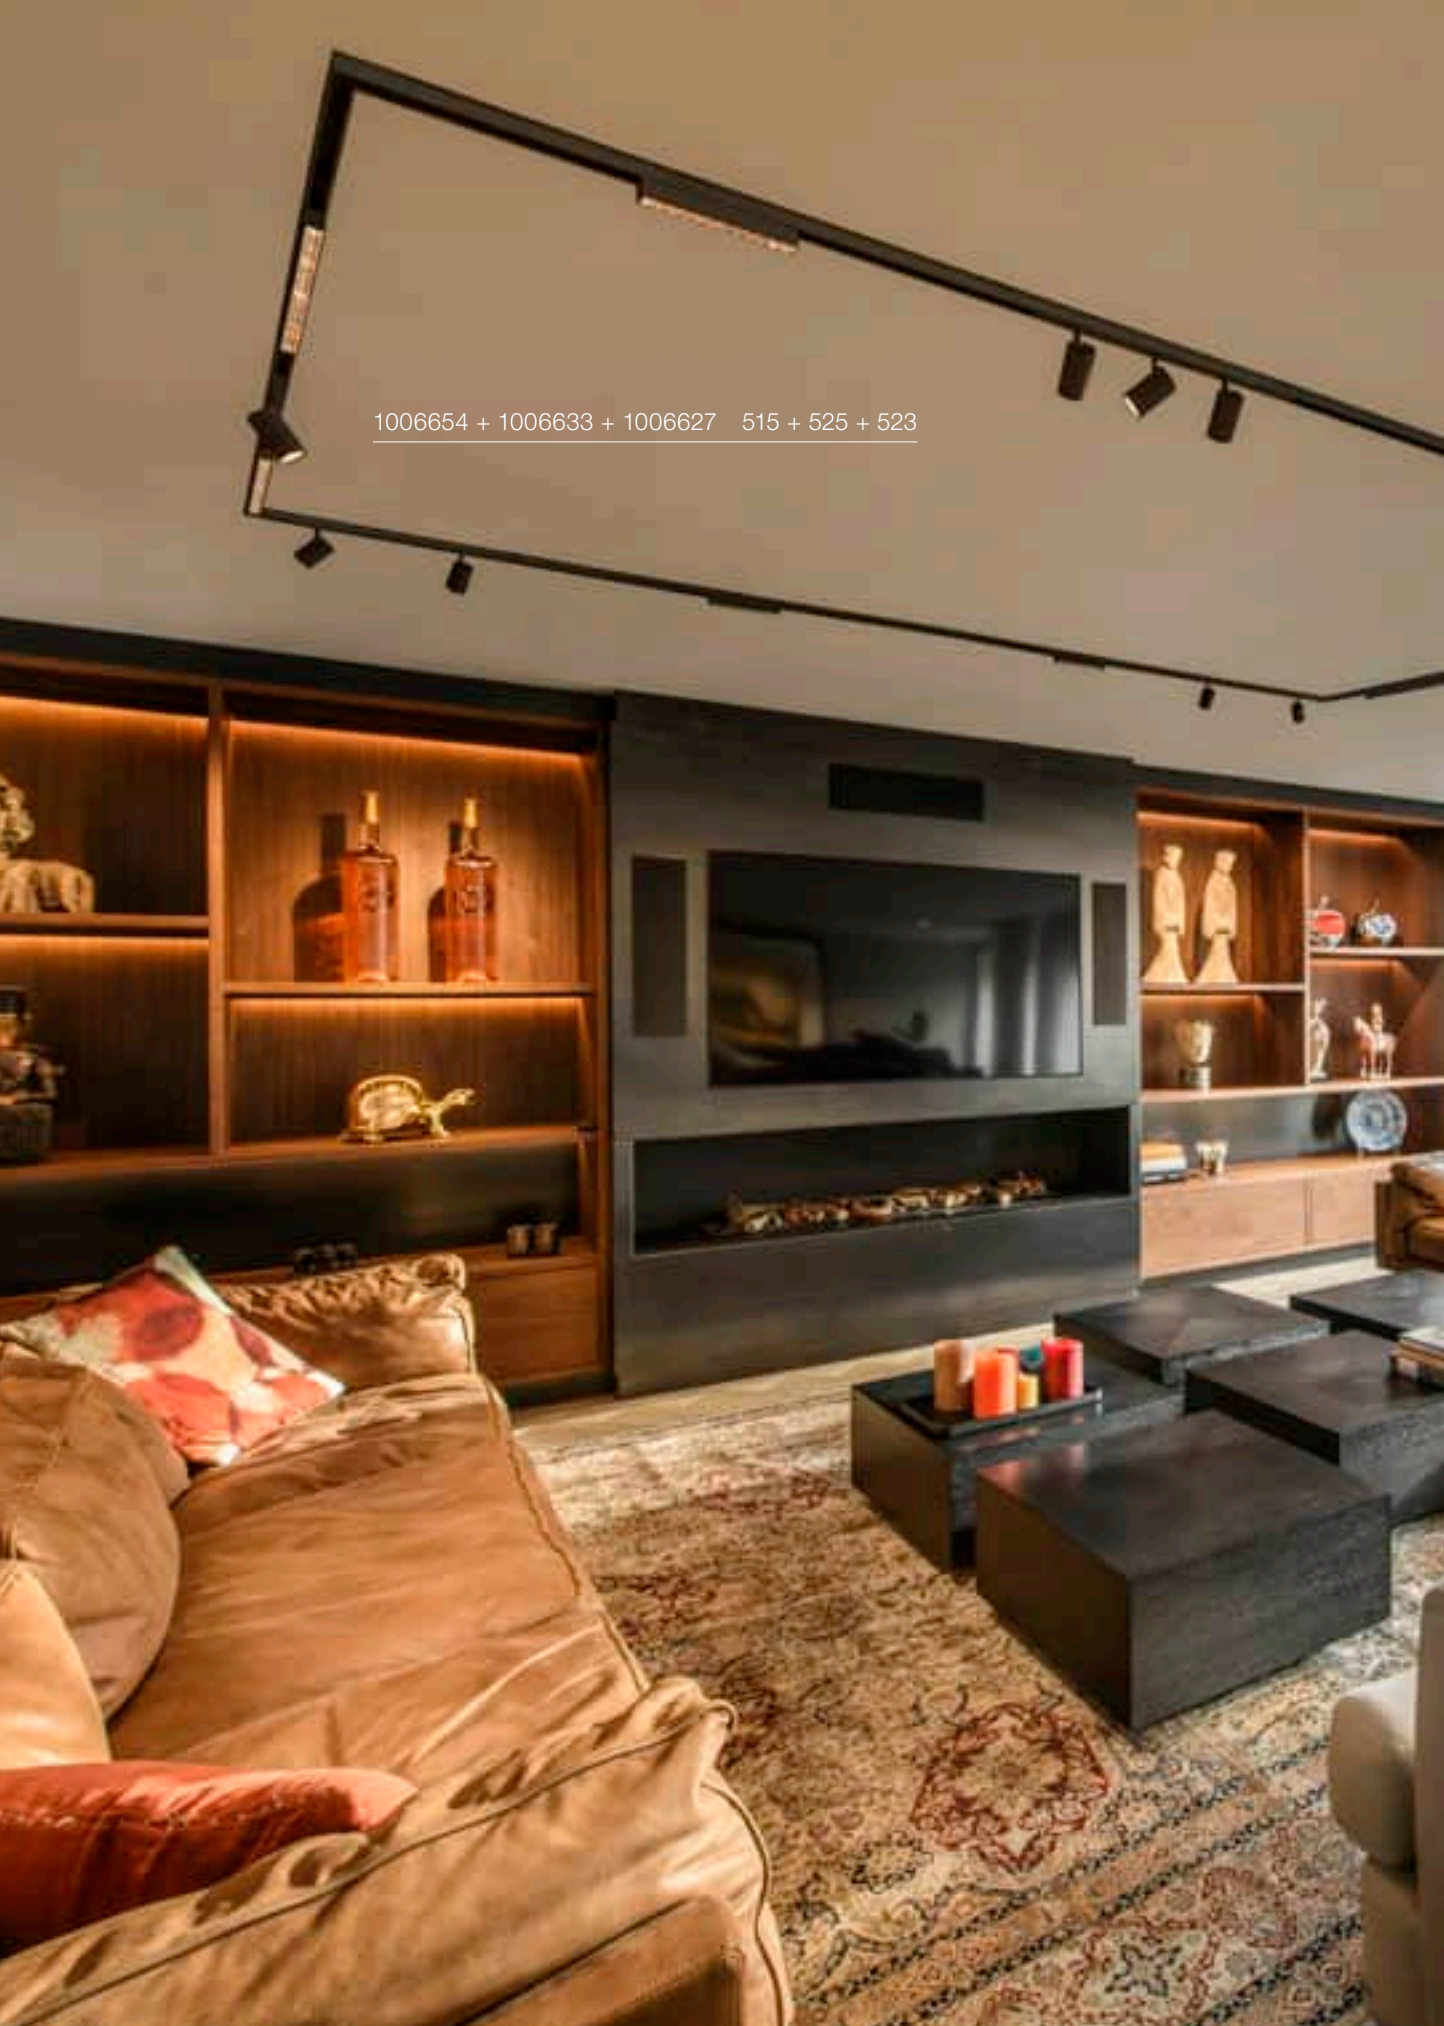
1006654 + 1006633 + 1006627 515 + 525 + 523

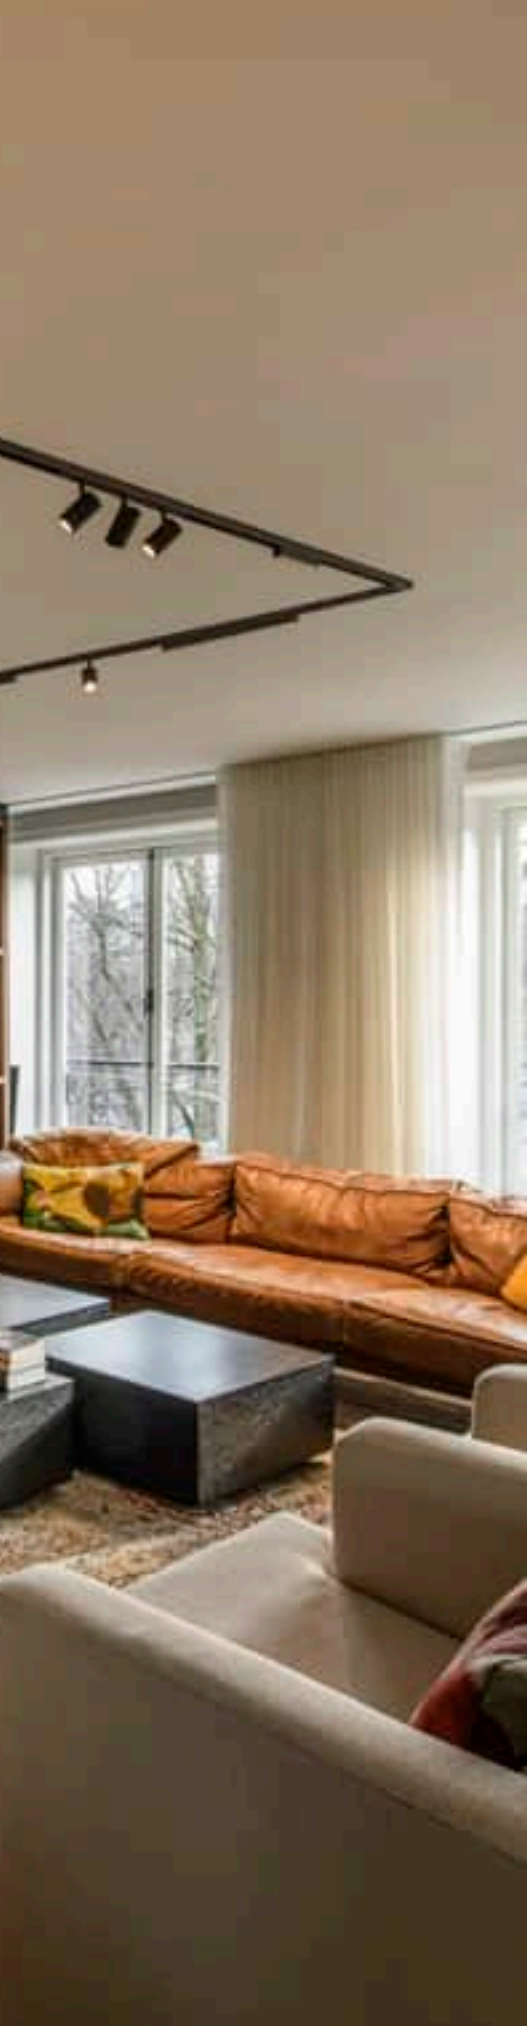

IN-LINE 22
48V, opal, DALI







Dali 2.0 | III | IP 20 | IK02 | 95° | UGR 28 | 50 000 Hours L80B50

48V | 350mA
Total wattage: 7.3W
Material: aluminium

LED INSIDE | CRI 90

Down
540lm | 2700K
570lm | 3000K
680lm | 4000K

Version	Prod. no.	GBP
● black 540lm | 2700K	**1006615**	**108.00**
● black 570lm | 3000K	**1006617**	**108.00**
● black 680lm | 4000K	**1006619**	**108.00**
○ white 540lm | 2700K	**1006616**	**108.00**
○ white 570lm | 3000K	**1006618**	**108.00**
○ white 680lm | 4000K	**1006620**	**108.00**

IN-LINE 22
48V, Darklight Reflector, DALI







Dali 2.0 | III | IP 20 | IK02 | 35° | UGR 16 | 50 000 Hours L80B50

48V | 350mA
Total wattage: 7.3W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down
580lm | 2700K
610lm | 3000K
650lm | 4000K

Version	Prod. no.	GBP
● black 580lm | 2700K	**1006627**	**121.00**
● black 610lm | 3000K	**1006629**	**121.00**
● black 650lm | 4000K	**1006631**	**120.00**
○ white 580lm | 2700K	**1006628**	**121.00**
○ white 610lm | 3000K	**1006630**	**121.00**
○ white 650lm | 4000K	**1006632**	**120.00**



1006633 + 1006654 525 + 515



IN-LINE 44
48V, opal, DALI





Dali 2.0 | III | IP 20 | IK02 | 95° | UGR 28 | 50 000 Hours L80B50

48V | 350mA
Total wattage: 14W
Material: aluminium

LED INSIDE | CRI 90

Down	1140lm | 2700K 1180lm | 3000K 1450lm | 4000K

Version	Prod. no.	GBP
● black 1140lm | 2700K	**1006621**	**158.00**
● black 1180lm | 3000K	**1006623**	**158.00**
● black 1450lm | 4000K	**1006625**	**158.00**
○ white 1140lm | 2700K	**1006622**	**158.00**
○ white 1180lm | 3000K	**1006624**	**158.00**
○ white 1450lm | 4000K	**1006626**	**158.00**

IN-LINE 44
48V, Darklight Reflector, DALI







Dali 2.0 | III | IP 20 | IK02 | 35° | UGR 16 | 50 000 Hours L80B50

48V | 350mA
Total wattage: 14W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down	1180lm | 2700K 1230lm | 3000K 1250lm | 4000K

Version	Prod. no.	GBP
● black 1180lm | 2700K	**1006633**	**171.00**
● black 1230lm | 3000K	**1006635**	**171.00**
● black 1250lm | 4000K	**1006637**	**171.00**
○ white 1180lm | 2700K	**1006634**	**171.00**
○ white 1230lm | 3000K	**1006636**	**171.00**
○ white 1250lm | 4000K	**1006638**	**171.00**


1006682 + 1006648
515 + 527



IN-LINE 24
48V, Move, Darklight Reflector, DALI







Dali 2.0 | III | IP 20 | IK02 | 35° | UGR 16 | 50 000 Hours L80B50 | 180°

48V | 350mA
Total wattage: 7.3W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down	580lm | 2700K 610lm | 3000K 650lm | 4000K

Version	Prod. no.	GBP
● black 580lm | 2700K	**1006639**	**129.00**
● black 610lm | 3000K	**1006641**	**129.00**
● black 650lm | 4000K	**1006643**	**129.00**
○ white 580lm | 2700K	**1006640**	**129.00**
○ white 610lm | 3000K	**1006642**	**129.00**
○ white 650lm | 4000K	**1006644**	**129.00**

IN-LINE 46
48V, Move, Darklight Reflector, DALI







Dali 2.0 | III | IP 20 | IK02 | 35° | UGR 16 | 50 000 Hours L80B50 | 180°

48V | 350mA
Total wattage: 14W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down	1180lm | 2700K 1230lm | 3000K 1250lm | 4000K

Version	Prod. no.	GBP
● black 1180lm | 2700K	**1006645**	**180.00**
● black 1230lm | 3000K	**1006647**	**180.00**
● black 1250lm | 4000K	**1006649**	**180.00**
○ white 1180lm | 2700K	**1006646**	**180.00**
○ white 1230lm | 3000K	**1006648**	**180.00**
○ white 1250lm | 4000K	**1006650**	**180.00**



GRIP! S
48V, DALI, Ø 3,0cm

NEW





Dali | III | IP20 | IK02 | 24° | UGR 25 | L80B10 | 350° | 90°

48DC | 250 mA
Total output: 9.8W
Material: aluminium

- Compatible only with the standard 48V mounting rail

LED INSIDE | CRI 90

Down 550lm | 2700K

Version	Prod. no.	GBP
black/gold	1008407	145.00
white/black	1008405	145.00
gold/black	1008409	145.00
bronze/black	1008408	145.00

GRIP! S
48V, DALI, Ø 3,0cm

NEW





Dali | III | IP20 | IK02 | 24° | UGR 25 | L80B10 | 350° | 90°

48DC | 250 mA
Total output: 9.8W
Material: aluminium

- Compatible only with the standard 48V mounting rail

LED INSIDE | CRI 90

Down 620lm | 3000K

Version	Prod. no.	GBP
black/gold	1008412	145.00
white/black	1008410	145.00
gold/black	1008414	145.00
bronze/black	1008413	145.00

GRIP! S
48V, DALI, Ø 3,0cm

NEW





Dali | III | IP20 | IK02 | 24° | UGR 25 | L80B10 | 350° | 90°

48DC | 250 mA
Total output: 9.8W
Material: aluminium

- Compatible only with the standard 48V mounting rail

LED INSIDE | CRI 90

Down 320lm | 2000-3000K

Version	Prod. no.	GBP
black/gold	1008417	145.00
white/black	1008415	145.00
gold/black	1008419	145.00
bronze/black	1008418	145.00


1008456 531
Le
Chouchou

GRIP! S
48V, PD, DALI, Ø 3,0 cm

NEW





Dali | IP20 | IK02 | 24° | UGR 25 | L80B10

200

48DC | 250 mA
Total output: 9.8W
Material: aluminium

INSIDE | CRI 90

Down 550lm | 2700K

Version	Prod. no.	GBP
black/gold	1008456	171.00
white/black	1008454	171.00
gold/black	1008458	171.00
bronze/black	1008457	171.00

GRIP! S
48V, PD, DALI, Ø 3,0 cm

NEW





Dali | IP20 | IK02 | 24° | UGR 25 | L80B10

200

48DC | 250 mA
Total output: 9.8W
Material: aluminium

INSIDE | CRI 90

Down 620lm | 3000K

Version	Prod. no.	GBP
black/gold	1008461	171.00
white/black	1008459	171.00
gold/black	1008463	171.00
bronze/black	1008462	171.00

GRIP! S
48V, PD, DALI, Ø 3,0 cm

NEW





Dali | IP20 | IK02 | 24° | UGR 25 | L80B10

200

48DC | 250 mA
Total output: 9.8W
Material: aluminium

INSIDE | CRI 90

Down 320lm | 2000-3000K

Version	Prod. no.	GBP
black/gold	1008466	171.00
white/black	1008464	171.00
gold/black	1008468	171.00
bronze/black	1008467	171.00



1007747 + 1007532 533 + 535

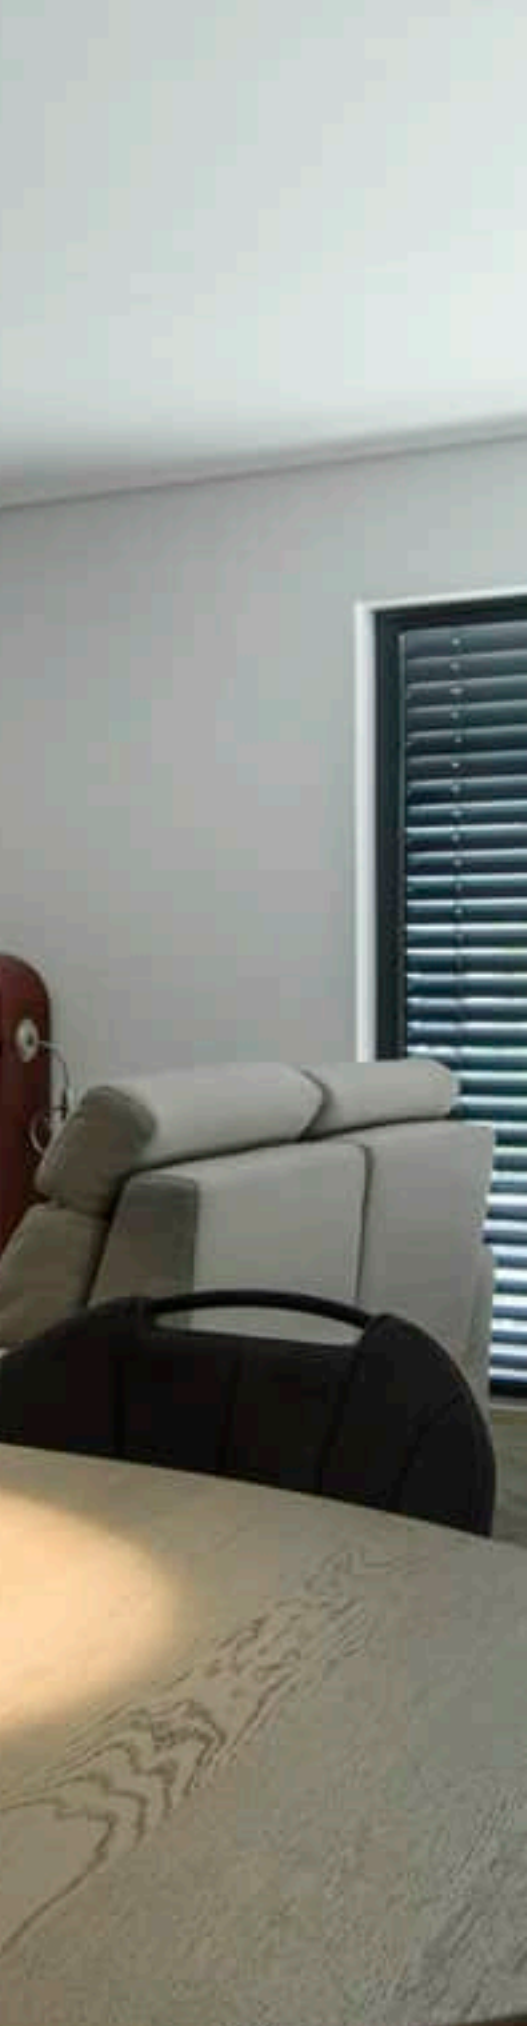

LALU® PD
48V, LED Base, Mix&Match

MIX match

NEW





Dali 2.0 | IP20 | IK02 | 40° | L80B50 | 150

48V | 200mA
Total wattage: 8W
Material: aluminium

- Matching lampshades can be found on page 534-535

LED INSIDE | CRI 90

Down — 700lm | 3000K

Version	Prod. no.	GBP
● black	**1007749**	**154.00**
○ white	**1007748**	**154.00**
◐ bronze	**1007747**	**162.00**



LALU® TETRA 14
Lampshade, Mix&Match

MIX match



H: 4.9 cm
Ø: 14 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	**1007523**	**48.00**
white/gold	**1007522**	**48.00**
bronze	**1007521**	**50.00**



LALU® TETRA 24
Lampshade, Mix&Match

MIX match



H: 6.7 cm
Ø: 24 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	**1007526**	**62.00**
white/gold	**1007525**	**62.00**
bronze	**1007524**	**67.00**

LALU® ELYPSE 15
Lampshade, Mix&Match

MIX match



H: 1.4 cm
Ø: 15 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007535	31.00
white/gold	1007534	31.00
bronze	1007533	37.00

LALU® PLATE 15
Lampshade, Mix&Match

MIX match



H: 1.5 cm
Ø: 15 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007544	37.00
white/gold	1007543	37.00
bronze	1007542	39.00

LALU® CONE 15
Lampshade, Mix&Match

MIX match



H: 17 cm
Ø: 15.2 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007532	49.00
white/gold	1007531	49.00
bronze	1007530	56.00

LALU® ELYPSE 22
Lampshade, Mix&Match

MIX match



H: 2.8 cm
Ø: 22 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007538	49.00
white/gold	1007537	49.00
bronze	1007536	56.00

LALU® PLATE 22
Lampshade, Mix&Match

MIX match



H: 1.5 cm
Ø: 22 cm
Material: steel

Version	Prod. no.	GBP
black/bronze	1007547	48.00
white/gold	1007546	48.00
bronze	1007545	51.00

DESIGN YOUR 48V SYSTEM

Select your track version in the appropriate length, desired colour and preferred installation method. Choose the recessed version or one of the two surface-mounted versions. Specially designed for the SLV 48V system: the NUMINOS®, IN-LINE and GRIP! spots or LALU® pendant lights are particularly flexible and provide the perfect setting for your surroundings.

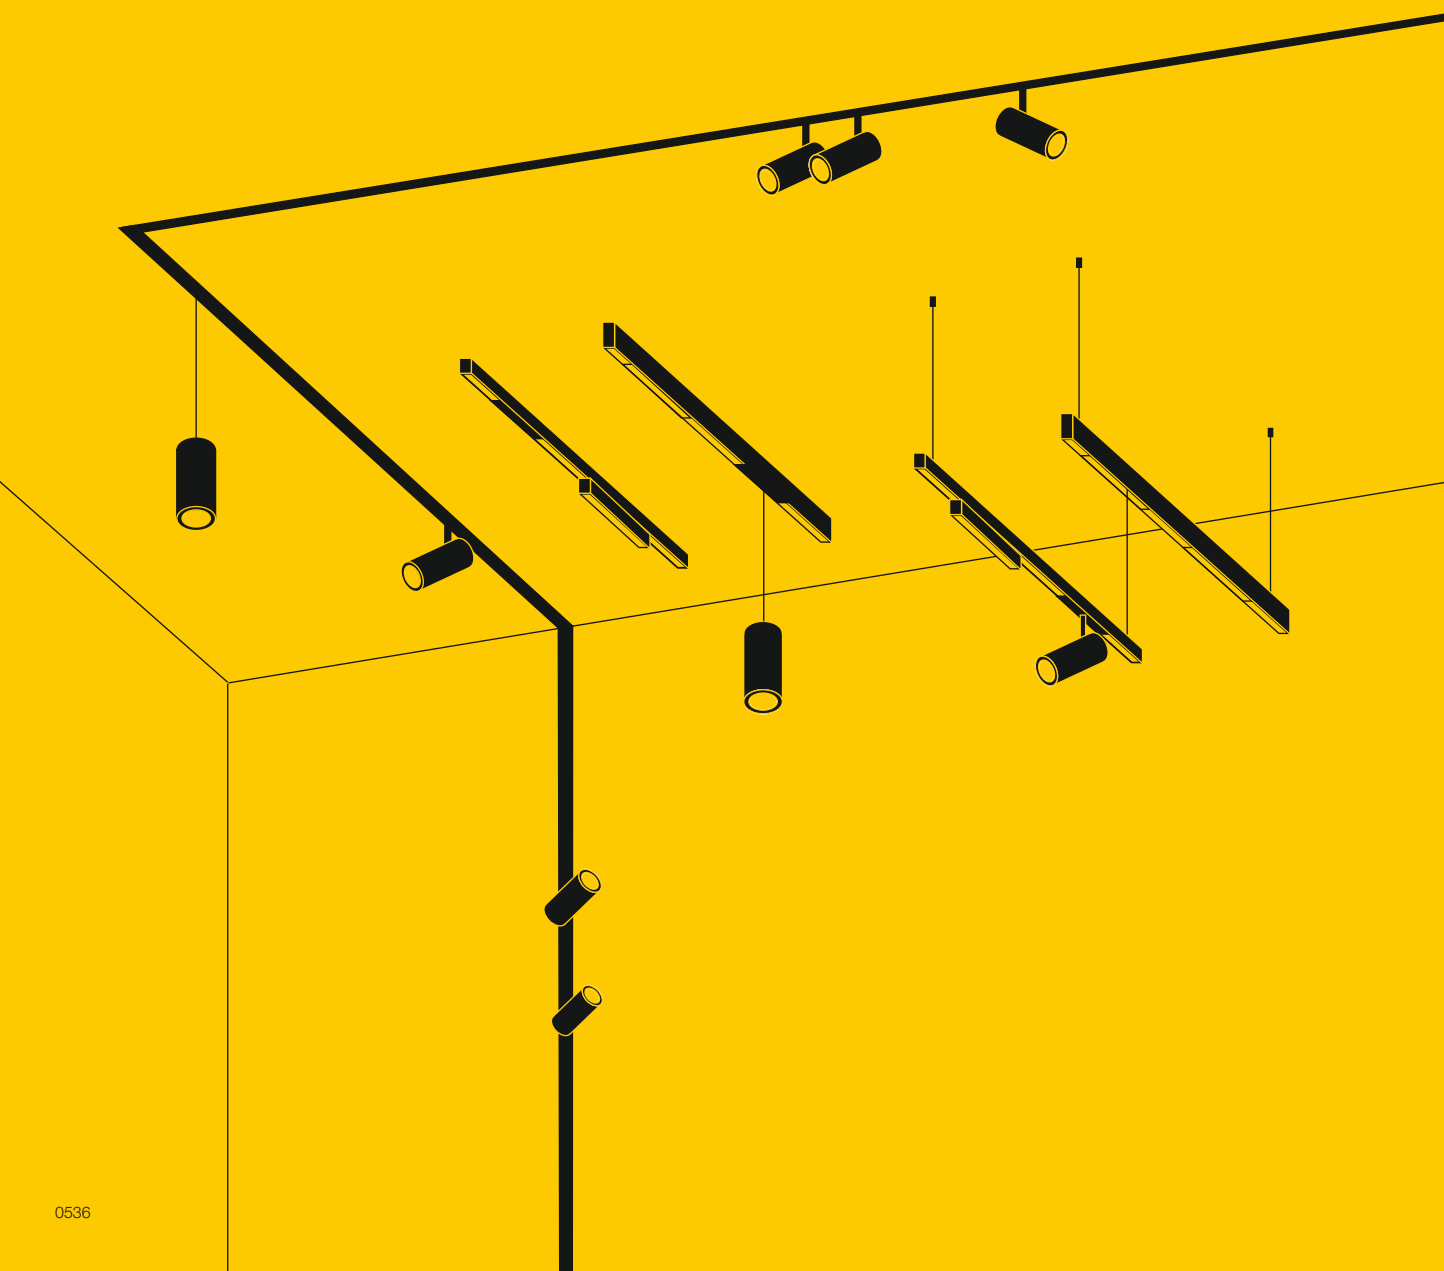

CHOOSE YOUR PREFERRED INSTALLATION

SURFACE-MOUNTED



RECESSED



CHOOSE YOUR TRACK

SURFACE-MOUNTED TRACK, STANDARD



SURFACE-MOUNTED TRACK, DEEP



RECESSED TRACK FOR PLASTER CEILINGS



CHOOSE YOUR ACCESSORIES

VARIOUS CONNECTORS, COVERS, SUSPENSIONS, POWER ADAPTERS, ETC.

CHOOSE YOUR LIGHTS

E.G. NUMINOS® SPOT AND PENDANT LIGHT

E.G. IN-LINE, IN-LINE DARKLIGHT REFLECTOR AND IN-LINE MOVE




139100 547



SOCKET

ASMARA | 544



SOCKET

TELESKOP | 544



SOCKET

COSMIC | 545



SOCKET

SYROS | 547



SOCKET

SALUNA | 547



LED

DURNO | 547



LED

PLYTTA | 548



LED

NOBLO SPOT | 549



LED

COMET LED | 549



SOCKET

COMET | 549

TENSEO, Low-voltage cable 4mm²







	10 m	10 m	10 m
Max. current (A)	25	25	25
Colour	● black	○ white	○ transparent
Material	copper/plastic	copper/plastic	copper/plastic
L (cm)	1000	1000	1000
Prod. no.	**1002602**	**1002603**	**1002604**
GBP	**26.00**	**26.00**	**26.00**

	20 m	20 m	20 m
Max. current (A)	25	25	25
Colour	● black	○ white	○ transparent
Material	copper/plastic	copper/plastic	copper/plastic
L (cm)	2000	2000	2000
Prod. no.	**139030**	**139031**	**139024**
GBP	**42.00**	**42.00**	**42.00**

	100 m	100 m	100 m
Max. current (A)	25	25	25
Colour	● black	○ white	○ transparent
Material	copper/plastic	copper/plastic	copper/plastic
L (cm)	10000	10000	10000
Prod. no.	**139040**	**139041**	**139004**
GBP	**210.00**	**210.00**	**210.00**

TENSEO, Low-voltage cable 6mm²







	20 m	20 m	20 m
Max. current (A)	25	25	25
Colour	● black	○ white	◌ transparent
Material	copper/plastic	copper/plastic	copper/plastic
L (cm)	2000	2000	2000
Prod. no.	**139050**	**139051**	**139026**
GBP	**50.00**	**50.00**	**50.00**

	100 m	100 m	100 m
Max. current (A)	25	25	25
Colour	● black	○ white	◌ transparent
Material	copper/plastic	copper/plastic	copper/plastic
L (cm)	10000	10000	10000
Prod. no.	**139060**	**139061**	**139006**
GBP	**247.00**	**247.00**	**247.00**


139131 547



12V AC | 50VA conventional
steel/brass
H: 11 cm Ø: 11.1 cm

● black	Prod. no.	**1002691**	**96.00 GBP**
○ white		**1002692**	**96.00 GBP**
◑ chrome		**1002693**	**99.00 GBP**

12V AC | 210VA conventional
steel/brass
H: 11 cm Ø: 13.5 cm

○ white	Prod. no.	**138991**	**175.00 GBP**
◑ chrome		**138992**	**183.00 GBP**



Wall bracket
steel/brass
L: 3 cm Ø: 5 cm

● black	Prod. no.	**186300**	**25.00 GBP**
○ white		**186301**	**25.00 GBP**
◑ chrome		**186302**	**27.00 GBP**



Diverter
steel/brass
H: 16 cm Ø: 5 cm

● black	Prod. no.	**186340**	**25.00 GBP**
○ white		**186341**	**25.00 GBP**
◑ chrome		**186342**	**27.00 GBP**



Ceiling diverter
steel/brass
H: 16 cm Ø: 5 cm

● black	Prod. no.	**186640**	**79.00 GBP**
○ white		**186641**	**79.00 GBP**
◑ chrome		**186642**	**85.00 GBP**



Insulating connector
25A max. | aluminium / plastic
L: 6.4 cm Ø: 1 cm

● black	Prod. no.	**186360**	**20.00 GBP**
○ white		**186361**	**20.00 GBP**
◑ chrome		**186362**	**22.00 GBP**



Electrical spacer
25A max. | brass
H: 9 cm Ø: 1.25 cm

● black	Prod. no.	**1002703**	**49.00 GBP**
○ white		**1002704**	**49.00 GBP**
◑ chrome		**1002705**	**54.00 GBP**



12V AC | 105VA conventional
steel/brass
H: 11 cm Ø: 11.1 cm

○ white	Prod. no.	**138981**	**116.00 GBP**
◑ chrome		**138982**	**127.00 GBP**



Cable tensioner
25A max. | brass
H: 11 cm Ø: 1 cm

● black	Prod. no.	**181530**	**25.00 GBP**
○ white		**181531**	**25.00 GBP**
◑ chrome		**181532**	**27.00 GBP**



Diverter 6 cm
steel/brass
H: 6 cm Ø: 5 cm

● black	Prod. no.	**186330**	**22.00 GBP**
○ white		**186331**	**22.00 GBP**
◑ chrome		**186332**	**25.00 GBP**



Wall bracket 10cm
steel/brass
H: 11.5 cm Ø: 5 cm
With clamping device

● black	Prod. no.	**186310**	**35.00 GBP**
○ white		**186311**	**35.00 GBP**
◑ chrome		**186312**	**37.00 GBP**



Feed-in
25A max. | brass
H: 1.8 cm Ø: 1 cm

● black	Prod. no.	**186350**	**11.00 GBP**
○ white		**186351**	**11.00 GBP**
◑ chrome		**186352**	**12.00 GBP**



Spacer
aluminium
W: 9 cm Ø: 1.25 cm

● black	Prod. no.	**1002700**	**40.00 GBP**
○ white		**1002701**	**40.00 GBP**
◑ chrome		**1002702**	**49.00 GBP**



Suspension kit 2 m
steel/aluminium
W: 18.6 cm Ø: 1.25 cm

● black	Prod. no.	**1002697**	**35.00 GBP**
○ white		**1002698**	**35.00 GBP**
◑ chrome		**1002699**	**37.00 GBP**



ASMARA
LV, QR-C51

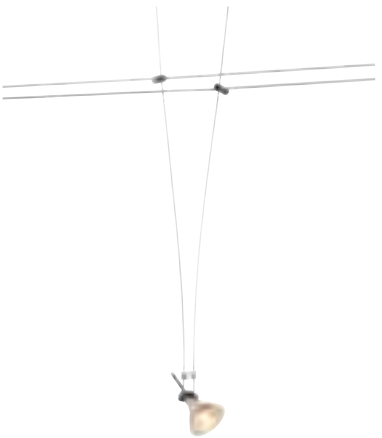



IP 20 90°

12V ~50Hz
Material: stainless steel

SOCKET INSIDE <35 W

Base: 1xGX5.3

Version	Prod. no.	GBP
● black	**139070**	**25.00**
○ white	**139071**	**25.00**
◑ chrome	**139072**	**27.00**

LED GU5.3 | 5.8W | 36°
3000K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001575 | 31.00 GBP

TELESKOP
LV, QR-C51





IP 20 90°

12V ~50Hz
Material: steel

- Telescope adjustable from 21-51 cm

SOCKET INSIDE <20 W

Base: 1xGX5.3

Version	Prod. no.	GBP
● black	**139080**	**29.00**
○ white	**139081**	**29.00**
◑ chrome	**139082**	**32.00**

LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001574 | 31.00 GBP

COSMIC
LV, QR-C51

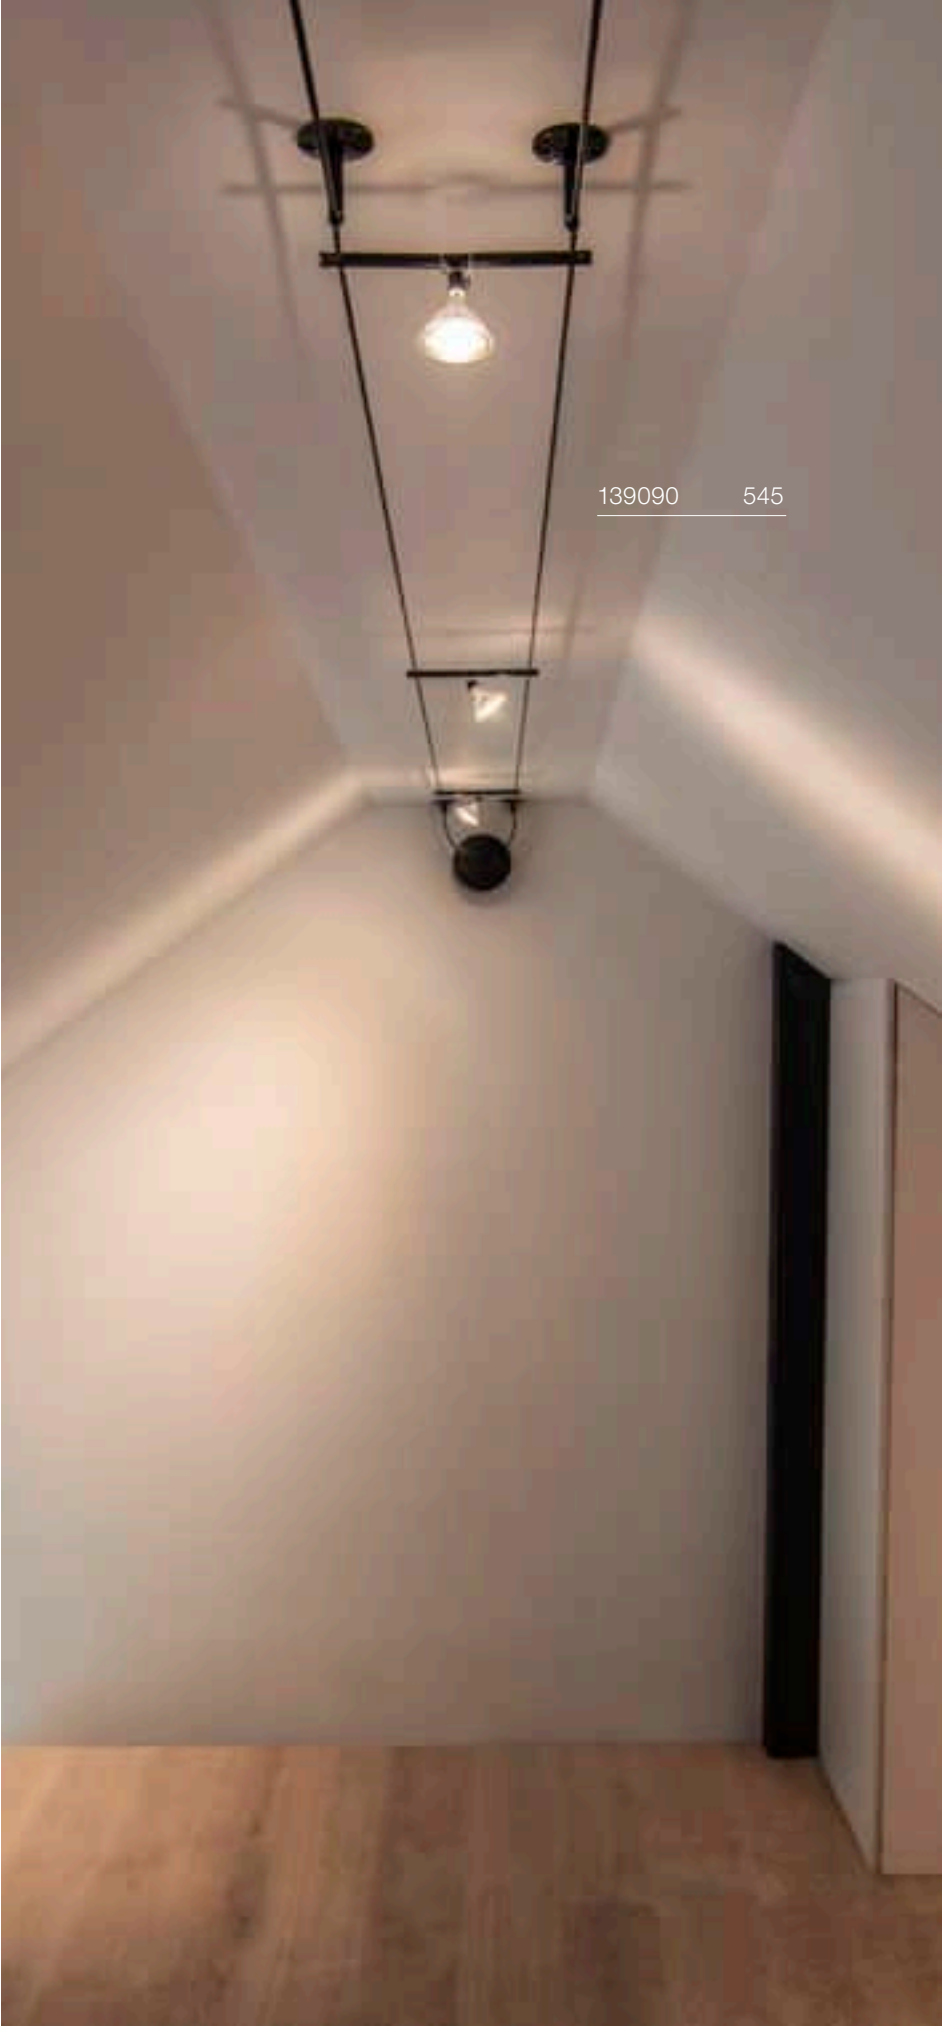







12V ~50Hz
Material: steel/brass

SOCKET INSIDE <35 W

Base: 1xGX5.3

Version	Prod. no.	GBP
● black	**139090**	**35.00**
○ white	**139091**	**35.00**
◑ chrome	**139092**	**37.00**

LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001574 | 31.00 GBP

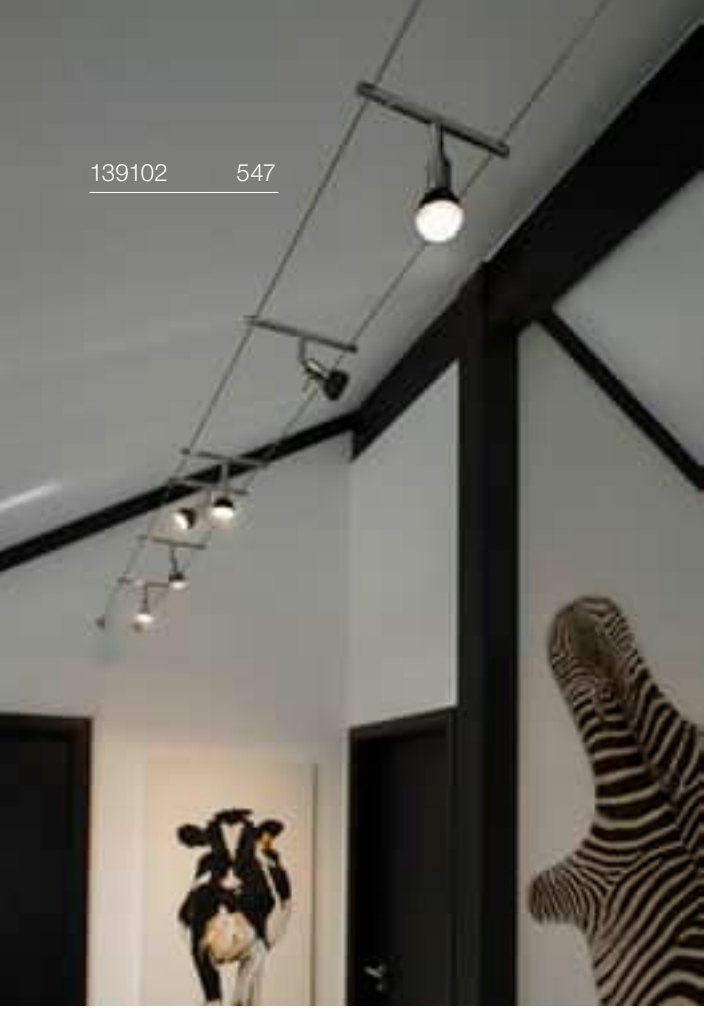
139102 547

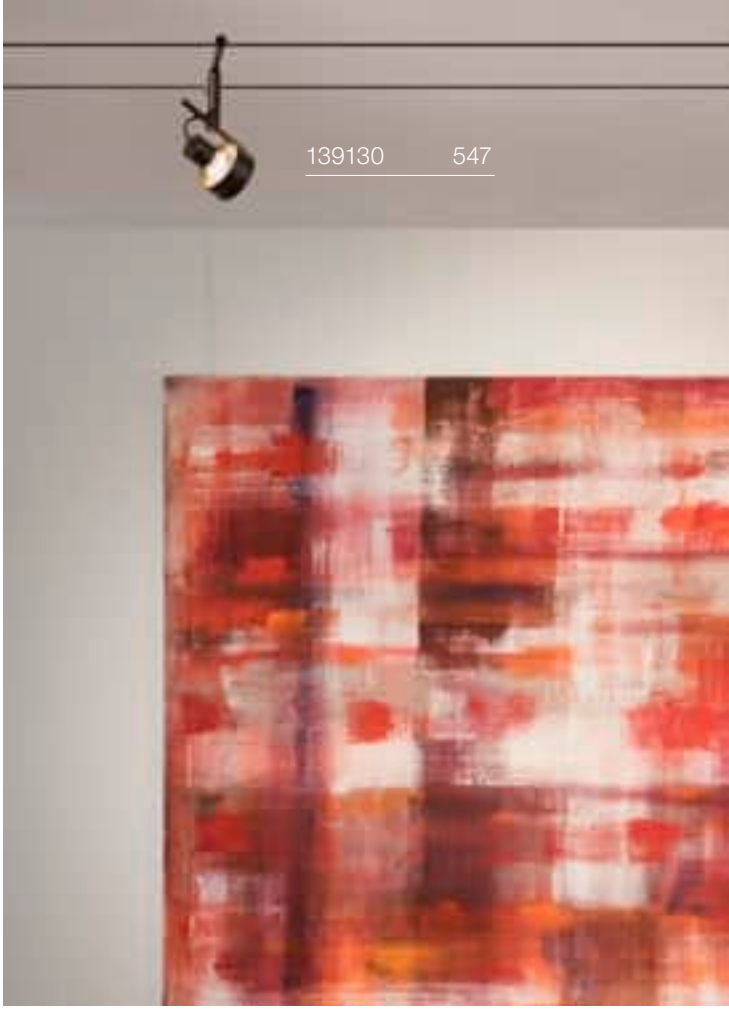
139130 547

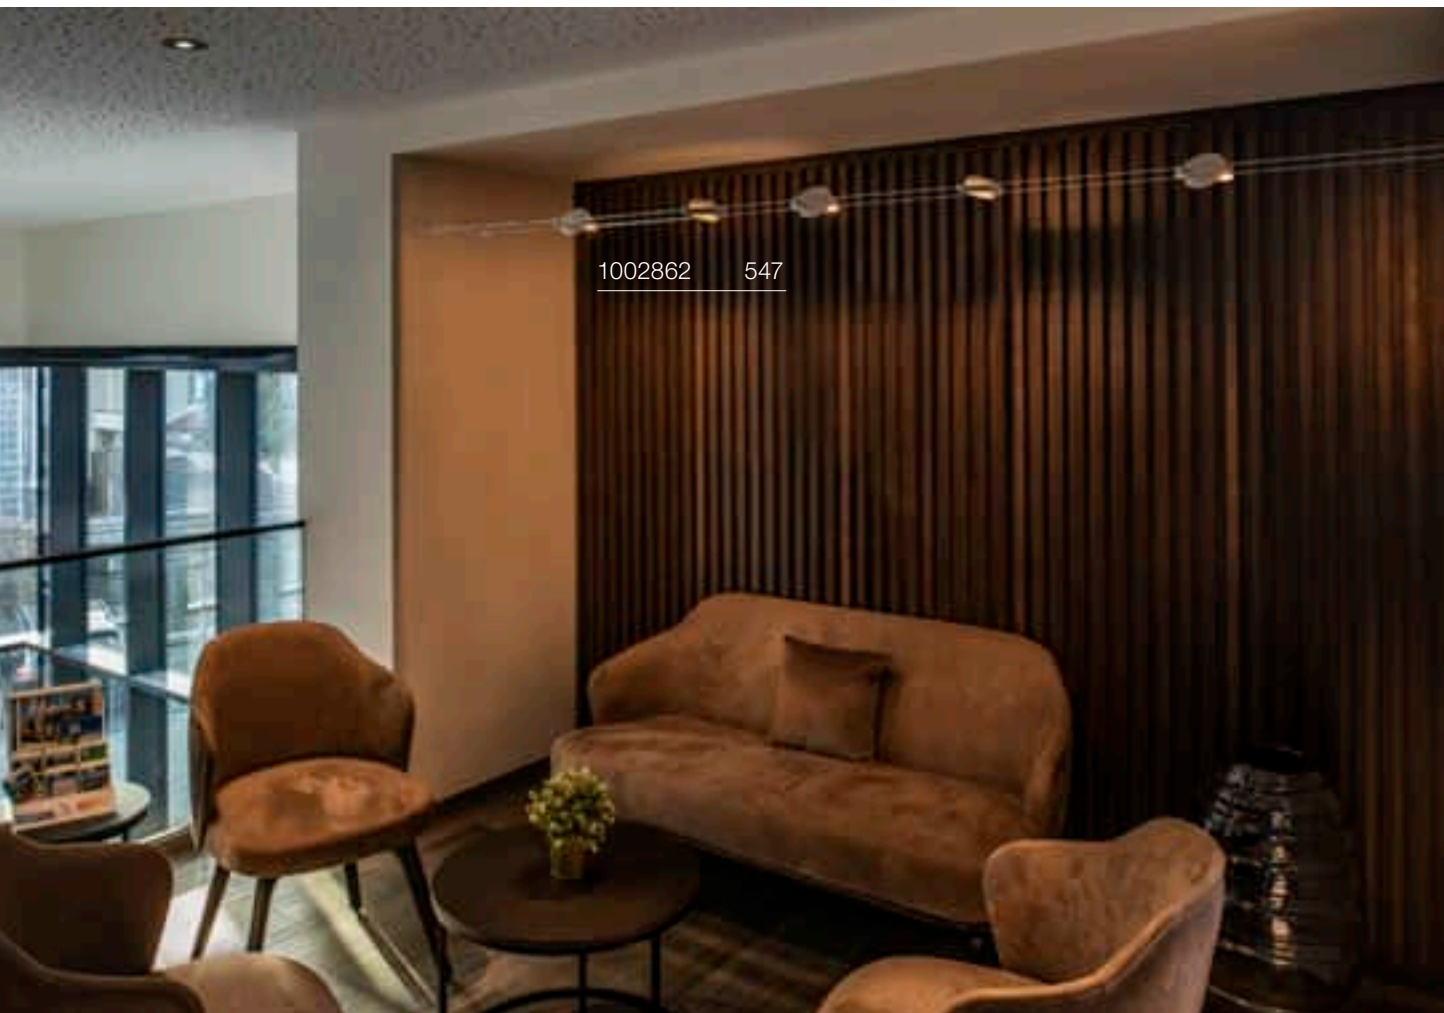
1002862 547

SYROS
LV, QR-C51





IP 20 | 350° | 90°

12V ~50Hz
Material: steel

SOCKET INSIDE <50 W

Base: 1xGX5.3

Version	Prod. no.	GBP
● black	**139100**	**48.00**
○ white	**139101**	**48.00**
◑ chrome	**139102**	**54.00**

LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001574 | 31.00 GBP

SALUNA
LV, QR-C51





IP 20 | 350° | 90°

12V ~50Hz
Material: steel/brass

SOCKET INSIDE <35 W

Base: 1xGX5.3

Version	Prod. no.	GBP
● black	**139130**	**62.00**
○ white	**139131**	**62.00**
◑ chrome	**139132**	**67.00**

LED GU5.3 | 5.8W | 36°
3000K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001575 | 31.00 GBP

DURNO
LV





120° | L70B50 | 40°

12V ~50Hz
Power consumption: 6W
Material: aluminium/stainless steel

LED INSIDE CRI 80

Down 360lm | 2700K

Version	Prod. no.	GBP
● black	**1002861**	**71.00**
○ white	**1002862**	**71.00**
◑ chrome/stainless steel	**1002863**	**74.00**



PLYTTA
LV









12V ~50Hz
Power consumption: 9.8W
Material: aluminium/plastic

LED INSIDE CRI 80

Down 750lm | 2700K

Version	Prod. no.	GBP
● black CRI80	**1002864**	**56.00**
○ white CRI90	**1002865**	**56.00**
◑ chrome CRI90	**1002866**	**61.00**

NOBLO SPOT
LV, Rope Track





IP 20 | 36° | L70B50 | 340° | 90°

12V ~50Hz
Power consumption: 8.5 W
Material: aluminium

LED INSIDE | CRI 80

Down | 420lm / 450lm | 2700K

Version	Prod. no.	GBP
● black		
420lm	**1002694**	**69.00**
○ white		
450lm	**1002695**	**69.00**
◑ chrome		
450lm	**1002696**	**73.00**

COMET LED
LV





IP 20 | 120° | L70B50

12V ~50Hz
Power consumption: 6.6W
Material: aluminium/glass

LED INSIDE | CRI 80

Down | 410lm | 2700K

Version	Prod. no.	GBP
◑ chrome/frosted	**1002690**	**72.00**

COMET
LV, QR-C51





IP 20

12V ~50Hz
Material: brass

SOCKET INSIDE | <50 W

Base: 1xGX5.3

Version	Prod. no.	GBP
● black	**139120**	**48.00**
○ white	**139121**	**48.00**
◑ chrome	**139122**	**54.00**

LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001574 | 31.00 GBP


NEW

LED

QUIMERA | 559


NEW

SOCKET

FORCHINI M
40 TRACK | 561


NEW

SOCKET

PURI 2.0 | 563


NEW

SOCKET

PURI 2.0 | 563


NEW

SOCKET

PURI 2.0 | 563


NEW

SOCKET

PURI 2.0 | 565


NEW

SOCKET

PURI 2.0 | 565


NEW

SOCKET

PURI 2.0 | 565


NEW

SOCKET

PURI 2.0 | 566


NEW

SOCKET

PURI 2.0 | 567


NEW

PURI 2.0 | 567


NEW

PURI 2.0 | 567


NEW

PURI 2.0 | 567


NEW

LED

GRIP! S | 569


NEW

LED

GRIP! S | 569


NEW

LED

GRIP! S | 569


NEW

LED

GRIP! M | 571


NEW

LED

GRIP! M | 571


NEW

LED

GRIP! M | 571


NEW

SOCKET

GRIP! L | 573


NEW

SOCKET

GRIP! L | 573


NEW

SOCKET

LIGHT EYE® 90 | 576


NEW

SOCKET

LIGHT EYE® 150 | 577


NEW

SOCKET

LIGHT EYE® 90 | 579


NEW

SOCKET

LIGHT EYE® 150 | 579



SOCKET

KALU TRACK | 581



LED

KALU TRACK | 581



LED

NOBLO SPOT | 582



LED

NOBLO SPOT | 582



LED

NOBLO SPOT | 583



LED

NOBLO SPOT | 583



SOCKET

ASTO TUBE | 585



SOCKET

PANTILO
ROPE 19 | 585



SOCKET

PARA CONE GL | 587



SOCKET

PARA CONE 14 | 587



SOCKET

PARA CONE 14 | 587



LED

HELIA 50 TRACK | 589



LED

PANEL TRACK | 589

LED

PANEL TRACK | 589



SOCKET

PURI TRACK | 591

SOCKET

PURI TRACK | 591

SOCKET

TONGA® | 592



SOCKET

PURIA TRACK | 593

SOCKET

AVO TRACK | 593



LED

ENOLA C TRACK | 594



LED

ENOLA C TRACK | 594



SOCKET

ENOLA B TRACK | 595

SOCKET

ENOLA B | 595



LED

BIMA | 597



SOCKET

BIMA | 597



SOCKET

EURO SPOT
TRACK | 598



SOCKET

ALTRA DICE
TRACK | 599



1-PHASE

Mounting track



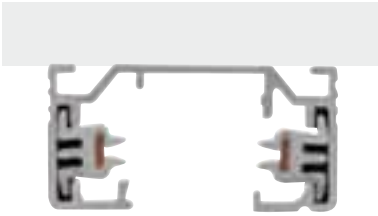

	1 m	1 m	1 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 3,5 x 1,8	100 x 3,5 x 1,8	100 x 3,5 x 1,8
Prod. no.	**143010**	**143011**	**143012**
GBP	**31.00**	**31.00**	**31.00**

	2 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	aluminium	aluminium	aluminium
L x W x H (cm)	200 x 3,5 x 1,8	200 x 3,5 x 1,8	200 x 3,5 x 1,8
Prod. no.	**143020**	**143021**	**143022**
GBP	**58.00**	**58.00**	**58.00**

	3 m	3 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 3,5 x 1,8	300 x 3,5 x 1,8	300 x 3,5 x 1,8
Prod. no.	**1002151**	**1002152**	**1002153**
GBP	**86.00**	**86.00**	**86.00**

Mounting track Planning tools and accessories at a glance

View of components from above on the installation side

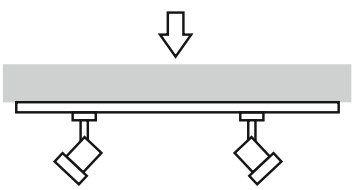

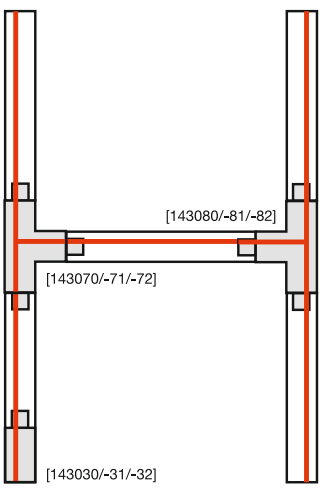

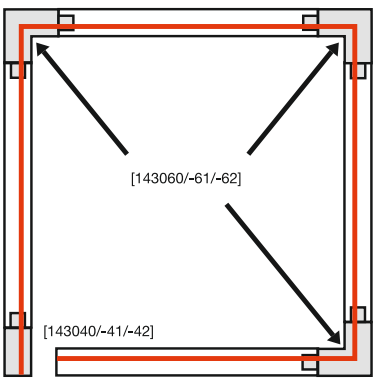

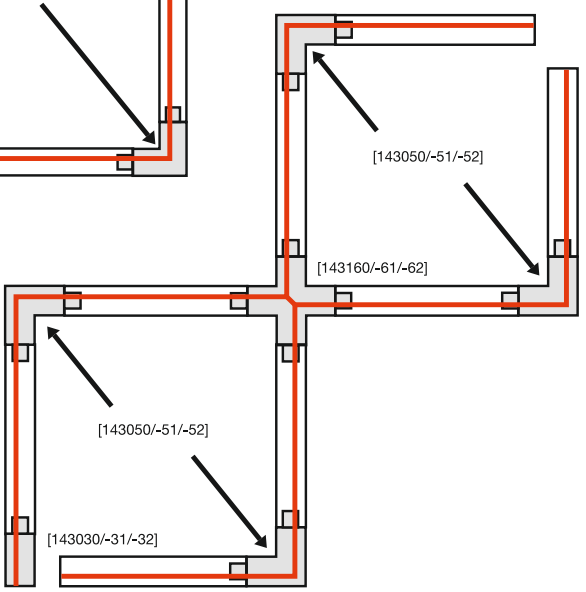



1-phase adapter
Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black	Prod. no.**143120**	**13.00 GBP**
○ white	**143121**	**13.00 GBP**
● grey	**143124**	**13.00 GBP**



1-phase Adaptor with hook
6 A max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 7.4 cm

● black	Prod. no.**143170**	**13.00 GBP**
○ white	**143171**	**13.00 GBP**
● grey	**143172**	**13.00 GBP**



Feed-in, earth left
16A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.**143030**	**9.00 GBP**
○ white	**143031**	**9.00 GBP**
● grey	**143032**	**9.00 GBP**



Feed-in, earth right
16A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.**143040**	**9.00 GBP**
○ white	**143041**	**9.00 GBP**
● grey	**143042**	**9.00 GBP**



Longitudinal connector with feed capacity
16A max. | polycarbonate (PC)
L: 17.2 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.**143100**	**16.00 GBP**
○ white	**143101**	**16.00 GBP**
● grey	**143102**	**16.00 GBP**



Longitudinal connector, electrical
16A max. | polycarbonate (PC)
L: 6.4 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.**143090**	**7.00 GBP**
○ white	**143091**	**7.00 GBP**
● grey	**143092**	**7.00 GBP**



Corner connector, earth inside
16A max. | polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.**143060**	**15.00 GBP**
○ white	**143061**	**15.00 GBP**
● grey	**143062**	**15.00 GBP**



Corner connector, earth outside
16A max. | polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.**143050**	**15.00 GBP**
○ white	**143051**	**15.00 GBP**
● grey	**143052**	**15.00 GBP**



T-connector, earth external, left
16A max. | polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.**143070**	**18.00 GBP**
○ white	**143071**	**18.00 GBP**
● grey	**143072**	**18.00 GBP**



T-connector, earth external, right
16A max. | polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.**143080**	**18.00 GBP**
○ white	**143081**	**18.00 GBP**
● grey	**143082**	**18.00 GBP**



X-connector
16A max. | polycarbonate (PC)
L: 9.5 cm | W: 17.2 cm | H: 1.8 cm

● black	Prod. no.**143160**	**27.00 GBP**
○ white	**143161**	**27.00 GBP**
● grey	**143162**	**27.00 GBP**



Flex connector
16A max. | polycarbonate (PC)
L: 16.4 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.**143110**	**16.00 GBP**
○ white	**143111**	**16.00 GBP**
● grey	**143112**	**16.00 GBP**



Stabiliser, longitudinal connector
steel
L: 19.7 cm | W: 3.2 cm | H: 1.3 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

◐ nickel Prod. no.**143151** **7.00 GBP**



Stabiliser, corner connector long
steel
L: 11.5 cm | W: 11.5 cm | H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

◐ nickel Prod. no.**143152** **8.00 GBP**



Stabilising X-connector
steel
L: 19.7 cm | W: 19.7 cm | H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845).

◐ nickel Prod. no.**143169** **11.00 GBP**



Cover for 1-phase mounting track, 2 m
Polycarbonate (PC)
L: 200 cm | W: 1.8 cm | H: 0.75 cm

● black	Prod. no.**1004783**	**19.00 GBP**
○ white	**1004785**	**19.00 GBP**
● grey	**1004784**	**19.00 GBP**



End caps (2 pieces)
Polycarbonate (PC)
L: 0.4 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.**143130**	**4.00 GBP**
○ white	**143131**	**4.00 GBP**
● grey	**143132**	**4.00 GBP**



Ceiling rosette 2.0
6 A max. | polycarbonate (PC)
H: 2.5 cm | Diameter: 11.5 cm

● black	Prod. no.**1007926**	**18.00 GBP**
○ white	**1007927**	**18.00 GBP**
● grey	**1007928**	**18.00 GBP**



Wire rope suspension (2 pieces)
Stainless steel/brass
L: 500cm

◐ nickel Prod. no.**1002845** **36.00 GBP**



Single-phase Cover plate
steel
L: 10 cm | W: 10 cm | H: 0.04 cm

● black	Prod. no.**1008149**	**13.00 GBP**
○ white	**1008148**	**13.00 GBP**
● grey	**1008150**	**13.00 GBP**


143580 589

1-PHASE

Mounting track



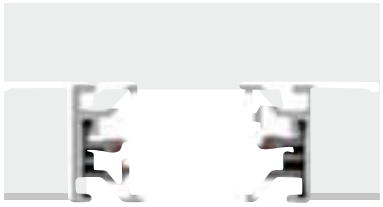

	2 m
Nominal voltage (V)	250V ~50/60Hz
Max. current (A)	16
Colour	○ white
Material	Aluminium
L x W x H (cm)	200 x 5,5 x 1,8
Prod. no.	**143221**
GBP	**64.00**



Feed-in, earth left
16A max. | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm
earth left

○ white Prod. no.**143231** **12.00 GBP**



Feed-in, earth right
16A max. | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm
Feed-in right

○ white Prod. no.**143241** **12.00 GBP**



Longitudinal connector including longitudinal brace
16A max. | Plastic / Steel
L: 6.5 cm | W: 1.8 cm | H: 1.7 cm

○ white Prod. no.**143271** **12.00 GBP**



Corner connector, earth inside
16A max. | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm
earth inside

○ white Prod. no.**143261** **18.00 GBP**



Corner connector, earth outside
16A max. | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm
earth outside

○ white Prod. no.**143251** **18.00 GBP**



End cap
Plastic
L: 2.7 cm | W: 5.5 cm | H: 1.8 cm
End cap

○ white Prod. no.**143281** **7.00 GBP**



Retainer
steel
L: 7.5 cm | W: 1.5 cm | H: 4 cm

◐ nickel Prod. no.**143230** **4.00 GBP**



1-phase Adaptor with hook
6A max. | 2 kg max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 7.4 cm
1-phase Adaptor with hook

● black	Prod. no.**143170**	**13.00 GBP**
○ white	**143171**	**13.00 GBP**
● grey	**143172**	**13.00 GBP**



1-phase adapter
2 kg max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black	Prod. no.**143120**	**13.00 GBP**
○ white	**143121**	**13.00 GBP**
● grey	**143124**	**13.00 GBP**


1008042 559



QUIMERA
1-phase, PD

NEW







IP20 | IK03 | 360° | L80B50 | 150

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium/glass

- Indirect light emission through the lines cut into the glass

LED INSIDE | CRI 90

Down 330lm | 2700K

Variant	Prod. no.	GBP
brass (PVD)	**1008042**	**317.00**
dark copper (PVD)	**1008043**	**317.00**
dark bronze (PVD)	**1008041**	**317.00**


1008540 561

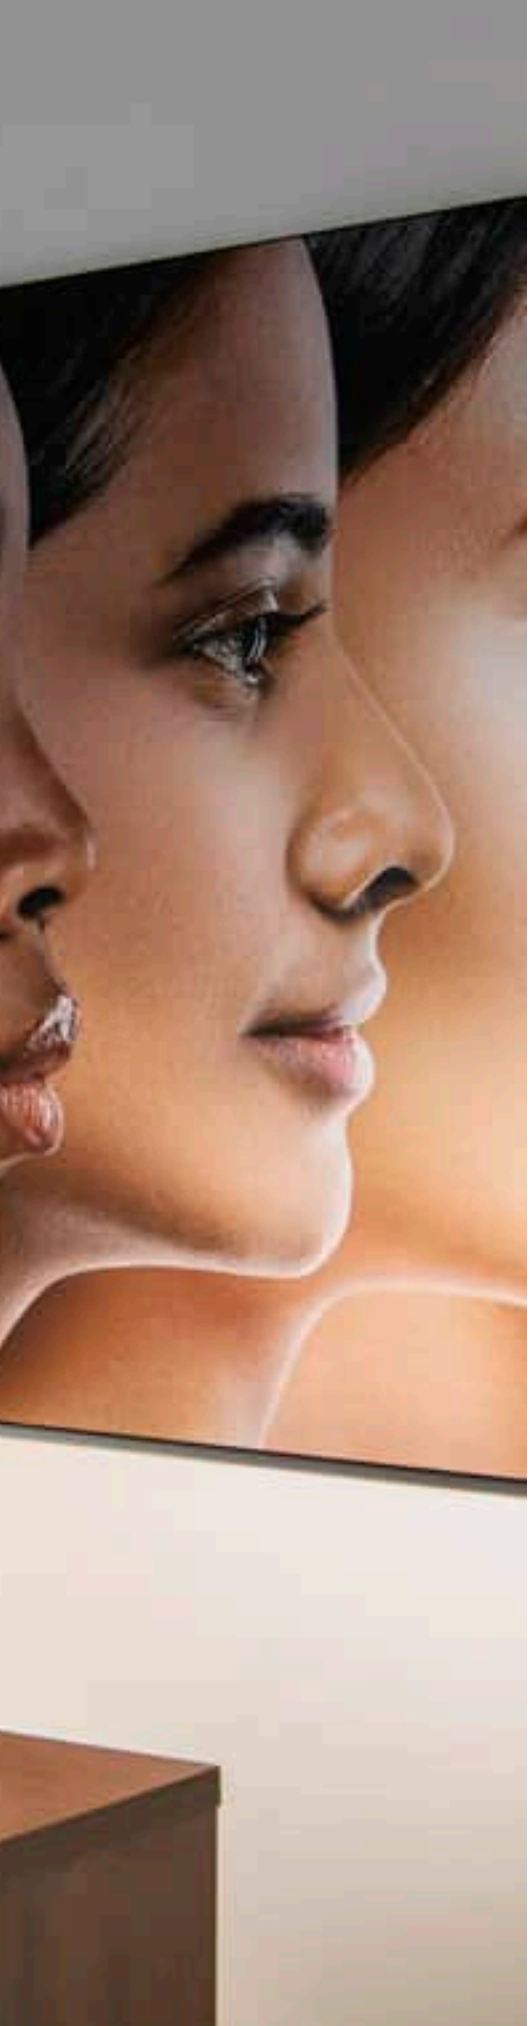

FORCHINI M 40 TRACK
1-phase, PD, E27

NEW





IP20 150

220-240V ~50/60Hz
Material: steel/aluminium

- 1008539 with white adapter
- 1008540 with black adapter

SOCKET INSIDE <40 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 15.2 cm

Variant	Prod. no.	GBP
black/gold	1008539	200.00
black/gold	1008540	200.00

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP



PURI 2.0
Tube 1-phase, QPAR51

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008242	34.00
black/gold	1008243	34.00
white	1008244	34.00
grey	1008245	34.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

PURI 2.0
Cone 1-phase, QPAR51

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008246	34.00
black/gold	1008247	34.00
white	1008248	34.00
grey	1008249	34.00

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005080 | 7.00 GBP

PURI 2.0
Dome 1-phase, QPAR51

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008250	34.00
black/gold	1008251	34.00
white	1008252	34.00
grey	1008253	34.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP


1008263 565

PURI 2.0
Tube PD, 1-phase, QPAR51

NEW





IP20 IK06 200

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008254	38.00
black/gold	1008255	38.00
white	1008256	38.00
grey	1008257	38.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

PURI 2.0
Cone PD, 1-phase, QPAR51

NEW





IP20 IK06 200

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008258	38.00
black/gold	1008259	38.00
white	1008260	38.00
grey	1008261	38.00

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h

Prod. no.: 1005078 | 7.00 GBP

PURI 2.0
Dome PD, 1-phase, QPAR51

NEW





IP20 IK06 200

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008262	38.00
black/gold	1008263	38.00
white	1008264	38.00
grey	1008265	38.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

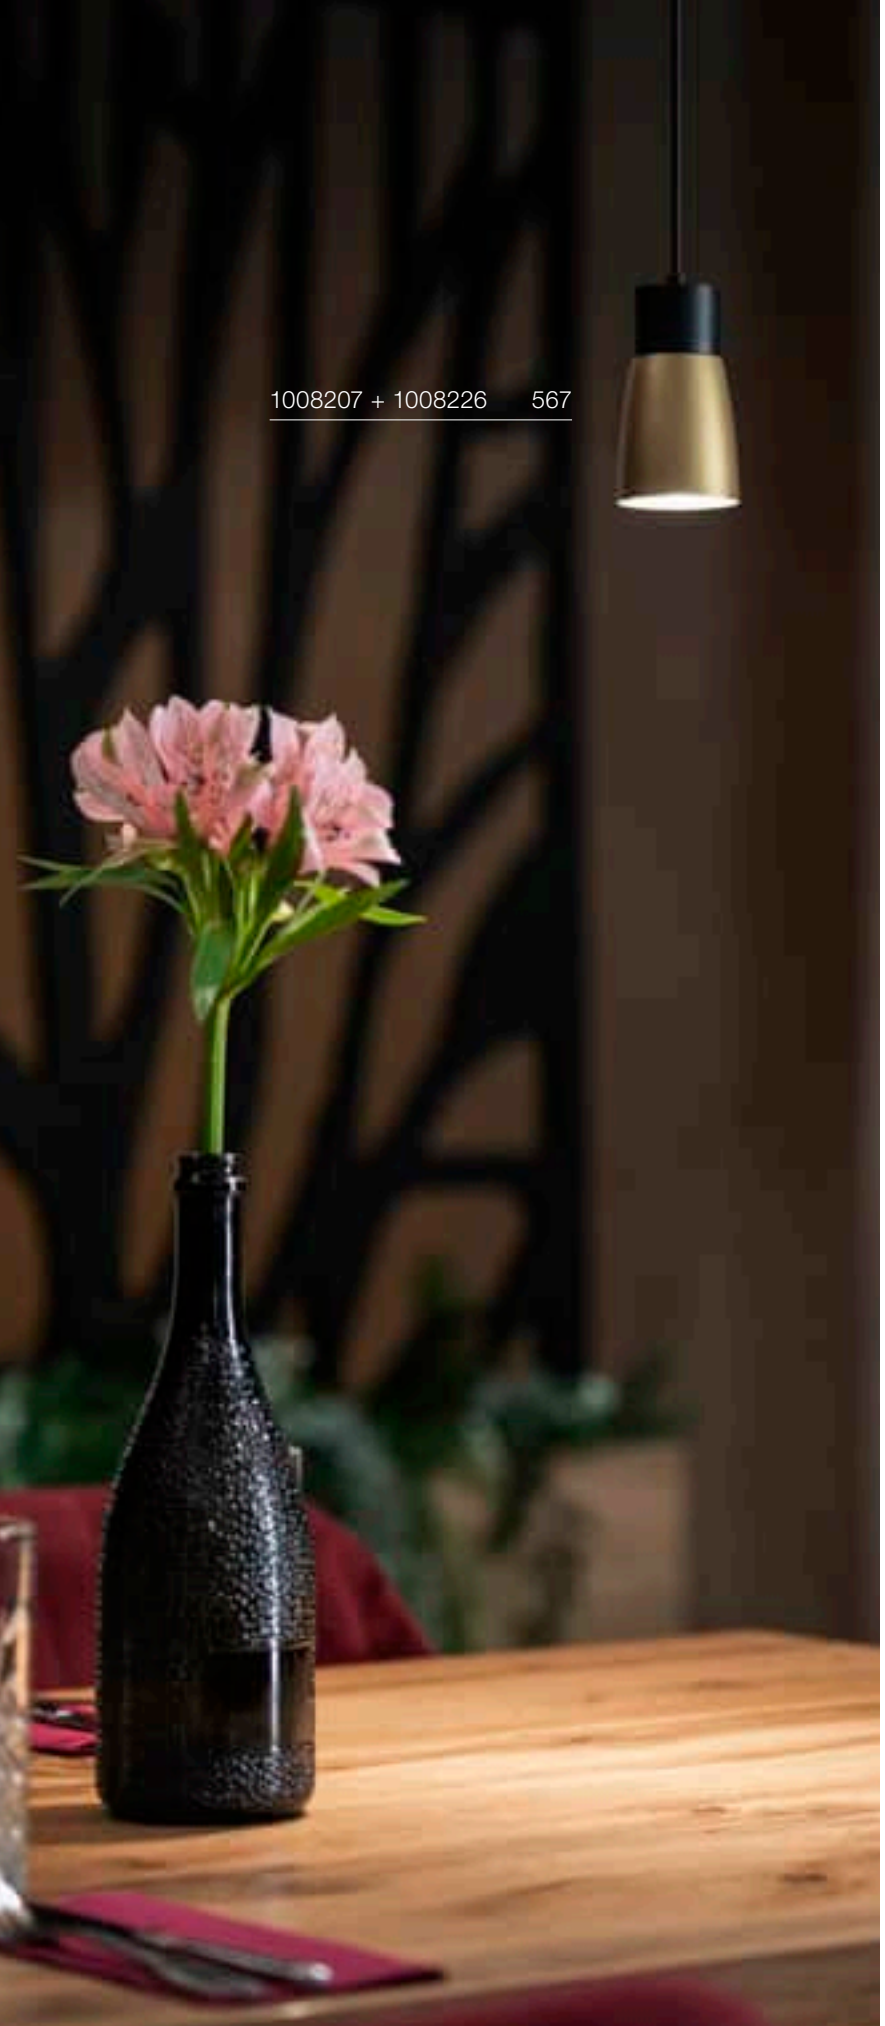

PURI 2.0
Basic 1-phase, QPAR51

MIX match

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

- Matching shades can be found on page 567

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008356	30.00
white	1008357	30.00
grey	1008358	30.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005075 | 7.00 GBP

PURI 2.0
Basic PD, 1-phase, QPAR51

MIX match

NEW





IP20 IK06 200

220-240V ~50/60Hz
Material: aluminium

- Matching shades can be found on page 567

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008207	30.00
white	1008208	30.00
grey	1008209	30.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

PURI 2.0
Cone Shade

MIX match

NEW



H: 6.5 cm
Ø: 5.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
aluminium	1008377	8.00
grey	1008220	8.00
bronze	1008222	8.00

PURI 2.0
Dome Shade

MIX match

NEW



H: 6.5 cm
Ø: 5.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
aluminium	1008378	8.00
grey	1008225	8.00
bronze	1008227	8.00

PURI 2.0
Tube Shade

MIX match

NEW



H: 6.5 cm
Ø: 5.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
aluminium	1008376	8.00
grey	1008215	8.00
bronze	1008217	8.00


1008399 569

GRIP! S
1-phase

NEW





C,L | IP20 | IK02 | 24° | UGR 25 | L80B10 | 350° | 90°

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down 550lm | 2700K

Variant	Prod. no.	GBP
black/gold	1008392	145.00
white/black	1008390	145.00
gold/black	1008394	145.00
bronze/black	1008393	145.00

GRIP! S
1-phase

NEW





C,L | IP20 | IK02 | 24° | UGR 25 | L80B10 | 350° | 90°

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down 620lm | 3000K

Variant	Prod. no.	GBP
black/gold	1008397	145.00
white/black	1008395	145.00
gold/black	1008399	145.00
bronze/black	1008398	145.00

GRIP! S
1-phase, PHASE, Ø 3,0 cm

DIM TO WARM

NEW





C,L | IP20 | IK02 | 24° | UGR 25 | L80B10 | 350° | 90°

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down 320lm | 2000-3000K

Variant	Prod. no.	GBP
black/gold	1008402	145.00
white/black	1008400	145.00
gold/black	1008404	145.00
bronze/black	1008403	145.00



GRIP! M
1-phase, PHASE, Ø 4,3 cm

NEW





C,L | IP20 | IK02 | 40° | UGR 19 | L80B10 | 350° | 90°

220-240V ~50/60 Hz | 500 mA
Total wattage: 20W
Material: aluminium

INSIDE | CRI 90

Down 1910lm | 2700K

Variant	Prod. no.	GBP
black/gold	1008422	154.00
white/black	1008420	154.00
gold/black	1008424	154.00
bronze/black	1008423	154.00

GRIP! M
1-phase, PHASE, Ø 4,3 cm

NEW





C,L | IP20 | IK02 | 40° | UGR 19 | L80B10 | 350° | 90°

220-240V ~50/60 Hz | 500 mA
Total wattage: 20W
Material: aluminium

INSIDE | CRI 90

Down 2040lm | 3000K

Variant	Prod. no.	GBP
black/gold	1008427	154.00
white/black	1008425	154.00
gold/black	1008429	154.00
bronze/black	1008428	154.00

GRIP! M
1-phase, PHASE, Ø 4,3 cm

DIM TO WARM

NEW





C,L | IP20 | IK02 | 40° | UGR 19 | L80B10 | 350° | 90°

220-240V ~50/60 Hz | 350 mA
Total wattage: 15W
Material: aluminium

INSIDE | CRI 90

Down 780lm | 1800K - 3000lm | 3000K

Variant	Prod. no.	GBP
black/gold	1008432	154.00
white/black	1008430	154.00
gold/black	1008434	154.00
bronze/black	1008433	154.00


1008473 573

GRIP! L
1-phase, QPAR51, Ø 5,7cm

NEW





IP20 IK02 350° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
black/gold	1008449	77.00
white/black	1008447	77.00
gold/black	1008451	77.00
bronze/black	1008450	77.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L

Prod. no.: 1005076 | 7.00 GBP

GRIP! L
1-phase, PD, QPAR51, Ø 5,7 cm

NEW





IP20 IK02 200

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
black/gold	1008471	120.00
white/black	1008469	120.00
gold/black	1008473	120.00
bronze/black	1008472	120.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L

Prod. no.: 1005273 | 9.00 GBP



1008473 + 1008499 573 + 575

GRIP! S
Decorative ring Ø 2,7 cm

NEW



H: 1.1 cm
Diameter: 2.7 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008489	15.00
white	1008488	15.00
gold	1008491	15.00
nickel	1008490	15.00

GRIP! M
Decorative ring Ø 4,0 cm

NEW



H: 1.4 cm
Ø: 4 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008493	17.00
white	1008492	17.00
gold	1008495	17.00
nickel	1008494	17.00

GRIP! L
Decorative ring Ø 5,4 cm

NEW



H: 3.4 cm
Ø: 5.4 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008497	19.00
white	1008496	19.00
gold	1008499	19.00
nickel	1008498	19.00

LIGHT EYE® 90
1-phase, QPAR51

NEW





IP20 330° 90°

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**1008180**	**72.00**
○ white	**1008181**	**72.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L

Prod. no.: 1005273 | 9.00 GBP



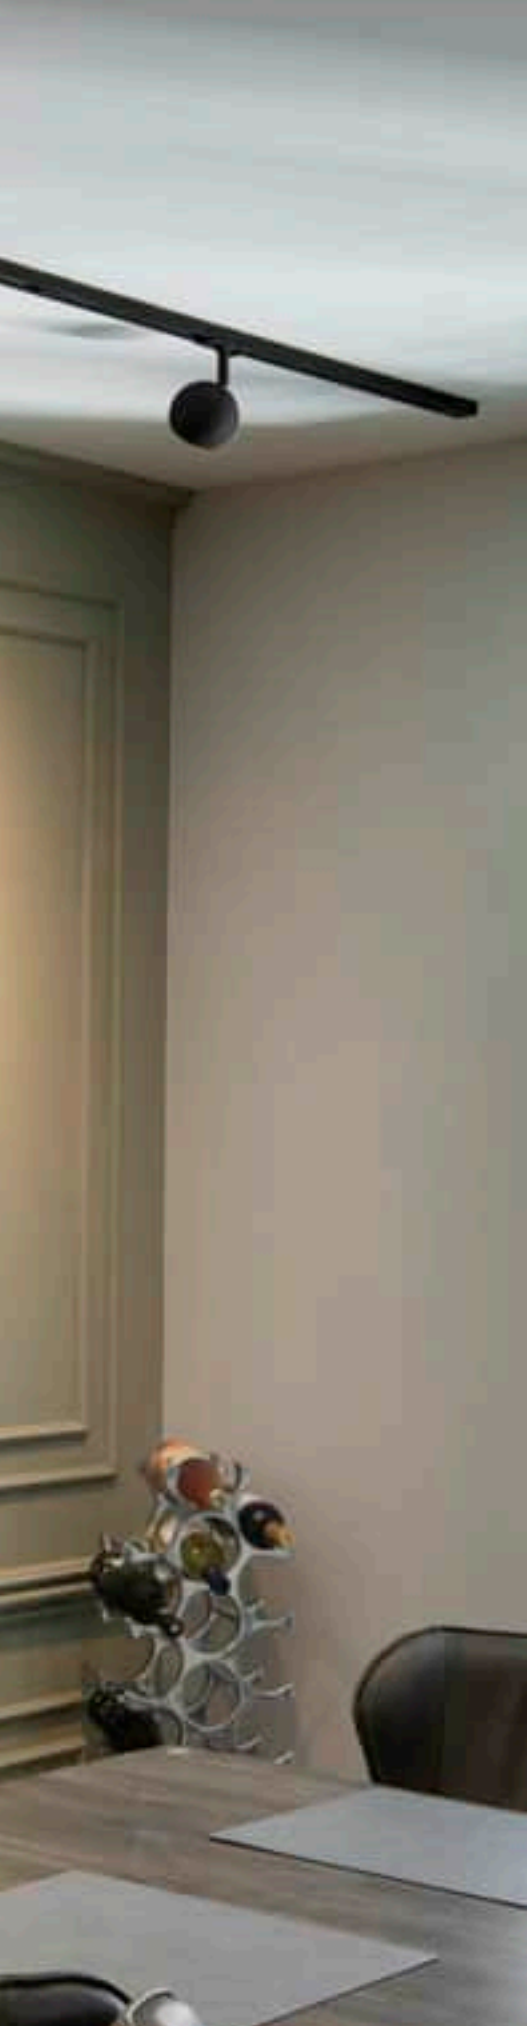

LIGHT EYE® 150
1-phase, QPAR111

NEW







220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <12.5 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008182	114.00
○ white	1008183	114.00

QPAR111 | 12W | 55°
3000K | 680lm | EEC=G
12kWh/1000h

C,L



Prod. no.: 1005298 | 73.00 GBP


1008168 549

LIGHT EYE® 90
1-phase, PD, QPAR51

NEW





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.	GBP
● black	1008168	72.00
○ white	1008169	72.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005077 | 7.00 GBP

LIGHT EYE® 150
1-phase, PD, QPAR111

NEW





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008174	102.00
○ white	1008175	102.00

QPAR111 | 12W | 55°
3000K | 680lm | EEC=G
12kWh/1000h

C,L



Prod. no.: 1005298 | 73.00 GBP

LIGHT EYE® 90
Decorative ring Ø 5,7 cm

NEW



Material: steel / steel
H: 1.4 cm
Ø: 5.9 cm

Variant	Prod. no.	GBP
● black	1008186	8.00
○ white	1008187	8.00
● gold	1008188	12.00

LIGHT EYE® 150
Decorative ring Ø 13,6 cm

NEW



Material: steel / steel
H: 2.3 cm
Ø: 13.6 cm

Variant	Prod. no.	GBP
● black	1008189	30.00
○ white	1008190	30.00
● gold	1008192	39.00
◑ chrome	1008191	39.00


1002854 581

KALU TRACK
1-phase, PHASE





C,L | IP 20 | 95° | L70B50 | 350° | 90°

220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium

LED INSIDE | CRI 80

Down 970lm | 3000K

Variant	Prod. no.	GBP
● black	**1002854**	**177.00**
○ white	**143731**	**177.00**

KALU TRACK
1-phase, QPAR111





IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: aluminium/plastic

SOCKET INSIDE | <75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143540**	**65.00**
○ white	**143541**	**65.00**
● grey	**143544**	**65.00**

QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

C,L



Prod. no.: 1005278 | 48.00 GBP

NOBLO SPOT
1-phase, Triple Track Set



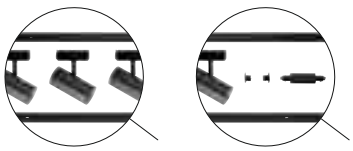



IP 20 | 32° | L80B10 | 320° | 90°

220-240V ~50/60Hz | 150mA
Total wattage: 19W
Material: aluminium

- Consists of 2 x 1 m track,
  1 x longitudinal connector with feed capacity,
  1 x 2 end caps,
  3 x NOBLO lamp head

LED INSIDE CRI 90

Down 2250lm | 2700K

Variant	Prod. no.	GBP
black	1007673	219.00
white	1007674	219.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO SPOT
1-phase, PHASE





IP 20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60Hz | 150mA
Total wattage: 6W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 90

Down 740lm | 2700K

Variant	Prod. no.	GBP
black	1007638	61.00
white	1007639	61.00
grey	1007640	61.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00



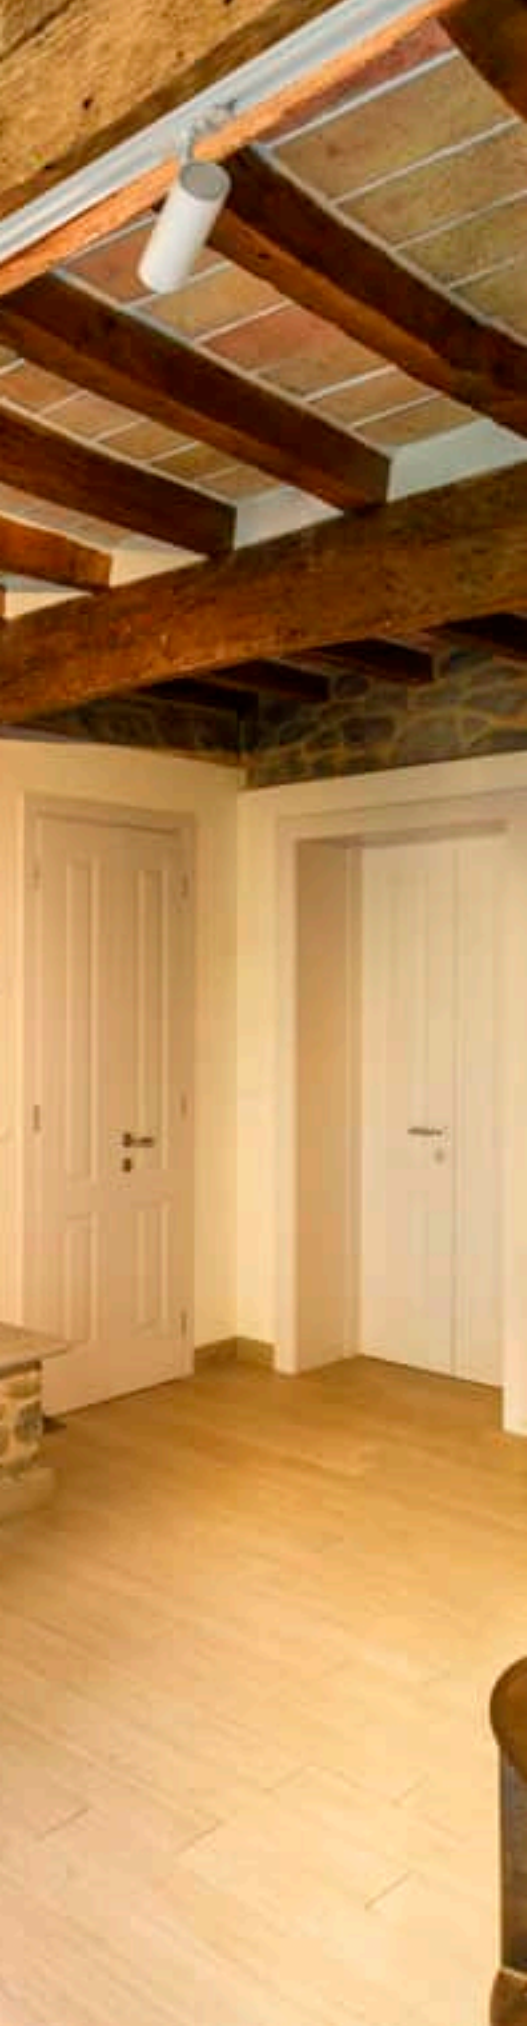

NOBLO SPOT
1-phase, PHASE





IP 20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60Hz | 150mA
Total wattage: 6W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down 750lm | 3000K

Variant	Prod. no.	GBP
black	1007641	61.00
white	1007642	61.00
grey	1007643	61.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO SPOT
1-phase, PHASE

DIM TO WARM





IP 20 | 36° | L70B50 | 320° | 90°

220-240V ~50/60Hz | 350mA
Total wattage: 8.4W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down 30lm | 2000K - 450lm | 3000K

Variant	Prod. no.	GBP
black	1007352	73.00
white	1007353	73.00
grey	1007354	73.00

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00


1006445 585

ASTO TUBE
1-phase, GU10





IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE | 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
black	1006445	61.00
white	1006446	61.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

ASTO TUBE
Decorative reflector



H: 3.95 cm
Ø: 6.75 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
black/chrome	1007190	4.00
gold	1006450	4.00
chrome	1006449	4.00
copper	1006451	4.00

PANTILO ROPE 19
PD, E27





IP20 | 250

200-240V ~50/60Hz
Material: glass/steel/hemp

- Open cable end

SOCKET INSIDE | <15 W

Base: 1xE27 | Max. Ø: 10 cm | L: 11 cm

Variant	Prod. no.	GBP
amber/gold	1007597	171.00
anthracite/silver	1007596	171.00

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h



Prod. no.: 1005305 | 17.00 GBP


1006155 587

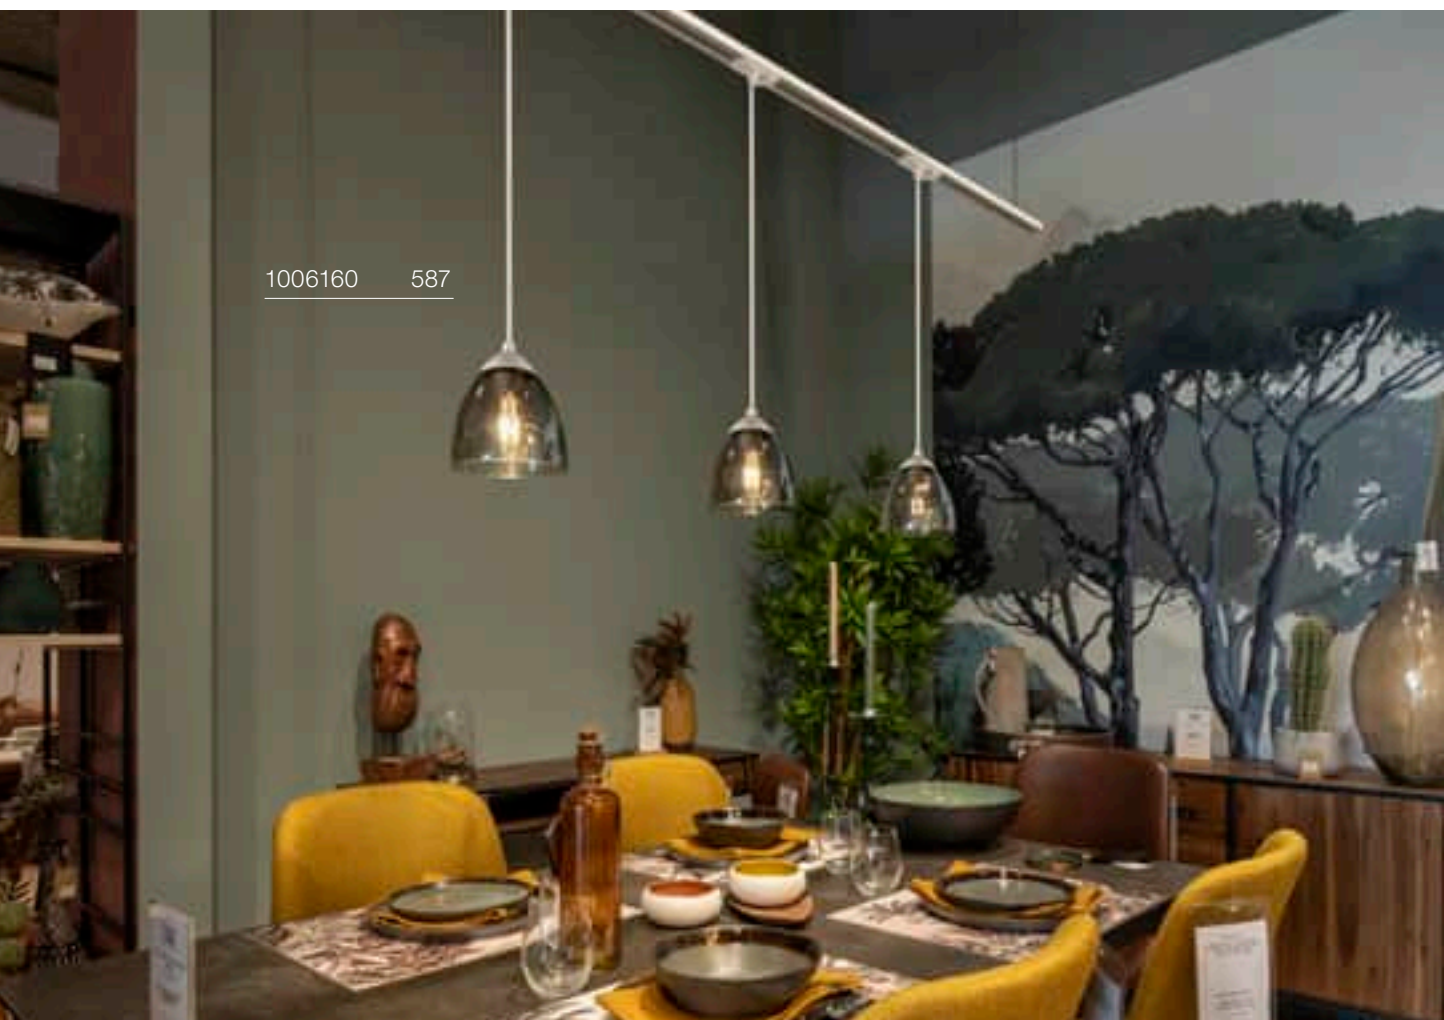
1006160 587

PARA CONE GL
1 phase, GU10





IP 20 300° 90°

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
black	**1006155**	**77.00**
white	**1006156**	**77.00**

LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G

C,L

Prod. no.: 1006321 | 34.00 GBP

PARA CONE 14
1-phase, GU10





IP20 300° 80°

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	**1008052**	**74.00**
white/gold	**1008053**	**74.00**
copper / white	**1008054**	**77.00**

GU10 LED | 6.5W | 330°
2700K | 650lm | EEC=F
7kWh/1000h

C

Prod. no.: 1008375 | 38.00 GBP

PARA CONE 14
1-phase, PD, GU10





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <35 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	**1008058**	**101.00**
white/gold	**1008059**	**101.00**
copper / white	**1008060**	**107.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L

Prod. no.: 1005077 | 7.00 GBP


143580 589


1004934 589
MUSEUM


1004935 589

HELIA 50 TRACK
1-phase





IP20 | 35° | L80B20 | 330° | 90°

220-240V ~50/60Hz | 500
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 90

Down | 810lm 880lm | 3000K

Variant	Prod. no.	GBP
● black 810lm	**143580**	**78.00**
○ white 880lm	**143581**	**78.00**

PANEL TRACK
1-phase, square





IP 20 | UGR 27.5 | L70B50 | 350° | 180°

220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: polycarbonate (PC)/steel

LED INSIDE | CRI 90

Down | 1800lm | 3000K

Variant	Prod. no.	GBP
● black	**1004933**	**83.00**
○ white	**1004934**	**83.00**

PANEL TRACK
1-phase, round



IP 20 | L70B50 | 350° | 180°

220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: polycarbonate (PC)/steel

LED INSIDE | CRI 90

Down | 1800lm | 3000K

Variant	Prod. no.	GBP
● black	**1004935**	**83.00**
○ white	**1004936**	**83.00**


1001868 594

PURI TRACK
1-phase, Triple Track Set



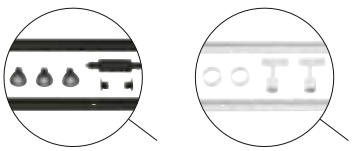

IP 20 340° 85°

220-240V ~50/60Hz
Total wattage: 4.3W
Material: aluminium

- Consists of 2 x 1 m tracks
  1 longitudinal connector with feed-in
  1 x 2 end caps
  3 x PURI light head
  3 x GU10 2700K lamp
  3 x decorative ring for GU10

Variant	Prod. no.	GBP
● black	**143190**	**171.00**
○ white	**143191**	**171.00**

PURI TRACK
1-phase, QPAR51





IP 20 340° 85°

220-240V ~50/60Hz
Material: aluminium/plastic

SOCKET INSIDE <10 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1001868**	**39.00**
○ white	**1001869**	**39.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

PURI TRACK
1-phase, QPAR51





IP 20 350° 85°

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- Decorative ring included

SOCKET INSIDE <50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143390**	**30.00**
○ white	**143391**	**30.00**
● grey	**143392**	**30.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

TONGA®
1-phase, PD, E14





IP 20 150

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <60 W

Base: 1xE14 | Max. Ø: 5.1 cm | L: 13 cm

Variant	Prod. no.	GBP
grey / milky	**143594**	**111.00**

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

Prod. no.: 1005285 | 8.00 GBP





PURIA TRACK
1-phase, QPAR51





IP 20 | 340° | 85°

220-240V ~50/60Hz
Material: aluminium/plastic

SOCKET INSIDE <10 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143450**	**37.00**
○ white	**143451**	**37.00**
● grey	**143454**	**37.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

AVO TRACK
1-phase, QPAR51





IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <50 W

Base: 1xGU10 Max. Ø: 5.1 cm

Variant	Prod. no.	GBP
● black	**144200**	**34.00**
○ white	**144201**	**34.00**
● grey	**144204**	**34.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

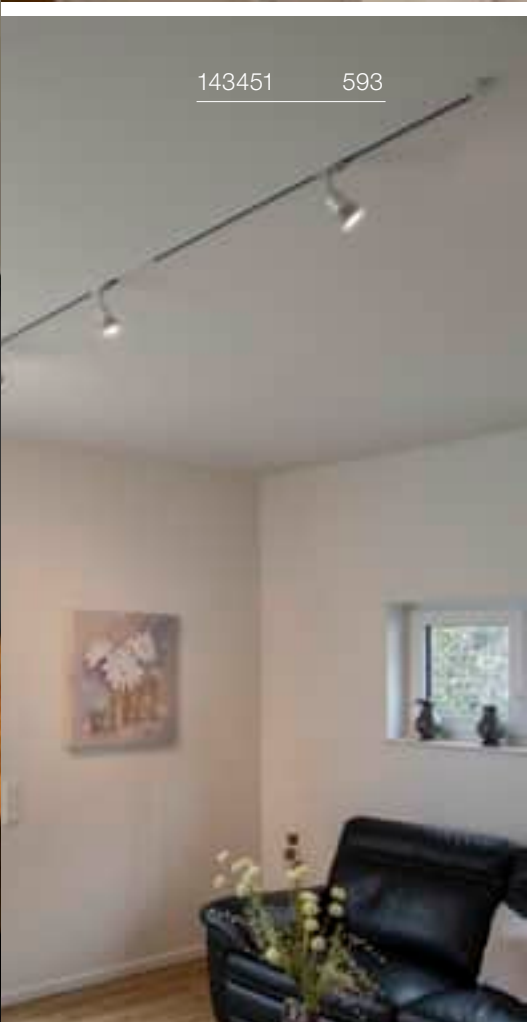

ENOLA C TRACK
1-phase







IP 20 35° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

LED INSIDE CRI 80

Down 1040lm | 3000K

Variant	Prod. no.	GBP
● black	**1000711**	**152.00**
○ white	**143941**	**152.00**

ENOLA C TRACK
1-phase







IP 20 55° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

LED INSIDE CRI 80

Down 1040lm | 3000K

Variant	Prod. no.	GBP
● black	**1000712**	**152.00**
○ white	**143951**	**152.00**







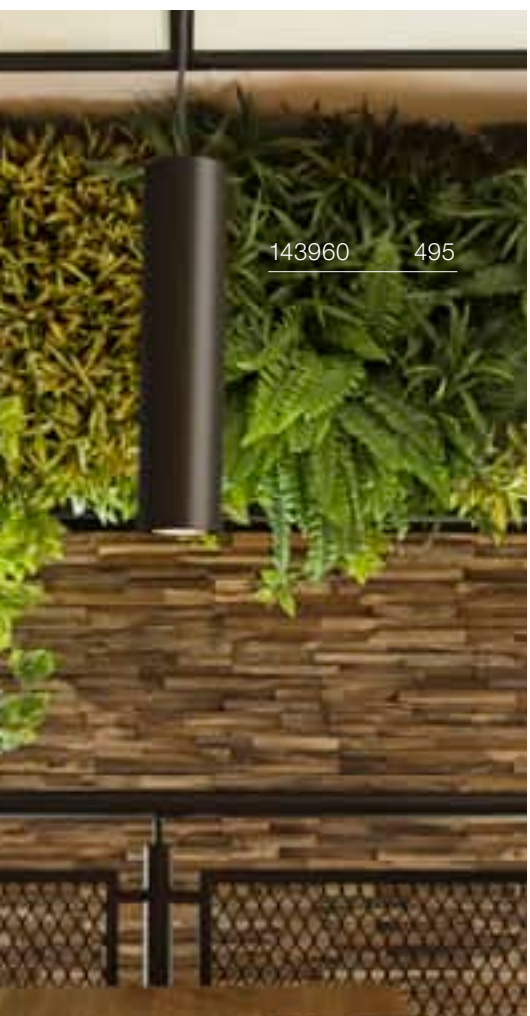

ENOLA B TRACK
1-phase, QPAR51





IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <50 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6.7 cm

Variant	Prod. no.	GBP
● black	**1002110**	**61.00**
○ white	**1002111**	**61.00**
● grey	**1002113**	**61.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005075 | 7.00 GBP

ENOLA B
1-phase, PD, QPAR51



IP 20 | 150

220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143960**	**108.00**
○ white	**143961**	**108.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP



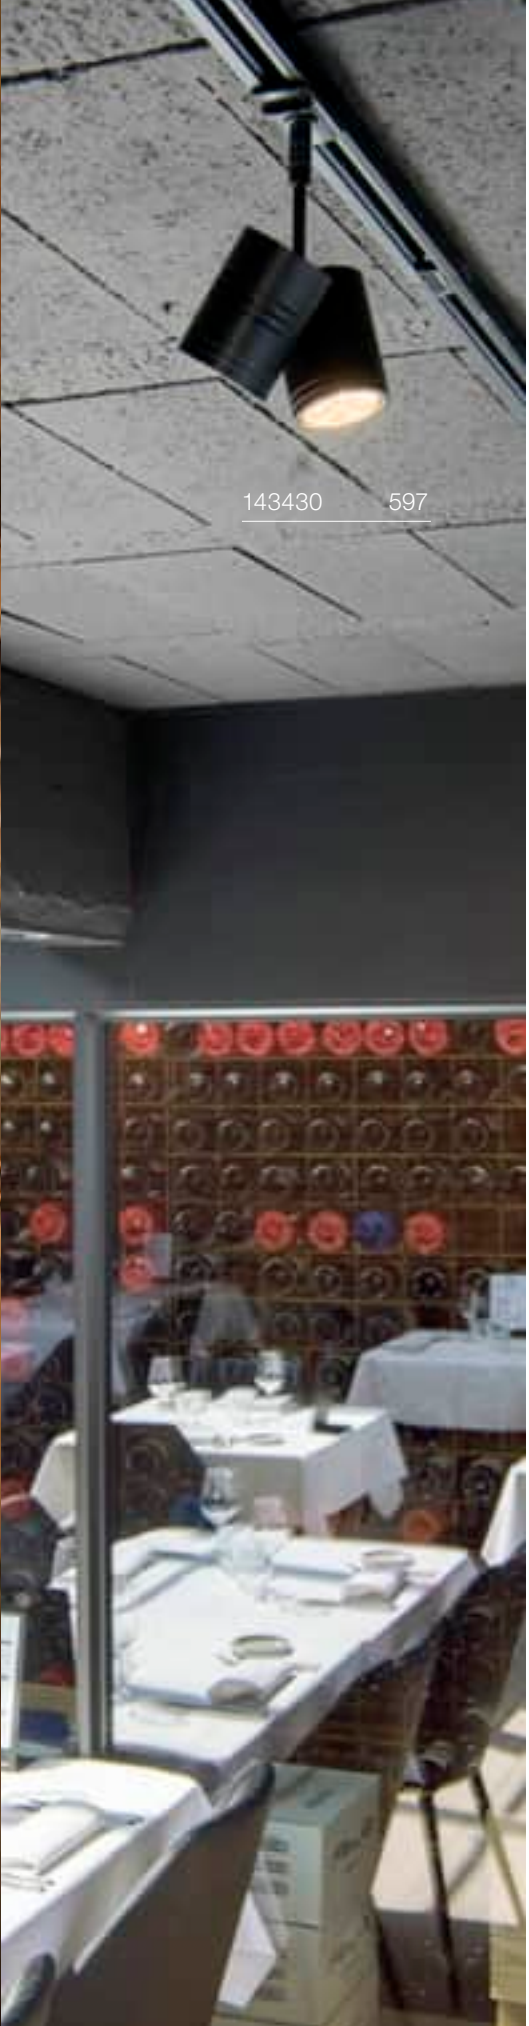

BIMA
1-phase, single, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● black	**143440**	**39.00**
○ white	**143441**	**39.00**
● grey	**143442**	**39.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

BIMA
1-phase, double, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● black	**143430**	**61.00**
○ white	**143431**	**61.00**
● grey	**143432**	**61.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

EURO SPOT TRACK
1-phase, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <25 W

Base: 1xGU10

Variant		Prod. no.	GBP
●	black	**1001861**	**67.00**
○	white	**143811**	**67.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

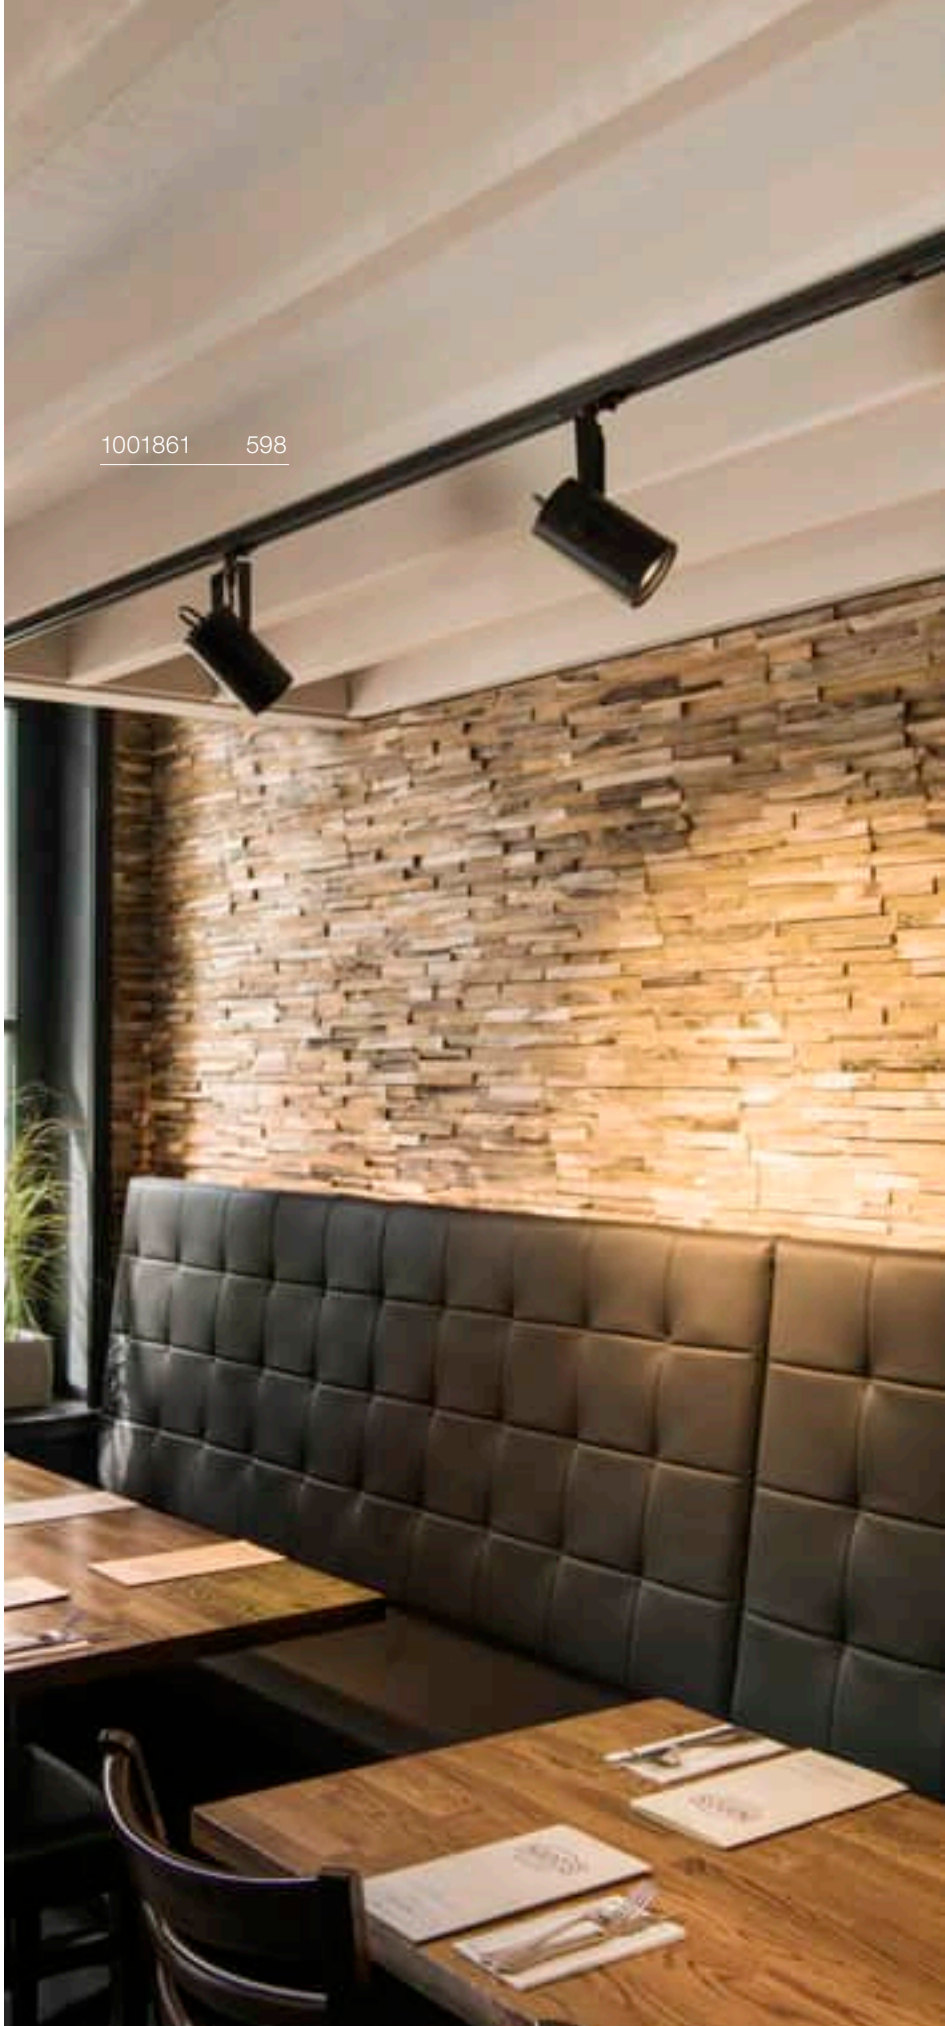

ALTRA DICE TRACK
1-phase, QPAR51

143350 599







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143350**	**73.00**
○ white	**143351**	**73.00**

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005080 | 7.00 GBP



SOCKET

PURI 2.0 | 619



SOCKET

PURI 2.0 | 619



SOCKET

PURI 2.0 | 619



SOCKET

PURI 2.0 | 621



SOCKET

PURI 2.0 | 621



SOCKET

PURI 2.0 | 621



SOCKET

PURI 2.0 | 622



SOCKET

PURI 2.0 | 623



PURI 2.0 | 623



PURI 2.0 | 623



PURI 2.0 | 623



GRIP! M | 624



GRIP! M | 624



GRIP! M | 625



GRIP! M | 625



SOCKET

GRIP! L | 627



NUMINOS® S | 628



NUMINOS® M | 630



NUMINOS® L | 632



NUMINOS® XL | 634



NUMINOS®
ZOOM M | 636



ONE 40 TRACK | 643



NOBLO SPOT | 644



NOBLO SPOT | 644



NOBLO SPOT | 645



NOBLO SPOT | 645



SIGHT EASY | 647



SIGHT EASY | 647



SIGHT TRACK | 648

SIGHT TRACK | 648



SIGHT MOVE | 649



SIGHT MOVE | 649



SOCKET

PARA CONE 14 | 651



SOCKET

PARA CONE 14 | 651



SOCKET

PARA CONE GL | 653



SOCKET

PARA CONE GL | 653



SOCKET

FORCHINI M
40 TRACK | 655



SOCKET

LIGHT EYE® 90 | 656



SOCKET

LIGHT EYE® 150 | 657



SOCKET

LIGHT EYE® 150 | 657

SOCKET

ALTRA DICE
TRACK | 658

EURO CUBE | 658



SOCKET

EURO SPOT
TRACK | 659



SOCKET

EURO SPOT
TRACK | 659



SOCKET

PURI TRACK | 661



SOCKET

PURI TRACK | 661



LED

KALU TRACK | 662



SOCKET

KALU TRACK | 662



SOCKET

BIMA | 663



SOCKET

BIMA | 663



LED

HELIA 50 TRACK | 665



LED

ENOLA C TRACK | 665

SOCKET

AVO TRACK | 665

3-PHASE BUSBAR COMPATIBILITY

Track compatibility with adapters from:

	SLV	EUTRAC®	Global/Nordic
SLV S-TRACK tracks and track components 			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

Light compatibility with tracks and track components from:

	SLV S-TRACK	EUTRAC®	Global/Nordic
SLV 3-phase light adapter 			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

The SLV track systems and components are highly compatible. With lights and adapters from: EUTRAC®, Zumtobel, Erco, LTS ONETrack and unipro®.

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓
✗	✗	✓	✓

Zumtobel	Erco	LTS ONETrack	unipro®
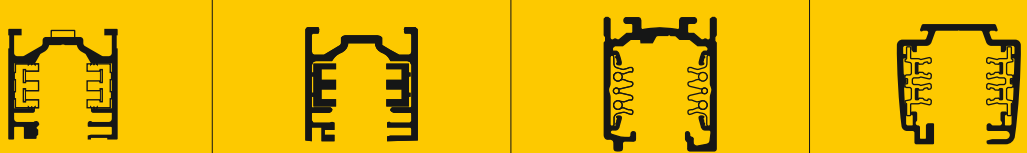			
✓	✓	✓	✓
✗	✗	✓	✓

Details not guaranteed.
Technical data and dimensions are subject to change without notice.
During the planning phase of the project, check the project using samples to ensure functionality.
Compatibility refers only to tracks/lights.
Tracks and track components from different manufacturers should not be combined.
Subject to prior testing using light and track samples.



S-TRACK

3-phase surface-mounted track, DALI



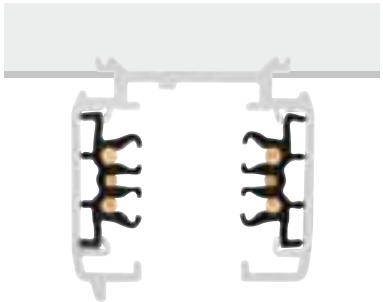

	1 m	1 m	2 m	2 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 3,6 x 3,6	100 x 3,6 x 3,6	200 x 3,6 x 3,6	200 x 3,6 x 3,6
Prod. no.	**1004937**	**1004938**	**1002631**	**1002632**
GBP	**40.00**	**40.00**	**70.00**	**70.00**

	3 m	3 m	4 m	4 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 3,6 x 3,6	300 x 3,6 x 3,6	400 x 3,6 x 3,6	400 x 3,6 x 3,6
Prod. no.	**1002633**	**1002634**	**1002635**	**1002636**
GBP	**101.00**	**101.00**	**127.00**	**127.00**

DALI 3-phase surface-mounted track
Planning aid and accessories at a glance

View of components from above on the installation side

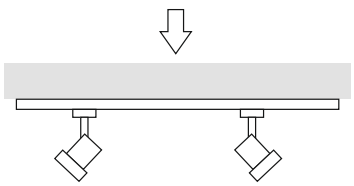

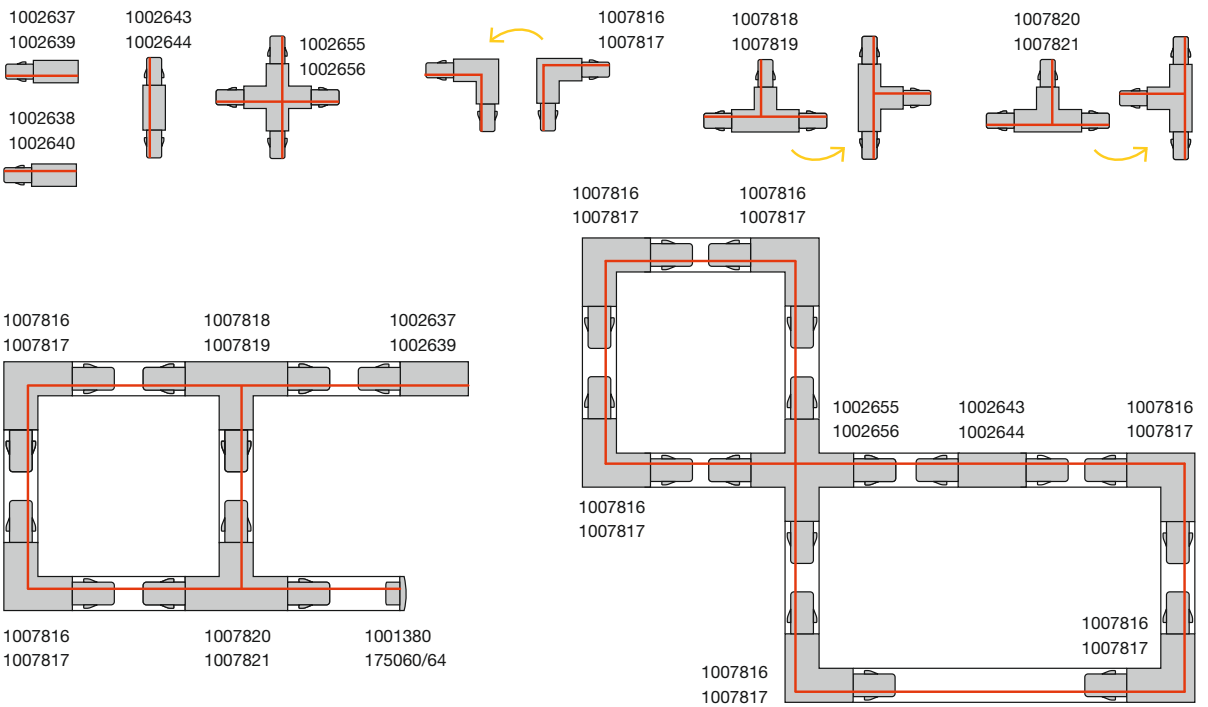



T-connector, PHASE & DALI, adjustable, left
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm



● black Prod. no.**1007818** ● **34.00 GBP**
○ white **1007819** ● **34.00 GBP**



T-connector, PHASE & DALI, adjustable, right
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm



● black Prod. no.**1007820** ● **34.00 GBP**
○ white **1007821** ● **34.00 GBP**





L-connector, PHASE & DALI, adjustable
16A max. | polycarbonate (PC)
L: 11.9 cm | W: 11.9 cm | H: 3.3 cm

● black	Prod. no.**1007816**	**29.00 GBP**
○ white	**1007817**	**29.00 GBP**



Feeder, DALI, earth left
16A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.**1002637**	**17.00 GBP**
○ white	**1002639**	**17.00 GBP**



Feeder, DALI, earth right
16A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.**1002638**	**17.00 GBP**
○ white	**1002640**	**17.00 GBP**



X-connector, DALI*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black	Prod. no.**1002655**	**55.00 GBP**
○ white	**1002656**	**55.00 GBP**



Longitudinal connector, DALI*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.**1002643**	**29.00 GBP**
○ white	**1002644**	**29.00 GBP**



Insulating connector
Plastic
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

● black	Prod. no.**175080**	**7.00 GBP**
○ white	**1001382**	**7.00 GBP**



Flex connector, DALI
16A max. | polycarbonate (PC)
L: 28.5 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.**1002645**	**47.00 GBP**
○ white	**1002646**	**47.00 GBP**



Mini-connector, DALI
16A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black	Prod. no.**1002641**	**9.00 GBP**
○ white	**1002642**	**9.00 GBP**



Pendant clip, DALI
steel
L: 4 cm | W: 3.4 cm | H: 1.25 cm

● black	Prod. no.**1002657**	**7.00 GBP**
○ white	**1002658**	**7.00 GBP**



3 phase Adapter, DALI
10A max. | **5 kg** max. | polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black	Prod. no.**1002660**	**17.00 GBP**
○ white	**1002659**	**17.00 GBP**



Mech. 3 phase Adapter
5 kg max. | Aluminium / plastic
L: 6.6 cm | W: 6.6 cm | H: 3.1 cm

● black	Prod. no.**175210**	**14.00 GBP**
○ white	**1001395**	**14.00 GBP**



Cover, 2m
Polycarbonate (PC)
L: 200 cm | W: 2.2 cm | H: 0.75 cm

● black	Prod. no.**1004939**	**7.00 GBP**
○ white	**1004940**	**7.00 GBP**



End cap
Plastic
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

● black	Prod. no.**175060**	**2.00 GBP**
○ white	**1001380**	**2.00 GBP**

Pendant suspension
Aluminium / plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black	Prod. no.**175160**	**28.00 GBP**
○ white	**1001390**	**28.00 GBP**



Joint connector
aluminium
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

● black	Prod. no.**175180**	**11.00 GBP**
○ white	**1001392**	**11.00 GBP**



Mech. 3 phase Adaptor with hook
5 kg max. | Plastic / Steel
H: 5.2 cm

● black	Prod. no.**175190**	**3.00 GBP**
○ white	**1001393**	**3.00 GBP**



Ceiling rosette, DALI
16A max. | polycarbonate (PC)
H: 3.5 cm | Diameter: 14.3 cm

● black	Prod. no.**1004684**	**33.00 GBP**
○ white	**1004685**	**33.00 GBP**



Wire rope suspension (2 pieces)
5 kg max. | Stainless steel/brass
L: 500 cm

◐ nickel	Prod. no.**1002845**	**36.00 GBP**

* with feed capacity



S-TRACK

3-phase mounting track, DALI



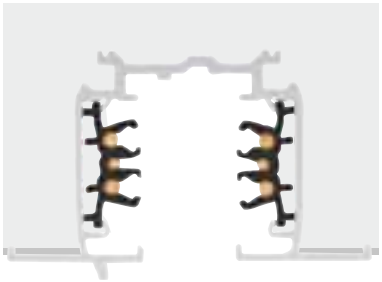

	1 m	1 m	2 m	2 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 5,6 x 3,2	100 x 5,6 x 3,2	200 x 5,6 x 3,2	200 x 5,6 x 3,2
Prod. no.	**1006511**	**1006512**	**1006513**	**1006514**
GBP	**46.00**	**46.00**	**83.00**	**83.00**

	3 m	3 m	4 m	4 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 5,6 x 3,2	300 x 5,6 x 3,2	400 x 5,6 x 3,2	400 x 5,6 x 3,2
Prod. no.	**1006515**	**1006516**	**1006517**	**1006518**
GBP	**118.00**	**118.00**	**187.00**	**187.00**

S-TRACK

DALI 3-phase recessed track
Planning aid and accessories at a glance

View of components from above on the installation side

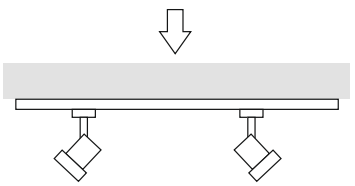

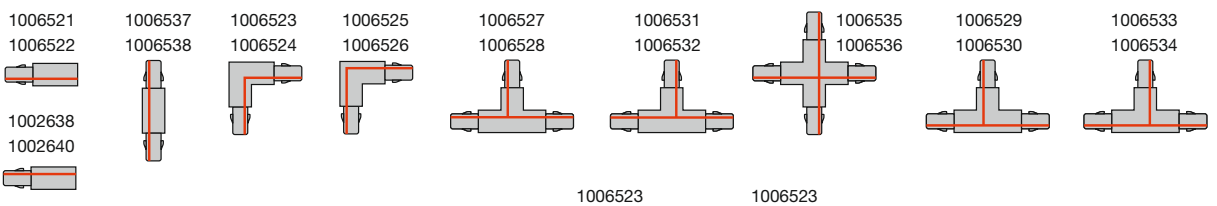

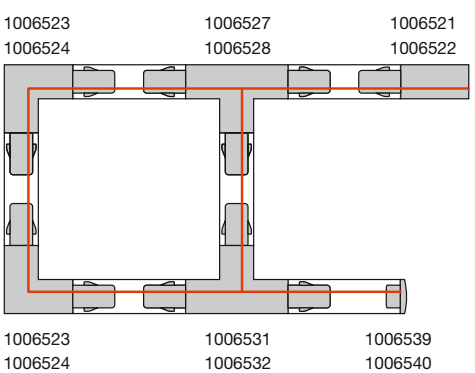

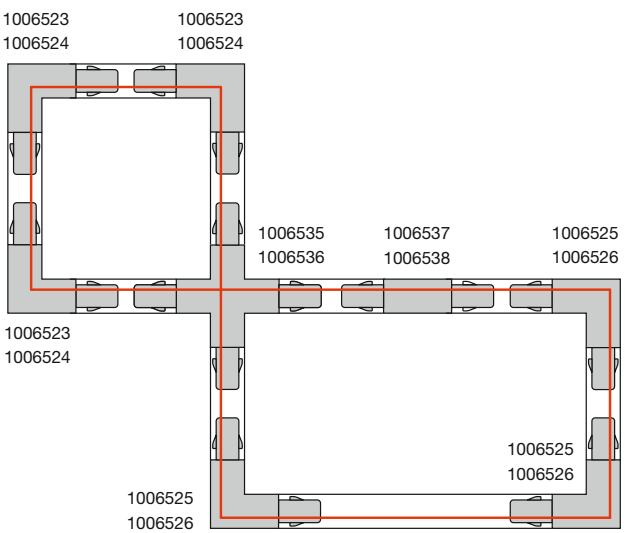



Feeder, DALI, earth left
16A max. | polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black	Prod. no.	**1006521**	**29.00 GBP**
○ white		**1006522**	**29.00 GBP**



Feeder, DALI, earth right
16A max. | polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black	Prod. no.	**1006519**	**29.00 GBP**
○ white		**1006520**	**29.00 GBP**



L-connector, DALI, earth inside*
16A max. | polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006523**	**29.00 GBP**
○ white		**1006524**	**29.00 GBP**



L-connector, DALI, earth outside*
16A max. | polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006525**	**29.00 GBP**
○ white		**1006526**	**29.00 GBP**



T-connector, DALI, external earth, left*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006529**	**34.00 GBP**
○ white		**1006530**	**34.00 GBP**



T-connector, DALI, internal earth right*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006531**	**34.00 GBP**
○ white		**1006532**	**34.00 GBP**



T-connector, DALI, internal earth left*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006527**	**34.00 GBP**
○ white		**1006528**	**34.00 GBP**



T-connector, DALI, external earth, right*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006533**	**34.00 GBP**
○ white		**1006534**	**34.00 GBP**



X-connector, DALI*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black	Prod. no.	**1006535**	**55.00 GBP**
○ white		**1006536**	**55.00 GBP**



Longitudinal connector, DALI*
16A max. | polycarbonate (PC)
L: 20.3 cm | W: 5.6 cm | H: 3.3 cm

● black	Prod. no.	**1006537**	**29.00 GBP**
○ white		**1006538**	**29.00 GBP**



Mini-connector, DALI
16A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black	Prod. no.	**1002641**	**9.00 GBP**
○ white		**1002642**	**9.00 GBP**



End cap, for 3-phase mounting track, DALI
Polycarbonate (PC)
L: 4.79 cm | W: 5.6 cm

● black	Prod. no.	**1006539**	**2.00 GBP**
○ white		**1006540**	**2.00 GBP**



3 phase Adapter, DALI
10A max. | **5 kg** max. | polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black	Prod. no.	**1002660**	**17.00 GBP**
○ white		**1002659**	**17.00 GBP**

* with feed capacity



EUTRAC®

3-phase surface-mounted track

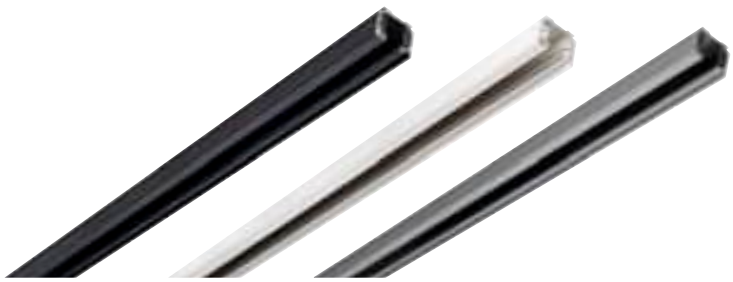

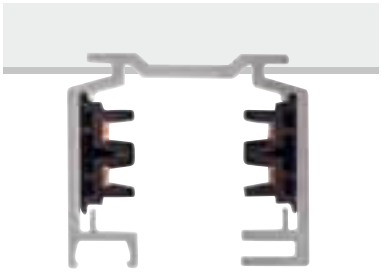

	1 m	1 m	1 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	Aluminium / plastic	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	100 x 3,6 x 3,2	100 x 3,6 x 3,2	100 x 3,6 x 3,2
Prod. no.	**145100**	**1001510**	**145102**
GBP	**43.00**	**43.00**	**43.00**

	2 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	Aluminium / plastic	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	200 x 3,6 x 3,2	200 x 3,6 x 3,2	200 x 3,6 x 3,2
Prod. no.	**145200**	**1001511**	**145202**
GBP	**78.00**	**78.00**	**78.00**

	3 m	3 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	Aluminium / plastic	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	300 x 3,6 x 3,2	300 x 3,6 x 3,2	300 x 3,6 x 3,2
Prod. no.	**145300**	**1001512**	**145302**
GBP	**121.00**	**121.00**	**121.00**

EUTRAC®

3-phase surface-mounted track
Planning aid and accessories at a glance

View of components from above on the installation side

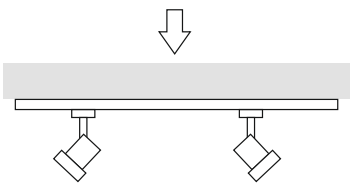

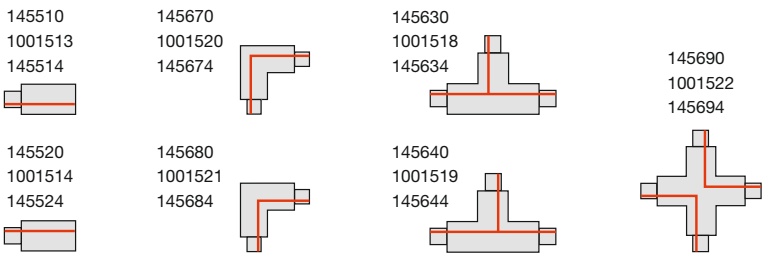

Example: external earth

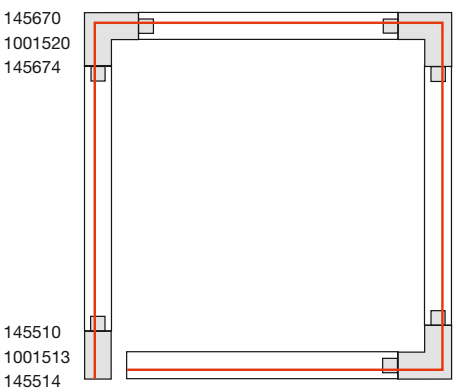

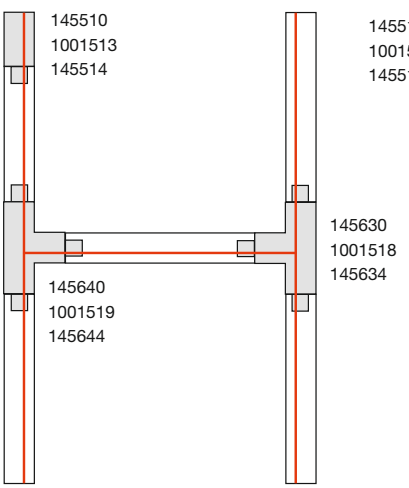

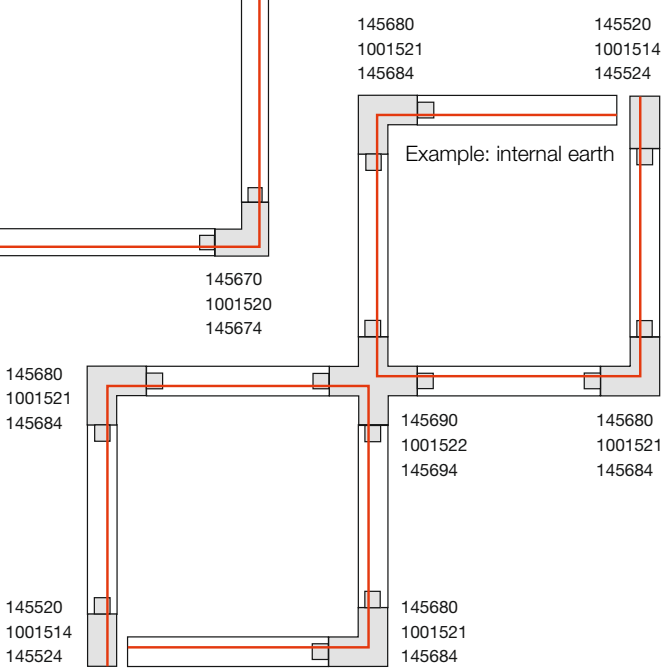



Feed-in, earth left
16A max. | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.**145510**	**17.00 GBP**
○ white	**1001513**	**17.00 GBP**
● grey	**145514**	**17.00 GBP**



Feed-in, earth right
16A max. | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.**145520**	**17.00 GBP**
○ white	**1001514**	**17.00 GBP**
● grey	**145524**	**17.00 GBP**



Central feed
16A max. | Plastic
L: 13 cm | W: 3.6 cm | H: 3.6 cm

● black	Prod. no.**145530**	**39.00 GBP**
○ white	**1001515**	**39.00 GBP**
● grey	**145534**	**39.00 GBP**



Longitudinal connector*
16A max. | Plastic
L: 19.2 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.**145660**	**67.00 GBP**
○ white	**1001517**	**67.00 GBP**
● grey	**145664**	**67.00 GBP**



Longitudinal connector*
16A max. | Plastic
L: 5.8 cm | W: 1.5 cm | H: 2.6 cm

● black	Prod. no.**145560**	**17.00GBP**
○ white	**1001516**	**17.00GBP**
● grey	**145564**	**17.00GBP**



L-connector, internal earth*
16A max. | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm

● black	Prod. no.**145680**	**56.00 GBP**
○ white	**1001521**	**56.00 GBP**
● grey	**145684**	**56.00 GBP**



L-connector, external earth*
16A max. | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm

● black	Prod. no.**145670**	**56.00 GBP**
○ white	**1001520**	**56.00 GBP**
● grey	**145674**	**56.00 GBP**



T-connector, internal earth left**
16A max. | Plastic
L: 26 cm | W: 18.5 cm | H: 3.2 cm

● black	Prod. no.**145630**	**77.00 GBP**
○ white	**1001518**	**77.00 GBP**
● grey	**145634**	**77.00 GBP**



T-connector, internal earth right*
16A max. | Plastic
L: 26 cm | W: 18.5 cm | H: 3.2 cm

● black	Prod. no.**145640**	**77.00 GBP**
○ white	**1001519**	**77.00 GBP**
● grey	**145644**	**77.00 GBP**



X connector*
16A max. | Plastic
L: 26 cm | W: 26 cm | H: 3.2 cm
Two separate power circuits

● black	Prod. no.**145690**	**112.00 GBP**
○ white	**1001522**	**112.00 GBP**
● grey	**145694**	**112.00 GBP**



Joint connector
Plastic
L: 10 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.**145600**	**19.00 GBP**
○ white	**1001523**	**19.00 GBP**
● grey	**145604**	**19.00 GBP**



Flex connector
16A max. | Plastic
L: 30.7 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.**145580**	**77.00 GBP**
○ white	**1001524**	**77.00 GBP**
● grey	**145584**	**77.00 GBP**



Socket
6.3A max. | Plastic
L: 9.6 cm | W: 6.5 cm | H: 9 cm

● black	Prod. no.**145700**	**81.00 GBP**
○ white	**1001525**	**81.00 GBP**



3-phase
10A max. | **5 kg** max. | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

● black	Prod. no.**145990**	**17.00 GBP**
○ white	**1001542**	**17.00 GBP**
● grey	**145994**	**17.00 GBP**



Pendant clip
aluminium
L: 5 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.**145730**	**10.00 GBP**
○ white	**1001530**	**10.00 GBP**
● grey	**145734**	**10.00 GBP**



Universal point outlet
16A max. | Plastic
H: 3.1 cm | Diameter: 11.9 cm

● black	Prod. no.**145830**	**90.00 GBP**
○ white	**1001526**	**90.00 GBP**
● grey	**145834**	**90.00 GBP**



End cap
Plastic
L: 3.6 cm | W: 1.7 cm | H: 3.2 cm

● black	Prod. no.**145590**	**4.00 GBP**
○ white	**1001527**	**4.00 GBP**
● grey	**145594**	**4.00 GBP**



Pendant suspension, rigid
Plastic/steel
H: 60 cm | Diameter: 7 cm

● black	Prod. no.**145720**	**34.00 GBP**
○ white	**1001529**	**34.00 GBP**
● grey	**145724**	**34.00 GBP**

Pendant suspension, rigid
Plastic/steel
H: 122 cm | Diameter: 7 cm

● black	Prod. no.**145710**	**39.00 GBP**
○ white	**1001528**	**39.00 GBP**
● grey	**145714**	**39.00 GBP**



Wire rope suspension (2 pieces)
5 kg max. | Stainless steel/brass
L: 500 cm

◐ nickel	Prod. no.**1002845**	**36.00 GBP**

* with feed capacity



EUTRAC®

3-phase recessed track



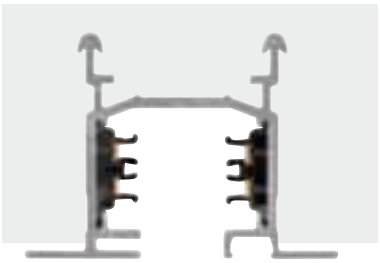

	2 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16
Colour	○ white	○ white
Material	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	200 x 5,9 x 4,1	300 x 5,9 x 4,1
Prod. no.	**1001531**	**1001532**
GBP	**104.00**	**173.00**



Feed-in, earth left
16A max. | Plastic / Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no.**1001533** **28.00 GBP**



Feed-in, earth right
16A max. | Plastic / Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no.**1001534** **28.00 GBP**



L-connector
16A max. | Plastic / Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
External earth. with feed capacity

○ white Prod. no.**1001536** **67.00 GBP**



L-connector
16A max. | Plastic / Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
Internal earth. with feed capacity

○ white Prod. no.**1001537** **67.00 GBP**



End cap
Plastic
L: 2.7 cm | W: 6 cm | H: 3.2 cm

○ white Prod. no.**1001538** **7.00 GBP**



Longitudinal connector incl. stabiliser
16A max. | Plastic / Steel
L: 6.2 cm | W: 2.5 cm | H: 2.7 cm

○ white Prod. no.**1001539** **24.00 GBP**



Mounting spring clip
steel
L: 2 cm | W: 1 cm | H: 2.5 cm

● grey Prod. no.**145551** **12.00 GBP**



3-phase light adapter
16A max. | **5 kg** max. | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

○ white Prod. no.**1001542** **17.00 GBP**



PURI 2.0
Tube 3-phase, QPAR51

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008266	34.00
black/gold	1008267	34.00
white	1008268	34.00

LED GU10 51 mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h



Prod. no.: 1005079 | 7.00 GBP

PURI 2.0
Cone 3-phase, QPAR51

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008269	34.00
black/gold	1008270	34.00
white	1008271	34.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

PURI 2.0
Dome 3-phase, QPAR51

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008272	34.00
black/gold	1008273	34.00
white	1008274	34.00

LED GU10 51 mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP



PURI 2.0
Tube PD, 3-phase, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008275	38.00
black/gold	1008276	38.00
white	1008277	38.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

PURI 2.0
Cone PD, 3-phase, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008278	38.00
black/gold	1008279	38.00
white	1008280	38.00

LED GU10 51 mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

PURI 2.0
Dome PD, 3-phase, QPAR51







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008281	38.00
black/gold	1008282	38.00
white	1008283	38.00

LED GU10 51 mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h



Prod. no.: 1005079 | 7.00 GBP



PURI 2.0
Basic 3-phase, QPAR51

MIX match

NEW





IP20 IK06

220-240V ~50/60Hz
Material: aluminium

- Matching shades can be found on page 623

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008359	30.00
○ white	1008360	30.00

LED GU10 51 mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h



Prod. no.: 1005080 | 7.00 GBP

PURI 2.0
Basic PD, 3-phase, QPAR51

MIX match

NEW





IP20 IK06 200

220-240V ~50/60Hz
Material: aluminium

• Matching shades can be found on page 623

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008210	30.00
white	1008211	30.00
grey	1008212	30.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

PURI 2.0
Cone Shade

MIX match

NEW



H: 6.5 cm
Diameter: 5.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
aluminium	1008377	8.00
grey	1008220	8.00
bronze	1008222	8.00

PURI 2.0
Dome Shade

MIX match

NEW



H: 6.5 cm
Diameter: 5.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
aluminium	1008378	8.00
grey	1008225	8.00
bronze	1008227	8.00

PURI 2.0
Tube Shade

MIX match

NEW



H: 6.5 cm
Diameter: 5.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
aluminium	1008376	8.00
grey	1008215	8.00
bronze	1008217	8.00

GRIP! M
3-phase, DALI, Ø 4,3 cm

NEW





Dali | IP20 | IK02 | 40° | UGR 19 | L80B10 | 50 000 Hours | 350° | 90°

220-240V ~50/60 Hz | 500 mA
Total wattage: 20W
Material: aluminium

LED INSIDE | CRI 90

Down — 1910lm | 2700K
2040lm | 3000K

Variant	Prod. no.	GBP
black/gold 2700K	1008436	154.00
black/gold 3000K	1008438	154.00
white/black 2700K	1008435	154.00
white/black 3000K	1008437	154.00

GRIP! M
3-phase, DALI, Ø 4,3 cm

NEW





Dali | IP20 | IK02 | 40° | UGR 19 | L80B10 | 50 000 Hours | 350° | 90°

220-240V ~50/60 Hz | 350 mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 90

Down — 780lm | 2000-3000K

Variant	Prod. no.	GBP
black/gold	1008440	154.00
white/black	1008439	154.00





GRIP! M
3-phase, PHASE, Ø 4,3 cm

NEW





IP20 | IK02 | 40° | UGR 19 | L80B10 | 350° | 90°

220-240V ~50/60 Hz | 500 mA
Total wattage: 20W
Material: aluminium

LED INSIDE | CRI 90

Down	1910lm | 2700K 2040lm | 3000K

Variant	Prod. no.	GBP
black/gold 2700K	1008442	154.00
black/gold 3000K	1008444	154.00
white/black 2700K	1008441	154.00
white/black 3000K	1008443	154.00

GRIP! M
3-phase, PHASE, Ø 4,3 cm

DIM TO WARM

NEW





IP20 | IK02 | 40° | UGR 19 | L80B10 | 350° | 90°

220-240V ~50/60 Hz | 350 mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 90

Down	780lm | 2000-3000K

Variant	Prod. no.	GBP
black/gold	1008446	154.00
white/black	1008445	154.00

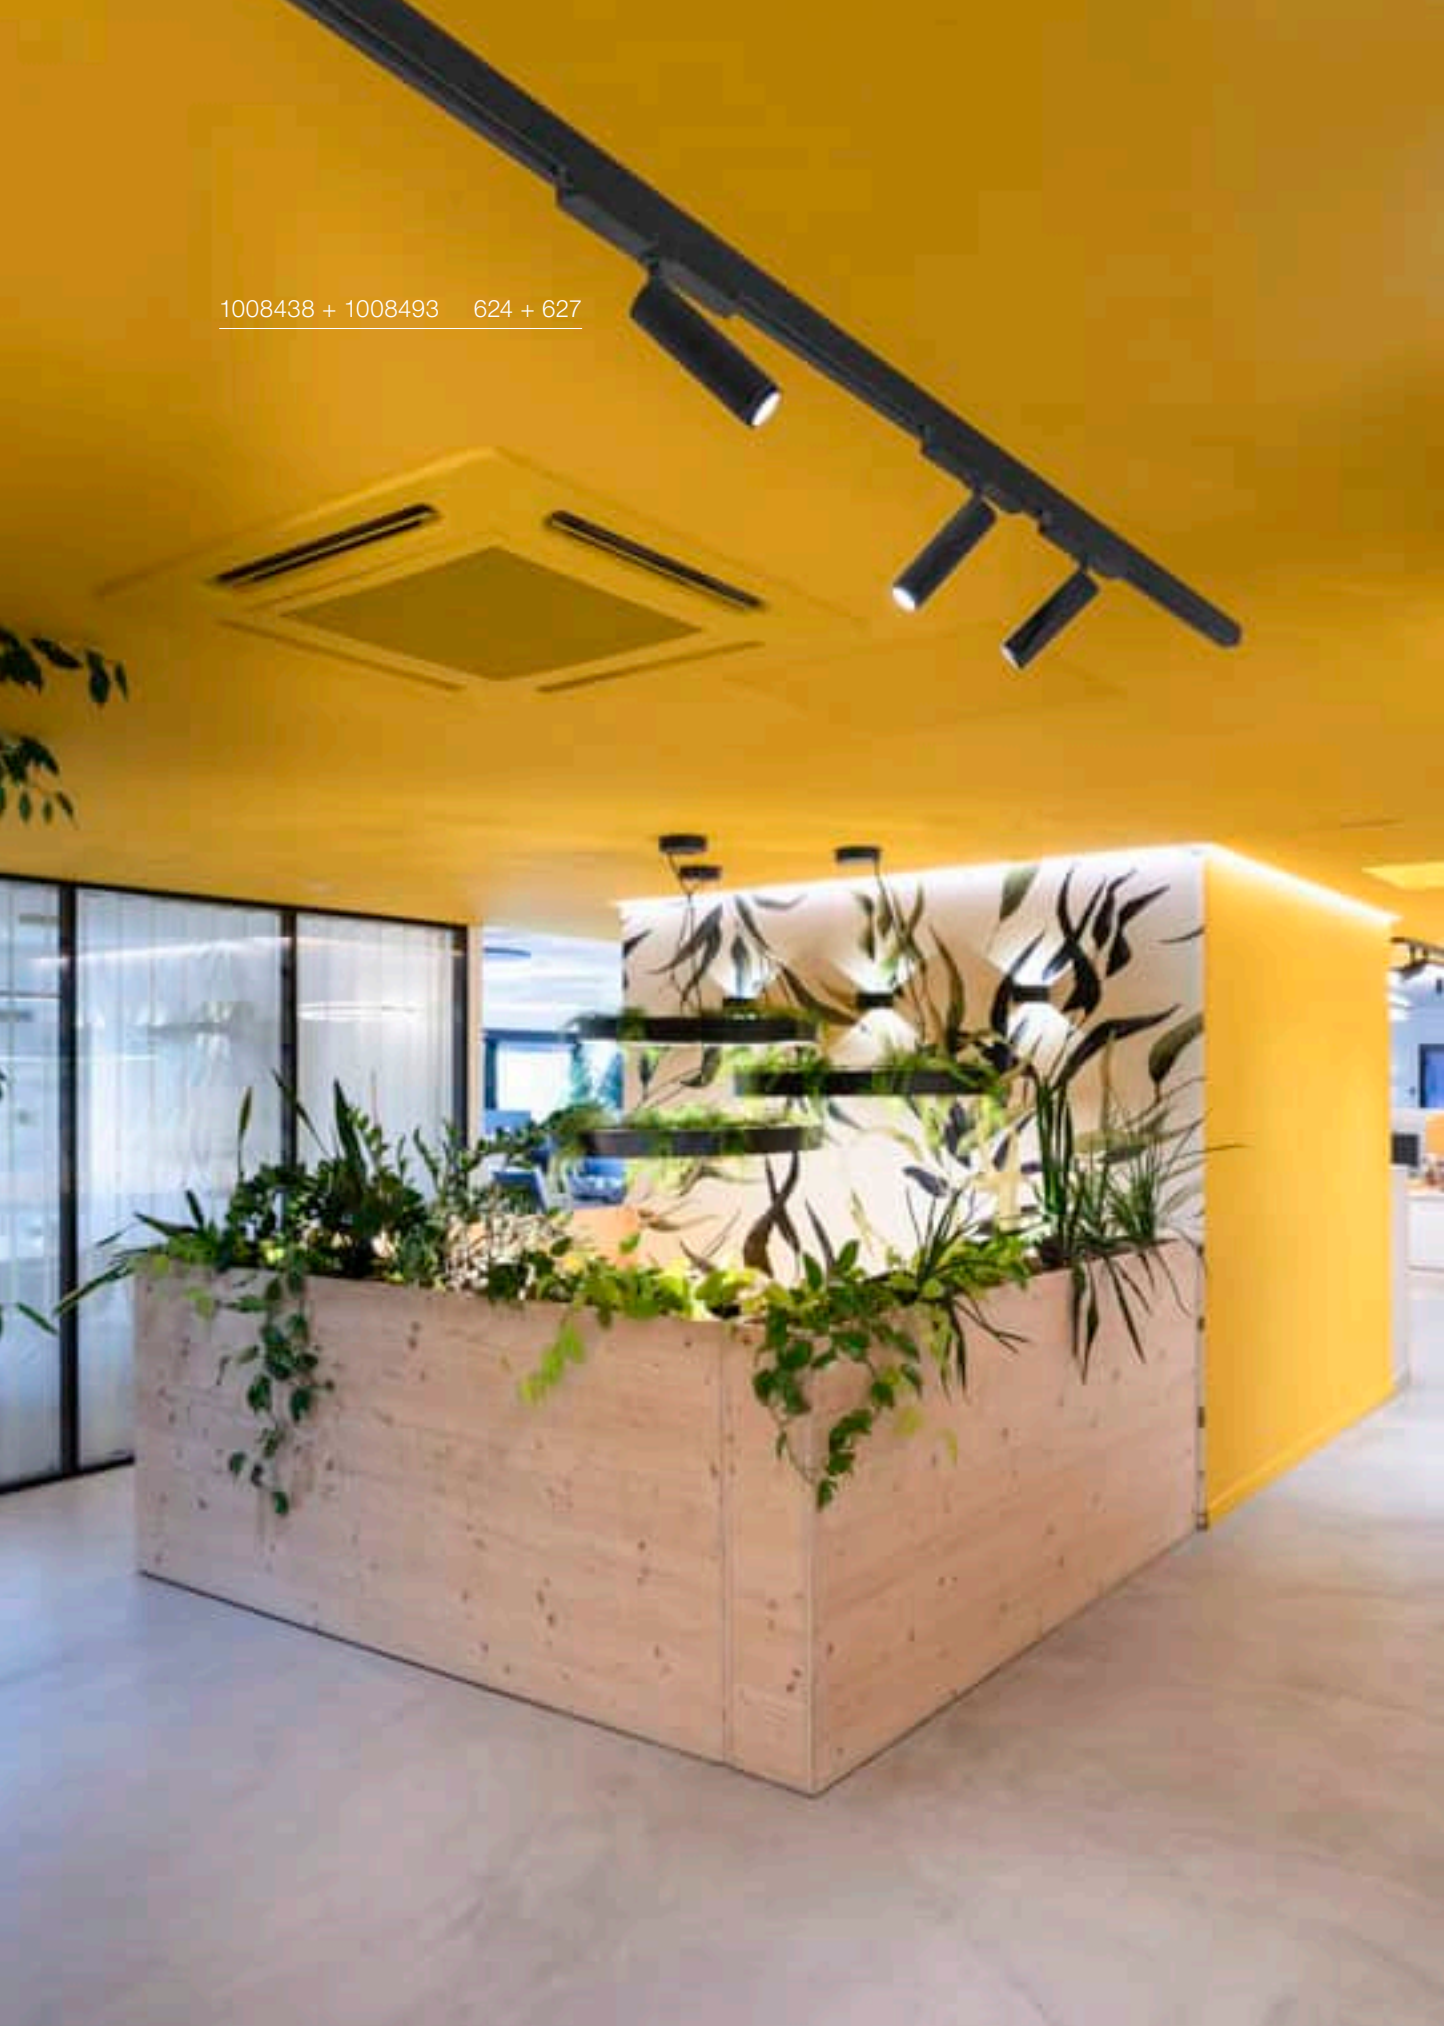

1008438 + 1008493 624 + 627

GRIP! L
3-phase, QPAR51, Ø 5,7cm

NEW





IP20 IK02 350° 90°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
black/gold	1008453	77.00
white/black	1008452	77.00

LED GU10 51 mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

GRIP! M
Decorative ring Ø 4,0 cm

NEW



H: 1.4 cm
Diameter: 4 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008493	17.00
white	1008492	17.00
gold	1008495	17.00
nickel	1008494	17.00

GRIP! L
Deco Ring Ø 5,4 cm

NEW



H: 3.4 cm
Ø: 5.4 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008497	19.00
white	1008496	19.00
gold	1008499	19.00
nickel	1008498	19.00

NUMINOS® S
3-phase





● black





○ white

IP 20 L80B50 350° 90°

CRI 90

INSIDE

200mA
220-240V ~50/60Hz
Total wattage: 8.6W
Material: aluminium/plastic

Variant	GBP
All S versions	**99.00**
All S versions DALI	**142.00**

Note:
Decorative ring also available in white, gold and copper



Variant	Prod. no.	GBP
Front ring S ○ white	**1006167**	**2.00**
Front ring S ● gold	**1008144** ●	**7.00**
Front ring S ● copper	**1008140** ●	**7.00**

				UGR	Prod. no.	
C	2700K	930lm	24°	16	**1004074**	
		944lm	36°	16	**1004075**	
		960lm	60°	19	**1004076**	
	3000K	1016lm	24°	13	**1004082**	
		1037lm	36°	13	**1004083**	
		1042lm	60°	19	**1004084**	
	4000K	1074lm	24°	16	**1004090**	
		1092lm	36°	16	**1004091**	
		1098lm	60°	19	**1004092**	
Dali	2700K	930lm	24°	16	**1004362**	
		944lm	36°	16	**1004363**	
		960lm	60°	19	**1004364**	
	3000K	1016lm	24°	13	**1004370**	
		1037lm	36°	13	**1004371**	
		1042lm	60°	19	**1004372**	
	4000K	1074lm	24°	16	**1004378**	
		1092lm	36°	16	**1004379**	
		1098lm	60°	19	**1004380**	
C	2700K	930lm	24°	16	**1004078**	
		944lm	36°	16	**1004079**	
		960lm	60°	19	**1004080**	
	3000K	1016lm	24°	13	**1004086**	
		1037lm	36°	13	**1004087**	
		1042lm	60°	19	**1004088**	
	4000K	1074lm	24°	16	**1004094**	
		1092lm	36°	16	**1004095**	
		1098lm	60°	19	**1004096**	
Dali	2700K	930lm	24°	16	**1004366**	
		944lm	36°	16	**1004367**	
		960lm	60°	19	**1004368**	
	3000K	1016lm	24°	13	**1004374**	
		1037lm	36°	13	**1004375**	
		1042lm	60°	19	**1004376**	
	4000K	1074lm	24°	16	**1004382**	
		1092lm	36°	16	**1004383**	
		1098lm	60°	19	**1004384**	

NUMINOS® M
3-phase





● black





○ white



LED INSIDE

350mA
220-240V ~50/60Hz
Total wattage: 14W
Material: aluminium/plastic

Variant	GBP
All M versions	**125.00**
All M versions DALI	**169.00**

Note:
Decorative ring also available in white, gold and copper



⊕

Variant	Prod. no.	GBP
Front ring M ○ white	**1006168**	**3.00**
Front ring M ● gold	**1008145** ●	**8.00**
Front ring M ● copper	**1008141** ●	**8.00**

		1750lm	24°	16	**1004170**	
	2700K	1744lm	36°	16	**1004171**	
		1697lm	60°	22	**1004172**	
		1804lm	24°	16	**1004178**	
C	3000K	1790lm	36°	13	**1004179**	
		1749lm	60°	22	**1004180**	
		1931lm	24°	19	**1004186**	
	4000K	1927lm	36°	16	**1004187**	
		1872lm	60°	25	**1004188**	
		1750lm	24°	16	**1004458**	
	2700K	1744lm	36°	16	**1004459**	
		1697lm	60°	22	**1004460**	
		1804lm	24°	16	**1004466**	
Dali	3000K	1790lm	36°	13	**1004467**	
		1749lm	60°	22	**1004468**	
		1931lm	24°	19	**1004474**	
	4000K	1927lm	36°	16	**1004475**	
		1872lm	60°	25	**1004476**	
		1750lm	24°	16	**1004174**	
	2700K	1744lm	36°	16	**1004175**	
		1697lm	60°	22	**1004176**	
		1804lm	24°	16	**1004182**	
C	3000K	1790lm	36°	13	**1004183**	
		1749lm	60°	22	**1004184**	
		1931lm	24°	19	**1004190**	
	4000K	1927lm	36°	16	**1004191**	
		1872lm	60°	25	**1004192**	
		1750lm	24°	16	**1004462**	
	2700K	1744lm	36°	16	**1004463**	
		1697lm	60°	22	**1004464**	
		1804lm	24°	16	**1004470**	
Dali	3000K	1790lm	36°	13	**1004471**	
		1749lm	60°	22	**1004472**	
		1931lm	24°	19	**1004478**	
	4000K	1927lm	36°	16	**1004479**	
		1872lm	60°	25	**1004480**	

NUMINOS® L
3-phase





● black





○ white

IP 20 L80B50 350° 90°

INSIDE

500mA
220-240V ~50/60Hz
Total wattage: 19 W
Material: aluminium/plastic

Variant	GBP
All L versions	133.00
All L versions DALI	185.00

Note:
Decorative ring also available in white, gold and copper



Variant	Prod. no.	GBP
Front ring L ○ white	1006169	3.00
Front ring L gold	1008146	9.00
Front ring L copper	1008142	9.00

				UGR	Prod. no.	
C	2700K	2370lm	24°	19	**1004266**	
		2245lm	36°	19	**1004267**	
		2304lm	60°	22	**1004268**	
	3000K	2432lm	24°	13	**1004274**	
		2320lm	36°	13	**1004275**	
		2373lm	60°	22	**1004276**	
	4000K	2694lm	24°	19	**1004282**	
		2557lm	36°	19	**1004283**	
		2601lm	60°	22	**1004284**	
Dali	2700K	2370lm	24°	19	**1004554**	
		2245lm	36°	19	**1004555**	
		2304lm	60°	22	**1004556**	
	3000K	2432lm	24°	13	**1004562**	
		2320lm	36°	13	**1004563**	
		2373lm	60°	22	**1004564**	
	4000K	2694lm	24°	19	**1004570**	
		2557lm	36°	19	**1004571**	
		2601lm	60°	22	**1004572**	
C	2700K	2370lm	24°	19	**1004270**	
		2245lm	36°	19	**1004271**	
		2304lm	60°	22	**1004272**	
	3000K	2432lm	24°	13	**1004278**	
		2320lm	36°	13	**1004279**	
		2373lm	60°	22	**1004280**	
	4000K	2694lm	24°	19	**1004286**	
		2557lm	36°	19	**1004287**	
		2601lm	60°	22	**1004288**	
Dali	2700K	2370lm	24°	19	**1004558**	
		2245lm	36°	19	**1004559**	
		2304lm	60°	22	**1004560**	
	3000K	2432lm	24°	13	**1004566**	
		2320lm	36°	13	**1004567**	
		2373lm	60°	22	**1004568**	
	4000K	2694lm	24°	19	**1004574**	
		2557lm	36°	19	**1004575**	
		2601lm	60°	22	**1004576**	

NUMINOS® XL
3-phase





● black





○ white

IP 20 L80B50 350° 90°

INSIDE

700mA
220-240V ~50/60Hz
Total wattage: 26W
Material: aluminium/polycarbonate (PC)

Variant	GBP
All XL versions	**142.00**
All XL versions DALI	**202.00**

Note:
Decorative ring also available in white, gold and copper



Variant	Prod. no.	GBP
Front ring XL ○ white	**1006170**	**4.00**
Front ring XL gold	**1008147**	**9.50**
Front ring XL copper	**1008143**	**9.50**

		3566lm	24°	19	**1005723**	
	2700K	3542lm	36°	19	**1005724**	
		3152lm	60°	25	**1005725**	
		3586lm	24°	19	**1005729**	
C	3000K	3536lm	36°	19	**1005730**	
		3135lm	60°	25	**1005731**	
		3891lm	24°	19	**1005735**	
	4000K	3840lm	36°	19	**1005736**	
		3438lm	60°	25	**1005737**	
		3566lm	24°	19	**1005795**	
	2700K	3542lm	36°	19	**1005796**	
		3152lm	60°	25	**1005797**	
		3586lm	24°	19	**1005801**	
Dali	3000K	3536lm	36°	19	**1005802**	
		3135lm	60°	25	**1005803**	
		3891lm	24°	19	**1005807**	
	4000K	3840lm	36°	19	**1005808**	
		3438lm	60°	25	**1005809**	
		3566lm	24°	19	**1005726**	
	2700K	3542lm	36°	19	**1005727**	
		3152lm	60°	25	**1005728**	
		3586lm	24°	19	**1005732**	
C	3000K	3536lm	36°	19	**1005733**	
		3135lm	60°	25	**1005734**	
		3891lm	24°	19	**1005738**	
	4000K	3840lm	36°	19	**1005739**	
		3438lm	60°	25	**1005740**	
		3566lm	24°	19	**1005798**	
	2700K	3542lm	36°	19	**1005799**	
		3152lm	60°	25	**1005800**	
		3586lm	24°	19	**1005804**	
Dali	3000K	3536lm	36°	19	**1005805**	
		3135lm	60°	25	**1005806**	
		3891lm	24°	19	**1005810**	
	4000K	3840lm	36°	19	**1005811**	
		3438lm	60°	25	**1005812**	

NUMINOS® ZOOM M
3-phase





● black



○ white



IP 20 | 15°- 60° | L70B50 | 350° | 90°

CRI 90 | INSIDE

350mA
220-240V ~50/60Hz
Total wattage: 14W
Material: aluminium/polycarbonate (PC)

Variant	GBP
All M versions	**157.00**
All M versions DALI	**199.00**

				UGR	Prod. no.	
C	2700K	617-1587lm	15° - 60°	25	**1006108**	
	3000K	630 - 1625lm		25	**1006110**	
	4000K	672 - 1743lm		25	**1006112**	
Dali	2700K	617-1587lm	15° - 60°	25	**1006114**	
	3000K	630 - 1625lm		25	**1006116**	
	4000K	672 - 1743lm		25	**1006118**	
C	2700K	617-1587lm	15° - 60°	25	**1006109**	
	3000K	630 - 1625lm		25	**1006111**	
	4000K	672 - 1743lm		25	**1006113**	
Dali	2700K	617-1587lm	15° - 60°	25	**1006115**	
	3000K	630 - 1625lm		25	**1006117**	
	4000K	672 - 1743lm		25	**1006119**	

CONFIGURE YOUR NUMINOS®

SELECT YOUR SYSTEM COLOUR

NUMINOS® DL

NUMINOS® MOVE

NUMINOS® GIMBLE



black — black, white, chrome

white — black, white, chrome

NUMINOS® PD

NUMINOS® CL

NUMINOS® SPOT



black white

NUMINOS® TRACK

NUMINOS® ZOOM



black white

The NUMINOS® lighting system offers constant lighting characteristics and modern design for all uses: hotels and offices to commercial and private spaces. From application to technology to detailed design: one great feature is that the modular downlights and spotlights can be configured exactly as required, depending on the design or space in question. Thanks to standardised light qualities within the system, all NUMINOS® variants can be perfectly combined with one another, regardless of the type of installation in the project. The more multifaceted your project, the more you can benefit from the intelligent NUMINOS® lighting system.

Discover NUMINOS® Lights, including for the 48V system p. 514-521

SIZE

XS **S** **M** **L** **XL**

S **M** **L** **XL**

S **M** **L** **XL**

NUMINOS® Zoom only available in size M

PERFORMANCE

XS 200mA
Power consumption: 7W

S 250mA
Power consumption: 8.6W

M 500mA
Power consumption: 17.5W

L 700mA
Power consumption: 25.4W

XL 1050mA
Power consumption: 37.4W

S 200mA
Power consumption: 11W

M 350mA
Power consumption: 20W

L 500mA
Power consumption: 28W

XL 700mA
Power consumption: 36W

DIFFUSERS

ELLIPTICAL

Vertically distributed light, reduced glare, perfect for corridor use

PRISMATIC

Wide beam, low glare, perfect for lights at specific distances

FROSTED

Wide beam, superior illumination, perfect for low ceilings

HONEYCOMB

Narrow beam, reduced glare, perfect for computer work

NUMINOS®
DOWN-/SPOTLIGHTS

Discover the NUMINOS® Configurator at slv.com

Available in three product variants: DL, Move and Gimble. All available in three light colours and housing sizes XS, S, M, L and XL.

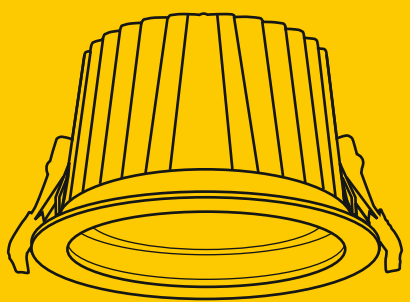



Selectable reflectors with half beam angles of 20°-55°.



Various effect filters available as accessories.



The decorative ring can be selected as a visible border.



DOWNLIGHTS

NUMINOS® downlights are available as fixed or swivelling versions.

NUMINOS® ONE LIGHTING SYSTEM – A THOUSAND POSSIBILITIES. The freely configurable lighting system that casts a good light on every setting. No two projects are the same. But many projects demand a coherent lighting and design concept. NUMINOS® is a perfectly coordinated lighting system that harmonises function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.

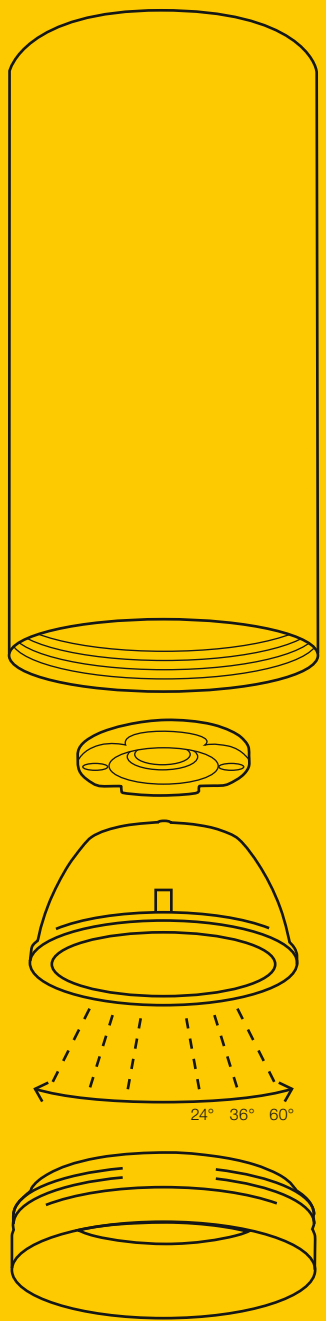

Available in four housing sizes S, M, L, XL, and in three light colours.

Thanks to the built-in LED driver, all spotlights are suitable for direct connection to 230V mains voltage.

Choice of lenses with half beam angles of 24°-60°.

The decorative ring can be selected as a visible border.

SPOTLIGHTS

NUMINOS® spotlights are available as swivelling or fixed ceiling spots, pendant lights and as spots for 3-phase track systems.

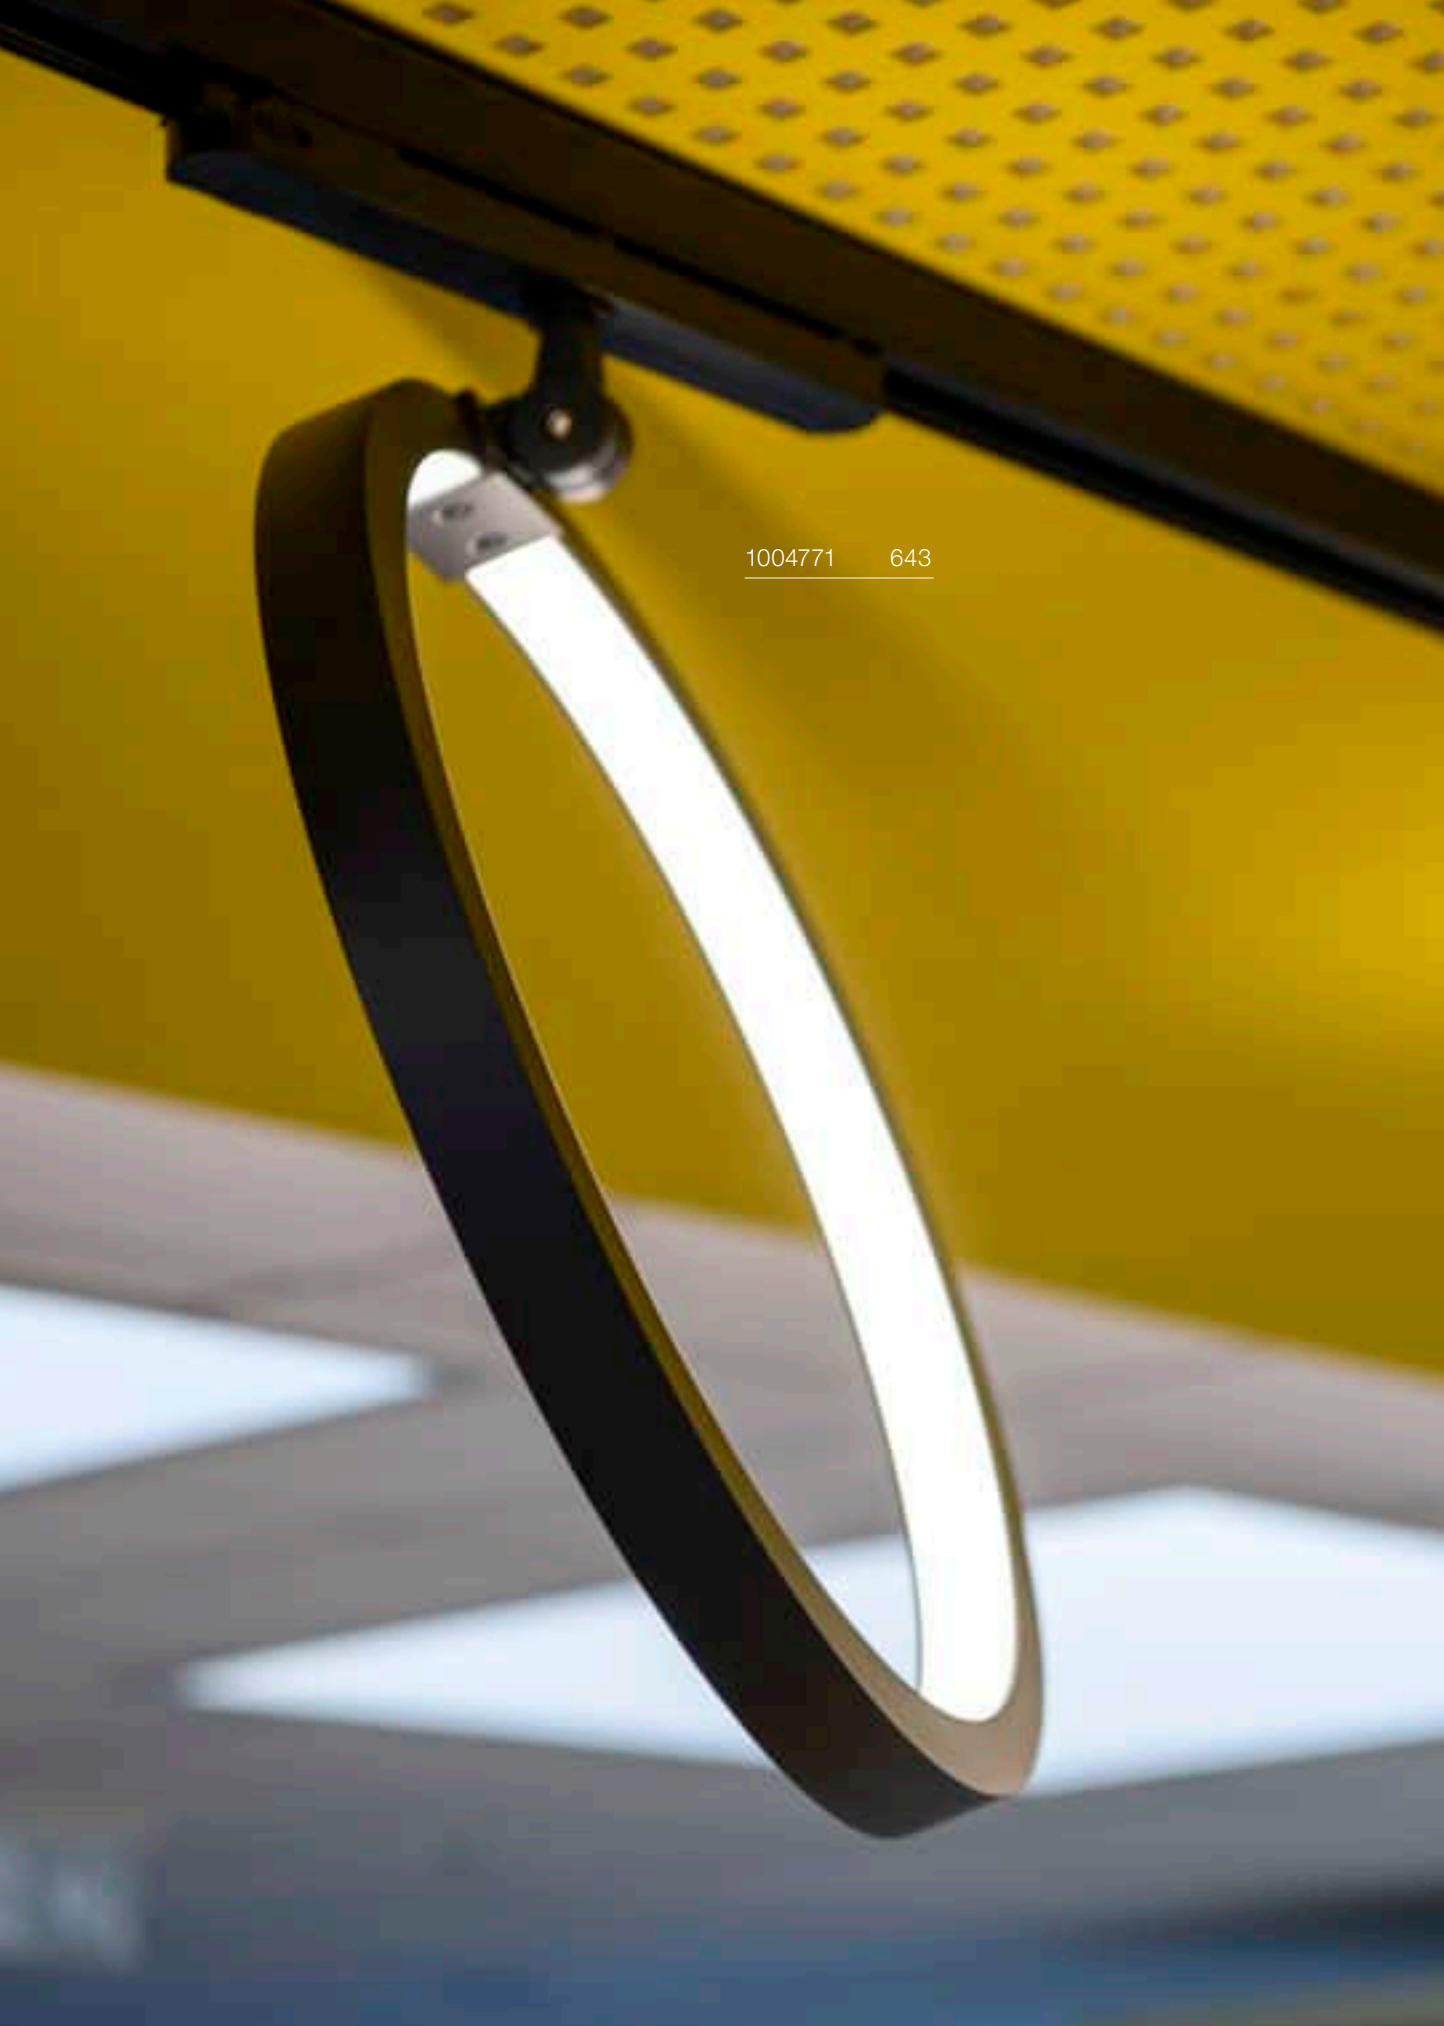
1004771 643

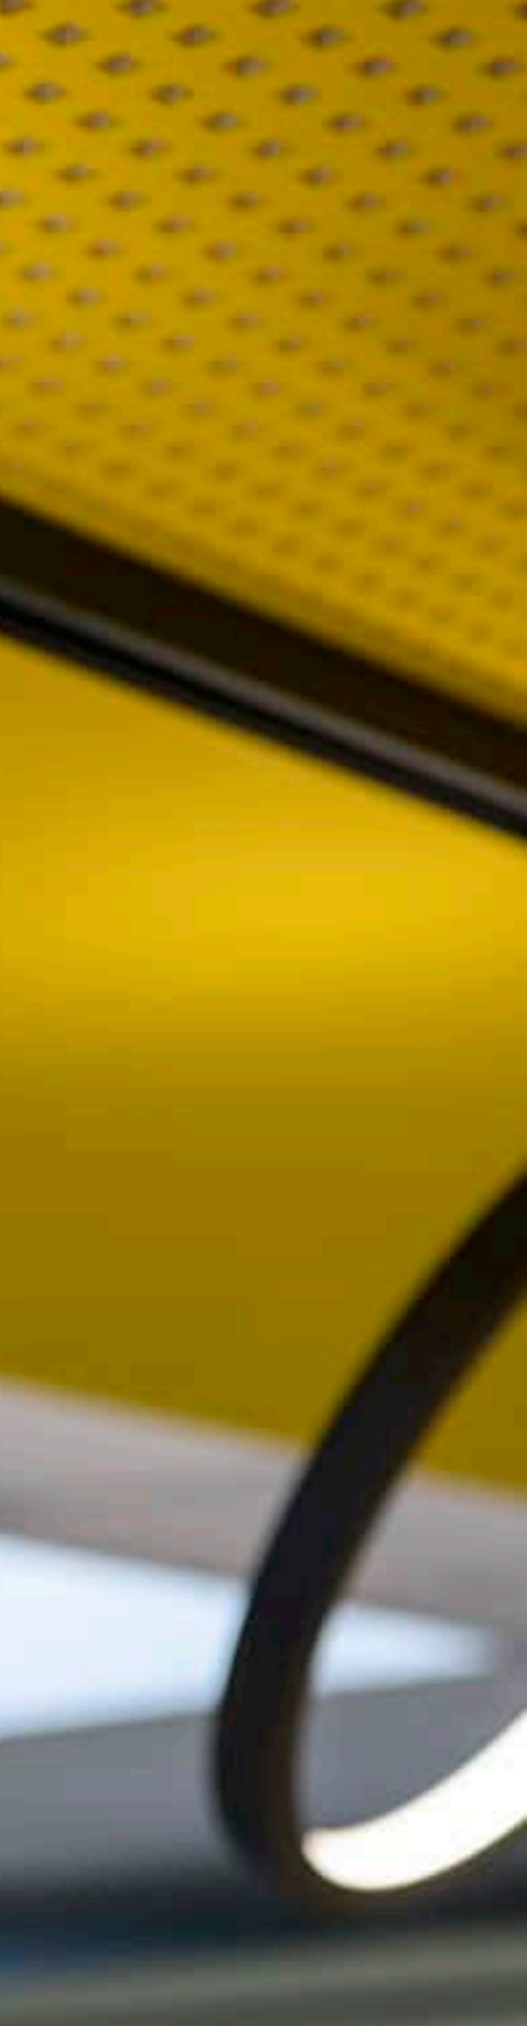

ONE 40 TRACK
3-phase, DALI





Dali 2.0 | 170° | 340° | 100°

220-240V ~50/60Hz | 350mA
Total wattage: 15.2W
Material: aluminium

LED INSIDE | CRI 90

Down 670lm | 4000K

Variant	Prod. no.	GBP
● black	**1004771**	**286.00**
○ white	**1004772**	**286.00**

NOBLO SPOT
3-phase, PHASE





IP 20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60Hz | 150mA
Total wattage: 6W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down 740lm | 2700K

Variant	Prod. no.	GBP
black	1007644	65.00
white	1007645	65.00

⊕

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO SPOT
3-phase, PHASE





IP 20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60Hz | 150mA
Total wattage: 6W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down 750lm | 3000K

Variant	Prod. no.	GBP
black	1007646	65.00
white	1007647	65.00

⊕

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00









NOBLO SPOT
3-phase, PHASE





IP 20 | 32° | L80B10 | 355° | 90°

220-240V ~50/60Hz | 150mA
Total wattage: 6W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down 760lm | 4000K

Variant	Prod. no.	GBP
black	1007648	65.00
white	1007649	65.00

⊕

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00

NOBLO SPOT
3-phase, PHASE

DIM TO WARM





IP 20 | 36° | L70B50 | 320° | 90°

220-240V ~50/60Hz | 350mA
Total wattage: 8.4W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

Down 30lm | 2000K - 450lm | 3000K

Variant	Prod. no.	GBP
black	1007355	78.00
white	1007356	78.00

⊕

Product	Prod. no.	GBP
Decorative ring		
black	1008482	5.00
white	1008483	5.00
gold	1008484	5.00
grey	1008485	5.00
copper	1008486	5.00
bronze	1008487	5.00





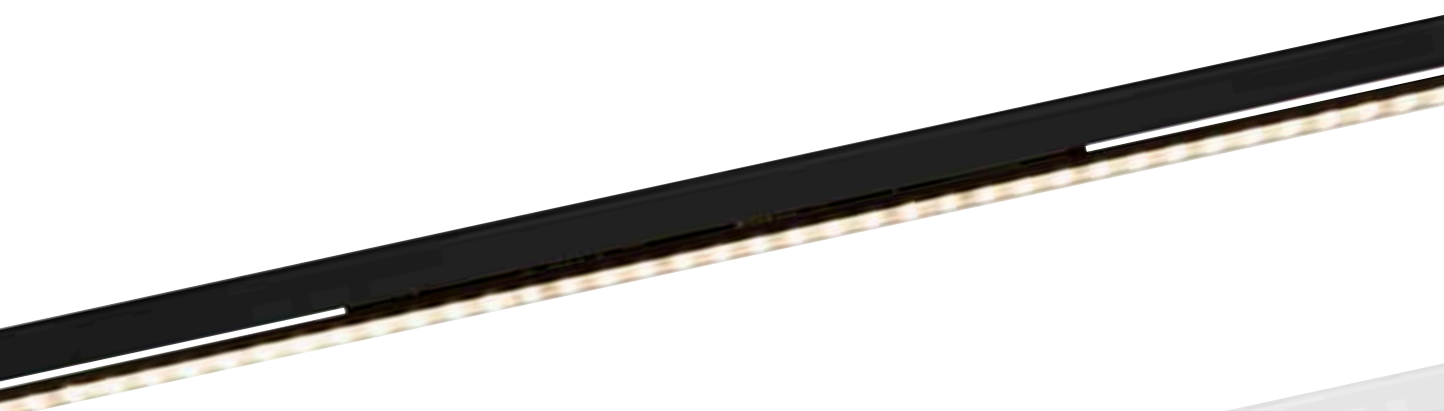







SIGHT EASY
3-phase DALI

NEW







Dali | IP20 | IK06 | 25° | UGR 25 | L80B10

220-240V ~50/60 Hz | 250/300/350/400mA
Total wattage: 41|49|58|66W
Material: aluminium

LED INSIDE | CRI 90

41W	6500lm	3000K
	7100lm	4000K
49W	7700lm	3000K
	8200lm	4000K
58W	9100lm	3000K
	9600lm	4000K
66W	10200lm	3000K
	10900lm	4000K

Variant	Prod. no.	GBP
● black 3000K	1008728	198.00
● black 4000K	1008730	198.00
○ white 3000K	1008729	198.00
○ white 4000K	1008731	198.00

SIGHT EASY
3-phase

NEW





IP20 | IK06 | 25° | UGR 25 | L80B10

220-240V ~50/60 Hz | 250/300/350/400mA
Total wattage: 41|49|58|66W
Material: aluminium

LED INSIDE | CRI 90

41W	6500lm	3000K
	7100lm	4000K
49W	7700lm	3000K
	8200lm	4000K
58W	9100lm	3000K
	9600lm	4000K
66W	10200lm	3000K
	10900lm	4000K

Variant	Prod. no.	GBP
● black 3000K	1008676	163.00
● black 4000K	1008678	163.00
○ white 3000K	1008677	163.00
○ white 4000K	1008679	163.00

SIGHT TRACK
3-phase, DALI





Dali 2.0 | IP 20 | 120° | UGR 25 | 30 000 Hours L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 39W
Material: aluminium/acrylic

LED INSIDE | CRI 90

Down	3000lm | 3000K	3000lm | 4000K

Variant	Prod. no.	GBP
● black	1005397	322.00
○ white	1005399	322.00

SIGHT TRACK
3-phase





IP 20 | 120° | UGR 25 | 30 000 Hours L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 37W
Material: aluminium/acrylic

LED INSIDE | CRI 90

Down	3000lm | 3000K	3000lm | 4000K

Variant	Prod. no.	GBP
● black	1005400	266.00
○ white	1005401	266.00
● grey	1005402	266.00





1005399 649

SIGHT MOVE
3-phase, DALI





Dali | IP 20 | 75° | UGR 25 | L70B50 | 120°

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material:
aluminium/polymethylacrylate (PMMA)

LED INSIDE | CRI 90

Down — 2700lm | 3000K, 3100lm | 4000K

Variant	Prod. no.	GBP
● black 2700lm | 3000K	**1004690**	**219.00**
● black 3100lm | 4000K	**1004692**	**219.00**
○ white 2700lm | 3000K	**1004691**	**219.00**
○ white 3100lm | 4000K	**1004693**	**219.00**

SIGHT MOVE
3-phase





IP | IP 20 | 75° | UGR 25 | L70B50 | 120°

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material:
aluminium/polymethylacrylate (PMMA)

LED INSIDE | CRI 90

Down — 2700lm | 3000K, 3100lm | 4000K

Variant	Prod. no.	GBP
● black 2700lm | 3000K	**1004686**	**157.00**
● black 3100lm | 4000K	**1004688**	**157.00**
○ white 2700lm | 3000K	**1004687**	**157.00**
○ white 3100lm | 4000K	**1004689**	**157.00**


1008063 651

PARA CONE 14
3-phase, GU10





IP20 300° 80°

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	**1008055**	**74.00**
white/gold	**1008056**	**74.00**
copper / white	**1008057**	**77.00**

LED GU10 | 6.5W | 330°
2700K | 650lm | EEC=F
7kWh/1000h

Prod. no.: 1008375 | 38.00 GBP

PARA CONE 14
3-phase, PD, GU10





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <35 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	**1008061**	**101.00**
white/gold	**1008062**	**101.00**
copper / white	**1008063**	**107.00**

LED GU10 | 3.2W
2700K | 270lm | EEC=G

Prod. no.: 1006321 | 34.00 GBP

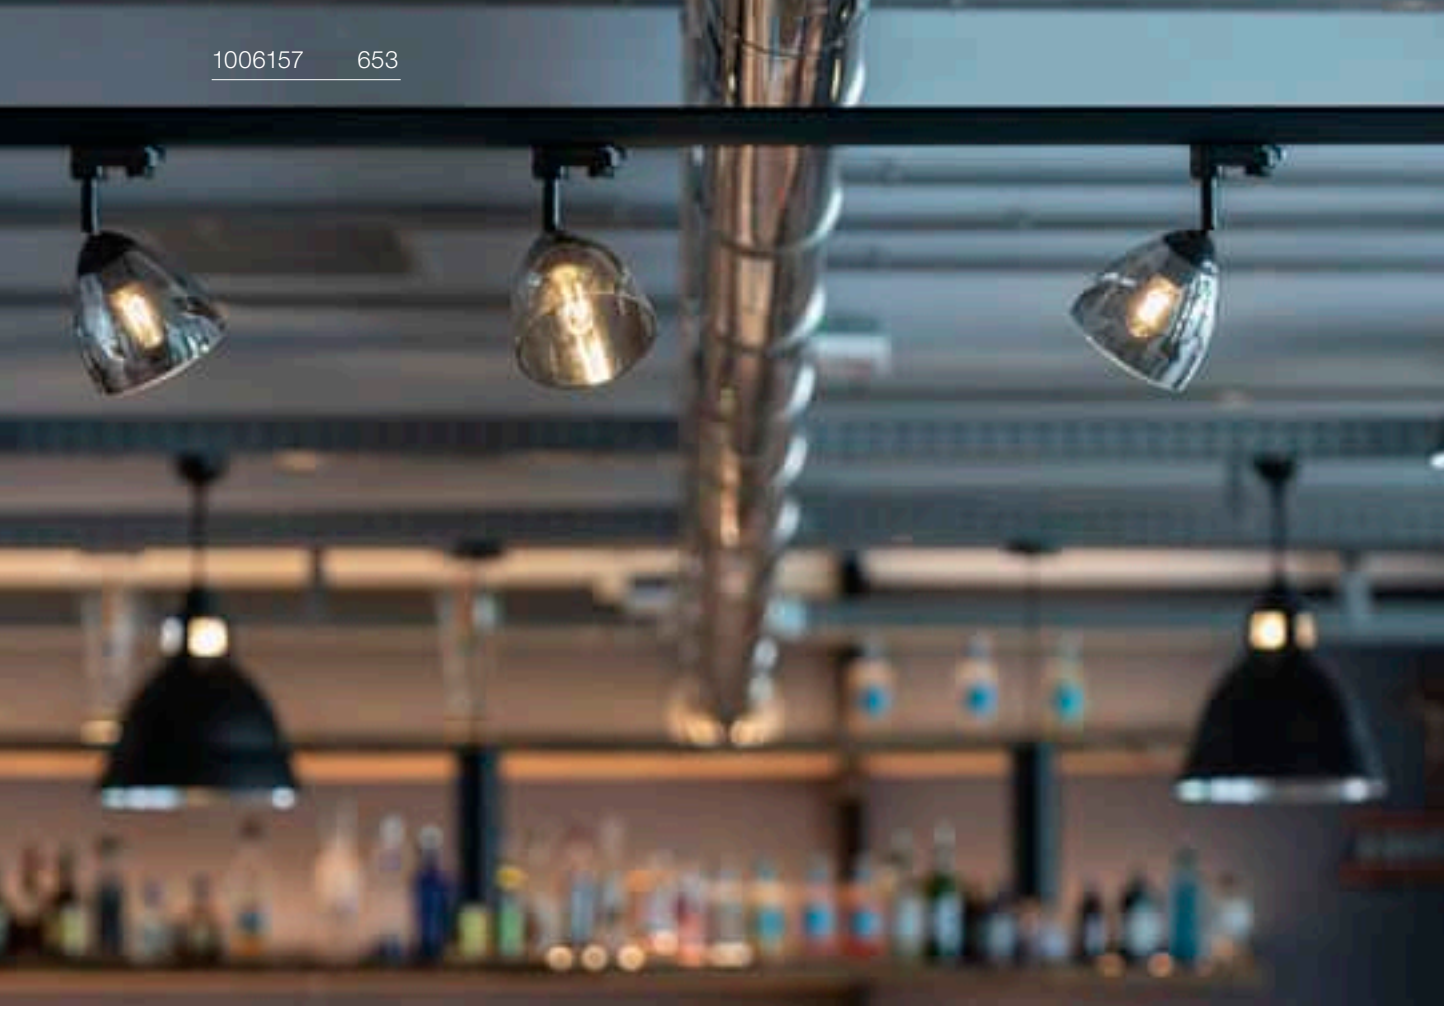
1006157 653

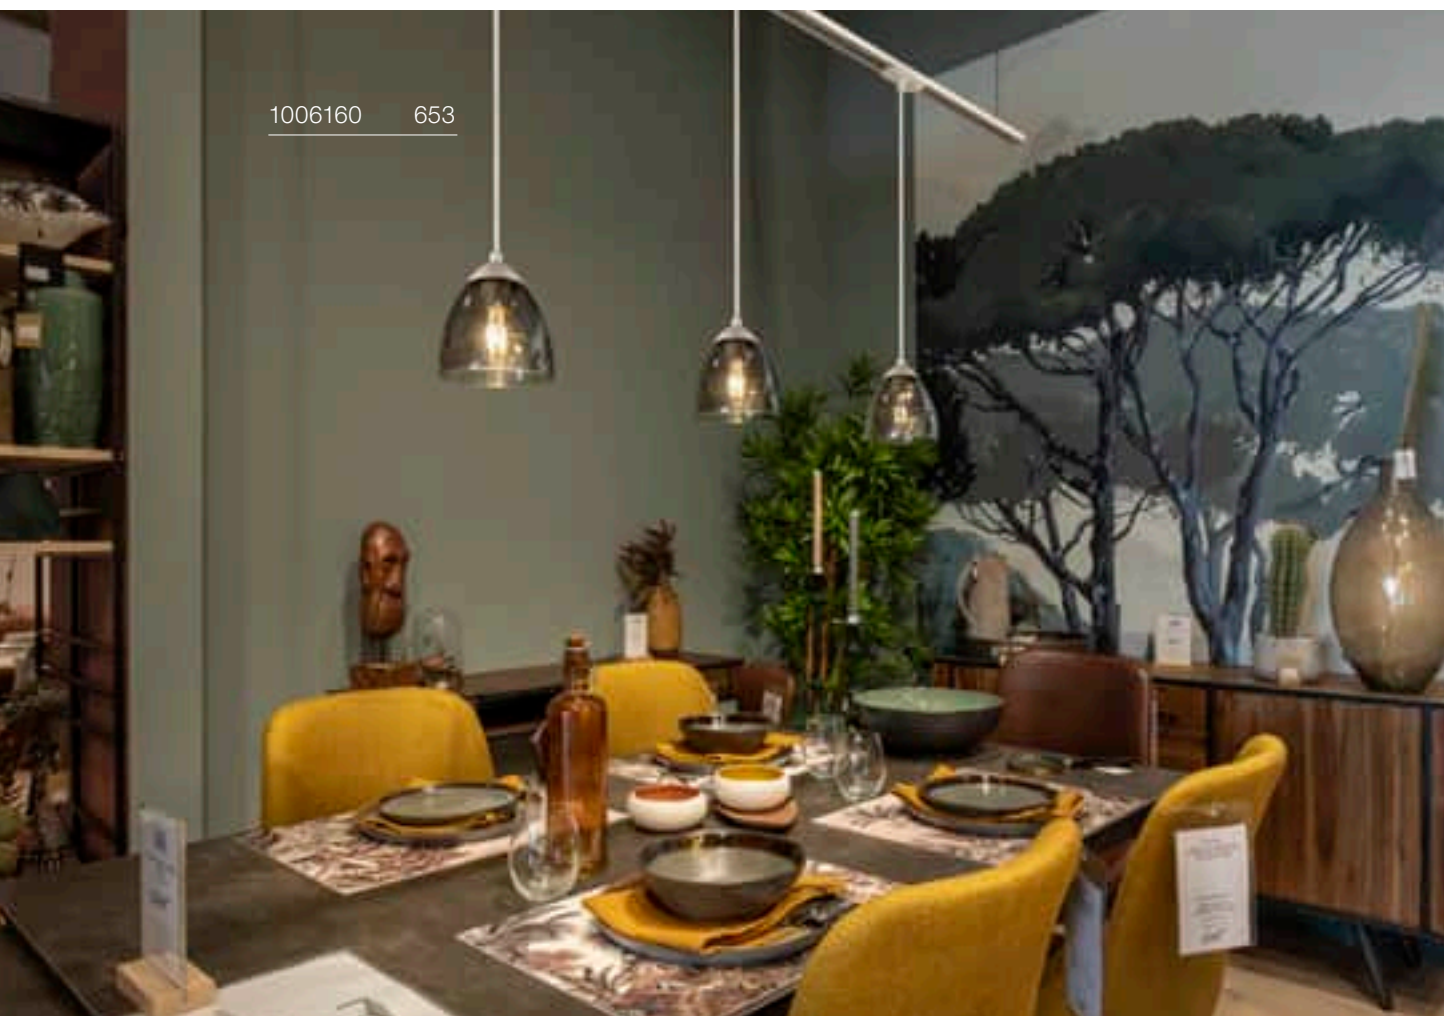
1006160 653

PARA CONE GL
3-phase, GU10





IP 20 | 300° | 90°

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1006157**	**88.00**
○ white	**1006158**	**88.00**

LED GU10 | 3.2W
2700K | 270lm | EEC=G

Prod. no.: 1006321 | 34.00 GBP

PARA CONE GL
PD, GU10





IP 20 | 250

220-240V ~50/60Hz
Material: aluminium/glass

- Accessories see page 615
- Open cable end

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1006159**	**73.00**
○ white	**1006160**	**73.00**

LED GU10 | 3.2W
2700K | 270lm | EEC=G

Prod. no.: 1006321 | 34.00 GBP

Product	Prod. no.	GBP
1-phase light adapter		
● black	**143120**	**13.00**
○ white	**143121**	**13.00**
● grey	**143124**	**13.00**
3-phase light adapter		
● black	**145990**	**17.00**
● grey	**145994**	**17.00**
○ white	**1001542**	**17.00**
Surface-mounted ceiling rose		
● black	**1004744**	**30.00**
○ white	**1004745**	**30.00**
Recessed ceiling rose		
● black	**1004674**	**20.00**
○ white	**1004675**	**20.00**
Fitu | Single ceiling rose		
● black	**132600**	**23.00**
○ white	**132601**	**23.00**
◑ chrome	**132605**	**25.00**


1008541 655



FORCHINI M 40 TRACK
3-phase, PD, E27

NEW





IP20 150

220-240V ~50/60Hz
Material: steel/aluminium

SOCKET INSIDE <40 W

Base: 1xE27 | Max. Ø: 6.8 cm | L: 15.2 cm

Variant	Prod. no.	GBP
black/gold	**1008541**	**200.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP



LIGHT EYE® 90
3-phase, PD, QPAR51

NEW







220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <6 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.	GBP
● black	1008170	72.00
○ white	1008171	72.00

LED GU10 51 mm | 6W | 38°
3000K | 470lm | EEC=F
6kWh/1000h





Prod. no.: 1005079 | 7.00 GBP

LIGHT EYE® 150
3-phase, PD, QPAR111

NEW





IP20 150

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <13 W

Base: 1xGU10 | Max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008176	114.00
○ white	1008177	114.00

QPAR111 | 12.5W | 30°
2700K | 950lm | EEC=F
13kWh/1000h

C,L



Prod. no.: 1005276 | 43.00 GBP

LIGHT EYE® 150
3-phase, QPAR111

NEW





IP20 330° 90°

220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <12.5 W

Base: 1xGU10 | Max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008184	114.00
○ white	1008185	114.00

QPAR111 | 12W | 55°
3000K | 680lm | EEC=G
12kWh/1000h

C,L



Prod. no.: 1005298 | 73.00 GBP

LIGHT EYE® 90
Decorative ring Ø 5,7 cm

NEW



Material: steel/steel
H: 1.4 cm
Diameter: 5.9 cm

Variant	Prod. no.	GBP
● black	1008186	8.00
○ white	1008187	8.00
● gold	1008188	12.00

LIGHT EYE® 150
Decorative ring Ø 13,6 cm

NEW



Material: steel/steel
H: 2.3 cm
Diameter: 13.6 cm

Variant	Prod. no.	GBP
● black	1008189	30.00
○ white	1008190	30.00
● gold	1008192	39.00
◑ chrome	1008191	39.00

ALTRA DICE TRACK
3-phase, QPAR51





IP 20 | 350° | 180°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE | <50 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● black	**152320**	**83.00**
○ white	**152321**	**83.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005075 | 7.00 GBP

EURO CUBE
3-phase





IP 20 | 60° | L70B50 | 350° | 170°

220-240V ~50/60Hz
Total wattage: 26W
Material: aluminium

LED INSIDE | CRI 90

Down | 2470lm | 3000K | 2740lm | 4000K

Variant	Prod. no.	GBP
● black 2470lm | 3000K	**152750**	**224.00**
○ white 2470lm | 3000K	**152751**	**224.00**
● black 2740lm | 4000K	**152780**	**224.00**
○ white 2740lm | 4000K	**152781**	**224.00**









EURO SPOT TRACK
3-phase, QPAR111





IP 20 350° 100°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**153420**	**91.00**
○ white	**153421**	**91.00**

QPAR111 | 12.5W | 30°
2700K | 950lm | EEC=F
13kWh/1000h



Prod. no.: 1005276 | 43.00 GBP

EURO SPOT TRACK
3-phase, QPAR51





IP 20 350° 100°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**153850**	**73.00**
○ white	**153851**	**73.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

153560 661


MENSEN DIE ZICH ELKE DAG KUNNEN GEVEN.
ZIJ ZIJN DE MENSEN DIE IK BEWONDER.
ZE ZIJN ECHTE MENSEN
Succes is geboren uit arrogantie,
maar grootheid komt uit nederigheid.

PURI TRACK
3-phase, QPAR51







220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Decorative ring included

SOCKET INSIDE <50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**153560**	**31.00**
○ white	**153561**	**31.00**
● grey	**153564**	**31.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

PURI TRACK
3-phase, QPAR51







220-240V ~50/60Hz
Material: aluminium/plastic

SOCKET INSIDE <10 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1001871**	**39.00**
○ white	**1001872**	**39.00**

LED GU10 51 mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

KALU TRACK
3-phase, PHASE





C,L | IP 20 | 95° | L70B50 | 350° | 90°

220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium

LED INSIDE | CRI 80

Down 970lm | 3000K

Variant	Prod. no.	GBP
● black CRI80	**152600**	**188.00**
○ white CRI90	**152601**	**188.00**

KALU TRACK
3-phase, QPAR111





IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: aluminium/plastic

SOCKET INSIDE | <75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**152610**	**77.00**
○ white	**152611**	**77.00**

QPAR111 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h

C,L

Prod. no.: 1005278 | 48.00 GBP







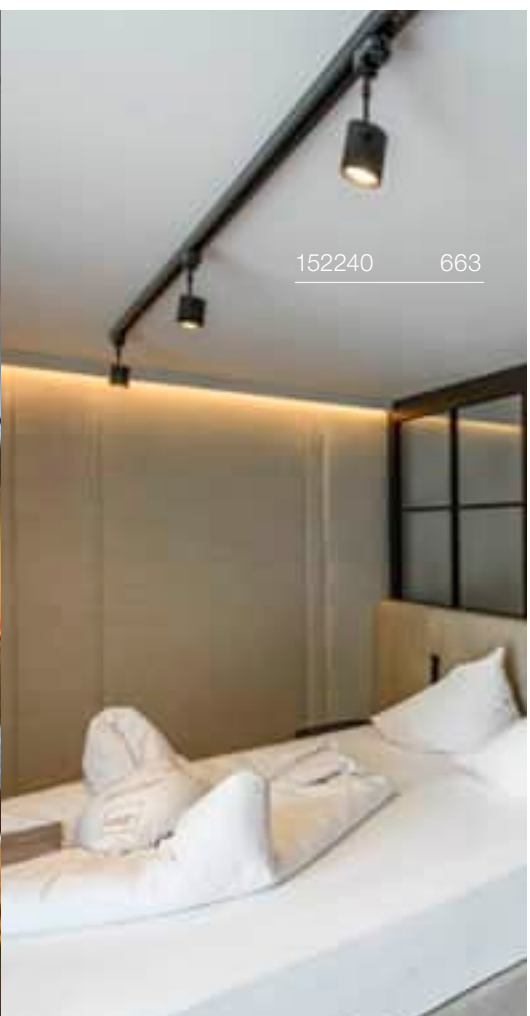

BIMA
3-phase, single, QPAR51





IP 20 | 350° | 200°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● black	**152240**	**39.00**
○ white	**152241**	**39.00**
● grey	**152242**	**39.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

BIMA
3-phase, double, QPAR51





IP 20 | 350° | 200°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● black	**152230**	**61.00**
○ white	**152231**	**61.00**
● grey	**152232**	**61.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

L



Prod. no.: 1005075 | 7.00 GBP

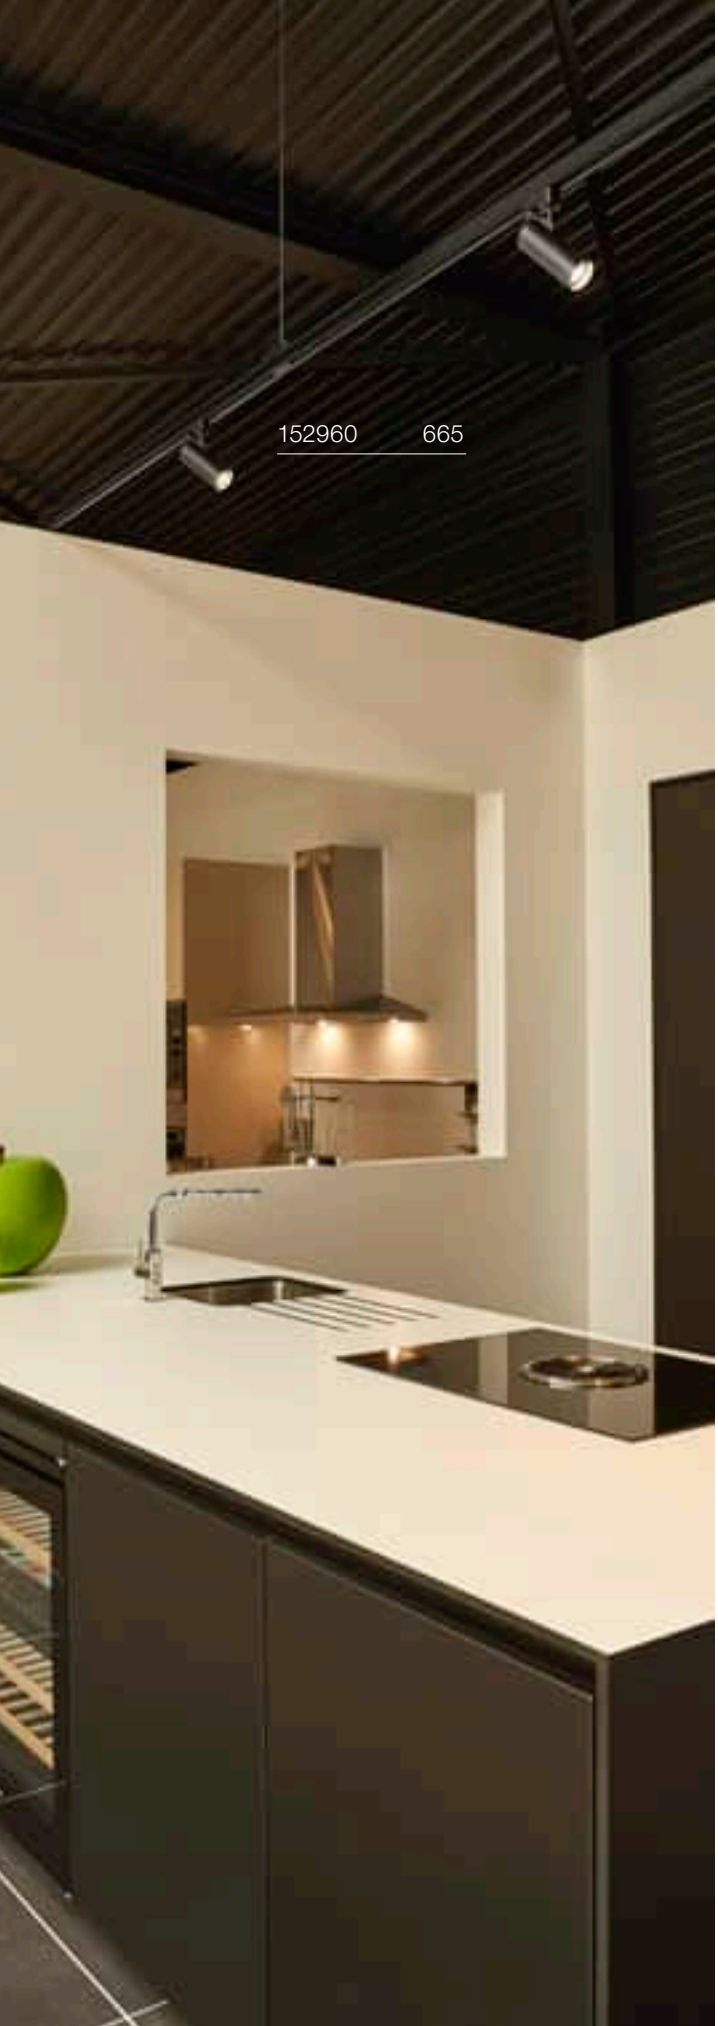

152960 665



152430 665

HELIA 50 TRACK
3-phase







220-240V ~50/60Hz | 500
Total wattage: 11W
Material: aluminium



Down 810lm 880lm | 3000K

Variant	Prod. no.	GBP
● black		
810lm	**152960**	**78.00**
○ white		
880lm	**152961**	**78.00**

ENOLA C TRACK
3-phase







220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

Down 1040lm | 3000K

Variant	Prod. no.	GBP
● black	**152430**	**152.00**
○ white	**152431**	**152.00**

AVO TRACK
3-phase, QPAR51







220-240V ~50/60Hz
Material: steel



Base: 1xGU10 Max. Ø: 5.1 cm

Variant	Prod. no.	GBP
● black	**152640**	**39.00**
○ white	**152641**	**39.00**

LED GU10 51 mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h





Prod. no.: 1005076 | 7.00 GBP

3-PHASE TRACK SYSTEM

Professionally managed: well-designed lighting is essential, especially where there's plenty to see. Due to the versatility of track lighting, it's possible to showcase specific objects in the perfect light. Changes to the lighting design can also be made at any time. 3-phase high-voltage busbars are perfect for shops and exhibition stands, or for use in the catering trade. They create the perfect illumination and present products and exhibition items in just the right light.

WHERE DO YOU WANT TO INSTALL YOUR SYSTEM?



TRACK CONFIGURATION

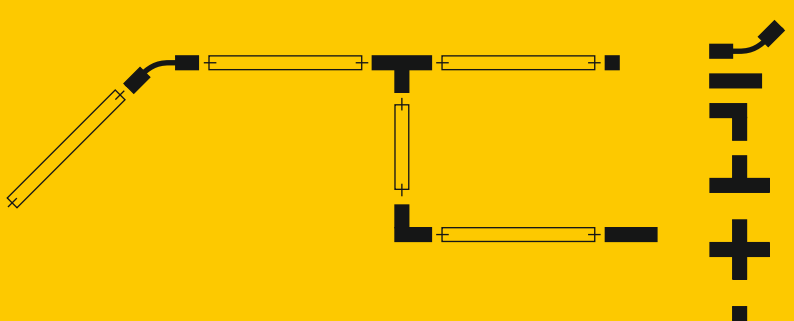

Use our track configurator at
www.slv.com/uk_en/service/slv-track-configurator

TRACK SYSTEMS



S-TRACK
3-phase system with DALI option



Mounting track



Mounting track



EUTRAC
3-phase system



Mounting track



Mounting track



Selection of the colour

Black / white

1m - 2m - 3m - 4m

White

1m - 2m - 3m

Black / Grey / White

1m - 2m - 3m

Choose your light!

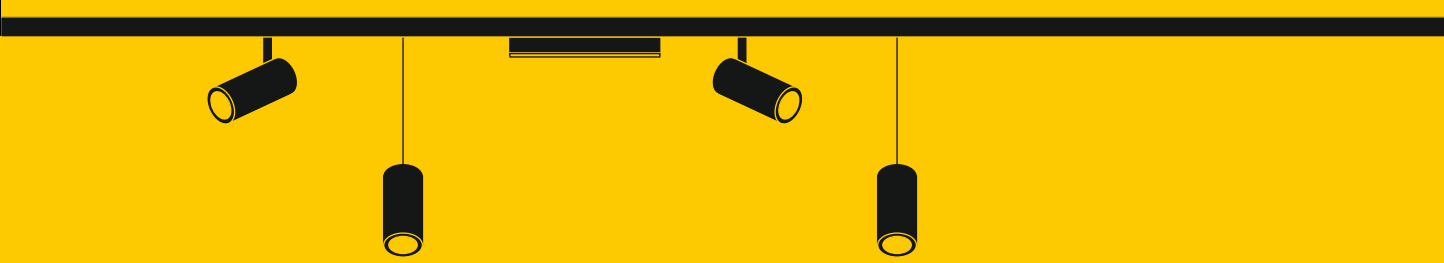

DONE!

Various design options tailored to your room



PROFILES



GRAZIA 10 SURFACE-MOUNTED PROFILE | 669



GRAZIA 10 RECESSED PROFILE | 669



GRAZIA 10 EDGE | 672



GRAZIA 20 SURFACE-MOUNTED PROFILE | 675



GRAZIA 20 RECESSED PROFILE | 675



GRAZIA 60 SURFACE-MOUNTED PROFILE | 679



GRAZIA 60 RECESSED PROFILE | 679



GRAZIA 10 ACCESSORIES | 671



GRAZIA 10 EDGE ACCESSORIES | 673



GRAZIA 20 ACCESSORIES | 676–677



GRAZIA 60 ACCESSORIES | 680–681

LED STRIPS

NEW



GRAZIA LED STRIP VALUE ADDITIONAL LIGHTING AND ACCESSORIES | 684

NEW



GRAZIA LED STRIP VALUE MAIN LIGHTING AND ACCESSORIES | 685

NEW



GRAZIA LED STRIP VALUE MAIN LIGHTING + AND ACCESSORIES | 686

NEW



GRAZIA LED STRIP CORE MAIN LIGHTING AND ACCESSORIES | 687



GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 688



GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 689



GRAZIA PRO FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 690



GRA ZIA PRO FLEXSTRIP RGBW AND ACCESSORIES | 691



GRAZIA IP FLEXSTRIP | 692



GRAZIA IP FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 693



GRAZIA IP FLEXSTRIP RGBW AND ACCESSORIES | 693



GRAZIA 10
Surface-mounted profile, flat 2 m

Material: aluminium
Width: 1.75 cm, Height: 1.1 cm
Max. LED strip width in mm: 10
Cover not included





IP 20

Length (cm)	Colour	Material	Prod. no.	GBP
200	● black	aluminium	**1000462**	**POA**
	○ white		**1000461**	**POA**

GRAZIA 10
Surface-mounted profile, standard

Material: aluminium
Width: 1.75 cm, Height: 1.62 cm
Max. LED strip width in mm: 10
Cover not included





IP 20

Length (cm)	Colour	Material	Prod. no.	GBP
200	● black	aluminium	**1000465**	**POA**
	○ white		**1000464**	**POA**

GRAZIA 10
Recessed profile

Material: aluminium
Width: 3 cm, Height: 1.62 cm
Max. LED strip width in mm: 10
Cover not included





IP 20

Length (cm)	Colour	Material	Prod. no.	GBP
200	● black	aluminium	**1000459**	**POA**
	○ white		**1000458**	**POA**



ACCESSORIES

GRAZIA 10
Cover

Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Cover	○ opaque	200	1,58	0,4	Polycarbonate (PC)	**1000466**	**16.00**
	○ frosted				Polymethylmeth-acrylate (PMMA)	**1000468**	**21.00**
	○ satin finish					**1000469**	**21.00**

GRAZIA 10
Mounting clips



Description	Colour	Width (cm)	Height (cm)	Depth (cm)	Material	Prod. no.	GBP
Mounting clips	◌ silver, 45°		0,001		Steel	**1000489**	**5.00**
	◐ stainless steel, not visible	1,53	0,3		Stainless steel	**1000487**	**4.00**

Packaging contents: 2 units

GRAZIA 10
End caps for surface-mounted profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
End caps	● black, flat		1,75	1,1	aluminium	**1000477**	**6.00**
	○ white, flat			1,1		**1000476**	**6.00**
End caps	● black, standard		1,75	1,62	aluminium	**1000480**	**6.00**
	○ white, standard			1,62		**1000479**	**6.00**

Packaging contents: 2 units

GRAZIA 10
End caps for recessed profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
End caps	● black		3	1,62	aluminium	**1000474**	**6.00**
	○ white					**1000473**	**6.00**

Packaging contents: 2 units



GRAZIA 10 EDGE
2 m

Material: aluminium
Width: 1.95 cm, Height: 1.95 cm
Max. LED strip width in mm: 10
Cover not included

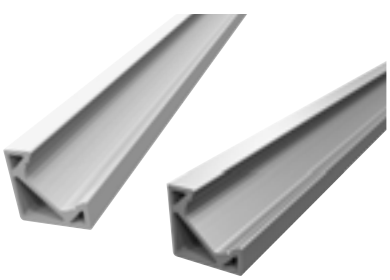



IP 20

Length (cm)	Colour	Material	Prod. no.	GBP
200	○ white	aluminium	**1004890**	**POA**
	● aluminium		**1004889**	**POA**

ACCESSORIES

GRAZIA 10 EDGE
Cover

Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Cover	○ opaque	200	1,58	0,4	Polycarbonate (PC)	**1000466**	**16.00**
	○ frosted				polymethylmeth-acrylate (PMMA)	**1000468**	**21.00**
	○ satin finish					**1000469**	**21.00**

GRAZIA 10 EDGE
End cap



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
End cap	○ white	2	0,7	2	ABS	**1004894**	**2.00**
	◍ aluminium					**1004893**	**2.00**

Packaging contents: 2 units

GRAZIA 10 EDGE
Mounting clips



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Mounting clips	◍ stainless steel	2,25	15	2,25	Steel	**1004895**	**4.00**

Packaging contents: 2 units



GRAZIA 20
Standard surface-mounted profile, 3 m

Material: aluminium
Width: 3.5 cm, Height: 3.2 cm
Max. LED strip width in mm: 20
Cover not included

IP 20





Length (cm)	Colour	Material	Prod. no.	GBP
300	● black	aluminium	**1000525**	**POA**
	○ white		**1000524**	**POA**

GRAZIA 20
Standard surface-mounted profile, 3 m

Material: aluminium
Width: 3.5 cm, Height: 2.2 cm
Max. LED strip width in mm: 20
Cover not included

IP 20





Length (cm)	Colour	Material	Prod. no.	GBP
300	● black	aluminium	**1000534**	**POA**
	○ white		**1000533**	**POA**

GRAZIA 20
Recessed profile, 3 m

Material: aluminium
Width: 5.2 cm, Height: 3.2 cm
Max. LED strip width in mm: 20
Cover not included

IP 20





Length (cm)	Colour	Material	Prod. no.	GBP
300	● black	aluminium	**1000498**	**POA**
	○ white		**1000497**	**POA**

ACCESSORIES

GRAZIA 20
Cover, 3m, tall

Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Cover	○ satin finish	300	3,2	0,6	Polycarbonate (PC)	**1000540**	**36.00**
	○ frosted				polymethylmeth-acrylate (PMMA)	**1000546**	**36.00**
	○ opaque					**1000549**	**36.00**

GRAZIA 20
Longitudinal connector



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Longitudinal connector	◍ aluminium	3,8	1,4	0,4	aluminium	**1000571**	**11.00**

Packaging contents: 2 units

GRAZIA 20
End caps for surface-mounted profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
End cap	● black		3,5	2,2	aluminium	**1000561**	**8.00**
	○ white					**1000560**	**8.00**
End cap	● black,standard		3,5	3,2	aluminium	**1000567**	**8.00**
	○ white,standard					**1000566**	**8.00**

Packaging contents: 2 units

GRAZIA 20
End cap for recessed profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
End cap	● black		5,2	3,2	aluminium	**1000558**	**8.00**
	○ white					**1000557**	**8.00**

Packaging contents: 2 units

GRAZIA 20
Pendant suspension



Description	Colour	Length (cm)	Material	Prod. no.	GBP
Pendant suspension	◌ silver	200	Steel	**1000535**	**24.00**

Packaging contents: 2 units

GRAZIA 20
Mounting clips



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Mounting clips	◌ silver		3	0,8	Steel	**1000536**	**4.00**
Mounting spring	◑ chrome/aluminium	5,5	7	2,3	steel/aluminium	**1004932**	**19.00**

Packaging contents: 2 units



GRAZIA 60
Surface mounted profile, 1.5 m

Material: aluminium
Width: 7 cm, Height: 9.5 cm
Max. LED strip width in mm: 20
Cover not included

IP 20





Length (cm)	Colour	Material	Prod. no.	GBP
150	● black	aluminium	**1004896**	**POA**
150	○ white		**1004897**	**POA**
300	● black	aluminium	**1004898**	**POA**
300	○ white		**1004899**	**POA**

The corresponding mounting profile and other accessories can be found on pages 682-683

GRAZIA 60
Recessed profile, 1.5 m

Material: aluminium
Width: 8.6 cm, Height: 3.3 cm
Max. LED strip width in mm: 20
Cover not included

IP 20

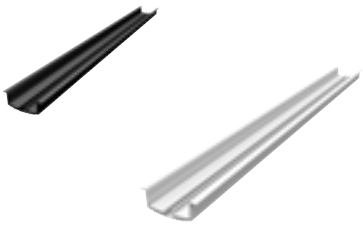



Length (cm)	Colour	Material	Prod. no.	GBP
150	● black	aluminium	**1004905**	**POA**
150	○ white		**1004906**	**POA**
300	● black	aluminium	**1004907**	**POA**
300	○ white		**1004908**	**POA**

ACCESSORIES

GRAZIA 60
Cover



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Cover, 1,5m	● black	150	6,5	0,65	aluminium	**1004912**	**25.00**
	○ white					**1004913**	**25.00**
	○ frosted				Polycarbonate (PC)	**1004914**	**16.00**
	○ frosted				Polymethylmeth-acrylate (PMMA)	**1004916**	**20.00**
Cover, 3 m	○ frosted	300	6,5	0,65	Polycarbonate (PC)	**1004915**	**31.00**
	○ frosted	300			Polymethylmeth-acrylate (PMMA)	**1004917**	**38.00**

GRAZIA 60
End cap





Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
End caps for surface-mounted profile	● black		7	9,5	aluminium	**1004900**	**11.00**
	○ white					**1004901**	**11.00**
End caps for recessed profile	● black		8,6	3,3	aluminium	**1004909**	**8.00**
	○ white					**1004910**	**8.00**

Packaging contents: 2 units

GRAZIA 60
Mounting profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Mounting profile	● black	150	6,1	1,2	aluminium	**1004902**	**31.00**

GRAZIA 60
Surface-mounted profile, longitudinal connector



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Longitudinal connector	aluminium	8	4,2	1	aluminium	**1004903**	**11.00**

GRAZIA 60
Surface-mounted profile, feed-in



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Feed-in	aluminium	8	4,2	2,4	aluminium	**1004904**	**12.00**

GRAZIA 60
Recessed profile, mounting clip



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.	GBP
Mounting clip	chrome	13	2,8	4	aluminium	**1004911**	**14.00**

DESIGN YOUR LED PROFILE

Create accents or illuminate entire rooms – from 700 lm pup to 4,000 lm per metre.

Bring colour into play – LED strips available in white, as CCT (Tunable White) or RGBW version.

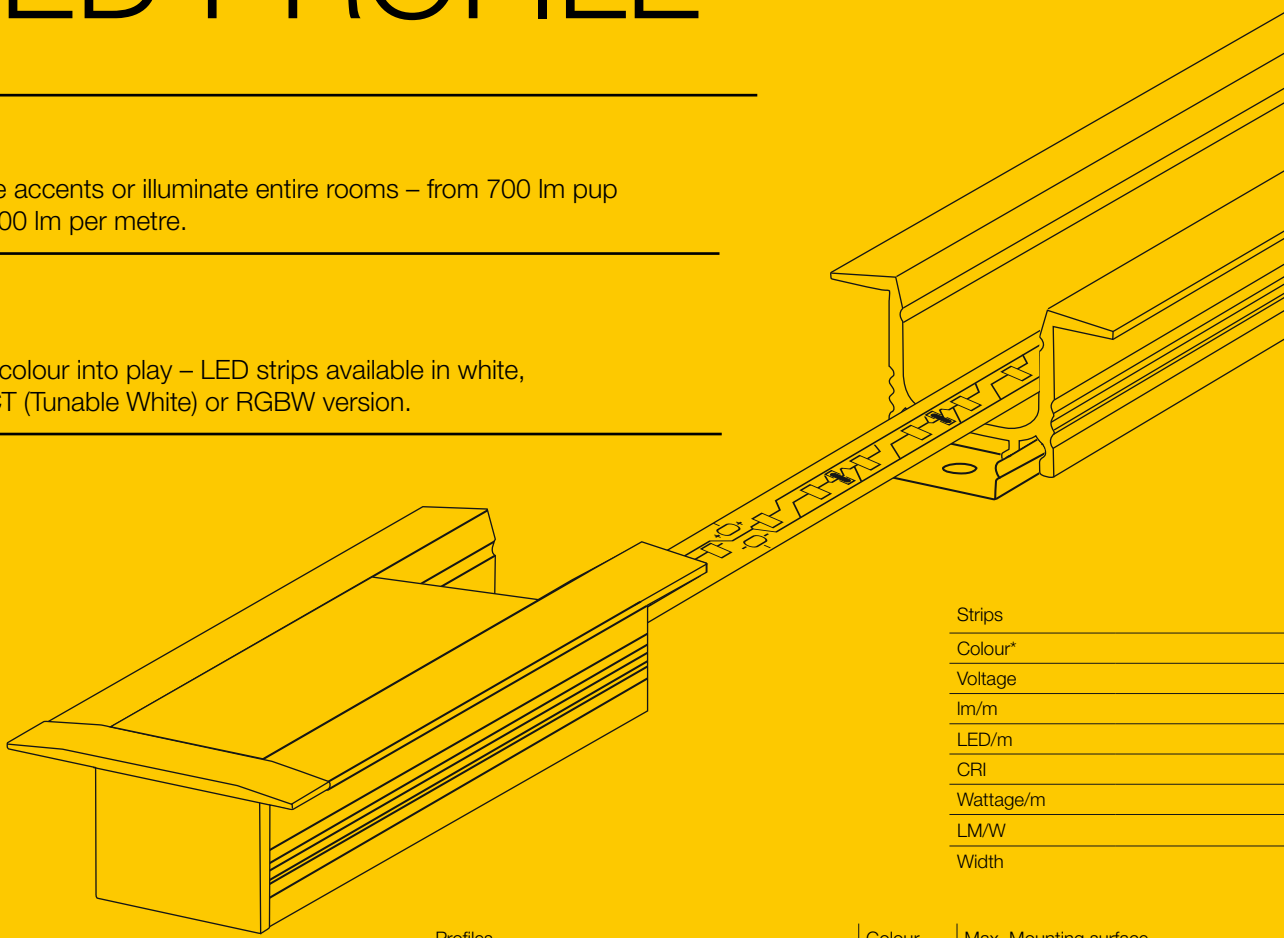

Strips
Colour*
Voltage
lm/m
LED/m
CRI
Wattage/m
LM/W
Width

Profiles		Colour	Max. Mounting surface
GRAZIA 10 Surface-mounted profile, flat 2 m	1000462	black	10mm
	1000461	white	
GRAZIA 10 Surface-mounted profile, standard	1000465	black	10mm
	1000464	white	
GRAZIA 10 Flush-mounted profile 2 m	1000459	black	10mm
	1000458	white	
GRAZIA 10 Corner 2m	1004889	aluminium	10mm
	1004890	white	
GRAZIA 20 Surface-mounted profile, standard 3 m	1000525	black	20mm
	1000524	white	
GRAZIA 20 Surface-mounted profile, flat 3 m	1000534	black	20mm
	1000533	white	
GRAZIA 20 Flush-mounted profile 3 m	1000498	black	20mm
	1000497	white	
GRAZIA 60 Surface mounted profile, 1.5 m	1004896	black	40mm
	1004897	white	
GRAZIA 60 Surface-mounted profile, 3 m	1004898	black	40mm
	1004899	white	
GRAZIA 60 Flush-mounted profile, 1.5 m	1004905	black	40mm
	1004906	white	
GRAZIA 60 Flush-mounted profile 3 m	1004908	black	40mm
	1004907	white	

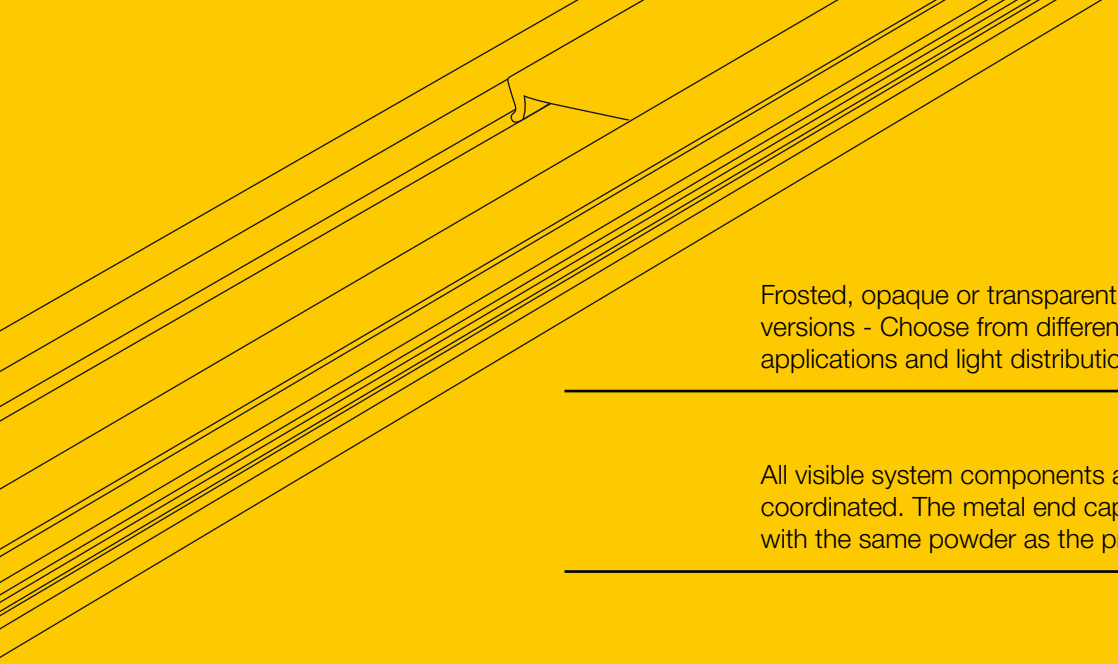

Frosted, opaque or transparent, in flat or tall versions - Choose from different covers for various applications and light distributions.

All visible system components are colour-coordinated. The metal end caps are coated with the same powder as the profiles.

The strip mounting surface of the profiles is not powder-coated to optimise heat dissipation.

NEW Grazia LED Strip Value, Additional Lighting	NEW Grazia LED Strip Value, Main Lighting	NEW Grazia LED Strip Value, Main Lighting Plus	NEW Grazia LED Strip Core, Main Lighting	Grazia LED Strip Pro MAX	Grazia LED Strip Pro MAX Performance
1008380	1008516	1008519	1008522	1004720	1004722
3000K	3000K	3000K	3000K	3000K	3000K
24V	24V	24V	24V	24V	24V
670	1340	2040	1620	2500	4000
64	128	160	180	196	196
>80	>80	>80	>90	>90	>90
4,8W	9,6W	14,4W	9W	25,2W	38,6W
140	140	140	180	99	104
8 mm	8 mm	8 mm	8 mm	20 mm	20 mm
✓	✓	✓	✓	-	-
✓	✓	✓	✓	-	-
✓	✓	✓	✓	-	-
✓	✓	✓	✓	-	-
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	-	-
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓

* available in other light colours



GRAZIA LED STRIP VALUE
Additional Lighting

LEDs per metre: 64
Width: 0.8 cm
Height: 0.14 cm
LED gap: 1.563 cm
Can be separated every 12.5 cm
IP code: IP20
Feed-in cable on both sides every 50 cm

NEW



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700	3300	24				**1008379**	
3000	3350	24	80	3	500	**1008380**	**46.00**
4000	3450	24				**1008381**	







Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ LED power supply | 30W, 24VDC slim	Polycarbonate (PC)	30	3	1.6	**1007250**	**43.00**
○ LED power supply | 36W, 24VDC flat	Polycarbonate (PC)	17	5.7	1.8	**1008654**	**47.00**
○ LED power supply | 25W, 24VDC Receptacle installation	Polycarbonate (PC)		Ø 5.5	2.5	**1008652**	**23.00**
○ LED power supply | 25W, 24VDC PHASECUT	Polycarbonate (PC)	12.8	5.2	3	**1006336**	**31.00**
○ LED power supply | 30W, 24VDC slim DALI	Polycarbonate (PC)	30	3	1.6	**1007254**	**52.00**



GRAZIA LED STRIP VALUE
Main Lighting

LEDs per metre: 128
Width: 0.8 cm
Height: 0.14 cm
LED gap: 0.781 cm
Can be separated every 6.25 cm
IP code: IP20
Feed-in cable on both sides every 50 cm

NEW



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700	6600	48	80	3	500	**1008515**	**98.00**
3000	6700	48				**1008516**	
4000	6950	48				**1008517**	



Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ LED power supply | 100W, 24VDC slim	Polycarbonate (PC)	35	3	1.8	**1007251**	**69.00**
○ LED power supply | 60W, 24VDC flat	Polycarbonate (PC)	17	5.7	1.8	**1008655**	**56.00**
○ LED power supply | 50W, 24VDC PHASECUT	Polycarbonate (PC)	18.4	6.1	3.2	**1003104**	**43.00**
○ LED power supply | 100W, 24VDC slim DALI	Polycarbonate (PC)	35	3	1.8	**1007255**	**95.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.



GRAZIA LED STRIP VALUE
Main Lighting +

LEDs per metre: 160
Width: 1 cm
Height: 0.14 cm
LED gap: 0.625 cm
Can be separated every 5 cm
IP code: IP20
Feed-in cable on both sides every 50 cm

NEW



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700	10050	72	80	3	500	**1008518**	**111.00**
3000	10200	72				**1008519**	
4000	10450	72				**1008520**	



⊕

Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ LED power supply | 100W, 24VDC slim	Polycarbonate (PC)	35	3	1.8	**1007251**	**69.00**
○ LED power supply | 100W, 24VDC PHASECUT	Polycarbonate (PC)	21	6.7	3.4	**1003105**	**104.00**
○ LED power supply | 100W, 24VDC slim DALI	Polycarbonate (PC)	35	3	1.8	**1007255**	**95.00**



GRAZIA LED STRIP CORE
Main Lighting

LEDs per metre: 180
Width: 1 cm
Height: 0.14 cm
LED gap: 0.556 cm
Can be separated every 5 cm
IP code: IP20
Feed-in cable on both sides every 50 cm

NEW



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700	8000	45	90	3	500	**1008521**	**171.00**
3000	8100	45				**1008522**	
4000	8500	45				**1008523**	
6500	8500	45				**1008524**	






Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ LED power supply | 100W, 24VDC slim	Polycarbonate (PC)	35	3	1.8	**1007251**	**69.00**
○ LED power supply | 60W, 24VDC flat	Polycarbonate (PC)	17	5.7	1.8	**1008655**	**56.00**
○ LED power supply | 50W, 24VDC PHASECUT	Polycarbonate (PC)	18.4	6.1	3.2	**1003104**	**43.00**
○ LED power supply | 100W, 24VDC slim DALI	Polycarbonate (PC)	35	3	1.8	**1007255**	**95.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.



GRAZIA PRO MAX FLEXSTRIP
24V

LEDs per metre: 196
Width: 2 cm
Height: 0.15 cm
LED gap: 0.5 cm
Can be separated every 3.6 cm
IP code: IP 20
Feed-in cable on both sides every 20 cm



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
3000	12500	126	90	3	500	**1004720**	**171.00**
4000	13000	126				**1004721**	



⊕

Product	Material		Width (cm)	Height (cm)	Prod. no.	GBP
○ LED power supply | 150W, Slim Line, on/off	Polycarbonate (PC)	35	3	1.8	**1007252**	**86.00**
○ LED power supply | 150W, Slim Line, DALI	Polycarbonate (PC)	35	3	1.8	**1007256**	**121.00**



GRAZIA PRO MAX FLEXSTRIP
24V

LEDs per metre: 196
Width: 2 cm
Height: 0.15 cm
LED gap: 1 cm
Can be separated every 7.1 cm
IP code: IP 20
Feed-in cable on both sides every 20 cm



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
3000	20000	193	90	3	500	**1004722**	**301.00**
4000	21400	192.9				**1004723**	



⊕

Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ LED power supply | 250W, Slim Line, on/off	Polycarbonate (PC)	40	4	2.2	**1007253**	**103.00**
○ LED power supply | 250W, Slim Line, DALI	Polycarbonate (PC)	40	4	2.2	**1007257**	**138.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.



GRAZIA PRO FLEXSTRIP
tunable white, 24V

LEDs per metre: 224
Width: 1 cm
Height: 0.12 cm
LED gap: 0.9 cm
Can be separated every 6.3 cm
IP code: IP 20
Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700-6500	3400	80	90	6	500	**1004725**	**132.00**



Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ DALI Controller | 1 channel, push-dim	Polycarbonate (PC)	11.6	4.2	1.8	**1003106**	**55.00**
○ DALI DT8 Controller | 5 channel, push-dim	Polycarbonate (PC)	17	5.9	2.9	**1007997**	**104.00**
○ SMART Controller | 1-5 channel	Polycarbonate (PC)	14.5	4.65	1.6	**1006348**	**69.00**
○ SMART Remote Controller | Zigbee	Polycarbonate (PC)	14	4.4	1.7	**1007827**	**68.00**
○ LED power supply | 60W, DALI, 2 channel	Polycarbonate (PC)	20.2	5.8	3	**1006133**	**132.00**
○ LED power supply | 100W, Slim Line, on/off	Polycarbonate (PC)	35	3	1.8	**1007251**	**69.00**
○ LED power supply | 100W, Slim Line, DALI	Polycarbonate (PC)	35	3	1.8	**1007255**	**95.00**



GRAZIA PRO FLEXSTRIP
RGBW, 24V

LEDs per metre: 70
Width: 1.2 cm
Height: 0.22 cm
LED gap: 1.4 cm
Can be separated every 10 cm
IP code: IP 20
Feed-in cable on both sides

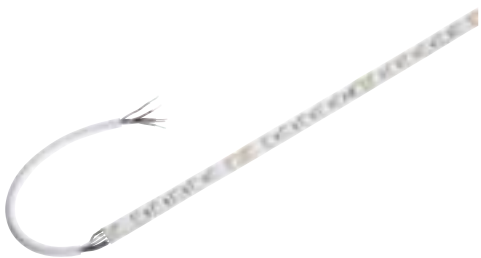

Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
3000	2050	26.9	90	6	500	**1004727**	**133.00**



⊕

Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ DALI DT8 Controller | 5 channel, push-dim	Polycarbonate (PC)	17	5.9	2.9	**1007997**	**104.00**
○ SMART Controller | 1-5 channel	Polycarbonate (PC)	14.5	4.65	1.6	**1006348**	**69.00**
○ SMART Remote Controller | Zigbee	Polycarbonate (PC)	14	4.4	1.7	**1007827**	**68.00**
○ LED power supply | 100W, Slim Line, on/off	Polycarbonate (PC)	35	3	1.8	**1007251**	**69.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.



GRAZIA IP FLEXSTRIP
24V

LEDs per metre: 70
Width: 1.2 cm
Height: 0.4 cm
LED gap: 1.4 cm
Can be separated every 10 cm
IP code: IP 54
Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700	3363	43.8	90	4	502	**1004734**	**85.00**
3000	3363	43.8				**1004735**	
4000	3614	43.8				**1004736**	

GRAZIA IP FLEXSTRIP
tunable white, 24V



LEDs per metre: 224
Width: 1.2 cm
Height: 0.4 cm
LED gap: 0.9 cm
Can be separated every 6.3 cm
IP code: IP66
Feed-in cable on both sides

Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
2700-6500	3223	80.3	90	4	502	**1004726**	**146.00**



⊕

Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ DALI DT8 Controller | 5 channel, push-dim	Polycarbonate (PC)	17	5.9	2.9	**1007997**	**104.00**
○ SMART Controller | 1-5 channel	Polycarbonate (PC)	14.5	4.65	1.6	**1006348**	**69.00**
○ SMART Remote Controller | Zigbee	Polycarbonate (PC)	14	4.4	1.7	**1007827**	**68.00**
○ LED power supply | 60W, DALI, 2 channel	Polycarbonate (PC)	20.2	5.8	3	**1006133**	**132.00**
○ LED power supply | 100W, DALI, 2 channel	Polycarbonate (PC)	34.7	4	2.2	**1006134**	**158.00**
○ LED power supply | 150W, Slim Line, on/off	Polycarbonate (PC)	35	3	1.8	**1007252**	**86.00**

GRAZIA IP FLEXSTRIP
RGBW, 24V

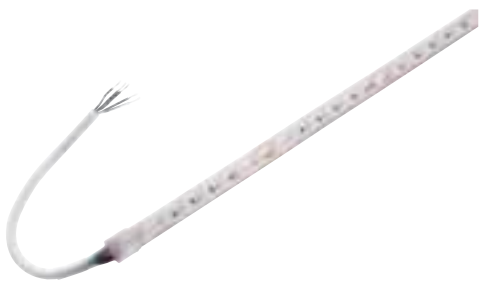

LEDs per metre: 70
Width: 1.4 cm
Height: 0.46 cm
LED gap: 1.4 cm
Can be separated every 10 cm
IP code: IP 54
Feed-in cable on both sides

Colour temperature (K)	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Prod. no.	GBP
3000	1958	27	90	6	502	**1004737**	**181.00**



⊕

Product	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	GBP
○ DALI DT8 Controller | 5 channel, push-dim	Polycarbonate (PC)	17	5.9	2.9	**1007997**	**104.00**
○ SMART Controller | 1-5 channel	Polycarbonate (PC)	14.5	4.65	1.6	**1006348**	**69.00**
○ SMART Remote Controller | Zigbee	Polycarbonate (PC)	14	4.4	1.7	**1007827**	**68.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.



1006380 + 1006394 729 + 726



SUN GRID | 701



GRID CUBE | 701



VINOLINA ONE | 703



VINOLINA | 703



VINOLINA TWO | 705



TAHA | 707



S-TUBE 32/75 | 709



PHOTONI CYL | 711



PHOTONI 45/75 | 713



S-CUBE 35/75 | 714



R-CUBE 35/75 | 715



ADEGAN | 717



ADEGAN | 717



I-RING | 718



LID I 45/75 | 719



M-POL S | 720



M-POL S | 721



M-POL S | 722



M-POL S | 723



M-POL S | 724



M-POL M | 725



M-POL M | 726



M-POL M | 727



M-POL
30/60/90 | 728, 729



CONCRETO | 733



CONCRETO | 733



RASTERLYS | 735



ESKINA
FRAME 45/75 | 737



ESKINA
FRAME 75 | 737



ESKINA
FRAME 125/175 | 738



ESKINA 30/80 | 739



T-TUBE 70 | 740, 741



T-TUBE 70 | 740, 741



LOGS 40/70 | 743



GRAFIT 30/60/90 | 745



GRAFIT 30/60/90 | 747



QUADRULO | 749



RUSTY®
SLOT 50/80 | 750



RUSTY®
SLOT 50/80 | 751



RUSTY®
PATHLIGHT | 752

RUSTY® PATHLIGHT
40/70 | 753

RUSTY® 40/70 | 755



SOCKET

RUSTY® 40/70 | 697



SOCKET

RUSTY®
CONE 24 | 757



SOCKET

RUSTY®
CONE 40/70 | 757



SOCKET

RUSTY® 40/70 | 758



SOCKET

ARROCK
GRANITE 40/70 | 759



SOCKET

ARROCK ARC | 760



LED

ARROCK
STONE 50/75 | 761



SOCKET

ARROCK SLOT | 761



LED

L-LINE OUT
30 | 762



LED

L-LINE OUT
60 | 763



LED

L-LINE OUT
50/80 | 763



SOCKET

THEO
PATHLIGHT | 764



LED

OVALISK 75/100 | 765



SOCKET

GLOO PURE
27/44/70 | 767



SOCKET

ROTOBALL
25/40/50 | 769



SOCKET

PHOTONIA | 771



SOCKET

OTOS GLAS | 771



SOCKET

CUBIX | 772



SOCKET

CONE | 772



SOCKET

MOLAT | 773



SOCKET

MOLAT | 773



SOCKET

LISENNE 40/70 | 774



SOCKET

ADEGAN | 775



SOCKET

ALPA MUSHROOM
45/75 | 777



SOCKET

ALPA CONE 100 | 777



LED

APONI 90/120 | 778



LED

TRUST 30/60 | 779



SOCKET

BIG NAILS 50/80 | 780



SOCKET

ROX ACRYL
30/60/90 | 781



SOCKET

VAP SLIM
30/60/90 | 783



SOCKET

C-POL | 784



SOCKET

F-POL | 784



SOCKET

SQUARE POLE
30/60/90 | 785



LED

SLOTS 45/65 | 787



LED

H-POL 30/60 | 788



LED

H-POL TWIN 60 | 789



SLOTBOX 40/60 | 791



FLATT 65/100 | 793



ORDI II | 795



ORDI II | 795



ABRIDOR 60/100 | 796



ABRIDOR 60/100 | 797



IPERI 50 | 798



QUADRASYL 75 | 799



QUAD POLE | 800



BOOKAT | 800



MYRA SPOT | 801



SITRA 360 | 801


1008477 701

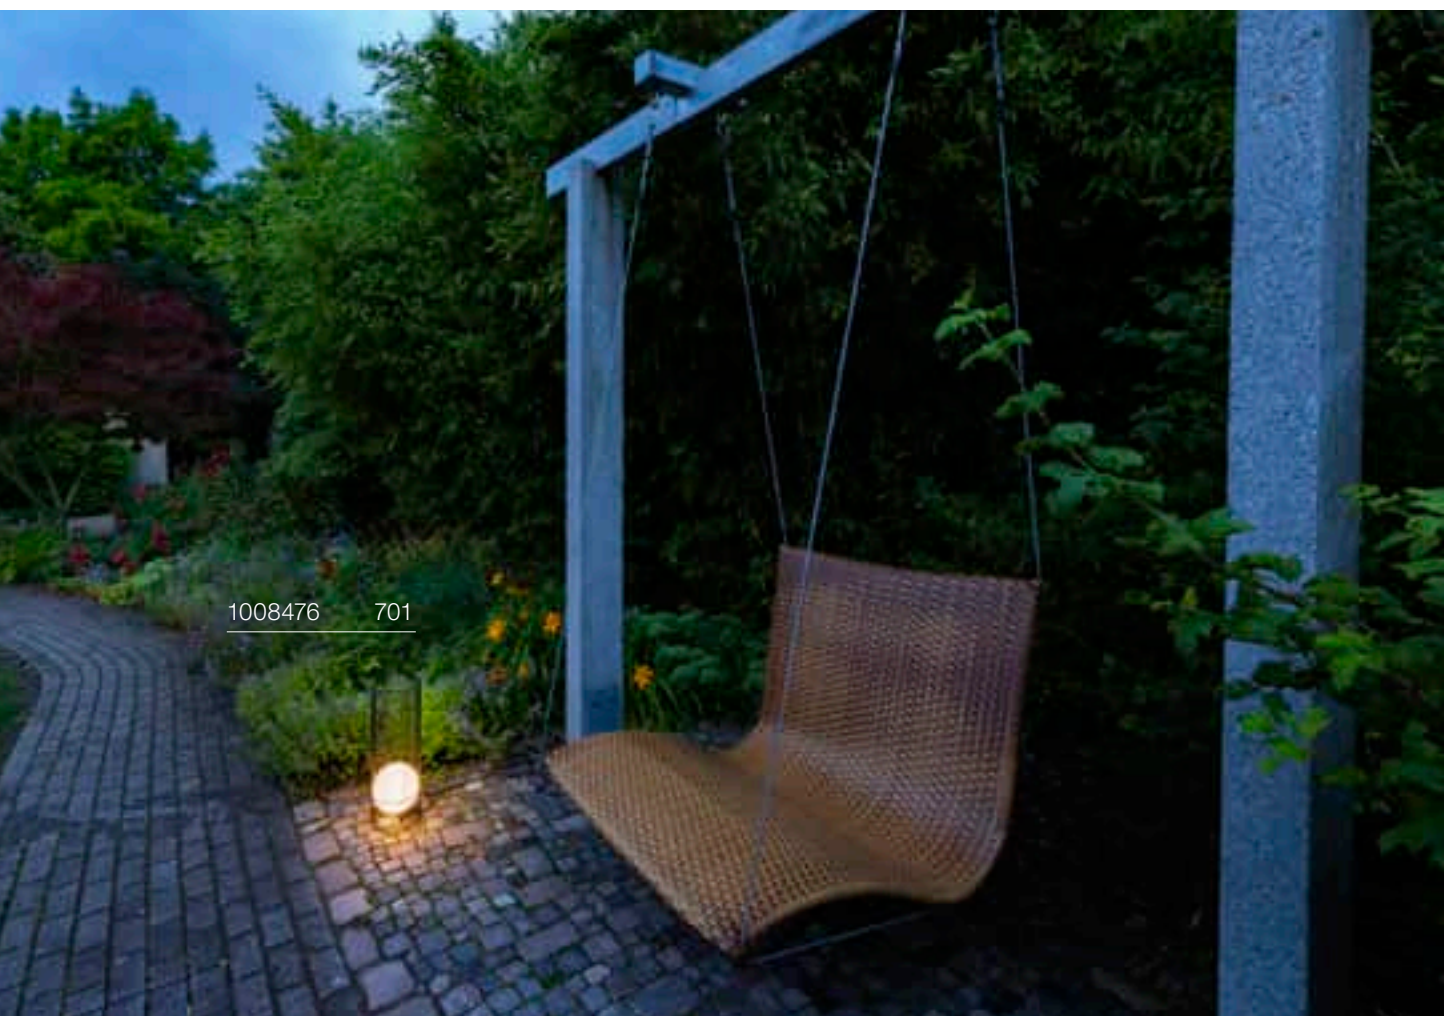
1008476 701

SUN GRID

from Spring 2025



IP 65 IK02

220-240V ~50/60Hz
Total wattage: 8W
Material: polycarbonate (PC)

LED INSIDE

Down 2700K

Variant	Prod. no.	GBP
● black	1008476	154.00

GRID CUBE

from Spring 2025





IP 65 IK02

220-240V ~50/60Hz
Total wattage: 8W
Material: polycarbonate (PC)

LED INSIDE

Down 2700K

Variant	Prod. no.	GBP
● black	1008477	171.00


1007357 703


1007360 703

VINOLINA ONE
TL, Battery





Touch | IP54 | L80B10

5V battery operation
Total wattage: 2.5W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A

LED INSIDE | CRI 80

Down	125lm | 2700K

Variant	Prod. no.	GBP
● black	**1007359**	**85.00**
○ white	**1007357**	**85.00**
● rust	**1007358**	**85.00**

VINOLINA
TL, Battery

CCT





Touch | IP54 | L80B10

5V battery operation
Total wattage: 2.2W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A

LED INSIDE | CRI 80

Down	130lm | 2700K	130lm | 3000K

Variant	Prod. no.	GBP
● black	**1007362**	**85.00**
○ white	**1007360**	**85.00**
● rust	**1007361**	**85.00**


1007697 705

VINOLINA TWO
TL, Battery, DTW

CCT





Touch | IP65 | IK03 | L70B50

5V battery operation
Total wattage: 2W
Material: aluminium/plastic

- Running time 10h
- Charging time 5h
- Charging station for one light included

LED INSIDE | CRI 80

140lm | 2200K	170lm | 2700K	190lm | 3000K

Variant	Prod. no.	GBP
black	**1007693**	**85.00**
white	**1007692**	**85.00**
sand	**1007697**	**85.00**
rust	**1007695**	**85.00**
red	**1007694**	**85.00**
lime green	**1007696**	**85.00**

VINOLINA TWO
Charging base

NEW



IP20 | IK04

220-240V ~50/60Hz | 5V
Total wattage: 37W
Material: plastic / plastic

L: 46.2 cm
W: 32.6 cm
H: 5 cm

- Charging base for max. 6 VINOLINA TWO
- Connection cable available separately

Variant	Prod. no.	GBP
black	**1007698**	**120.00**

VINOLINA TWO
IEC connection cable with safety plug

NEW



IP 20

L: 180 cm

Variant	Prod. no.	GBP
black	**1008029**	**13.00**


1007380 707


1007380 707



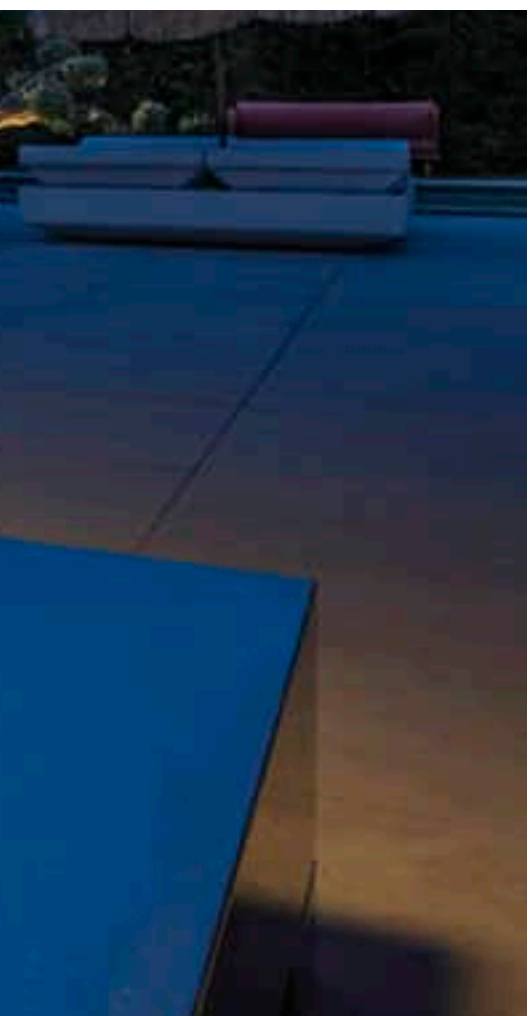

TAHA
Light set, battery-powered





IP 65 IK03 L70B50

100-240V ~50/60Hz | 5V battery operation
Total wattage: 5W
Max. U-out driver: 5V DC
Material: aluminium/plastic

- 3 dimming levels
- Plug-in power supply

LED INSIDE CRI 80

Down 200lm | 2700K

Variant	Prod. no.	GBP
● black	**1007980**	**137.00**


1007651 709
1007652 709

S-TUBE 32
Pole, GU10





IP65 IK06 340° 130°

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE <10 W

Base: 1xGU10 | Max. Ø: 5 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1007651**	**73.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

S-TUBE 75
Pole, GU10





IP65 IK06 340° 130°

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE <10 W

Base: 1xGU10 | Max. Ø: 5 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1007652**	**115.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**


1008194 711

PHOTONI CYL
Pole 45

NEW





IP65 IK08

220-240V ~50/60 Hz
Material: aluminium

• IP connection box

SOCKET INSIDE 13 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
black	1008195	154.00
rust	1008196	154.00

LED A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

PHOTONI CYL
Pole 75

NEW





IP65 IK08

220-240V ~50/60 Hz
Material: aluminium

• IP connection box

SOCKET INSIDE 13 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
black	1008193	171.00
rust	1008194	171.00

LED A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP


1007584 713
1007587 713

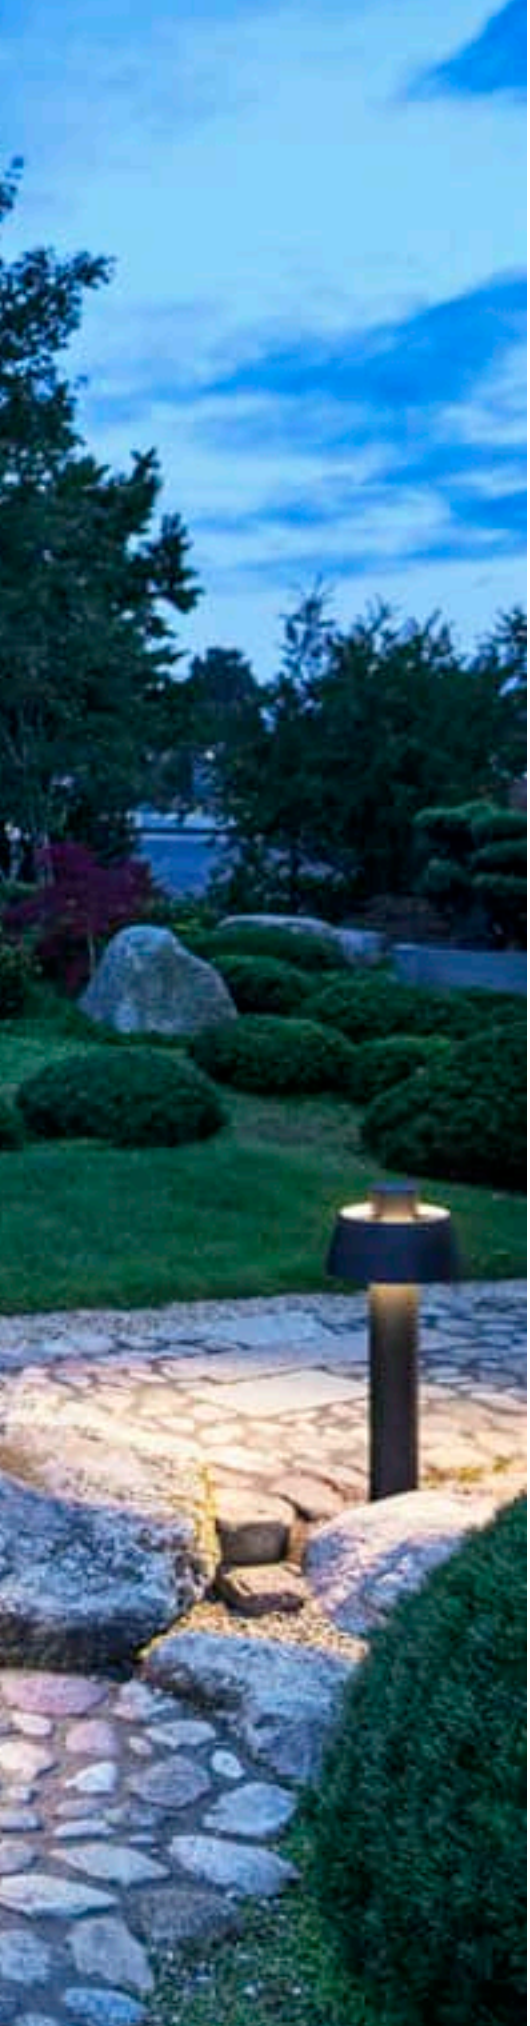

PHOTONI 45
Pole, E27





IP65 IK08

220-240V ~50/60Hz
Material: aluminium

• IP connection box 3-pin

SOCKET INSIDE <13 W

Base: 1xE27	Max. Ø: 6 cm	L: 11.6 cm

Variant	Prod. no.	GBP
● black	**1007587**	**154.00**
● rust	**1007583**	**154.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

PHOTONI 75
Pole, E27





IP65 IK08

220-240V ~50/60Hz
Material: aluminium

• IP connection box 3-pin

SOCKET INSIDE <13 W

Base: 1xE27	Max. Ø: 6 cm	L: 11.6 cm

Variant	Prod. no.	GBP
● black	**1007584**	**171.00**
● rust	**1007580**	**171.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

S-CUBE 35
Pole

CCT





C | IP 65 | IK04 | 80° | L70B20 | 180°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

• Open cable end

LED INSIDE | CRI 80

Down	1000lm | 2700K	1200lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007460**	**171.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

S-CUBE 75
Pole

CCT





C | IP 65 | IK04 | 80° | L70B20 | 180°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

• Open cable end

LED INSIDE | CRI 80

Down	1000lm | 2700K	1200lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007459**	**201.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

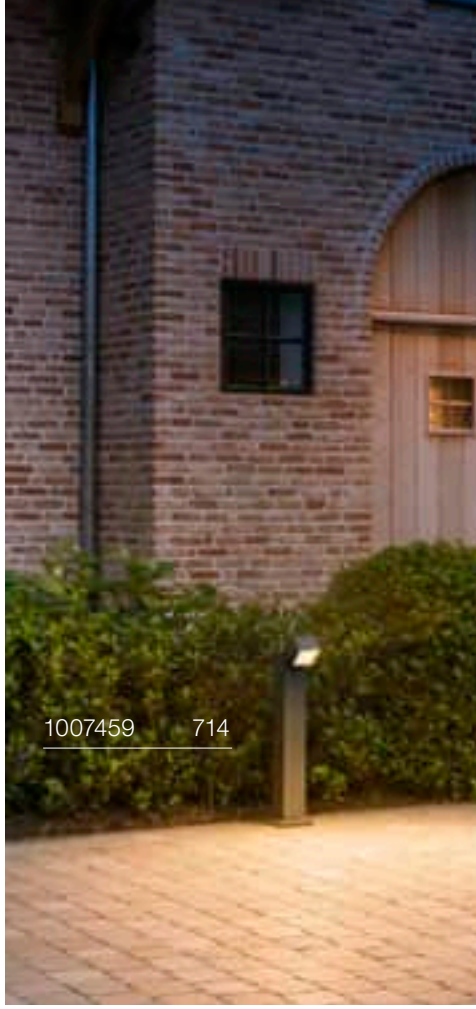

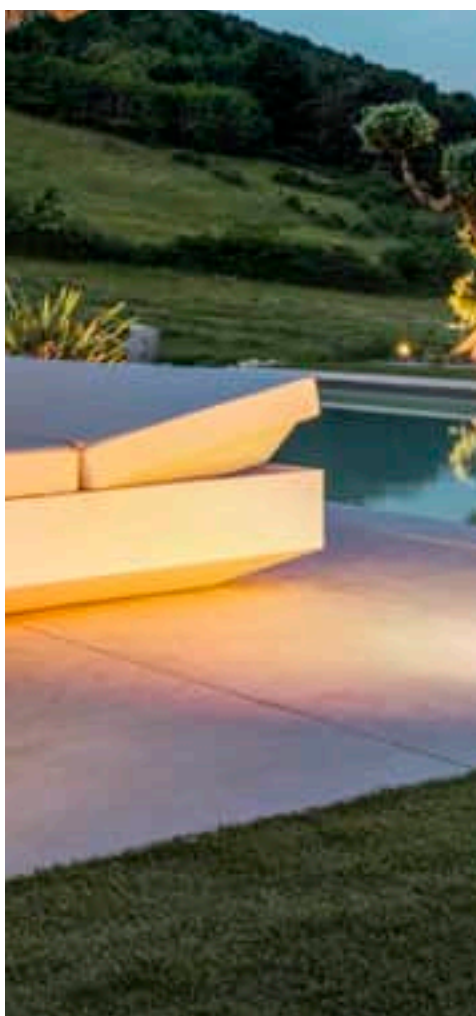



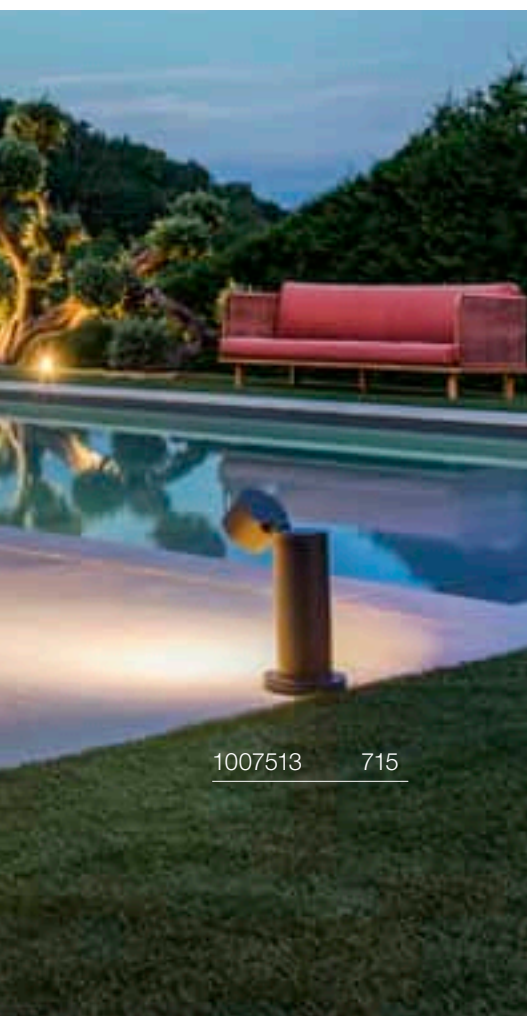

R-CUBE 35
Pole

CCT





C | IP 65 | IK04 | 70° | L70B20 | 350° | 180°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	800lm | 2700K	800lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007513**	**171.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

R-CUBE 75
Pole

CCT





C | IP 65 | IK04 | 70° | L70B20 | 350° | 180°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	800lm | 2700K	800lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007512**	**201.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**


1008389 717

ADEGAN
FL, SOLAR

from Spring 2025



IP 65 IK02

220-240V ~50/60Hz
Material: polyethylene (PE)

LED INSIDE

Down 550lm | 2200K

Variant	Prod. no.	GBP
black	1008386	326.00
brown	1008387	326.00

ADEGAN
FL, FLAT SOLAR

from Spring 2025



IP 65 IK02

220-240V ~50/60Hz
Material: polyethylene (PE)

LED INSIDE

Down 550lm | 2200K

Variant	Prod. no.	GBP
black	1008388	249.00
brown	1008389	249.00

I-RING
Pole



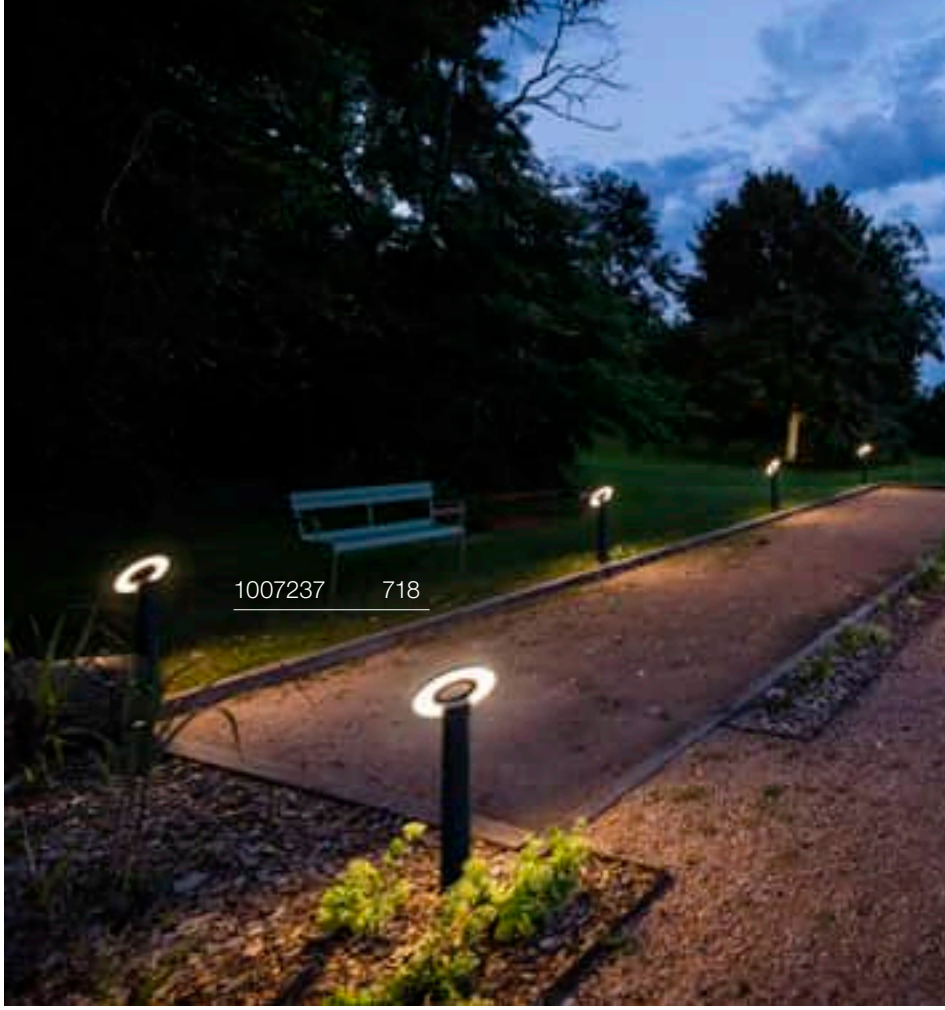





IP 65 | IK05 | L70B50 | 350° | 90° | 10

100-240V ~50/60Hz | 350mA
Total wattage: 9.2W
Material: aluminium

- IP68 3-pin connection box

LED INSIDE | CRI 80

Down 670lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1007237**	**197.00**

Product	Prod. no.	GBP
Screw set		
Stainless steel	**228753**	**8.00**



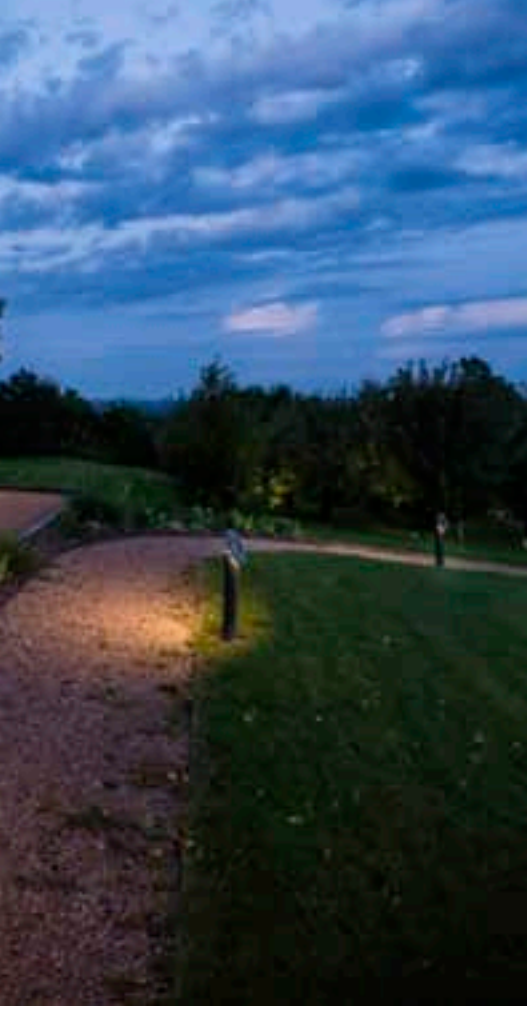

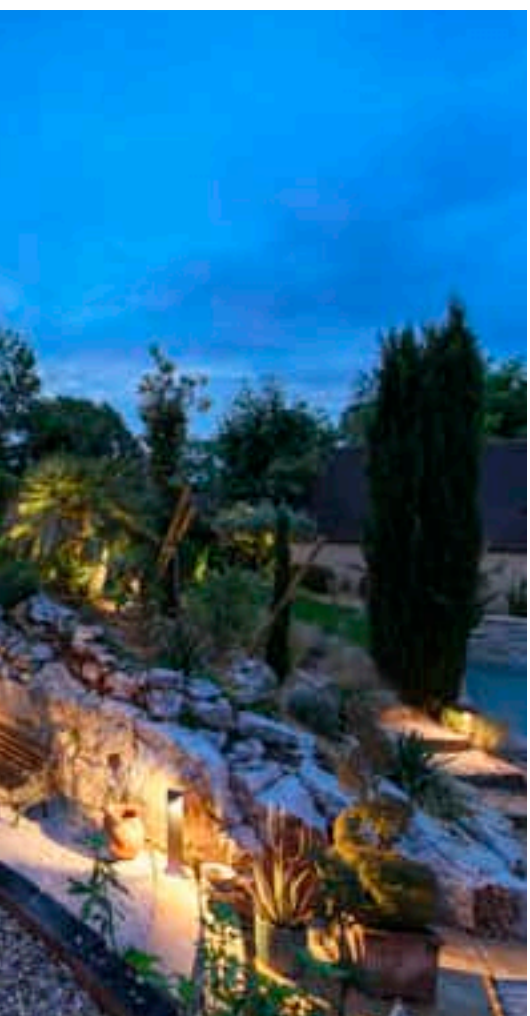

LID I 45
Pole, single

CCT





C | IP65 | IK07 | 100° | L70B20 | 330°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	900lm | 2700K	1050lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1007670**	**188.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**

LID I 75
Pole, double

CCT





C | IP65 | IK07 | 100° | 100° | L70B20 | 2x330°

220-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	850lm | 2700K	1000lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1007669**	**257.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL S
Polehead 360°, Glare reduction





IP 65 IK10 L80B50 90 17

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 80

Down 750lm | 2700K

Variant	Prod. no.	GBP
anthracite	**1007232**	**249.00**

⊕

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL S
Polehead 360°,
Glare reduction, DALI







Dali IP 65 IK10 L80B50 90 20

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 80

Down 750lm | 2700K

Variant	Prod. no.	GBP
anthracite	**1007233**	**266.00**

⊕

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**

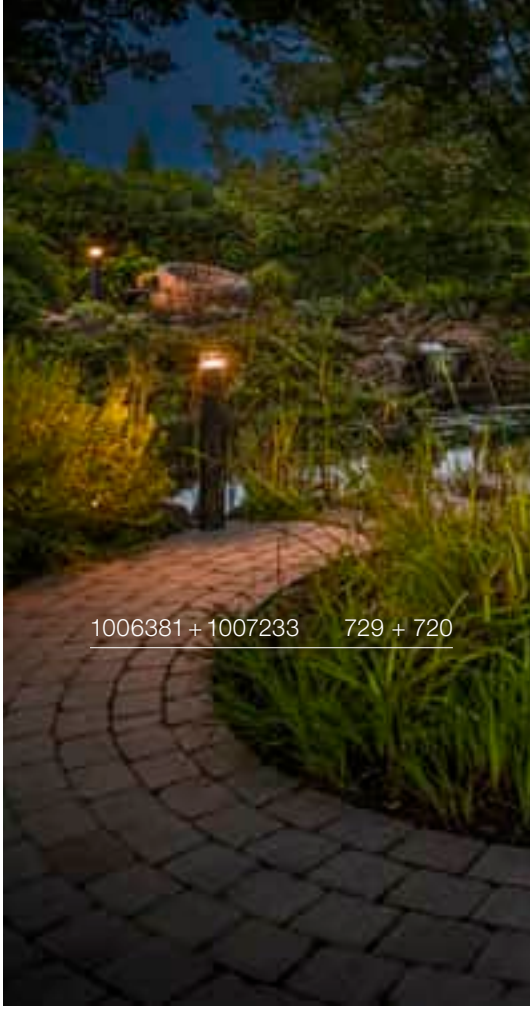







M-POL S
Polehead 180°, Glare reduction





IP 65 | IK10 | L80B50 | 90 | 17

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE | CRI 80

Down | 700lm | 2700K

Variant	Prod. no.	GBP
anthracite	**1007234**	**257.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL S
Polehead 180°,
Glare reduction, DALI





Dali | IP 65 | IK10 | L80B50 | 90 | 20

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE | CRI 80

Down | 700lm | 2700K

Variant	Prod. no.	GBP
anthracite	**1007235**	**274.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**



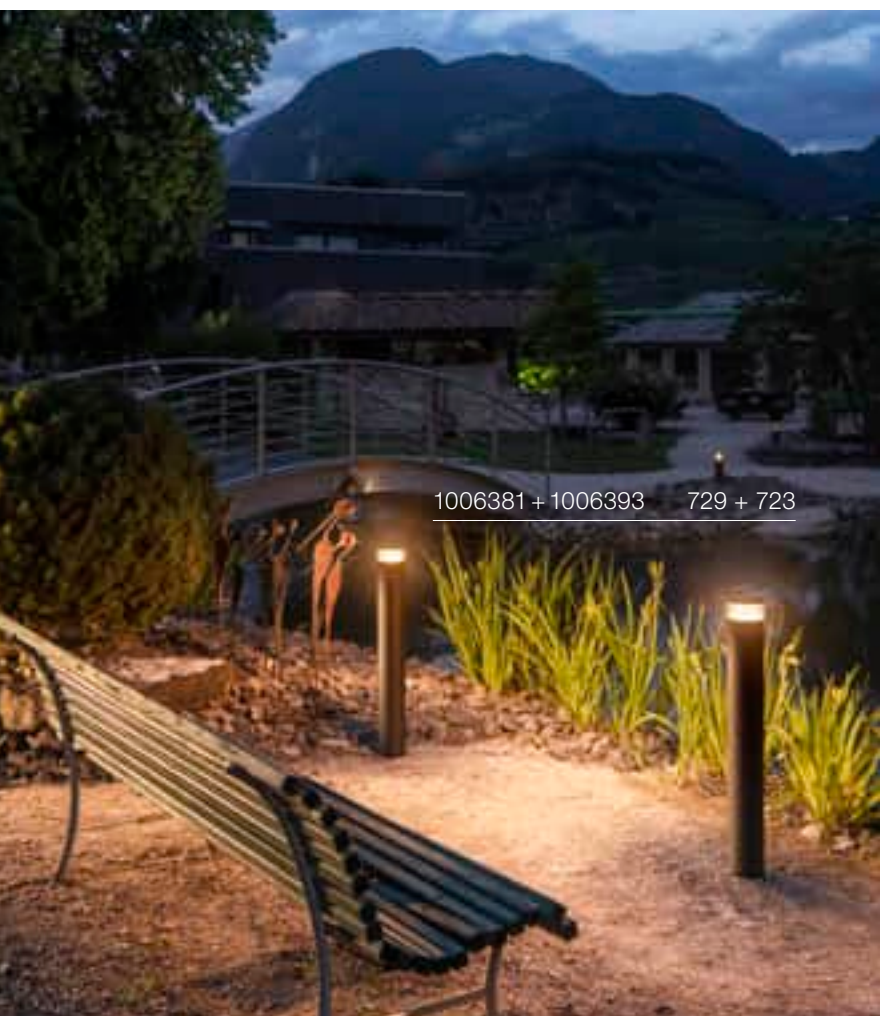

M-POL S
Polehead

CCT





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 90

Down	470lm | 2700K	510lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006383**	**223.00**

⊕

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL S
Polehead, DALI





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19 W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 90

Down	890lm | 2700K	950lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006389**	**314.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**

M-POL S
Polehead, Shader





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 90

Down	285lm | 2700K	310lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006387**	**240.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL S
Polehead, Shader, DALI





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19 W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 90

Down	520lm | 2700K	550lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006393**	**331.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**

M-POL S
Polehead, Louver

CCT





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 90

Down	145lm | 2700K	155lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006385**	**271.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL S
Polehead, Louver, DALI

CCT
DALI





Dali IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19 W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE CRI 90

Down	260lm | 2700K	270lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006391**	**386.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**







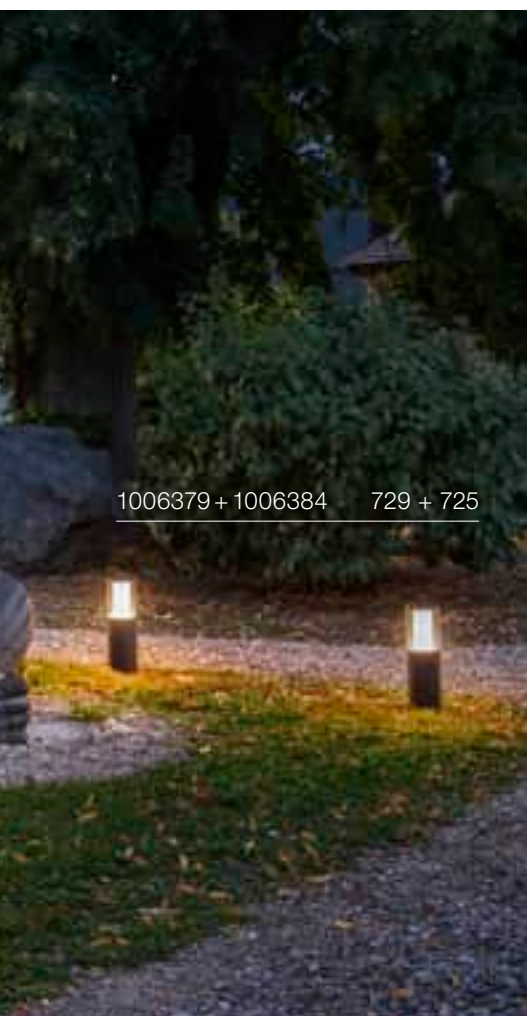

M-POL M
Polehead

CCT





IP 65 | IK10 | L80B50 | 90

220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE | CRI 90

Down	590lm | 2700K	660lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006384**	**240.00**

⊕

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL M
Polehead, DALI

CCT

DALI





Dali | IP 65 | IK10 | L80B50 | 90

220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19 W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE | CRI 90

Down	1150lm | 2700K	1230lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006390**	**331.00**

⊕

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**



M-POL M
Polehead, Shader





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

Down	420lm | 2700K	460lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006388**	**257.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL M
Polehead, Shader, DALI





IP 65 IK10 L80B50 90

220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19 W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

Down	820lm | 2700K	870lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006394**	**351.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**



M-POL M
Polehead, Louver

CCT





IP 65 | IK10 | L80B50 | 90

220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE | CRI 90

Down	190lm | 2700K	210lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006386**	**377.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
T-connector box		
black	**228726**	**28.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

M-POL M
Polehead, Louver, DALI

CCT
DALI





Dali | IP 65 | IK10 | L80B50 | 90

220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19 W
Material: aluminium

- Open cable end
- Matching bollards and other accessories can be found on pages 726-729

LED INSIDE | CRI 90

Down	350lm | 2700K	370lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1006392**	**454.00**

Product	Prod. no.	GBP
Ground anchor		
Stainless steel	**1006382**	**43.00**
Connection box		
black	**228725**	**17.00**
IP68 connection box, 5-pin		
black	**1006453**	**31.00**



M-POL
CAP

NEW



Material: aluminium

Variant	Prod. no.	GBP
anthracite	1008475	21.00

M-POL
Pole 60, Socket

NEW

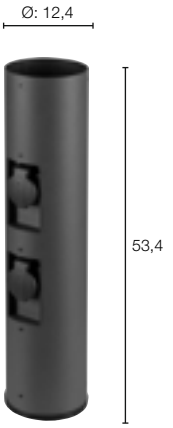

IP54 IK10

220-240V ~50/60 Hz
Material: aluminium

- Open cable end

Variant	Prod. no.	GBP
anthracite	1008474	137.00

M-POL 30
Pole



Material: aluminium

- Suitable for all lamp heads from pages 720-727

Variant	Prod. no.	GBP
● anthracite	**1006379**	**85.00**

M-POL 60
Pole

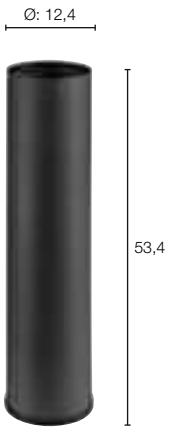

Material: aluminium

- Suitable for all lamp heads from pages 720-727

Variant	Prod. no.	GBP
● anthracite	**1006380**	**120.00**

M-POL 90
Pole

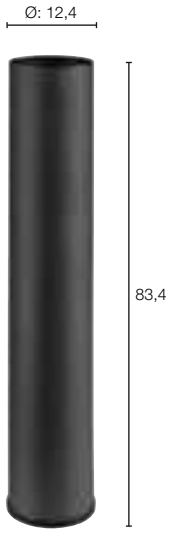

Material: aluminium

- Suitable for all lamp heads from pages 720-727

Variant	Prod. no.	GBP
● anthracite	**1006381**	**145.00**

DESIGN YOUR M-POL SYSTEM

The right bollard lights in a few steps – made possible with the M-POL system. It combines three sizes and eight lamp heads with five light properties and two colour temperatures. Whether in high or flat form, with shaders for less light on one side, homogeneous and diffuse radiance or glare-free thanks to integrated louvres. Whether 2700 or 3000 Kelvin, controllable as an On/Off version or DALI. Configure your chosen M-POL bollard lights and showcase every outdoor ambience in its best light.

CHOOSE YOUR PREFERRED ...

1. bollard (30, 60, 90)
2. Lamp head (On/Off, DALI)
3. Lamp head size (high, flat)
4. Light property (Clear, Shader, Louver)
5. Colour temperature (2700K, 3000K)

DONE!

LAMP HEADS

M-POL S
Diameter: 12.3 cm, H: 15.9 cm

Clear | Shader | Louver | 180° direction | 360° direction



M-POL M
Diameter: 12.3 cm, H: 25.9 cm

Clear | Shader | Louver

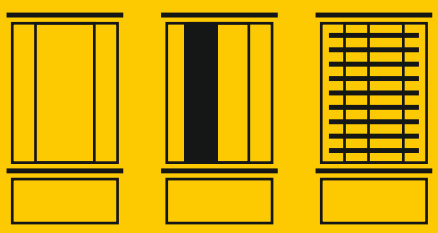

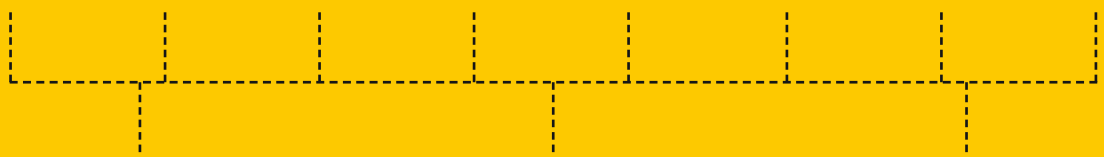

NEW



M-POL 30
Diameter: 12.4 cm, H: 23.4 cm

M-POL 60
Diameter: 12.4 cm, H: 53.4 cm

M-POL 90
Diameter: 12.4 cm, H: 83.4 cm

BOLLARD


1006408 733

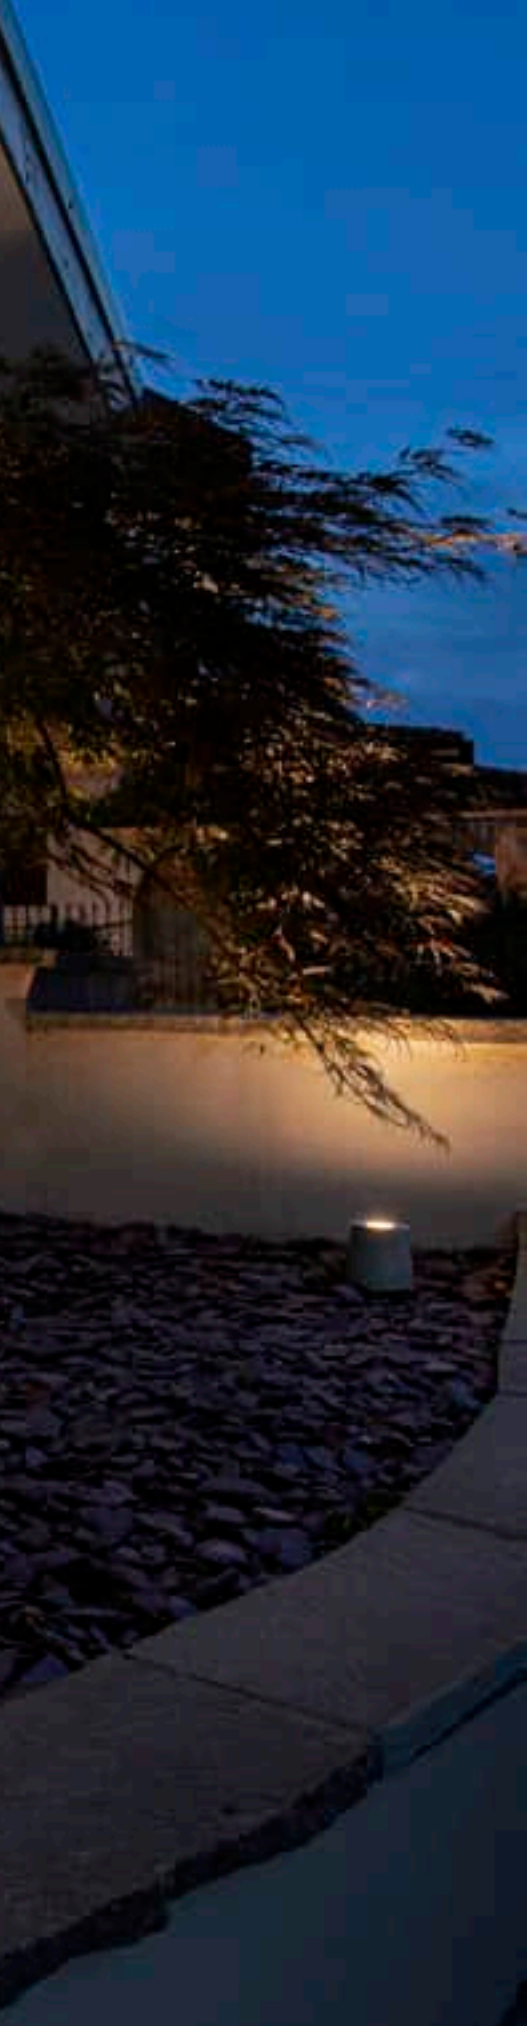

CONCRETO
FL, round, QPAR 51





IP 65 IK05 200

220-240V ~50/60Hz
Material: concrete/aluminium

- IP44 safety plug

SOCKET INSIDE <10 W

Base: 1xGU10	Max. Ø: 5.1 cm	L: 6 cm

Variant	Prod. no.	GBP
grey	**1007931**	**103.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

CONCRETO
FL, square, QPAR51





IP 65 IK05 200

220-240V ~50/60Hz
Material: concrete/aluminium

- IP44 safety plug

SOCKET INSIDE <10 W

Base: 1xGU10	Max. Ø: 5.1 cm	L: 6 cm

Variant	Prod. no.	GBP
grey	**1007932**	**103.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP


1008385 735

RASTERLYS
Pole 70

CCT

from Spring 2025



C;L | IP65 | IK06 | 70° | L80B50

220-240V ~50/60 Hz | 350
Total wattage: 14W
Material: aluminium

• Open cable end

LED INSIDE | CRI 80

Down	175lm | 2700K	200lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1008385**	**257.00**

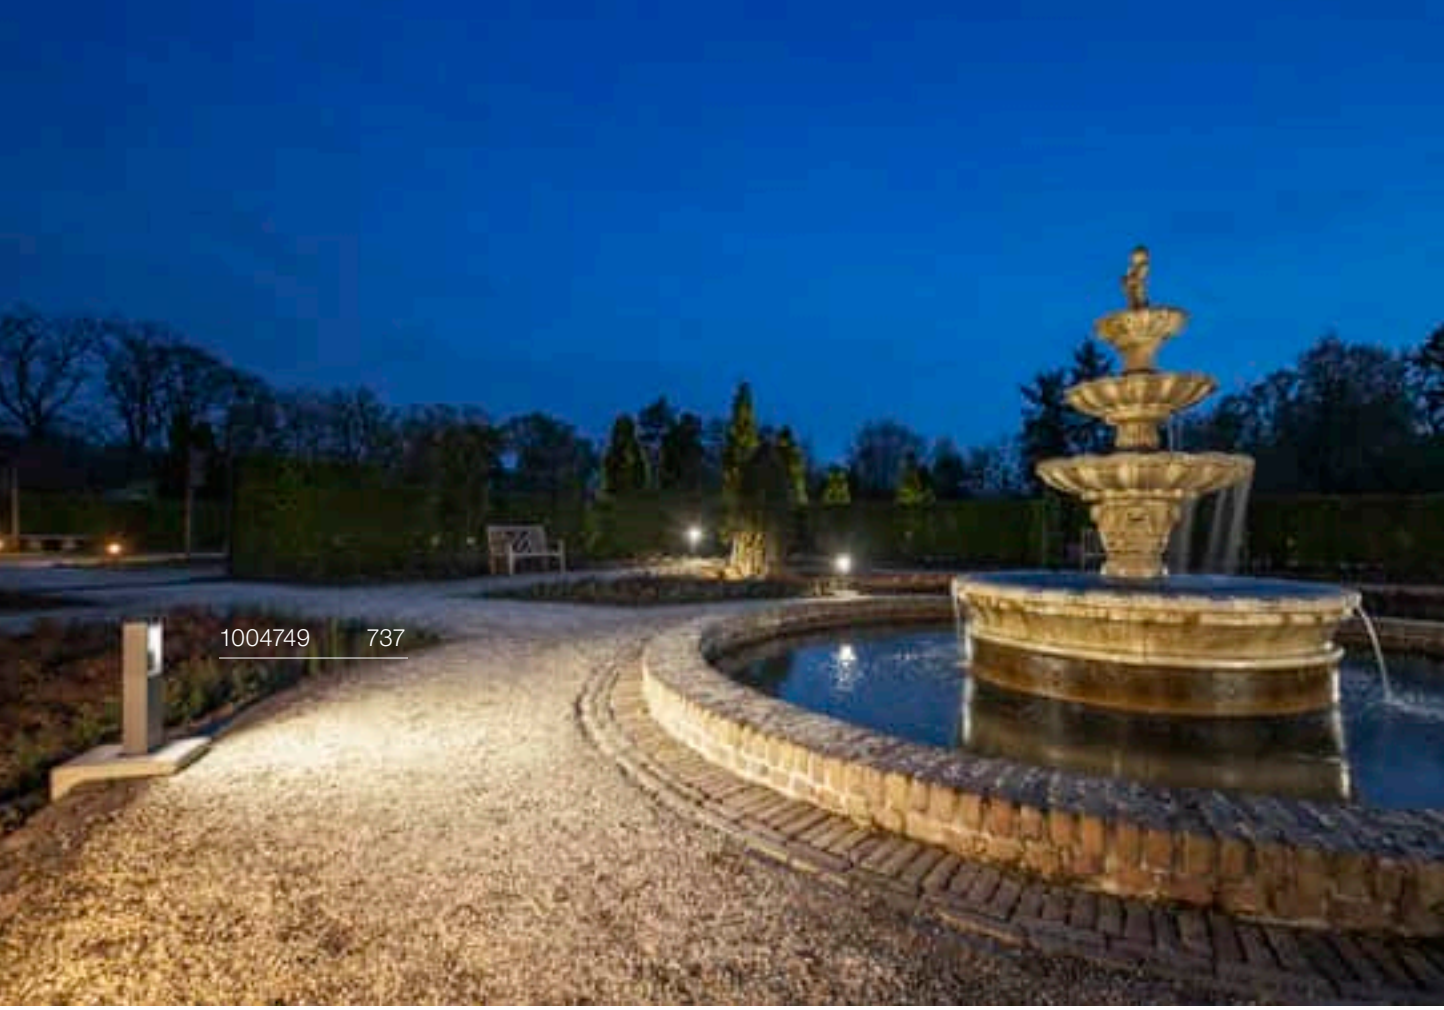
1004749 737

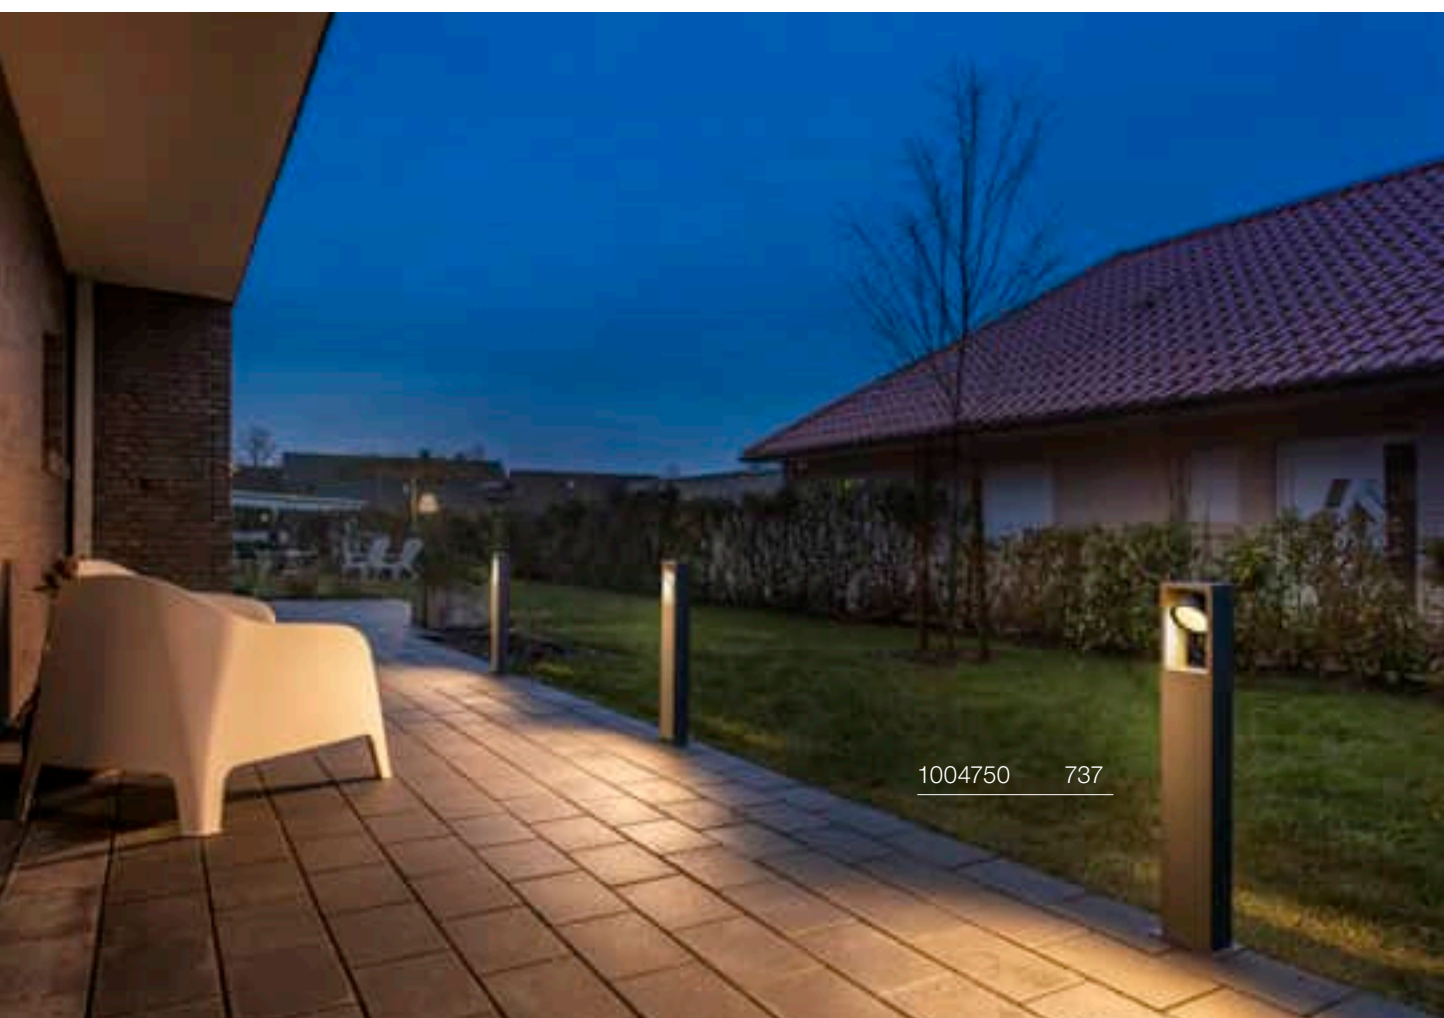
1004750 737

ESKINA FRAME 45
Pole, single

CCT





IP 65 | IK06 | 95° | L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1004749**	**242.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

ESKINA FRAME 75
Pole, single

CCT





IP 65 | IK06 | 95° | L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1004750**	**265.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

ESKINA FRAME 75
Pole, double

CCT





IP 65 | IK06 | 2x95° | L70B50 | 2x320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Spot 1	1100lm | 3000K	1200lm | 4000K
Spot 2	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1004751**	**300.00**

⊕

Product	Prod. no.	GBP
IP68 connection box 3-pin		
● black	**228730**	**15.00**

ESKINA FRAME 125
Pole, double





IP 65 IK06 2x95° L70B50 2x320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

• Open cable end

LED INSIDE CRI 80

Spot 1	1100lm	3000K	1200lm	4000K
Spot 2	1100lm	3000K	1200lm	4000K

Variant	Prod. no.	GBP
● anthracite	**1005439**	**346.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

ESKINA FRAME 175
Pole, double





IP 65 IK06 2x95° L70B50 2x320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

• Open cable end

LED INSIDE CRI 80

Spot 1	1100lm	3000K	1200lm	4000K
Spot 2	1100lm	3000K	1200lm	4000K

Variant	Prod. no.	GBP
● anthracite	**1005440**	**407.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**



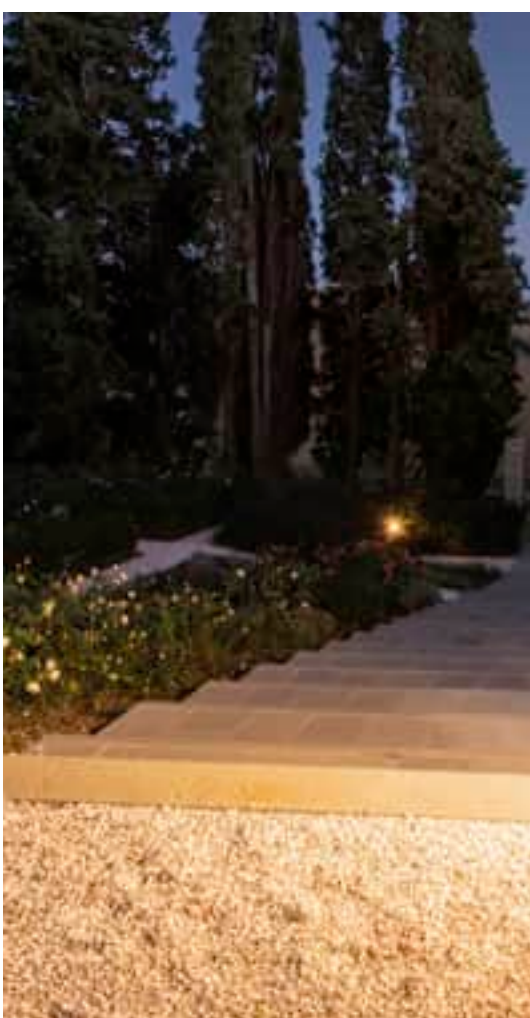





ESKINA 30
Pole





IP 65 IK02 95° L70B50 340° 105° 150

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

• IP44 safety plug

LED INSIDE CRI 80

Down	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1007935**	**242.00**

⊕

Product	Prod. no.	GBP
Ground spike		
grey	**230060**	**46.00**

ESKINA 80
Pole





IP 65 IK02 95° L70B50 340° 105°

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

• Open cable end

LED INSIDE CRI 80

Down	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1002907**	**265.00**

⊕

Product	Prod. no.	GBP
Ground spike		
grey	**230060**	**46.00**

T-TUBE 70
Pole, GU10 single, Sensor

from Spring 2025



IP44 IK06 6

220-240V ~50/60 Hz
Material: aluminium

- Primary and replica functionality, multiple lights can be switched
- Open cable end

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008014** ●	**137.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

T-TUBE 70
Pole, GU10 double, Sensor

from Spring 2025



IP44 IK06

220-240V ~50/60 Hz
Material: aluminium

- Primary and replica functionality, multiple lights can be switched
- Open cable end

SOCKET INSIDE 10 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008015** ●	**171.00**

LED QPAR51 | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP





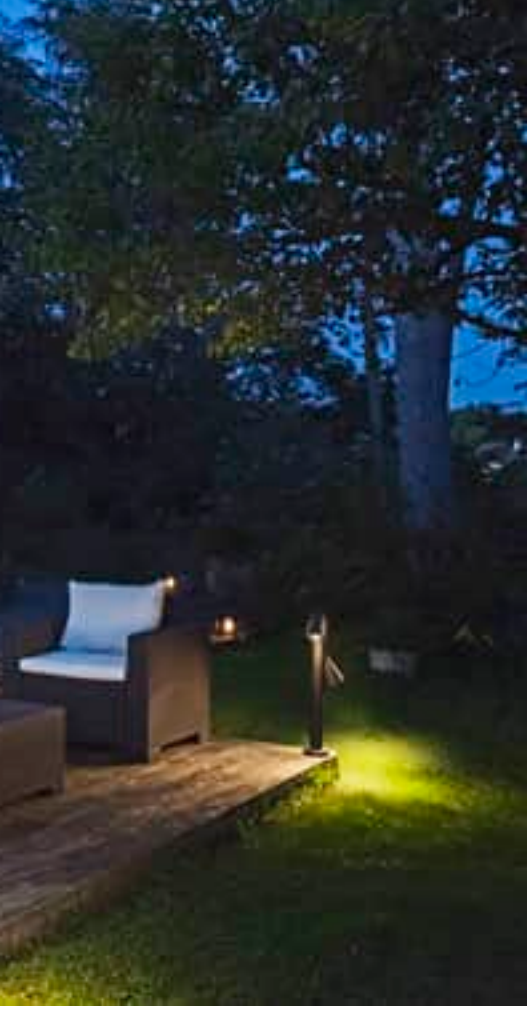



T-TUBE 70
Pole, GU10 single

from Spring 2025



IP65 IK06

220-240V ~50/60 Hz
Material: aluminium

- Open cable end

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008016**	**120.00**

LED QPAR51 | 6W | 38°
3000K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005080 | 7.00 GBP

T-TUBE 70
Pole, GU10 double

from Spring 2025



IP65 IK06

220-240V ~50/60 Hz
Material: aluminium

- Open cable end

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008017**	**154.00**

LED QPAR51 | 2.4W | 36°
3000K | 230lm | EEK=E
3kWh/1000h



Prod. no.: 1007231 | 5.00 GBP


232115 743

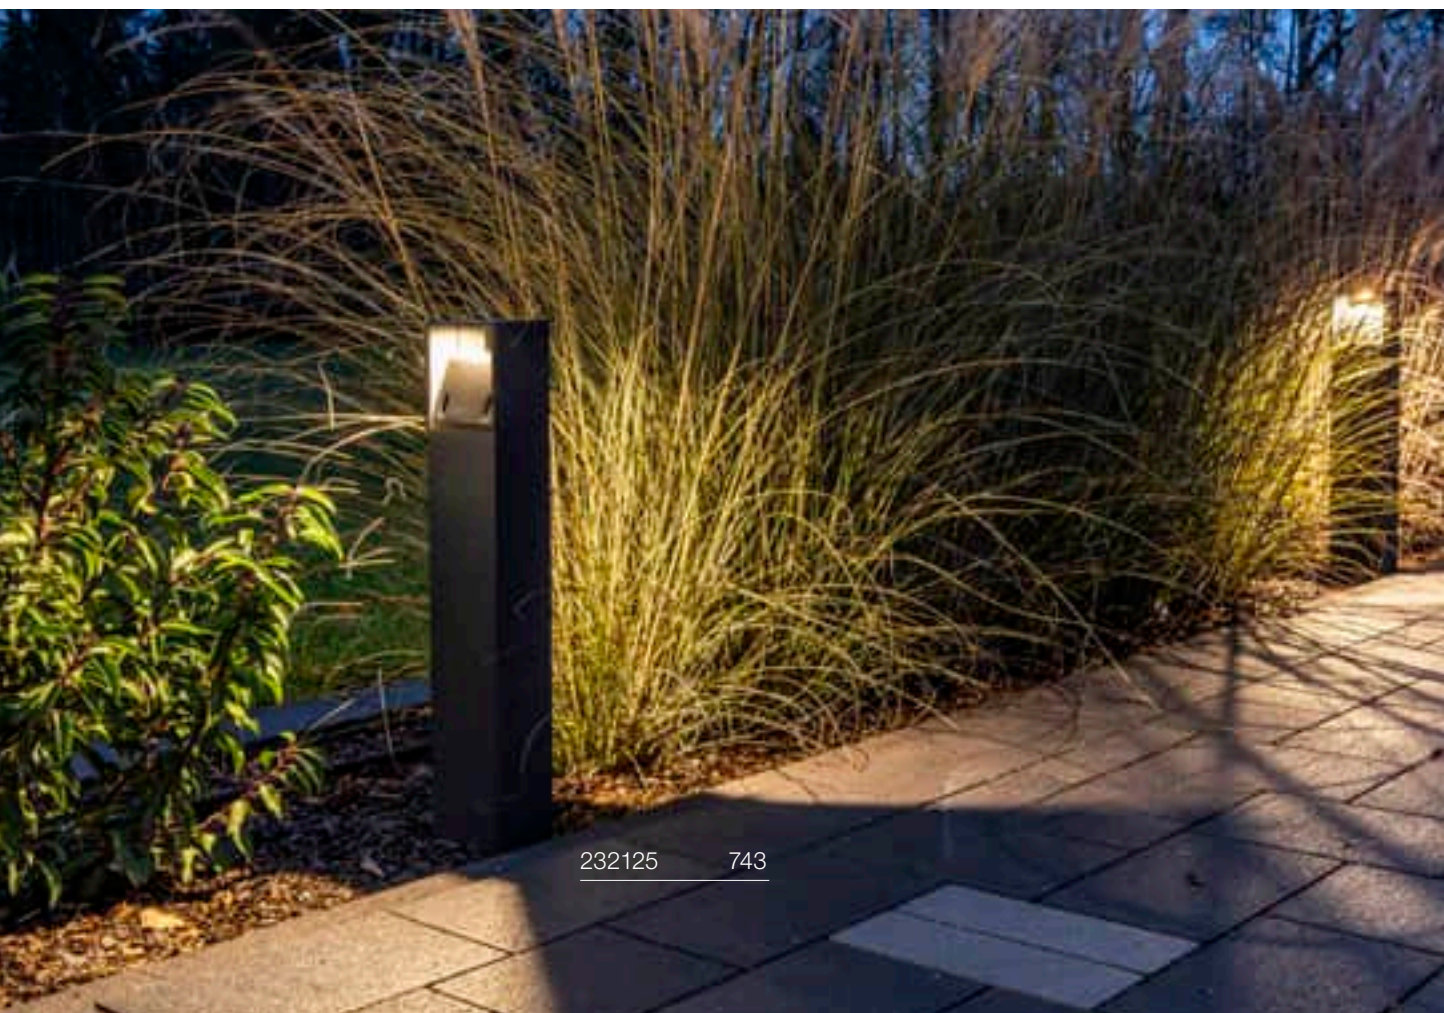
232125 743

LOGS 40
Pole





IP 65 IK04 L70B50 20

220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

• Open cable end

LED INSIDE CRI 80

Down 570lm | 3000K

Variant	Prod. no.	GBP
anthracite	**232115**	**223.00**

Product	Prod. no.	GBP
Concrete anchor		
grey	**232119**	**53.00**
Ground spike		
grey	**231230**	**40.00**
Screw set		
Stainless steel	**228754**	**4.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

LOGS 70
Pole





IP 65 IK04 L70B50 20

220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

• Open cable end

LED INSIDE CRI 80

Down 570lm | 3000K

Variant	Prod. no.	GBP
anthracite	**232125**	**257.00**

Product	Prod. no.	GBP
Concrete anchor		
grey	**232119**	**53.00**
Ground spike		
grey	**231230**	**40.00**
Screw set		
Stainless steel	**228754**	**4.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**


1006180 745

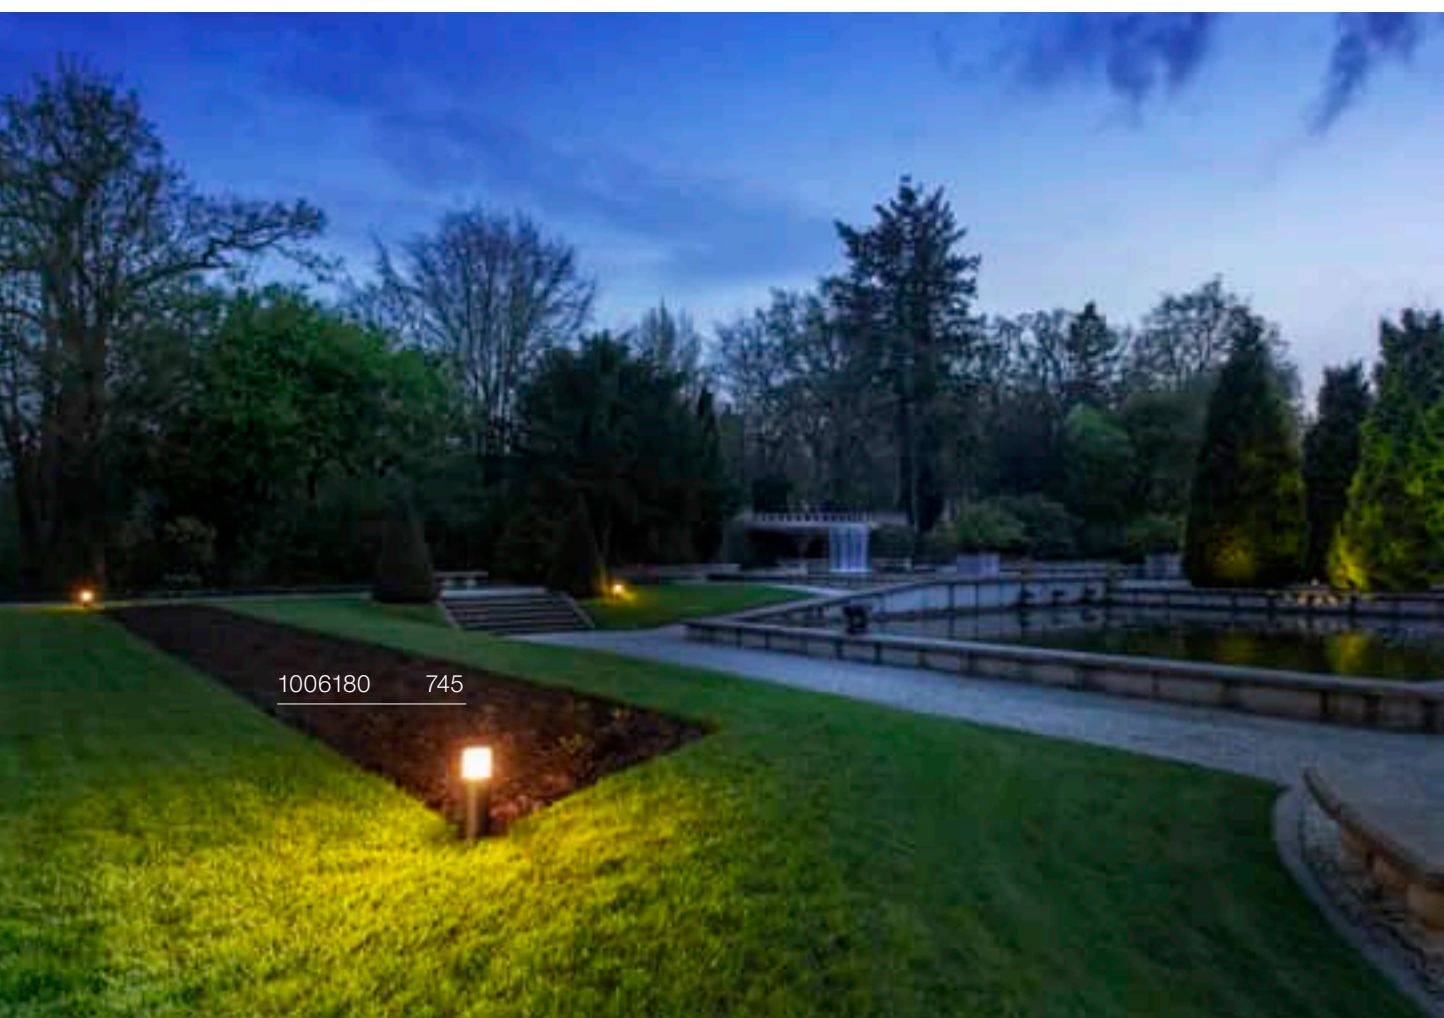
1006180 745

GRAFIT 30
Pole, round, E27





IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**1006180**	**69.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h



Prod. no.: 1005303 | 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

GRAFIT 60
Pole, round, E27





IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**1006181**	**86.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h



Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

GRAFIT 90
Pole, round, E27





IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**1006182**	**113.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h



Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**


231225 747


1006184 747

GRAFIT 30
Pole, E27





IP 44

220-240V ~50/60Hz
Material: aluminium/plastic

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
anthracite	231215	69.00

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005303 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	231230	40.00
Screw set		
Stainless steel	228754	4.00
Connection box IP68 3-pin		
black	228730	15.00

GRAFIT 60
Pole, E27





IP 44

220-240V ~50/60Hz
Material: aluminium/plastic

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
anthracite	231225	86.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	231230	40.00
Screw set		
Stainless steel	228754	4.00
Connection box IP68 3-pin		
black	228730	15.00

GRAFIT 90
Pole, E27





IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
anthracite	1006184	113.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	231230	40.00
Screw set		
Stainless steel	228754	4.00
Connection box IP68 3-pin		
black	228730	15.00


1005442 749

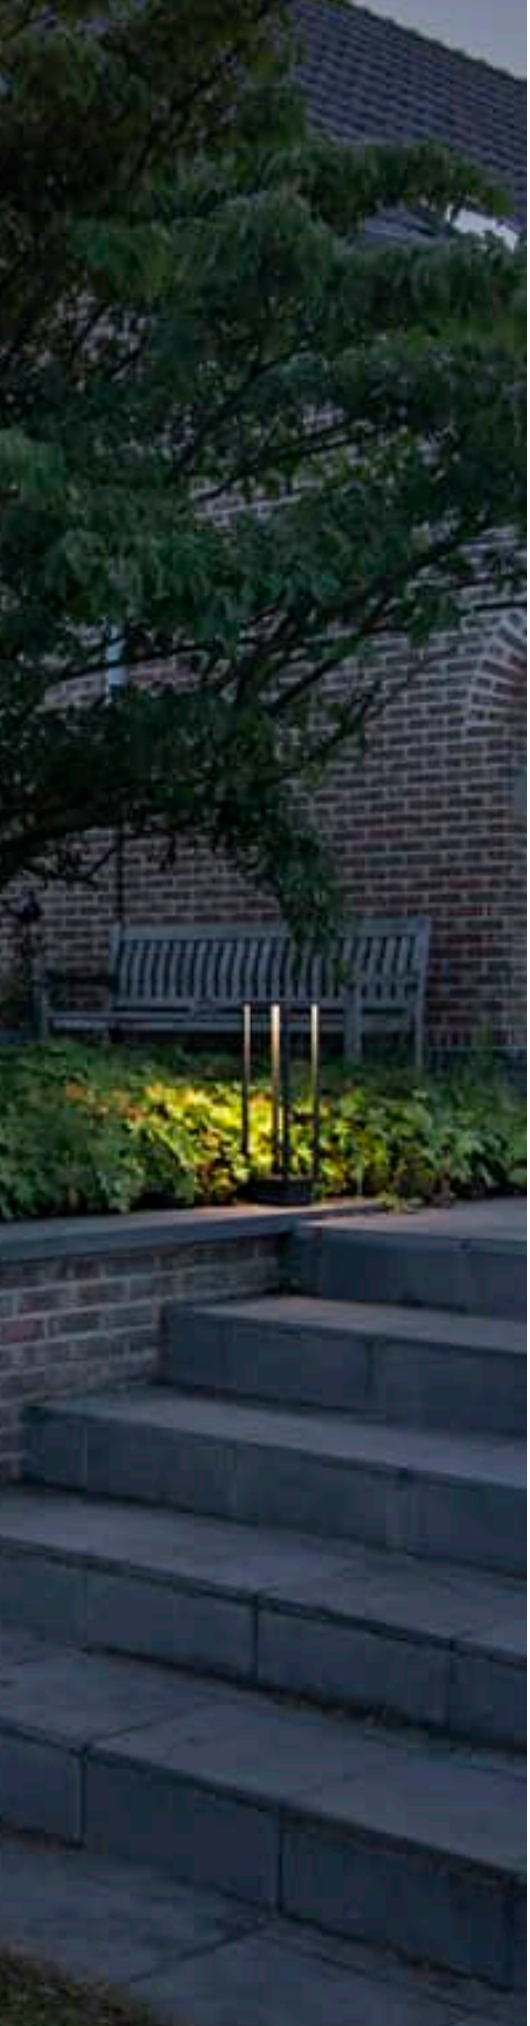

QUADRULO
FL







100-277V ~50/60Hz | 480mA
Total wattage: 7W
Material: aluminium/acrylic

- IP68 connection box 3-pin
- Open cable end



Down 340lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1005442**	**141.00**

RUSTY® SLOT 50
Pole





IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

LED INSIDE CRI 80

Down 30lm | 3000K

Variant	Prod. no.	GBP
rust	233447	266.00

Product	Prod. no.	GBP
Ground spike		
grey	231230	40.00
Connection box IP68 3-pin		
black	228730	15.00

RUSTY® SLOT 80
Pole





IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

LED INSIDE CRI 80

Down 30lm | 3000K

Variant	Prod. no.	GBP
rust	233457	334.00

Product	Prod. no.	GBP
Ground spike		
grey	231230	40.00
Connection box IP68 3-pin		
black	228730	15.00



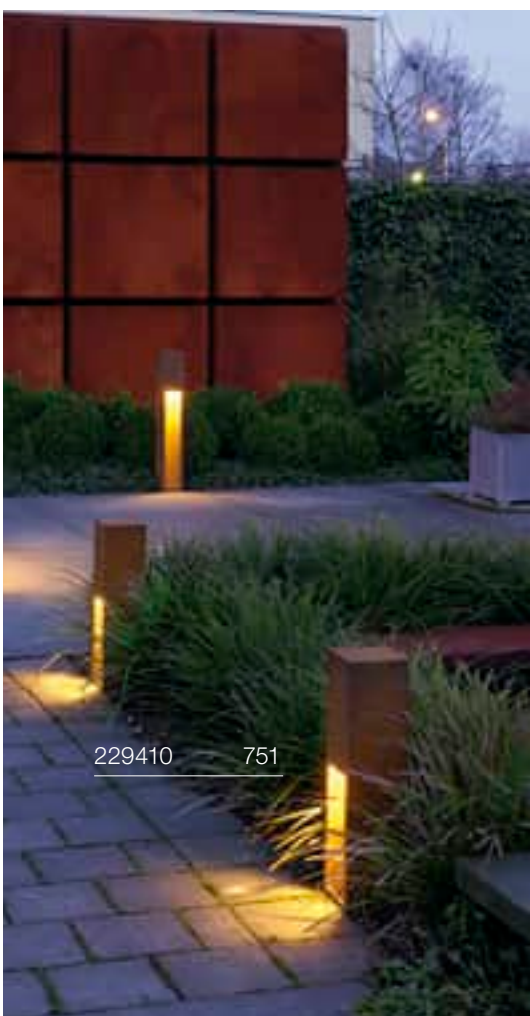

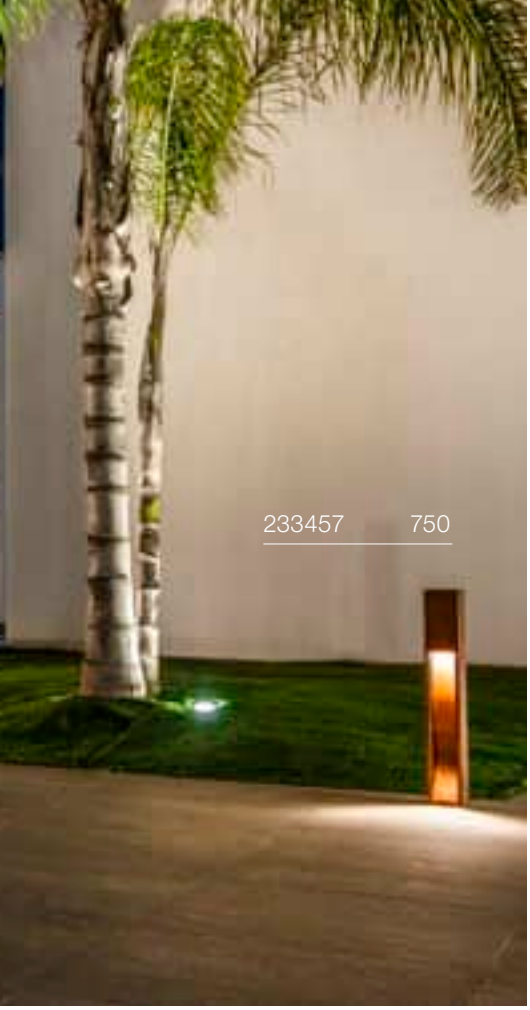



RUSTY® SLOT 50
Pole, E27





IP 44

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	**229410**	**246.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**231230**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

RUSTY® SLOT 80
Pole, E27





IP 44

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	**229411**	**309.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**231230**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

RUSTY® PATHLIGHT
Pole, TCR-TSE







IP 44

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <9 W

Base: 1xG53	Max. Ø: 7.5 cm	L: 2.7 cm

Variant	Prod. no.	GBP
rust	**230090**	**266.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEC=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**





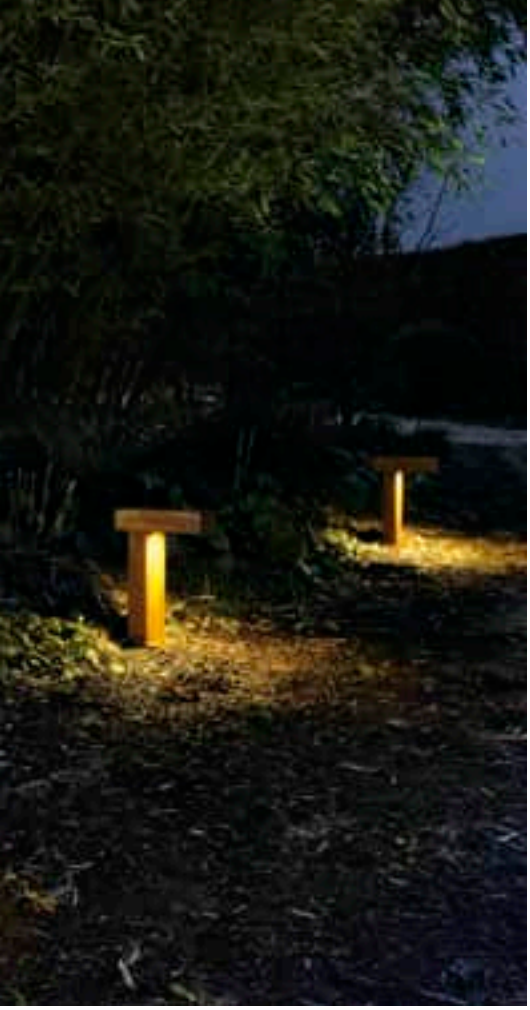

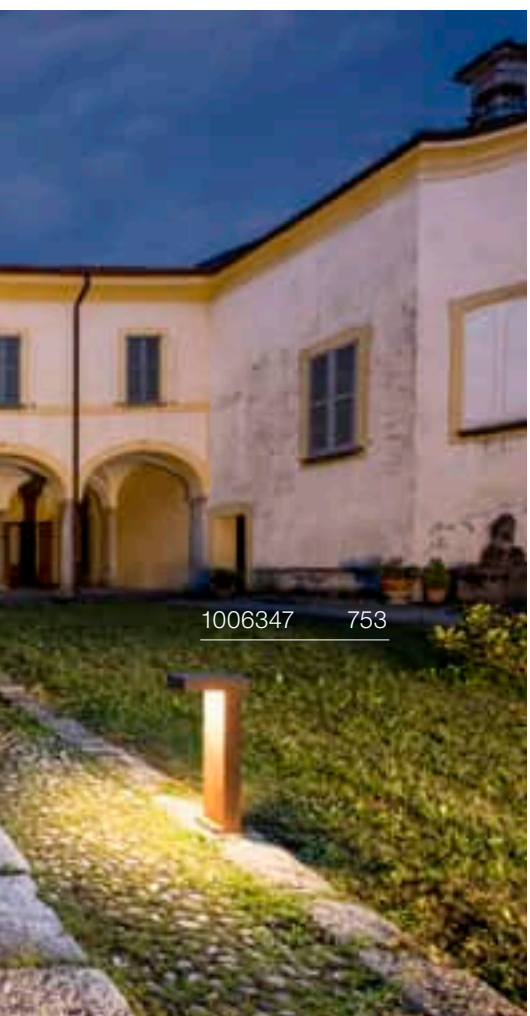

RUSTY® PATHLIGHT 40
Pole





IP55 IK06 90° L70B50 20

220-240V ~50/60Hz
Total wattage: 8.8W
Material: Steel/acrylic

- Open cable end

LED INSIDE CRI 80

Down 470lm | 3000K

Variant	Prod. no.	GBP
rust	**1006346**	**278.00**

⊕

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

RUSTY® PATHLIGHT 70
Pole





IP55 IK06 90° L70B50 20

220-240V ~50/60Hz
Total wattage: 8.8W
Material: Steel/acrylic

- Open cable end

LED INSIDE CRI 80

Down 470lm | 3000K

Variant	Prod. no.	GBP
rust	**1006347**	**360.00**

⊕

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**





RUSTY® 40
Pole





IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonate (PC)

- Open cable end

LED INSIDE CRI 80

Down 90lm | 3000K

Variant	Prod. no.	GBP
rust	**233427**	**266.00**

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

RUSTY® 70
Pole





IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

LED INSIDE CRI 80

Down 90lm | 3000K

Variant	Prod. no.	GBP
rust	233437	334.00

Product	Prod. no.	GBP
Ground spike		
grey	229422	40.00
Connection box IP68 3-pin		
black	228730	15.00

RUSTY® 40
Pole, E27





IP 55

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 Max. Ø: 4.8 cm L: 13.9 cm

Variant	Prod. no.	GBP
rust	229420	244.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	229422	40.00
Connection box IP68 3-pin		
black	228730	15.00

RUSTY® 70
Pole, E27





IP 55

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27 Max. Ø: 4.8 cm L: 13.9 cm

Variant	Prod. no.	GBP
rust	229421	309.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	229422	40.00
Connection box IP68 3-pin		
black	228730	15.00


229432 757
229430 757


229431 757
229432 757

RUSTY® CONE 24
FL, E14





IP 54 IK02

220-240V ~50/60Hz
Material: FeCSi steel/glass

• Open cable end

SOCKET INSIDE <40 W

Base: 1xE14	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	229430	236.00

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h



Prod. no.: 1005285 | 8.00 GBP

RUSTY® CONE 40
Pole, E27





IP 54 IK02

220-240V ~50/60Hz
Material: FeCSi steel/glass

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	229431	360.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h



Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	229423	43.00
Connection box IP68 3-pin		
black	228730	15.00

RUSTY® CONE 70
Pole, E27





IP 54 IK02

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	229432	428.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h



Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	229423	43.00
Connection box IP68 3-pin		
black	228730	15.00

RUSTY® 40
Pole, E27





IP 55 IK02

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	229020	244.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
Stainless steel	229022	43.00
Connection box IP68 3-pin		
black	228730	15.00

RUSTY® 70
Pole, E27





IP 55 IK02

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.	GBP
rust	229021	309.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
Stainless steel	229022	43.00
Connection box IP68 3-pin		
black	228730	15.00







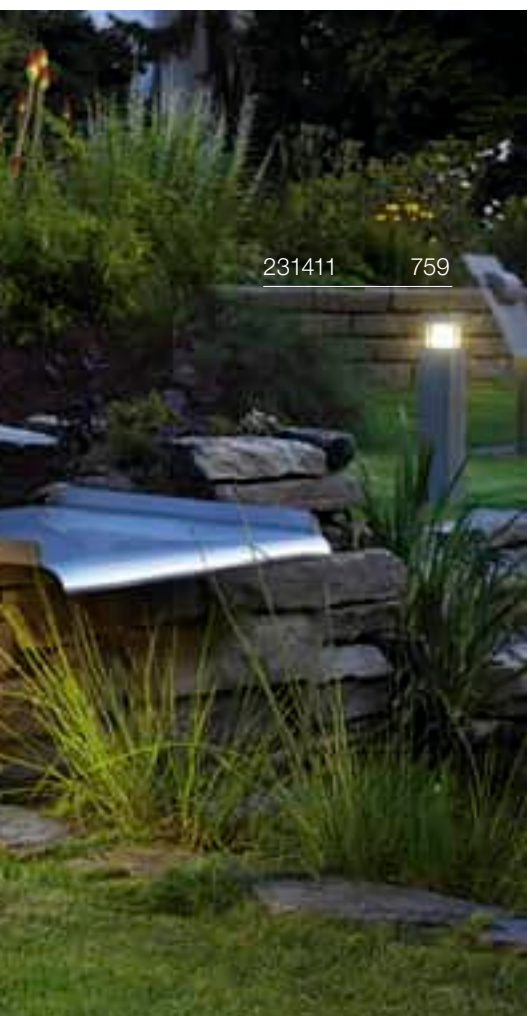

ARROCK GRANITE 40
Pole, square, E27





IP 44 IK02

220-240V ~50/60Hz
Material: granite/stainless steel 304

- Open cable end

SOCKET INSIDE <15 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 11.5 cm

Variant	Prod. no.	GBP
grey	231410	308.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	229422	40.00
Connection box IP68 3-pin		
black	228730	15.00

ARROCK GRANITE 70
Pole, square, E27





IP 44 IK02

220-240V ~50/60Hz
Material: granite/stainless steel 304

- Open cable end

SOCKET INSIDE <15 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 11.5 cm

Variant	Prod. no.	GBP
grey	231411	373.00

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	229422	40.00
Connection box IP68 3-pin		
black	228730	15.00

ARROCK ARC
Pole, QPAR51





IP 44 IK02

220-240V ~50/60Hz
Material: granite/stainless steel 304

SOCKET INSIDE <35 W

Base: 1xGU10	Max. Ø: 5.1 cm	L: 7.6 cm

Variant	Prod. no.	GBP
grey	**231420**	**308.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005075 | 7.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**231233**	**43.00**







ARROCK STONE 50
Pole





IP 55 IK02 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: basalt/stainless steel 304

• Open cable end

LED INSIDE CRI 80

Down 330lm | 3000K

Variant	Prod. no.	GBP
grey	231370	355.00

⊕

Product	Prod. no.	GBP
Ground spike		
grey	231235	43.00

ARROCK STONE 75
Pole





IP 55 IK02 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: basalt/stainless steel 304

• Open cable end

LED INSIDE CRI 80

Down 330lm | 3000K

Variant	Prod. no.	GBP
grey	231371	407.00

⊕

Product	Prod. no.	GBP
Ground spike		
grey	231235	43.00

ARROCK SLOT
Pole, QPAR51





IP 55

220-240V ~50/60Hz
Material: granite/stainless steel 304

• Open cable end

SOCKET INSIDE <4 W

Base: 1xGU10

Variant	Prod. no.	GBP
grey	231440	355.00

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005076 | 7.00 GBP

⊕

Product	Prod. no.	GBP
Ground spike		
grey	231235	43.00
Connection box IP68 3-pin		
black	228730	15.00



L-LINE OUT 30
FL, vertical

CCT







IP 65 | IK02 | L70B50 | 20

220-240V ~50/60Hz | 500mA
Total wattage: 11.5W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE | CRI 80

Down	800lm | 3000K	810lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003536**	**199.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

L-LINE OUT 60
FL, vertical

CCT





IP 65 | IK02 | L70B50 | 20

220-240V ~50/60Hz | 500mA
Total wattage: 11.5W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE | CRI 80

Down	780lm | 3000K	800lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003535**	**208.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

L-LINE OUT 50
Pole, horizontal

CCT





IP 65 | IK02 | L70B50 | 20

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE | CRI 80

Down	490lm | 3000K	530lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003537**	**164.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

L-LINE OUT 80
Pole, horizontal

CCT





IP 65 | IK02 | L70B50 | 20

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE | CRI 80

Down	490lm | 3000K	530lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003538**	**191.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

THEO PATHLIGHT
Pole, double





IP 44 IK02 90° / 90°

220-240V ~50/60Hz
Material: aluminium

• Open cable end

SOCKET INSIDE <7 W

Base: 2xGU10

Variant	Prod. no.	GBP
● anthracite	**1002871**	**205.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**





OVALISK 75
Pole

CCT





IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass

- Open cable end

LED INSIDE CRI 80

Down	580lm | 3000K	630lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1004680**	**283.00**

Product	Prod. no.	GBP
Concrete anchor		
silver	**228712**	**55.00**
Ground spike		
grey	**228722**	**50.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

OVALISK 100
Pole

CCT





IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass

- Open cable end

LED INSIDE CRI 80

Down	580lm | 3000K	630lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1004681**	**309.00**

Product	Prod. no.	GBP
Concrete anchor		
silver	**228712**	**55.00**
Ground spike		
grey	**228722**	**50.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**


1001999 767


1002001 767

GLOO PURE 27
Pole, E27





IP 44 IK02 30

220-240V ~50/60Hz
Material: aluminium/glass

• Open cable end

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 4.8 cm | L: 18 cm

Variant	Prod. no.	GBP
anthracite	**1001999**	**80.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**231234**	**45.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

GLOO PURE 44
Pole, E27





IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium/glass

• Open cable end

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 4.8 cm | L: 18 cm

Variant	Prod. no.	GBP
anthracite	**1002000**	**107.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**231234**	**45.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

GLOO PURE 70
Pole, E27





IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium/glass

• Open cable end

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 4.8 cm | L: 18 cm

Variant	Prod. no.	GBP
anthracite	**1002001**	**117.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**231234**	**45.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**


227221 769

ROTOBALL 25
FL, E27





IP 44 IK04 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE <24 W

Base: 1xE27

Variant	Prod. no.	GBP
○ white	**1007969**	**137.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

ROTOBALL 40
FL, E27





IP 44 IK04 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE <24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.	GBP
○ white	**1007970**	**154.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

ROTOBALL 50
FL, E27





IP 44 IK04 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE <24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.	GBP
○ white	**1007971**	**206.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP


232075 771

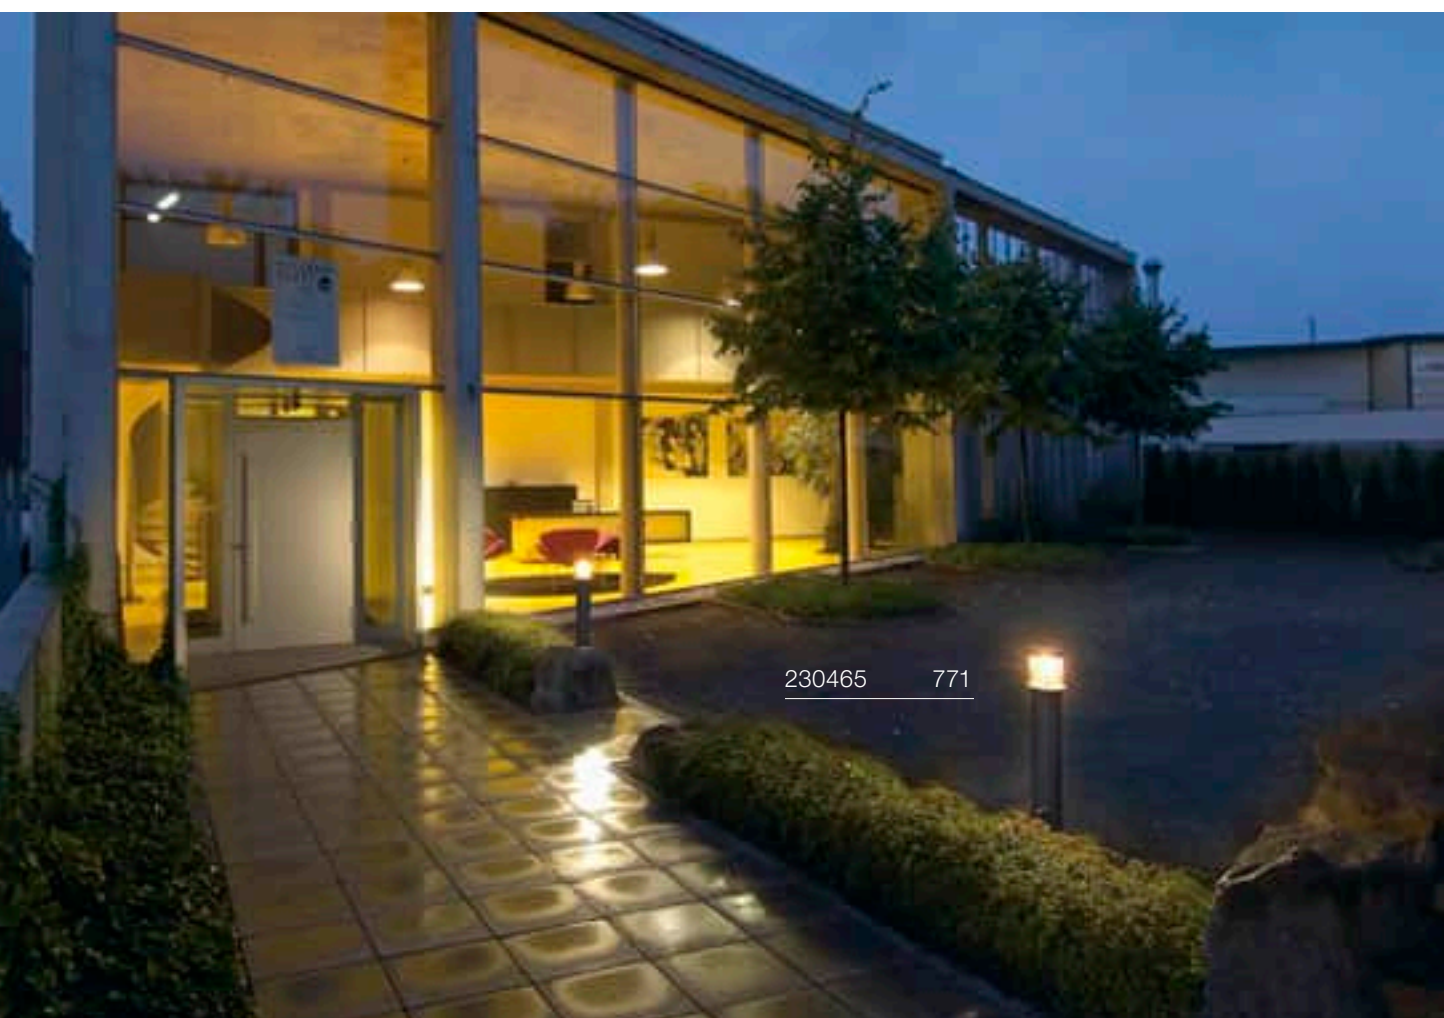
230465 771

PHOTONIA
Pole, E27





IP 55 IK03 20

220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end

SOCKET INSIDE <60 W

Base: 1xE27	max. Ø: 9 cm	L: 15 cm

Variant	Prod. no.	GBP
anthracite	**232075**	**236.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**232085**	**43.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

OTOS GLAS
Pole, E27





IP 43 IK04

220-240V ~50/60Hz
Material: aluminium/glass

- Concrete anchor included
- Open cable end

SOCKET INSIDE <15 W

Base: 1xE27	max. Ø: 6.5 cm	L: 14.5 cm

Variant	Prod. no.	GBP
anthracite	**230465**	**124.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005303 | 9.00 GBP

Product	Prod. no.	GBP
Screw set		
Stainless steel	**228753**	**8.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

CUBIX
FL, QPAR51





IP 44 IK04 100° 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

SOCKET INSIDE <25 W

Base: 1xGU10

Variant	Prod. no.	GBP
anthracite	**1007933**	**109.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L

Prod. no.: 1005077 | 7.00 GBP

CONE
FL, E27





IP 54 IK05

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <100 W

Base: 1xE27 max. L: 15 cm

Variant	Prod. no.	GBP
anthracite	**230435**	**86.00**

A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005305 | 17.00 GBP





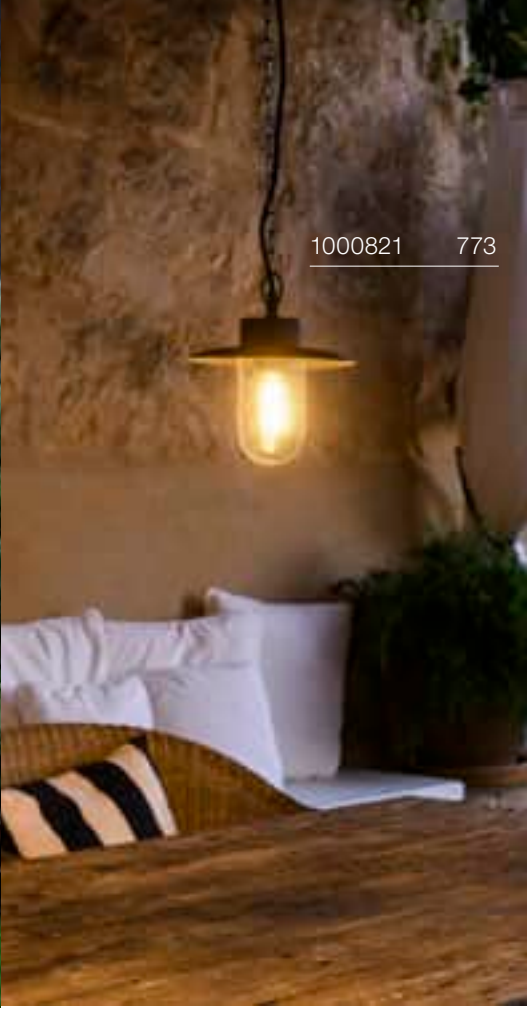



MOLAT
PD, E27





IP 44 IK04 500 250

220-240V ~50/60Hz
Material: aluminium/glass

- Suspension chain included
- IP44 safety plug

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.	GBP
anthracite	**1007954**	**120.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

Product	Prod. no.	GBP
Ceiling rose		
anthracite	**1000398**	**69.00**

MOLAT
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.	GBP
anthracite	**1000822**	**154.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**230060**	**46.00**

LISENNE 40
Pole, E27





IP 54 IK02

220-240V ~50/60Hz
Material: basalt/glass

• Open cable end

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 5.9 cm | L: 15 cm

Variant	Prod. no.	GBP
grey	**1000665**	**344.00**

LED E27 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005268 | 11.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

LISENNE 70
Pole, E27





IP 54 IK02

220-240V ~50/60Hz
Material: basalt/glass

• Open cable end

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 5.9 cm | L: 15 cm

Variant	Prod. no.	GBP
grey	**1000666**	**393.00**

LED E27 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005268 | 11.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**





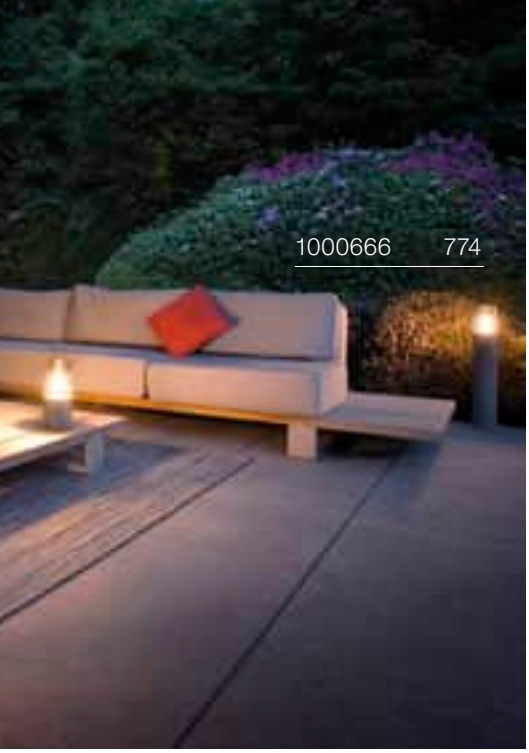



ADEGAN
FL, E27





IP 54 IK04 250

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- IP44 safety plug

SOCKET INSIDE <24 W

Base: 1xE27 max. Ø: 5.2 cm

Variant	Prod. no.	GBP
● anthracite	**1007929**	**260.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
● anthracite	**228960**	**31.00**


228935 777

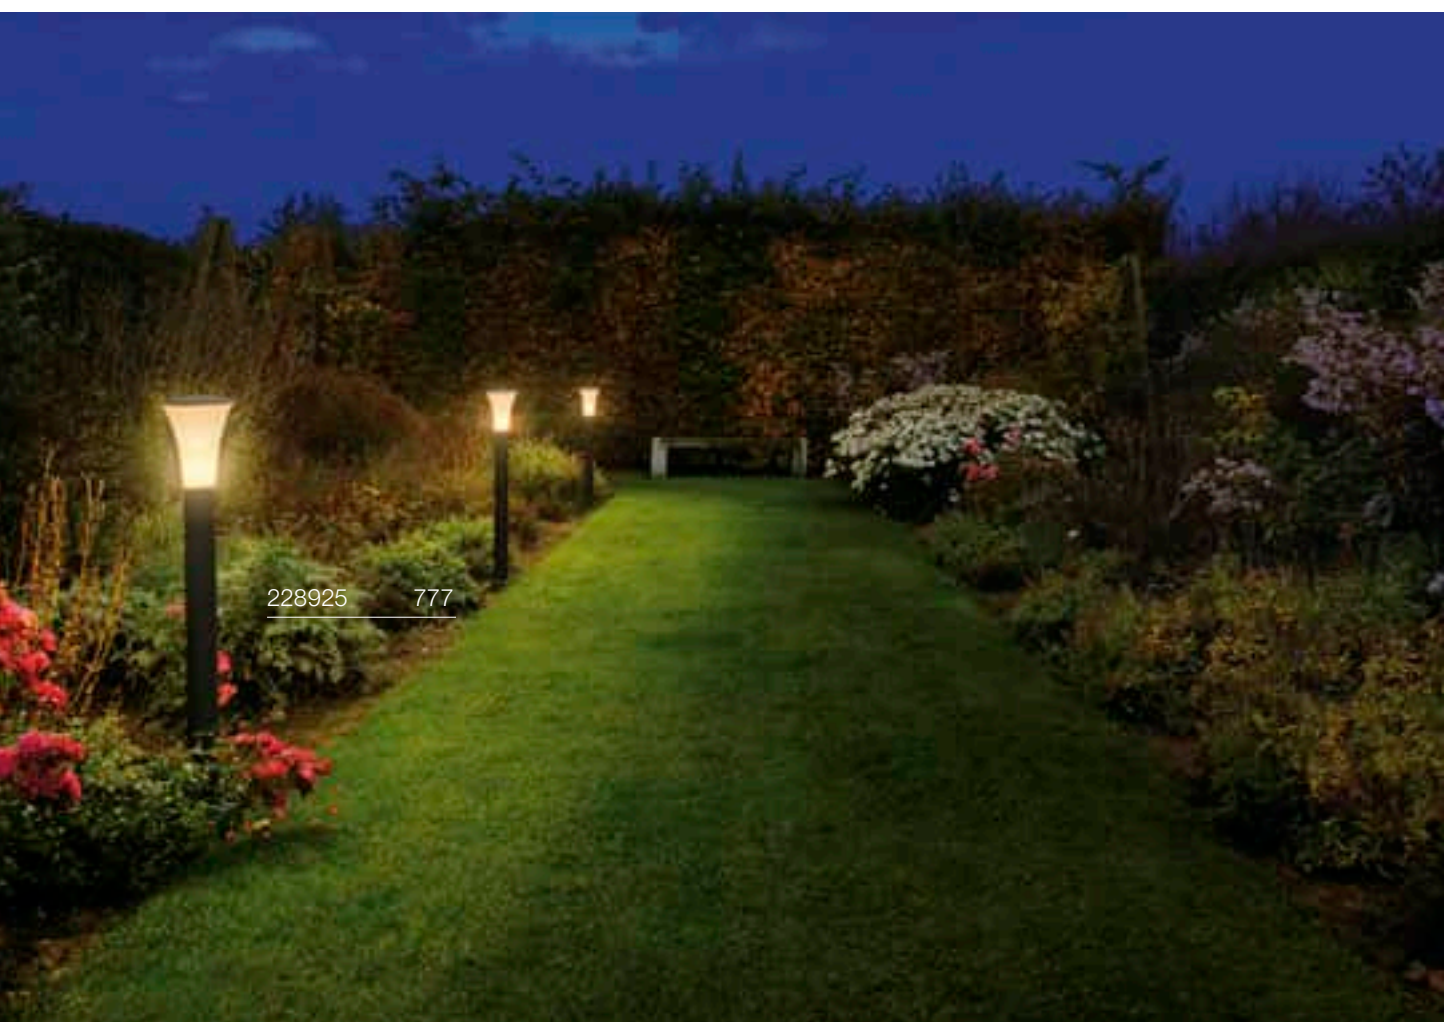
228925 777

ALPA MUSHROOM 45
Pole, E27





IP 55 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 16 cm

Variant	Prod. no.	GBP
anthracite	228935	113.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Ground spike		
grey	228722	50.00
Connection box IP68 3-pin		
black	228730	15.00

ALPA MUSHROOM 75
Pole, E27





IP 55 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 16 cm

Variant	Prod. no.	GBP
anthracite	228945	139.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Ground spike		
grey	228722	50.00
Connection box IP68 3-pin		
black	228730	15.00

ALPA CONE 100
Pole, E27





IP 55 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	228925	164.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Ground spike		
grey	228722	50.00
Connection box IP68 3-pin		
black	228730	15.00

APONI 90
Pole, PHASE





IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 6.3W
Material: aluminium

• Open cable end

INSIDE CRI 80

Down 520lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1000682**	**223.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**

APONI 120
Pole, PHASE





IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 6.3W
Material: aluminium

• Open cable end

INSIDE CRI 80

Down 520lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1000683**	**275.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**





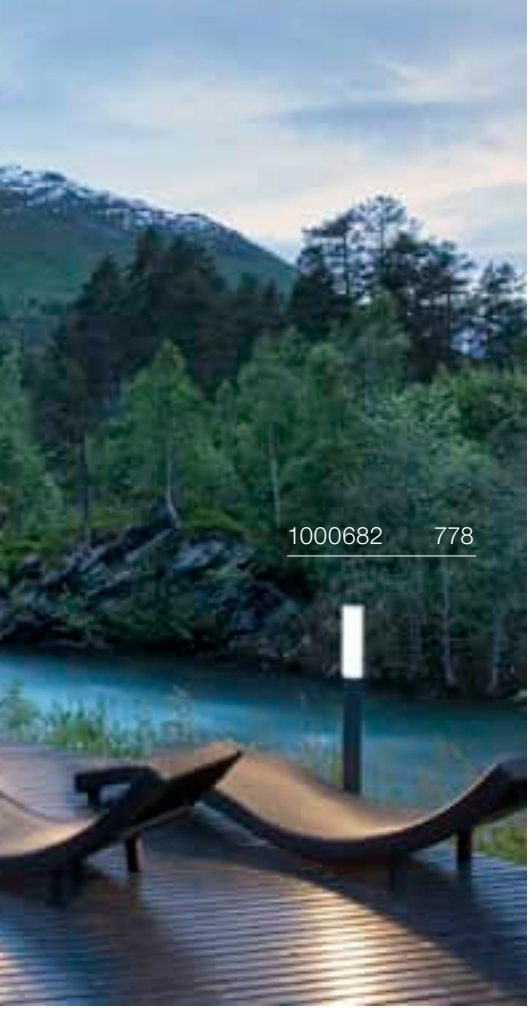

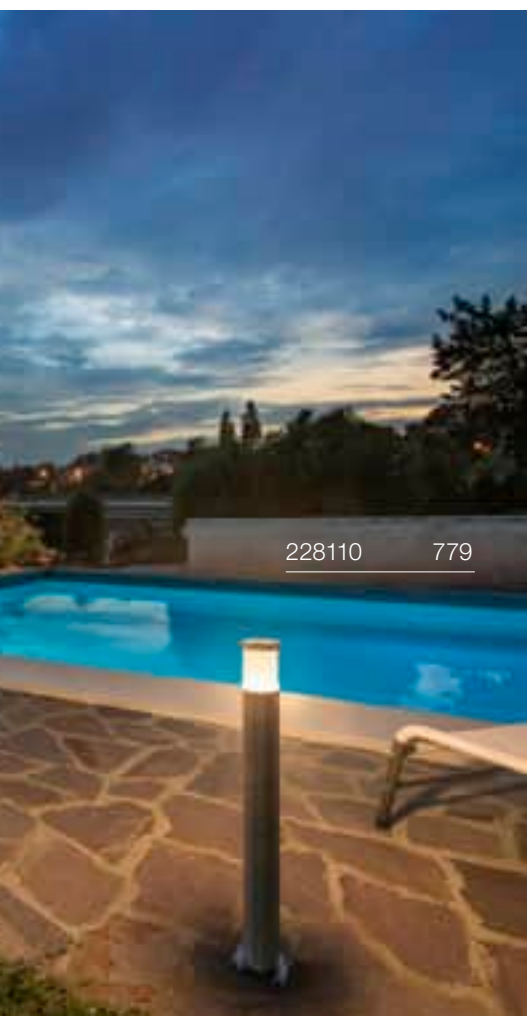

TRUST 30
Pole





IP 55 IK07 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

- Open cable end

LED INSIDE CRI 80

Down 400lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**228100**	**223.00**

Product	Prod. no.	GBP
Ground spike		
grey	**227922**	**46.00**
Ring-shaped grid		
Stainless steel	**228130**	**84.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

TRUST 60
Pole





IP 55 IK07 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

- Open cable end

LED INSIDE CRI 80

Down 400lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**228110**	**285.00**

Product	Prod. no.	GBP
Ground spike		
grey	**227922**	**46.00**
Ring-shaped grid		
Stainless steel	**228130**	**84.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

BIG NAILS 50
POLE, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <15 W

Base: 1xE27	Max. Ø: 4.5 cm	L: 17 cm

Variant	Prod. no.	GBP
Stainless steel	**229162**	**139.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
black	**227922**	**46.00**

BIG NAILS 80
POLE, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <15 W

Base: 1xE27	Max. Ø: 4.5 cm	L: 17 cm

Variant	Prod. no.	GBP
Stainless steel	**229172**	**160.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
black	**227922**	**46.00**







ROX ACRYL 30
Pole, E27





IP 65 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 6 cm	L: 15 cm

Variant	Prod. no.	GBP
Stainless steel	**1001488**	**139.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**1001494**	**26.00**
Ground spike		
grey	**231234**	**45.00**
T-connector box		
black	**228726**	**28.00**

ROX ACRYL 60
Pole, E27





IP 65 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 6 cm	L: 15 cm

Variant	Prod. no.	GBP
Stainless steel	**1001489**	**164.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**1001494**	**26.00**
Ground spike		
grey	**231234**	**45.00**
T-connector box		
black	**228726**	**28.00**

ROX ACRYL 90
Pole, E27





IP 65 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 6 cm	L: 15 cm

Variant	Prod. no.	GBP
Stainless steel	**1001490**	**181.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**1001494**	**26.00**
Ground spike		
grey	**231234**	**45.00**
T-connector box		
black	**228726**	**28.00**


230066 783


23006 783

VAP SLIM 30
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27 | Max. Ø: 5.1 cm | L: 12.6 cm

Variant	Prod. no.	GBP
Stainless steel	**230063**	**145.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**230061**	**23.00**
Ground spike		
grey	**230060**	**46.00**

VAP SLIM 60
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27 | Max. Ø: 5.1 cm | L: 12.6 cm

Variant	Prod. no.	GBP
Stainless steel	**230066**	**163.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**230061**	**23.00**
Ground spike		
grey	**230060**	**46.00**

VAP SLIM 90
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27 | Max. Ø: 5.1 cm | L: 12.6 cm

Variant	Prod. no.	GBP
Stainless steel	**230069**	**188.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**230061**	**23.00**
Ground spike		
grey	**230060**	**46.00**

C-POL
POLE, E27





IP 54 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <24 W

Base: 1xE27	max. Ø: 5.2 cm	L: 17.3 cm

Variant	Prod. no.	GBP
● anthracite	**231475**	**173.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228748**	**15.00**

F-POL
POLE, E27





IP 54 IK05

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 5.1 cm	L: 14.8 cm

Variant	Prod. no.	GBP
● anthracite	**231595**	**164.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228748**	**15.00**

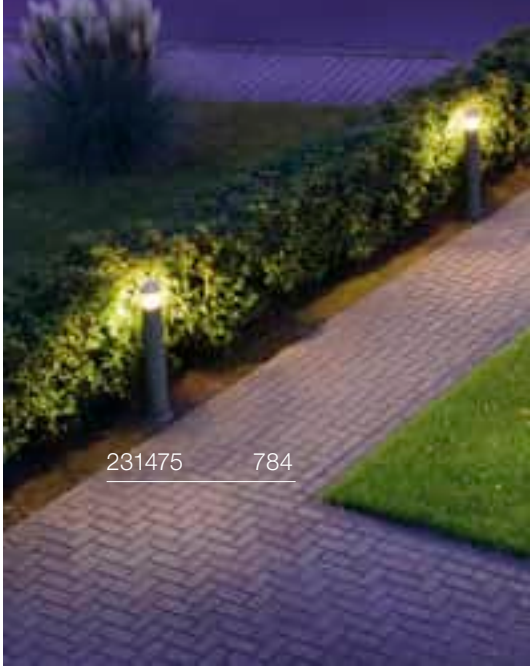



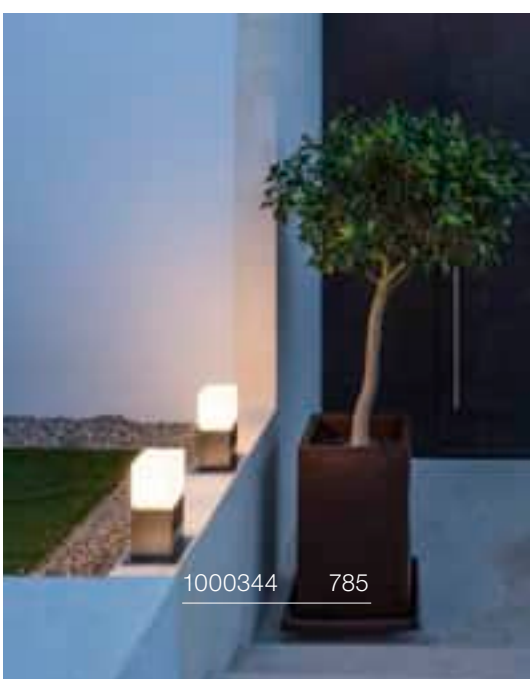

SQUARE POLE 30
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 6 cm	L: 15 cm

Variant	Prod. no.	GBP
Stainless steel	**1000344**	**197.00**

13.5W | 240°
3000K | 1520lm | EEC=E
14kWh/1000h

Prod. no.: 1005307 | 11.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**1000343**	**47.00**
Ground spike		
grey	**231234**	**45.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

SQUARE POLE 60
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 6 cm	L: 15 cm

Variant	Prod. no.	GBP
Stainless steel	**1000345**	**249.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**1000343**	**47.00**
Ground spike		
grey	**231234**	**45.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**

SQUARE POLE 90
Pole, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

• Open cable end

SOCKET INSIDE <20 W

Base: 1xE27	Max. Ø: 6 cm	L: 15 cm

Variant	Prod. no.	GBP
Stainless steel	**1000346**	**292.00**

13.5W | 240°
3000K | 1520lm | EEC=E
14kWh/1000h

Prod. no.: 1005307 | 11.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
Stainless steel	**1000343**	**47.00**
Ground spike		
grey	**231234**	**45.00**
Connection box IP68 3-pin		
black	**228730**	**15.00**


231455 787

SLOTS 45
Pole





IP 44 | 68° | L70B50

220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium

- Open cable end
- Concrete anchor included

LED INSIDE | CRI 80

Down | 200lm | 3000K

Variant	Prod. no.	GBP
anthracite	231815	154.00
rust	231817	154.00

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	228730	15.00
Screw set		
Stainless steel	228753	8.00

SLOTS 65
Pole





IP 44 | 68° | L70B50

220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium

- Open cable end
- Concrete anchor included

LED INSIDE | CRI 90

Down | 200lm | 3000K

Variant	Prod. no.	GBP
anthracite	231455	163.00
rust	231457	163.00

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	228730	15.00
Screw set		
Stainless steel	228753	8.00

H-POL 30
Pole





IP 65 IK03 120° L70B50 36

100-277V ~50/60Hz | 480mA
Total wattage: 9.7W
Material: aluminium/plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the ground. Installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80

Down 430lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232155**	**208.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit 14x14 cm		
● black	**232195**	**43.00**

H-POL 60
Pole





IP 65 IK03 L70B50 120° 18

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available or optional installation in the ground. Installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80

Down 700lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232165**	**303.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit 14x14 cm		
● black	**232195**	**43.00**



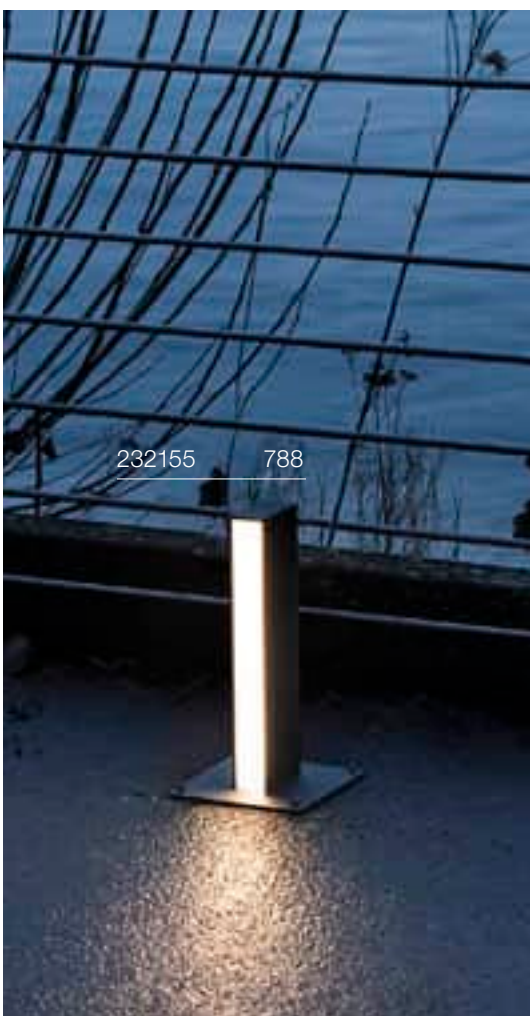

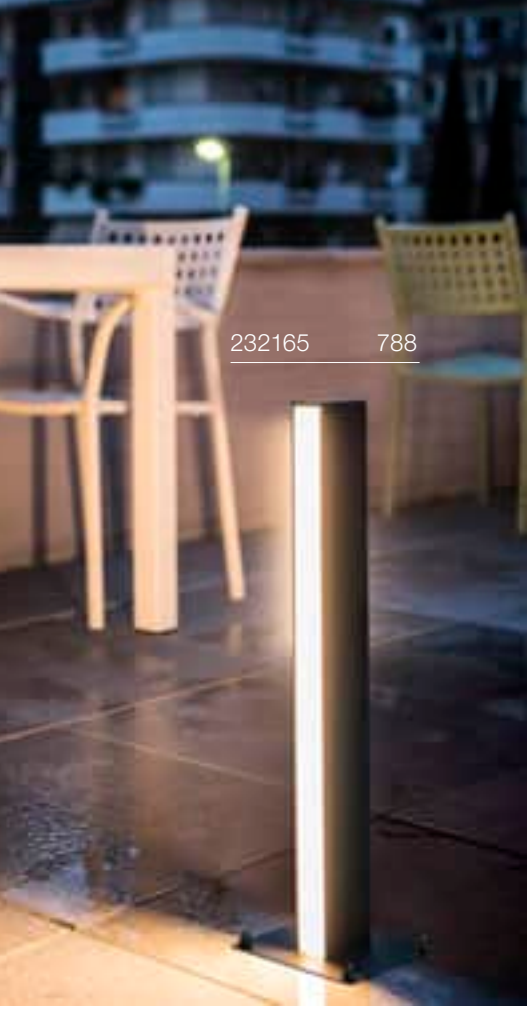



H-POL TWIN 60
Pole









IP 65 IK03 2x120° L70B50 9

220-240V ~50/60Hz | 1000mA
Total wattage: 35W
Material: aluminium/plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the ground. Installation dimensions L: 14 cm W: 14 cm D: 16 m

LED INSIDE CRI 80

Spot 1	700lm	3000K
Spot 2	700lm	3000K

Variant	Prod. no.	GBP
● anthracite	**232185**	**398.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit 14x14 cm		
● black	**232195**	**43.00**


232135 791


232145 791

SLOTBOX 40
Pole





IP 44 IK04 L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8W
Material: aluminium

• Open cable end

CRI 80

Down 190lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232135**	**173.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

SLOTBOX 70
Pole





IP 44 IK04 L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.7W
Material: aluminium

• Open cable end

CRI 80

Down 190lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232145**	**208.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

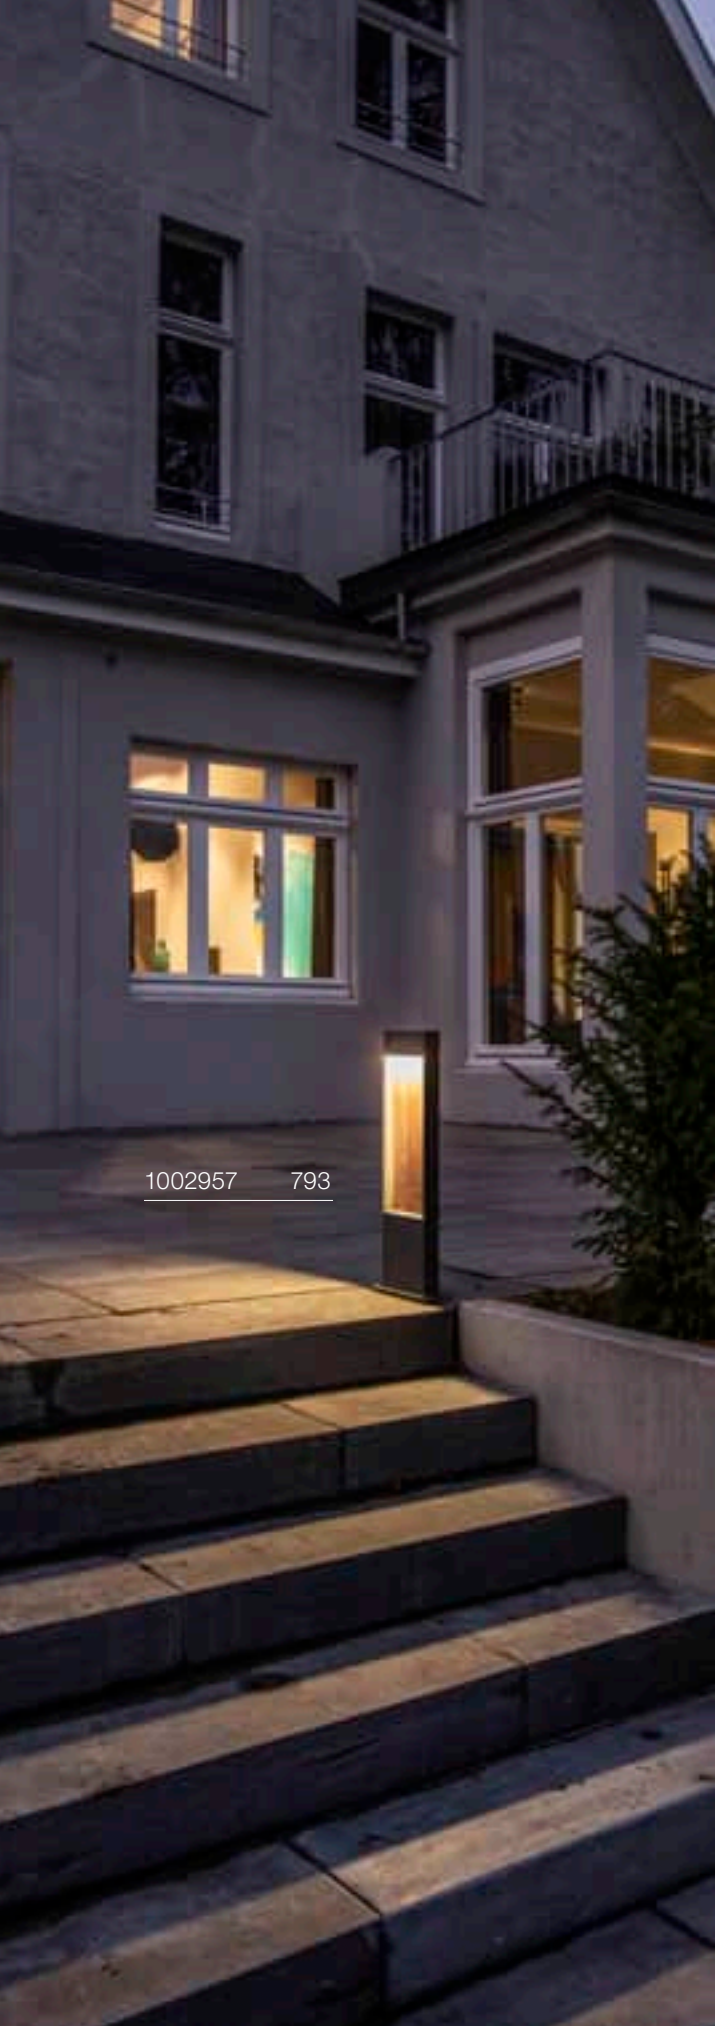
1002957 793


1002958 793

FLATT 65
POLE

CCT





IP 65 IK03 L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 10W
Material: aluminium/aluminium

- Open cable end

LED INSIDE CRI 80

Down	400lm | 3000K	400lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1002956**	**213.00**
brown/anthracite	**1002957**	**213.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**

FLATT 100
POLE

CCT





IP 65 IK03 L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 10W
Material: aluminium/aluminium

- Open cable end

LED INSIDE CRI 80

Down	400lm | 3000K	400lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1002958**	**260.00**
brown/anthracite	**1002959**	**260.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**


1008727 795

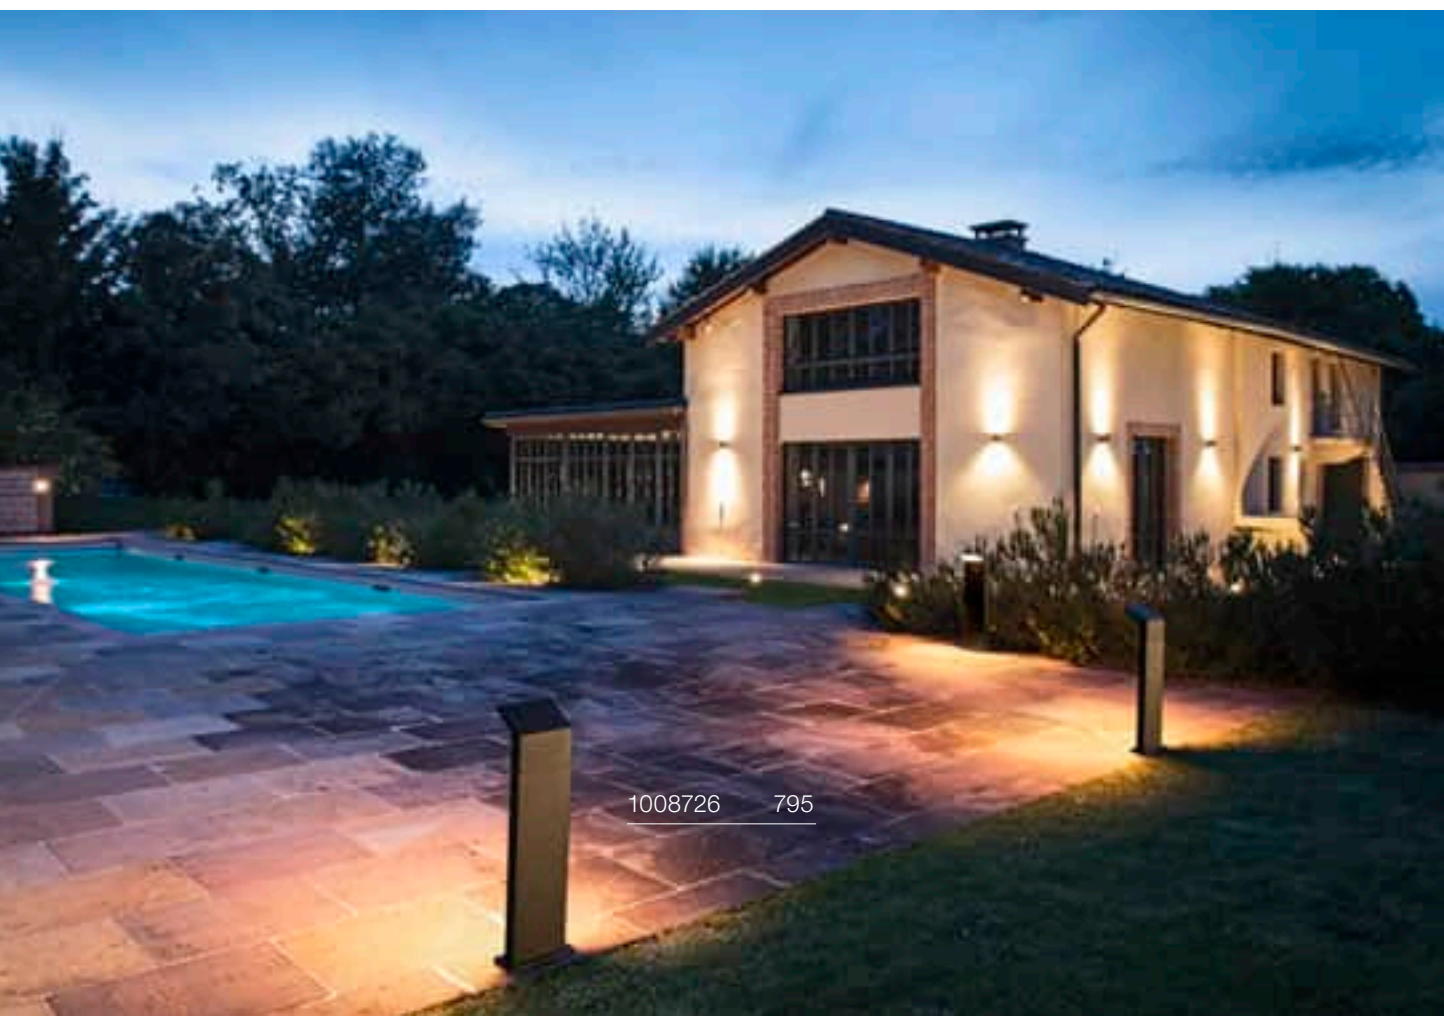
1008726 795

ORDI II
Pole 45

from Spring 2025



IP 65 IK02

220-240V ~50/60Hz
Total wattage: 10W
Material: aluminium

LED INSIDE

Down	700lm | 2200K	700lm | 3000K

Variant	Prod. no.	GBP
● black	1008725 ●	223.00

ORDI II
Pole 70

from Spring 2025



IP 65 IK02

220-240V ~50/60Hz
Total wattage: 10W
Material: aluminium

LED INSIDE

Down	700lm | 2200K	700lm | 3000K

Variant	Prod. no.	GBP
● black	1008726 ●	257.00

ORDI II
Pole 70, SENSOR

IR

from Spring 2025



IP 54 IK02

220-240V ~50/60Hz
Total wattage: 10W
Material: aluminium

- Primary and replica functionality, multiple lights can be switched

LED INSIDE

Down	700lm | 2200K	700lm | 3000K

Variant	Prod. no.	GBP
● black	1008727 ●	266.00

ABRIDOR 60
Pole, HYBRID

CCT

NEW





IP65 IK07

100-240V ~50/60Hz |
380mA battery-powered
Total wattage: 6.8W
Material: aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- Open cable end

LED INSIDE CRI 80

Down	600lm | 2200K	650lm | 2700K

Variant	Prod. no.	GBP
anthracite	1008543	250.00

ABRIDOR 100
Pole 100, HYBRID

CCT

NEW





IP65 IK07

100-240V ~50/60Hz |
380mA battery-powered
Total wattage: 6.8W
Material: aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- Open cable end

LED INSIDE CRI 80

Down	600lm | 2200K	650lm | 2700K

Variant	Prod. no.	GBP
anthracite	1008544	283.00







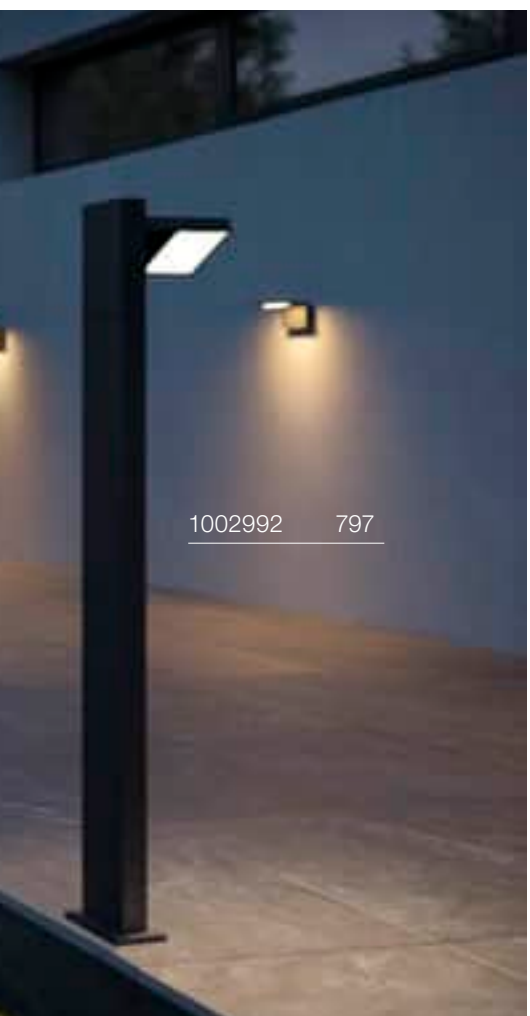

ABRIDOR 60
Pole

CCT





IP 55 | IK03 | 100° | L70B50 | 90°

100-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	950lm | 3000K	980lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1002991**	**191.00**

Product	Prod. no.	GBP
Connection box 5 pins, IP68		
black	**1006453**	**31.00**

ABRIDOR 100
Pole

CCT





IP 55 | IK03 | 100° | L70B50 | 90°

100-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: aluminium

- Open cable end

LED INSIDE | CRI 80

Down	950lm | 3000K	980lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1002992**	**242.00**

Product	Prod. no.	GBP
Connection box 5 pins, IP68		
black	**1006453**	**31.00**

IPERI 50
Pole







220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium/plastic

• Open cable end

LED INSIDE | CRI 80

Down 400lm | 4000K

Variant	Prod. no.	GBP
anthracite	**231305**	**111.00**

⊕

Product	Prod. no.	GBP
Ground spike		
grey	**231231**	**43.00**

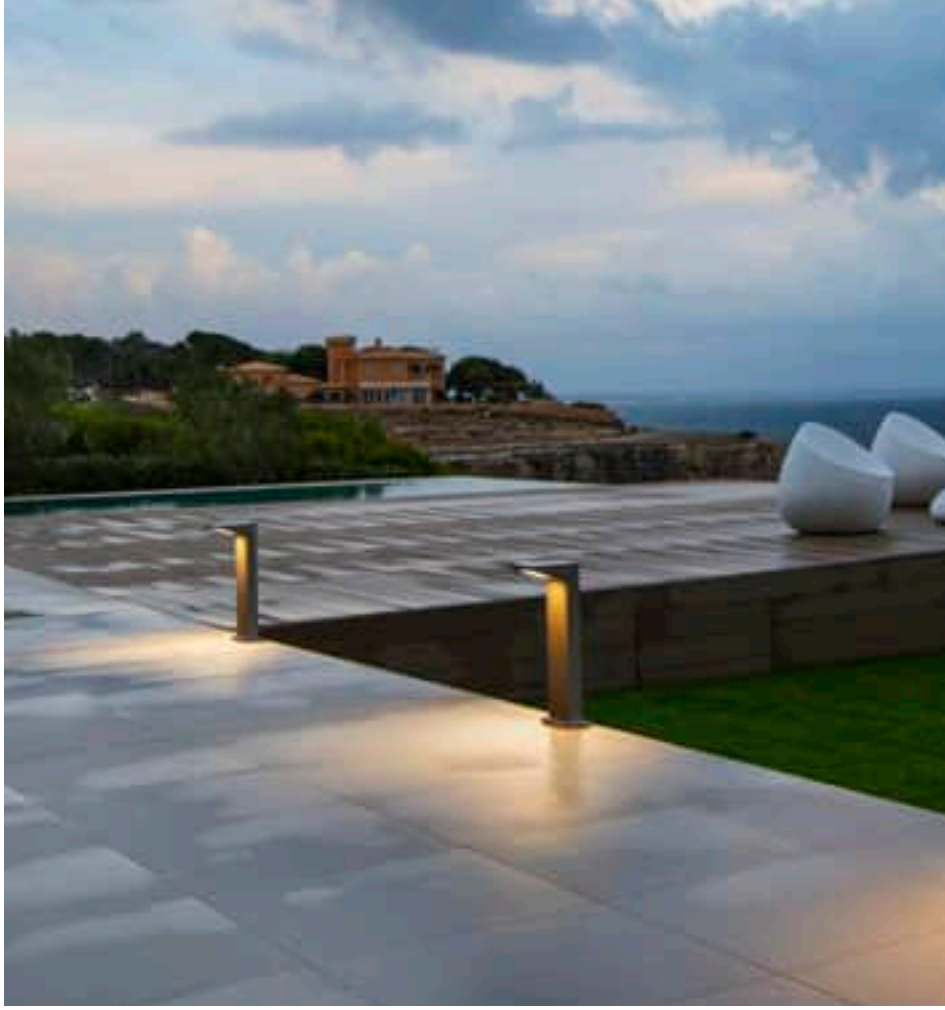



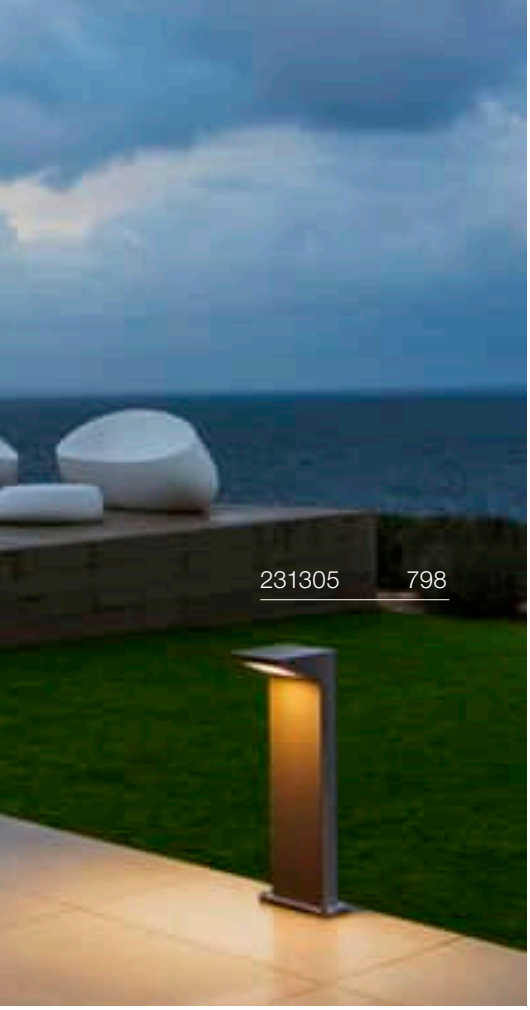

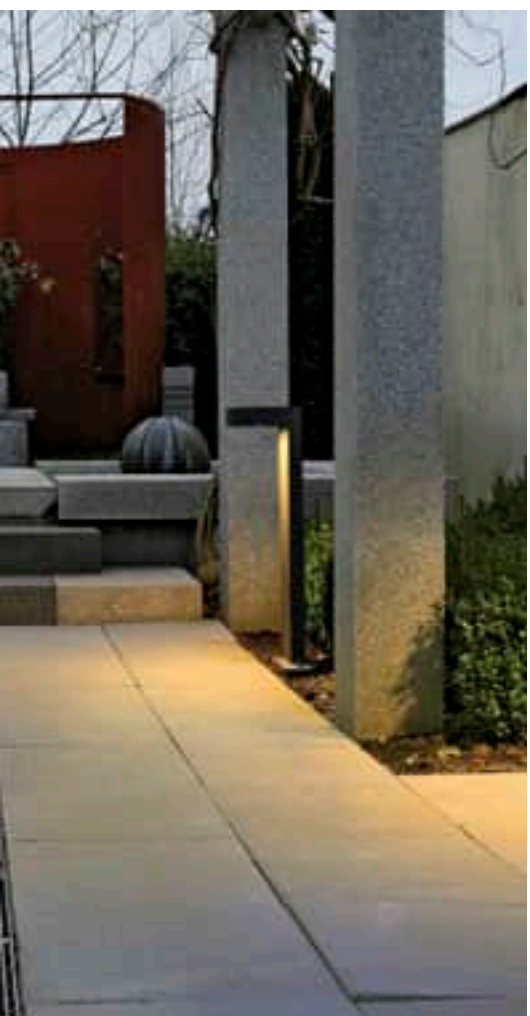

QUADRASYL 75
Pole, TCR-TSE





IP 44

220-240V ~50/60Hz
Material: aluminium

- Concrete anchor included
- Open cable end

SOCKET INSIDE <11 W

Base: 1xG53	Max. Ø: 7.5 cm	L: 2.7 cm

Variant	Prod. no.	GBP
anthracite	**232295**	**141.00**
grey	**232294**	**141.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEC=G
6kWh/1000h

C,L

Prod. no.: 1005271 | 10.00 GBP

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**

QUAD POLE
Pole





IP 65 | IK02 | 100° | L70B50 | 180°

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

- Open cable end

LED INSIDE | CRI 80

Down	1550lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1003001**	**318.00**

⊕

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

BOOKAT
Pole

CCT





IP 65 | IK05 | L70B50 | 10

100-277 V ~50/60 Hz | 700 mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)

- IP connection box included
- Open cable end

LED INSIDE | CRI 80

Down	1240lm | 3000K	1300lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1005441**	**346.00**









MYRA SPOT
Double, GU10





IP 44 | 340° | 45° | 300

220-240V ~50/60Hz
Material: aluminium

- The height of the light can be increased by a maximum of 2 extension rods.
- Open cable end

SOCKET INSIDE <4.5 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
anthracite	233185	145.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005075 | 7.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Screw set		
Stainless steel	228752	6.00
Pedestal		
anthracite	233145	23.00
Extension rod 30 cm		
anthracite	233165	23.00

SITRA 360
Pole, TCR-TSE





IP 44 | 90° | 90°

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <9 W

Base: 2xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
anthracite	231505	137.00

LED GX53 | 6.1W | 120°
3000K | 490lm | EEC=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	230060	46.00
Ground spike		
Stainless steel	1000736	19.00


1007869 816

NEW



SYNA | 804

NEW



SYNA | 805



SYNA PLANT | 807



SYNA GARDEN | 807



SYNA | 807



GALEN 60 | 808



GALEN 120 | 808



FLAC BEAM® | 809



SAMRINA | 809



NAUTILUS 10 | 810



BIG NAUTILUS | 810



NAUTILUS 10 | 811



NAUTILUS 10 | 812



NAUTILUS | 813



NAUTILUS 10
SPOT | 813



NAUTILUS 10
SPOT LED | 813



DASAR®
PROJECTOR | 815



DASAR® 920 | 815

NEW



HELIA SLIM | 816

NEW



HELIA SLIM | 816



HELIA SPOT S | 817



HELIA SPOT L | 817



THEO BRACKET | 819



LED SPIKE | 819



SITRA 360 SPIKE | 821



SITRA 360 SPIKE | 821

SYNA
WIDE, SP

from spring 2025





IP65 IK06

220-240V ~50/60 Hz | 500
Total wattage: 5.5W
Material: aluminium

• IP44 safety plug

LED INSIDE CRI >80

Down 500lm | 2200K
650lm | 3000K

Variant	Prod. no.	GBP
● black 500lm | 2200K	**1008478**	**60.00**
● black 650lm | 3000K	**1008479**	**60.00**

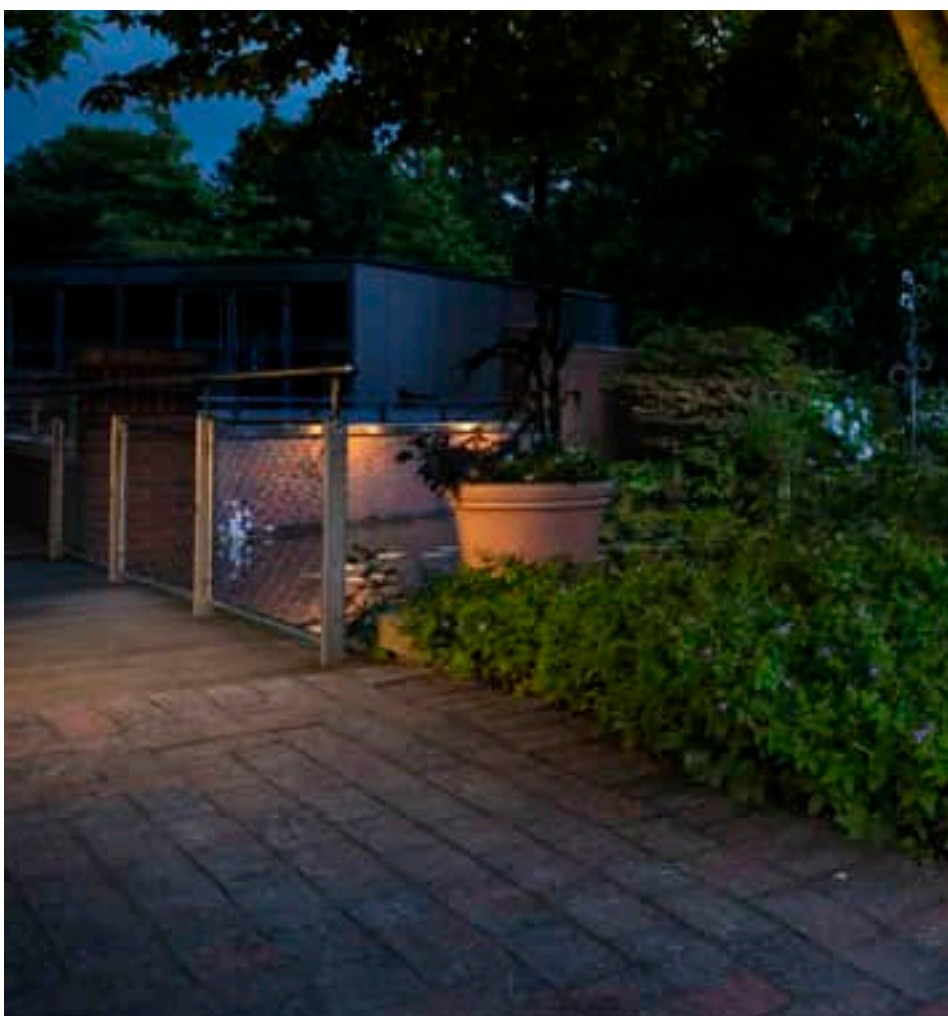

SYNA
SHADE, SP, GU10

from spring 2025



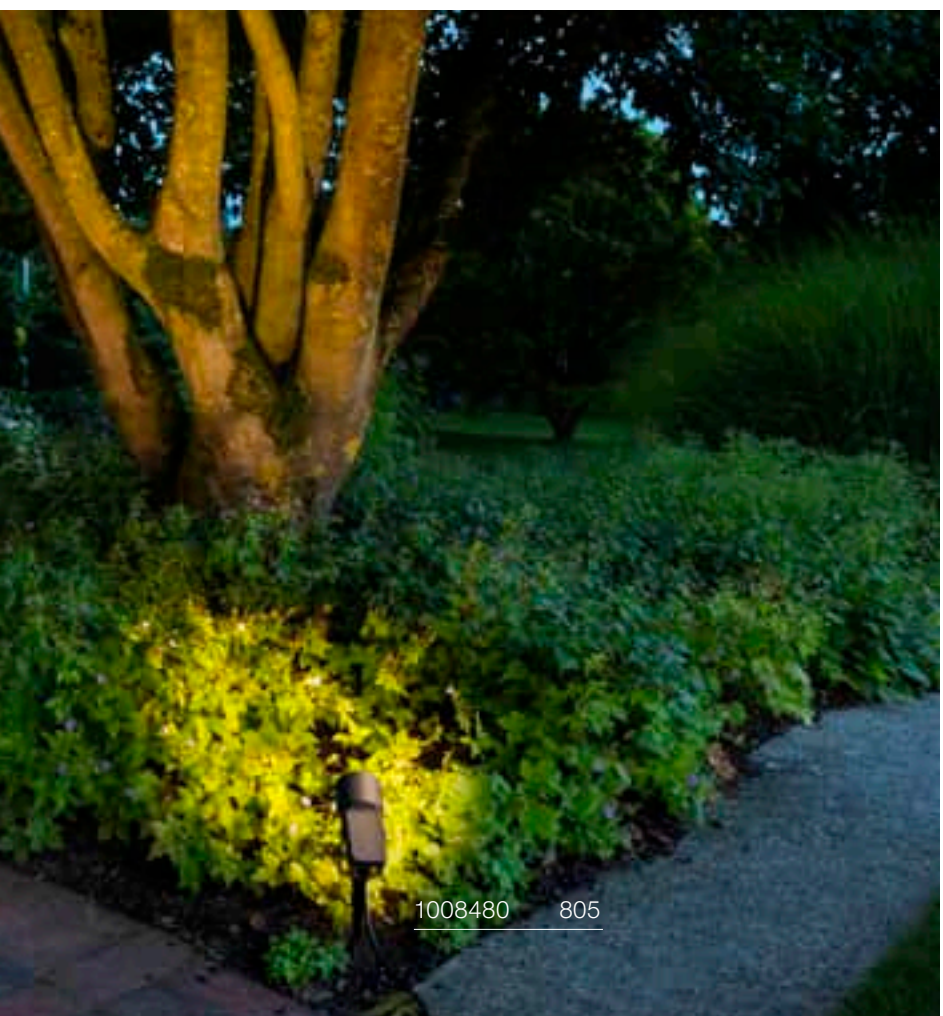



IP65 IK06

220-240V ~50/60 Hz
Material: aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | Max. Ø: 5 cm | L: 5.3 cm

Variant	Prod. no.	GBP
● black	1008480	39.00

QPAR51 | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP


227505 807

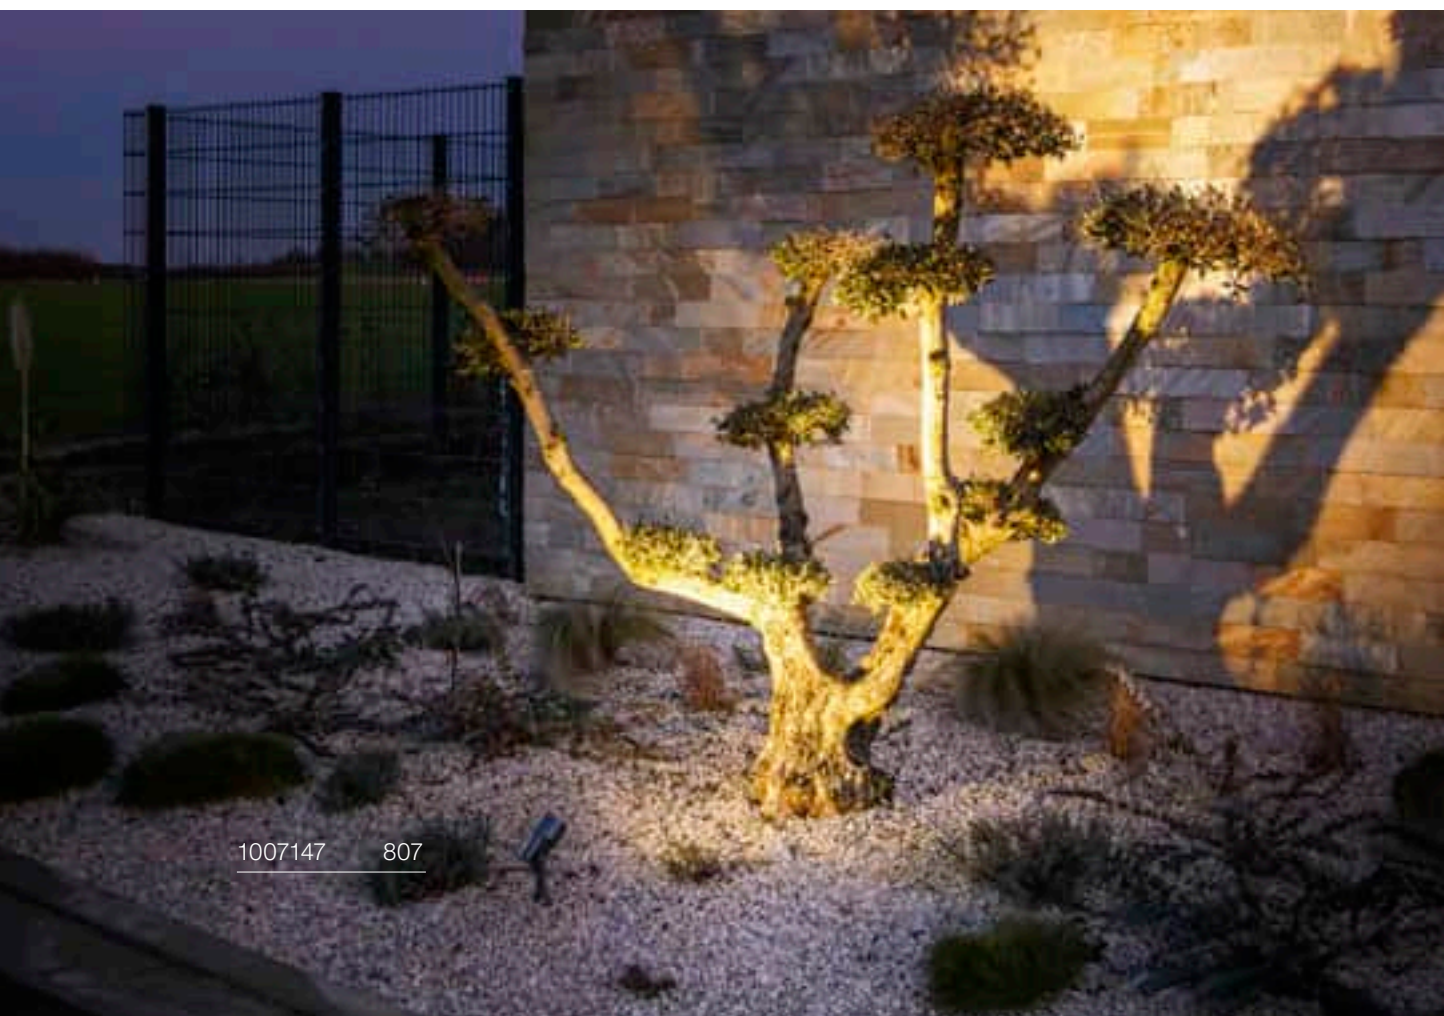
1007147 807

SYNA PLANT
SP





IP 65 | IK06 | 36° | L70B50 | 180° | 150

220-240V ~50/60Hz | 250mA
Total wattage: 6W
Material: aluminium

• IP44 safety plug

LED INSIDE | CRI 80

Down 540lm | 3000K

Variant	Prod. no.	GBP
● black	**1007978**	**56.00**

SYNA GARDEN
SP





IP 65 | IK06 | 36° | L70B50 | 300° | 150

220-240V ~50/60Hz | 250mA
Total wattage: 6W
Material: aluminium

• IP44 safety plug

LED INSIDE | CRI 80

Down 540lm | 3000K

Variant	Prod. no.	GBP
● black	**1007979**	**60.00**

SYNA
SP





IP 55 | IK04 | 50° | L70B50 | 180° | 150

220-240V ~50/60Hz
Total wattage: 9W
Material: aluminium/acrylic

• IP44 safety plug

LED INSIDE | CRI 80

Down 470lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007977**	**69.00**

GALEN 60
SP

CCT





IP 65 | IK03 | L70B50 | 180° | 11 | 12

220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: aluminium/glass

- IP67 Plug System

LED INSIDE | CRI 80

Down	1570lm | 3000K	1570lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003447**	**197.00**

Product	Prod. no.	GBP
5m connection cable with open cable end		
● black	**231960**	**25.00**
Connection cable 1.0m		
● black	**231961**	**17.00**

GALEN 120
SP

CCT





IP 65 | IK03 | L70B50 | 180° | 11 | 10

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: aluminium/glass

- IP67 Plug System

LED INSIDE | CRI 80

Down	3000lm | 3000K	3100lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003448**	**291.00**

Product	Prod. no.	GBP
5m connection cable with open cable end		
● black	**231960**	**25.00**
Connection cable 1.0m		
● black	**231961**	**17.00**





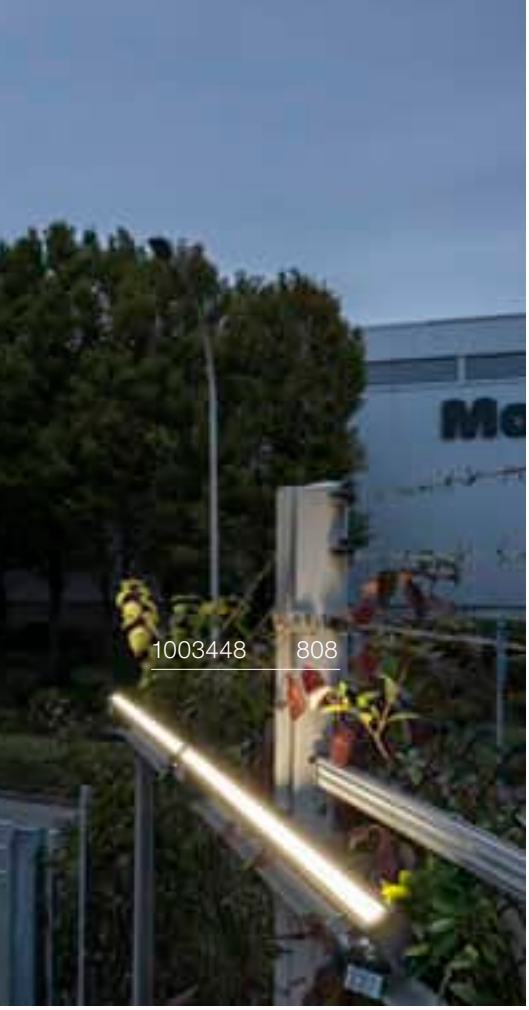



FLAC BEAM®
SP





IP65 | IK04 | 60° | L70B50 | 120° | 170° | 200

220-240V ~50/60Hz
Total wattage: 27W
Material: aluminium/glass

- IP44 safety plug

LED INSIDE | CRI 80

Down | 1600lm | 3000K

Variant	Prod. no.	GBP
grey	**1007942**	**422.00**

SAMRINA
SP, single, GU10





IP 65 | IK04 | 280° | 150

220-240V ~50/60Hz
Material: plastic/glass

- Contains recycled material
- IP44 safety plug

SOCKET INSIDE | 7 W

Base: GU10 | Max. Ø: 6 cm | L: 6 cm

Variant	Prod. no.	GBP
black	**1007972**	**40.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

NAUTILUS 10
SP, round, QPAR51





IP 65 IK04 180° 150

220-240V ~50/60Hz
Material: aluminium

- IP44 safety plug

SOCKET INSIDE <35 W

Base: 1xGU10 max. L: 5.7 cm

Variant	Prod. no.	GBP
grey	**1007956**	**24.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

BIG NAUTILUS
SP, round, QPAR51





IP 44 IP 65 IK06 180° 150

220-240V ~50/60Hz
Material: aluminium

- IP44 safety plug

SOCKET INSIDE <11 W

Base: GU10 Max. Ø: 5.1 cm L: 8.3 cm

Variant	Prod. no.	GBP
black	**1007955**	**26.00**
rust	**1008030**	**26.00**
green	**1007960**	**26.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

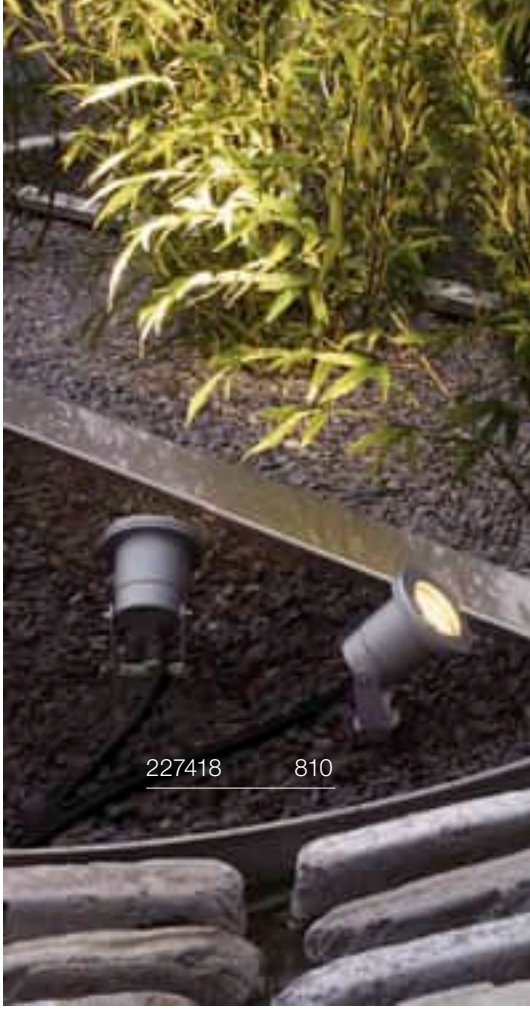

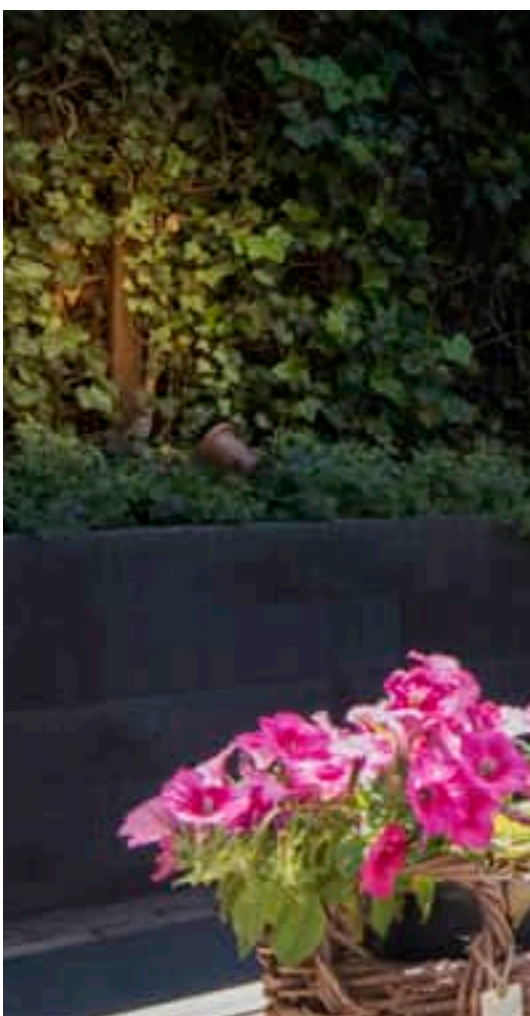

NAUTILUS 10
SP, round, QPAR51







220-240V ~50/60Hz
Material: stainless steel 316

- IP44 safety plug

SOCKET INSIDE <25 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
Stainless steel	**1007957**	**85.00**

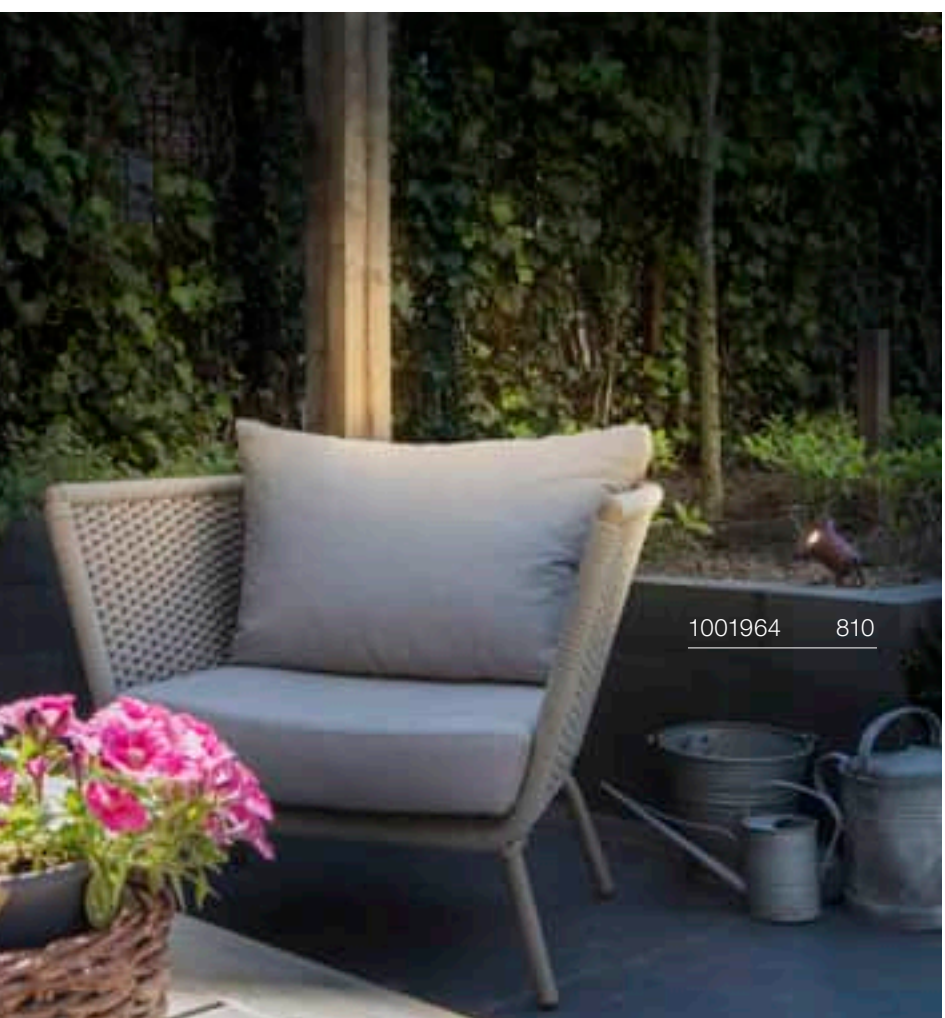

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP





NAUTILUS 10
SP, square







IP 65 | IK04 | 45° | L70B50 | 90° | 200

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.5W
Material: aluminium/glass

- IP44 safety plug

LED INSIDE | CRI 80

Down 660lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007958**	**125.00**

NAUTILUS
SP, QR-C51





IP 67 | IK03 | 180° | 150

12V ~50Hz
Material: stainless steel 304/glass

- Open cable end

SOCKET INSIDE <35 W

Base: 1xGX5.3

Variant	Prod. no.	GBP
Stainless steel	**229090**	**77.00**

LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEC=G
6kWh/1000h



Prod. no.: 1001574 | 31.00 GBP

NAUTILUS 10 SPOT
SP, QPAR51





IP 55 | IK03 | 360° | 180° | 150

220-240V ~50/60Hz
Material: stainless steel 316

- Open cable end

SOCKET INSIDE <25 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
Stainless steel	**229741**	**85.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	**228730**	**15.00**

NAUTILUS 10 SPOT LED
SP





IP 55 | IK04 | 60° | L80B50 | 180° | 150

220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

- IP44 safety plug

LED INSIDE CRI 80

Down | 520lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007959**	**98.00**

Product	Prod. no.	GBP
Plastic ground spike		
black	**900011**	**4.00**
Mounting plate		
Stainless steel	**1001963**	**8.00**



233570 815

DASAR® PROJECTOR
SP, 12/24V







12-24V DC
Total wattage: 6.5W
Material: stainless steel 316/glass

• Open cable end

LED INSIDE CRI 80

Down 520lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**233570**	**208.00**

⊕

Product	Prod. no.	GBP
Stainless steel 316 ground spike		
Stainless steel	**233580**	**17.00**
Plastic ground spike		
black	**900011**	**4.00**
Stainless steel 316 mounting plate		
Stainless steel	**233582**	**23.00**

DASAR® 920
SP, 230V







220-240V ~50/60Hz | 400mA
Total wattage: 4.6W
Material: stainless steel 316/glass

• IP44 safety plug

LED INSIDE CRI 80

Down 300lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007934**	**260.00**

⊕

Product	Prod. no.	GBP
Stainless steel 316 ground spike		
Stainless steel	**233580**	**17.00**
Plastic ground spike		
black	**900011**	**4.00**
Stainless steel 316 mounting plate		
Stainless steel	**233582**	**23.00**

HELIA SLIM
Pole, single

NEW





IP65 IK03 38° L70B50

180° 150

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium

- Euro plug

LED INSIDE CRI 80

Down 450lm | 3000K

Variant	Prod. no.	GBP
● black	1007868	119.00

HELIA SLIM
Pole, double

NEW





IP65 IK03 2x38° L70B50

180° 150

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium

- Euro plug

LED INSIDE CRI 80

Up 450lm
Down 450lm | 3000K

Variant	Prod. no.	GBP
● black	1007869	145.00

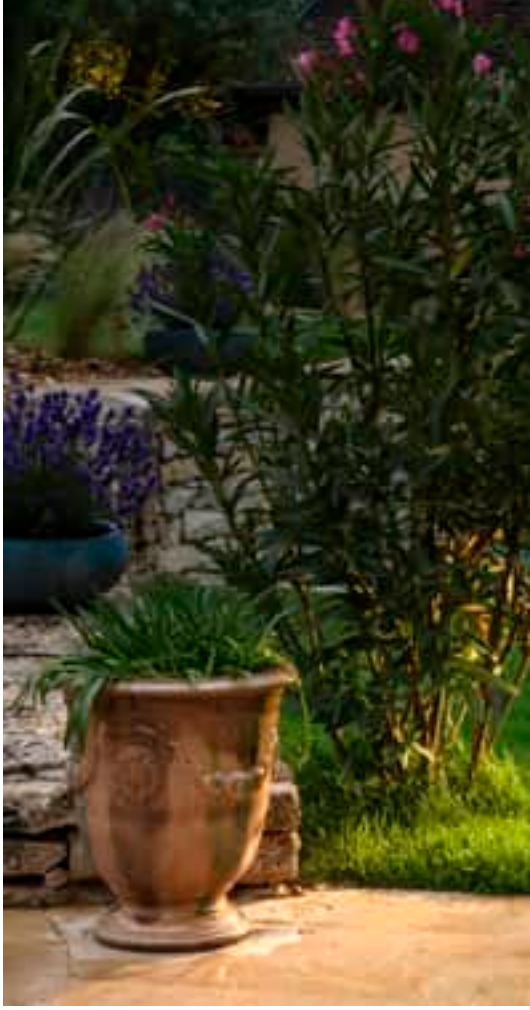



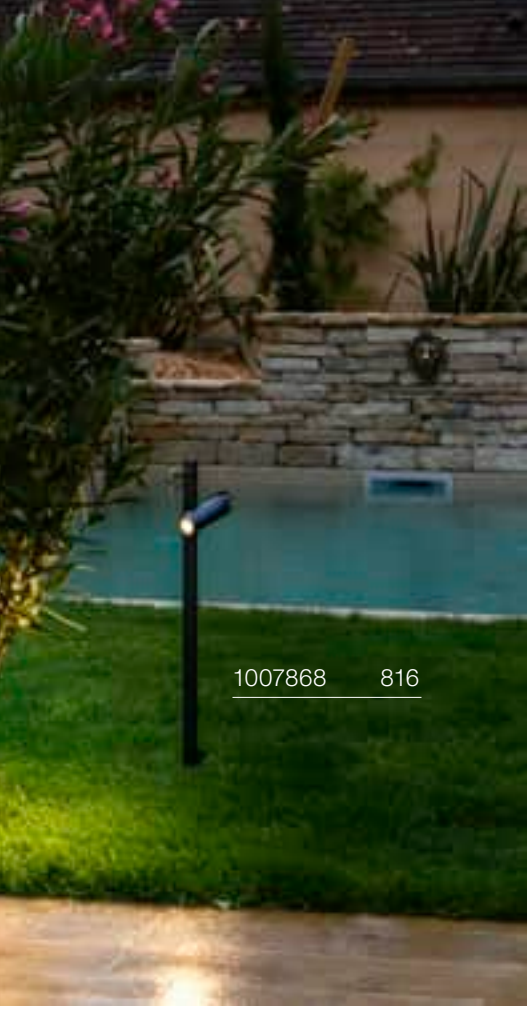



HELIA SPOT S
SP, single





IP 66 | IK04 | 35° | L70B50 | 330° | 90° | 300

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium

- IP44 safety plug

LED INSIDE | CRI 80

Down 440lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1007944**	**151.00**

Product	Prod. no.	GBP
Ground spike		
Stainless steel	**1000736**	**19.00**

HELIA SPOT L
SP, single, PHASE





C | IP 66 | IK04 | 40° | L70B50 | 320° | 90° | 300

220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/glass

- IP44 safety plug

LED INSIDE | CRI 80

Down 1340lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1007943**	**194.00**

Product	Prod. no.	GBP
Ground spike		
Stainless steel	**228560**	**23.00**



1004652 819

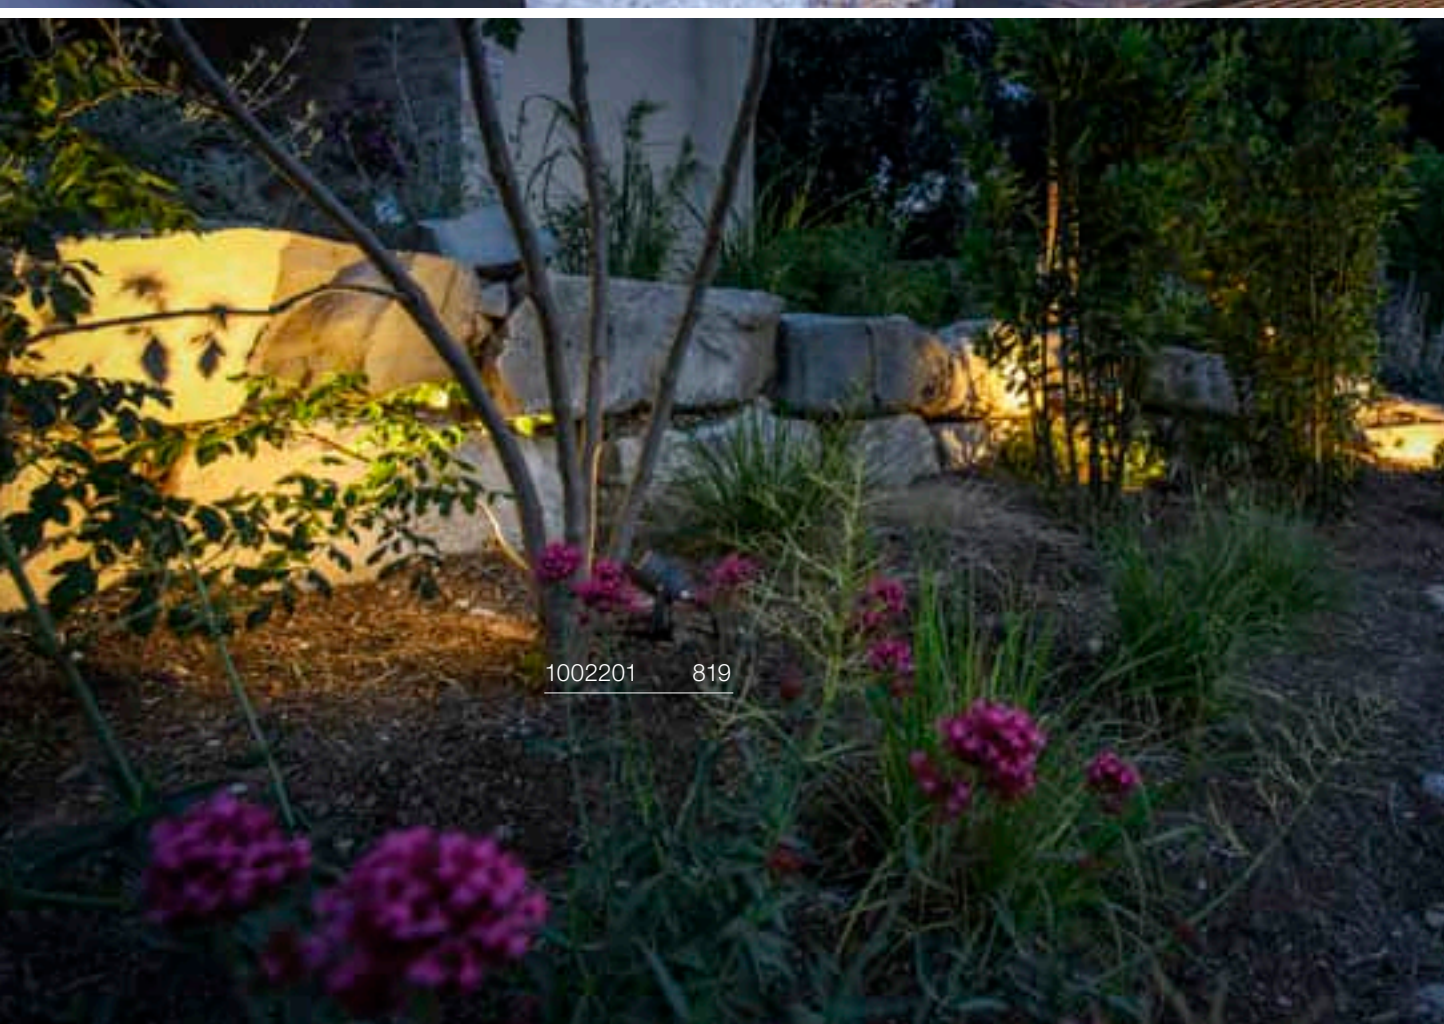

1002201 819



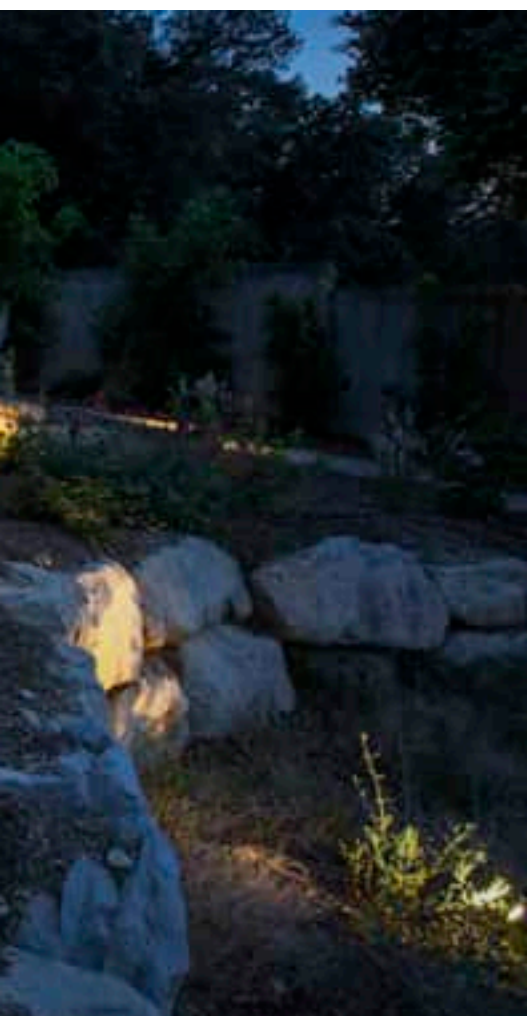

THEO BRACKET
SP





IP 44
IP 65 | IK02 | 70° | 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

SOCKET INSIDE | <7 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
anthracite	**1007981**	**55.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

Prod. no.: 1005077 | 7.00 GBP

LED SPIKE
SP





IP 55 | IK06 | 40° | L70B50 | 150

100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

- IP44 safety plug

LED INSIDE | CRI 80

Down | 400lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1007949**	**61.00**
rust	**1007950**	**61.00**


231535 821

SITRA 360 SPIKE
SP, single, TCR-TSE





IP 44 IK04 90° 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

SOCKET INSIDE <9 W

Base: 1xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
anthracite	**1007973**	**55.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEC=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP

SITRA 360 SPIKE
SP, double, TCR-TSE





IP 44 IK04 90° 90° 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

SOCKET INSIDE <9 W

Base: 2xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
anthracite	**1007974**	**164.00**

LED GX53 | 6W | 120°
2700K | 490lm | EEC=G
6kWh/1000h

Prod. no.: 1005272 | 10.00 GBP


1006327 830

NEW



SOCKET

PHOTONI CYL | 825



SOCKET

PHOTONI | 825



LED

S-CUBE | 826



LED

ESKINA FRAME | 827



LED

ENOLA OCULUS | 828



LED

ENOLA
ROUND S | 829



LED

ENOLA
ROUND M | 829



LED

ENOLA
ROUND L | 829



LED

ENOLA
SQUARE S | 831



LED

ENOLA
SQUARE M | 831



LED

ENOLA
SQUARE L | 831



LED

BIG THEO | 833



SOCKET

BIG THEO | 833



LED

OVALISK | 833



SOCKET

MOLAT | 834



SOCKET

SITRA | 835



SOCKET

ROX | 837



SOCKET

ROX | 837


1007586 827

PHOTONI CYL
CL

NEW





IP65 IK08

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
black	1008199	85.00
rust	1008200	85.00

LED A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

L



Prod. no.: 1005305 | 17.00 GBP

PHOTONI
CL, E27





IP65 IK08

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <13 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
black	1007586	85.00
rust	1007582	85.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L



Prod. no.: 1005289 | 9.00 GBP

S-CUBE
CL

CCT





IP 65 IK04 80° L70B20

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE CRI 80

Down	1000lm | 2700K	1200lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007461**	**115.00**

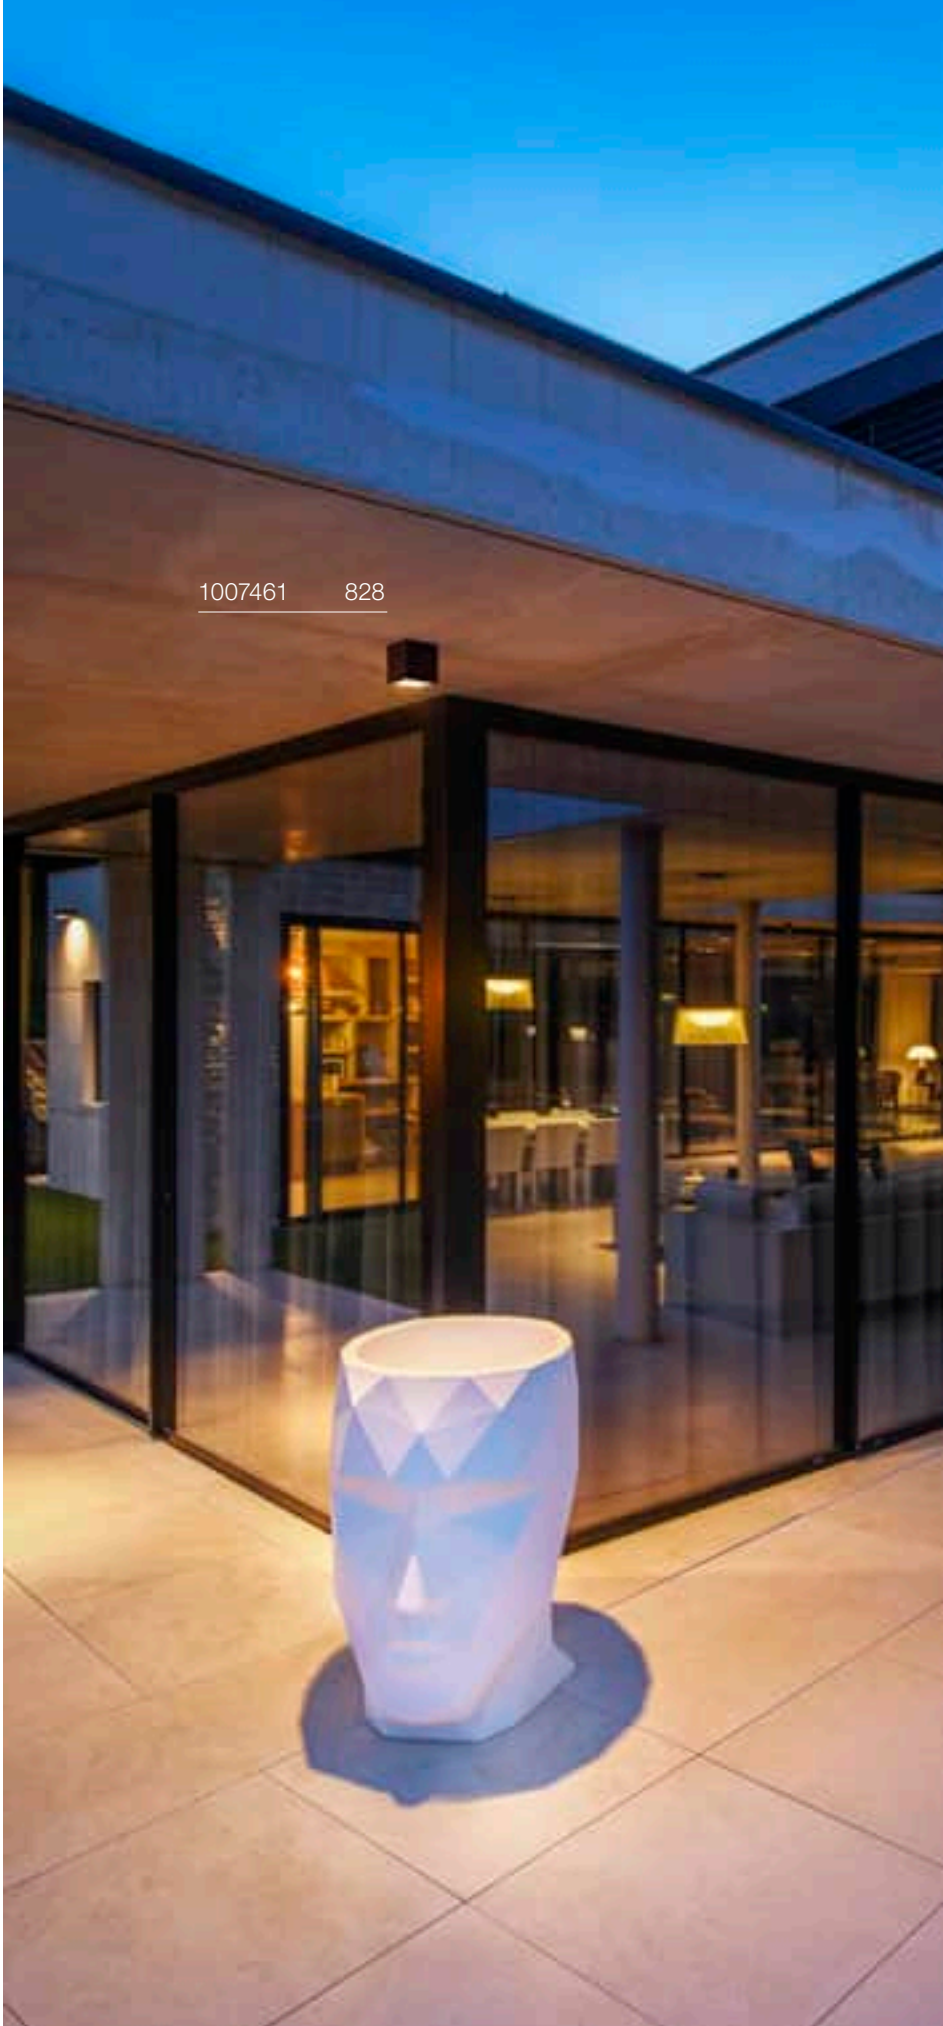



ESKINA FRAME
CL, single

CCT





C | IP 65 | IK06 | 95° | 30 000 Hours L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/glass

LED INSIDE | CRI 80

Down	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1006316**	**157.00**

ENOLA OCULUS
CL

CCT





IP 65 IK03 100° L70B50 20

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

Down	1000lm | 3000K	1100lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1006327**	**205.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1003479**	**8.00**



ENOLA ROUND S
CL





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE | CRI 90

Down	540lm | 3000K	610lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003426	148.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Reflector 60°		
chrome	1005262	15.00

ENOLA ROUND M
CL





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Down	840lm | 3000K	960lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003427	188.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA ROUND L
CL





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Down	3200lm | 3000K	3500lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003442	268.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Reflector 60°		
chrome	1005263	19.00


1003421 833

ENOLA SQUARE S
CL

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE | CRI 90

Down	540lm | 3000K	610lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003420	148.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Reflector 60°		
chrome	1005262	15.00

ENOLA SQUARE M
CL

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Down	840lm | 3000K	960lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003421	188.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA SQUARE L
CL

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Down	3200lm | 3000K	3500lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003439	268.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Reflector 60°		
chrome	1005263	19.00


234535 835


1004677 835

BIG THEO
CL





IP 44 | IK02 | 24° | L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 2000lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**234535**	**180.00**

BIG THEO
CL, QPAR111





IP 44 | IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE | <75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● anthracite	**229555**	**107.00**
○ white	**229551**	**107.00**
● grey	**229554**	**107.00**

QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

C,L



Prod. no.: 1005278 | 48.00 GBP

OVALISK
CL

CCT





IP 65 | IK02 | L70B50 | 20

220-240V ~50/60Hz | 350mA
Total wattage: 7.9W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 540lm | 3000K | 570lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1004677**	**231.00**

MOLAT
CL, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.	GBP
anthracite	**1000823**	**111.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP





SITRA
CL, TCR-TSE







IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <9 W

Base: 1xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
● anthracite	**231545**	**77.00**
○ white	**231541**	**77.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

C,L

Prod. no.: 1005271 | 10.00 GBP


1000332 839

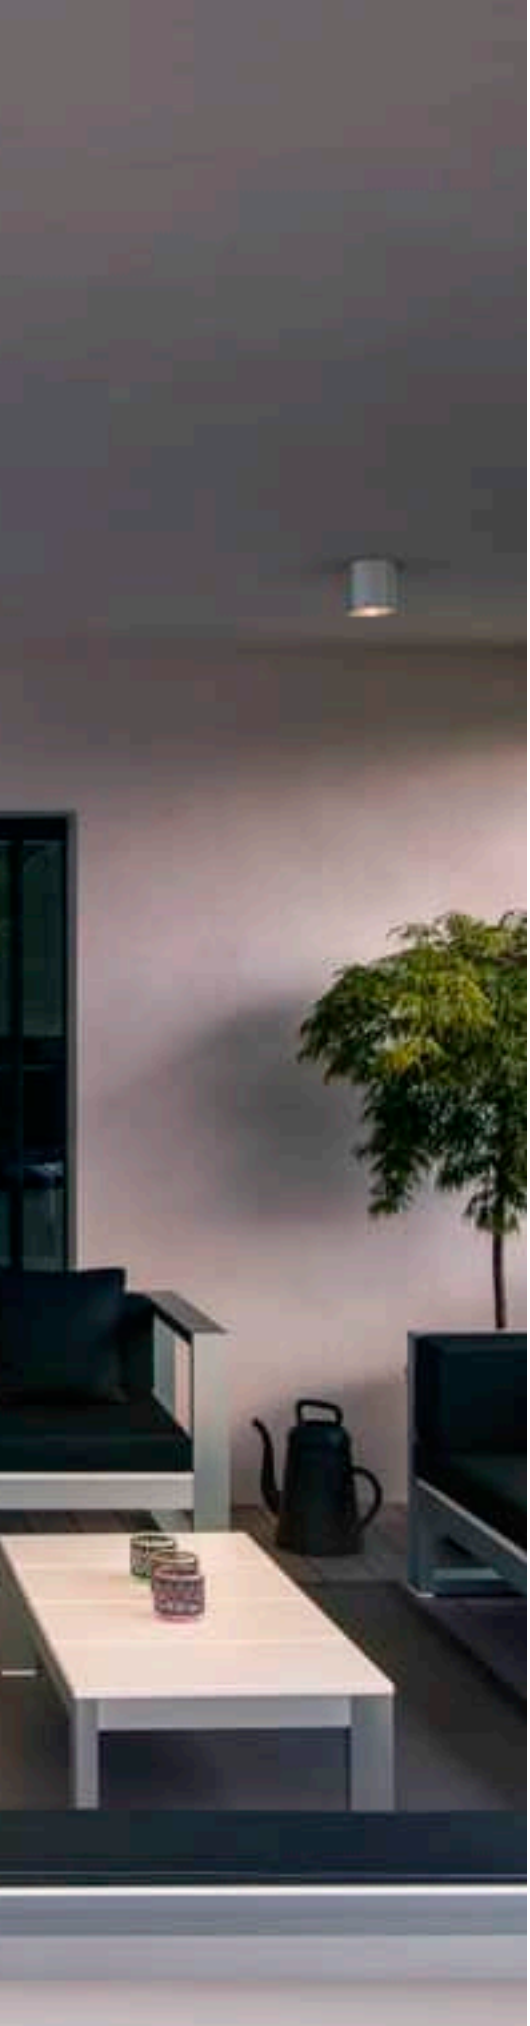

ROX
CL, QPAR111





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <50 W

Base: 1xGU10

Variant	Prod. no.	GBP
aluminium	**1000332**	**113.00**

QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

C,L



Prod. no.: 1005278 | 48.00 GBP

ROX
CL, GX53





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <11 W

Base: 1xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
aluminium	**1000339**	**139.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

C,L

Prod. no.: 1005271 | 10.00 GBP



R-CUBE | 843



S-CUBE | 843



SOCKET

PHOTONI CYL | 845



SOCKET

PHOTONI | 845



LID I | 846



LID I | 846



LID II | 847



LID II | 847



Q-RING | 849



Q-RING | 849



D-RING S | 851

D-RING M | 851



I-RING | 852



OVAL 14 | 853



OVAL 18 | 853



CONCRETO M | 855



CONCRETO L | 855



VANO WING | 857



VANO WING | 857



MANA BASE | 858



RUSTY® MANA | 858



RUSTY® MANA | 858



MANA OUT | 859



MANA OUT | 859



SOCKET

THEO UP/DOWN | 861



BIG THEO BEAM UP/ FLOOD DOWN | 861



SOCKET

BIG THEO UP/ DOWN | 861



SOCKET

THEO | 862



BIG THEO FLOOD UP/ DOWN | 862



SOCKET

BIG THEO | 863



BIG THEO | 863



ENOLA OCULUS | 865



ENOLA OCULUS | 865



ENOLA ROUND S | 867



ENOLA ROUND M | 867



ENOLA ROUND L | 867



ENOLA ROUND S UP/DOWN | 869



ENOLA ROUND M UP/DOWN | 869



ENOLA ROUND L UP/DOWN | 869



ENOLA SQUARE S | 871

ENOLA SQUARE M | 871

ENOLA SQUARE L | 871



ENOLA SQUARE S
UP/DOWN | 872



ENOLA SQUARE M
UP/DOWN | 872



ENOLA SQUARE L
UP/DOWN | 872



SITRA S | 877



SITRA S | 877



SITRA M | 879



SITRA L | 879



SITRA CUBE | 879



GRAFIT | 880



GRAFIT | 880



GRAFIT | 881



GRAFIT | 881



QUADRULO | 882



QUADRULO
SENSOR | 883



QUADRULO | 883



MERIDIAN | 884



MERIDIAN BOX | 884



MERIDIAN BOX
SENSOR | 885



MERIDIAN BOX | 885



ESKINA FRAME | 887



ESKINA FRAME | 887



ESKINA FRAME | 887



BOOKAT | 889



BIG QUAD | 890



BIG QUAD
UP/DOWN | 891



QUAD | 892



QUAD
UP/DOWN 15 | 893



RUSTY®
UP/DOWN | 894



RUSTY®
UP/DOWN | 894



OVALISK
SENSOR | 895



OVALISK | 895



PEMA® | 896



PEMA® | 897



PEMA® | 897



PEMA® | 897



FLATT | 898



FLATT SENSOR | 898



ASTINA | 899



ASTINA STEEL | 899

NEW



MODELA | 901

ANGOLUX
SENSOR | 902

ANGOLUX | 902



LED

VILUA S | 903



LED

VILUA L | 903



LED

VILUA | 903



SOCKET

MYRA UP/DOWN | 904



LED

SITRA UP/DOWN | 905



SOCKET

SITRA UP/DOWN | 905



SOCKET

ROX UP/DOWN | 907



LED

DELWA | 907

NEW



SOCKET

T-TUBE | 908

NEW



SOCKET

T-TUBE | 908

NEW



SOCKET

T-TUBE | 909

NEW



SOCKET

T-TUBE | 909



SOCKET

WALLYX | 910



LED

DOWNUNDER
OUT | 911



LED

DOWNUNDER
OUT | 911

NEW



LED

ABRIDOR | 913



LED

ABRIDOR | 915



LED

ABRIDOR
SENSOR | 915

NEW



LED

ORDI II SENSOR | 916

NEW



LED

ORDI II | 916



LED

ORDI SENSOR | 917



LED

ORDI | 917



SOCKET

BOX-L | 919



LED

BOX-L | 919



SOCKET

BOX UP/DOWN | 919



LED

LOGS | 921



LED

OUT-BEAM UP/
FLOOD DOWN | 921



LED

L-LINE OUT | 921



SOCKET

PHOTONIA | 923



SOCKET

MOLAT | 923



SOCKET

GLOO PURE | 923



SOCKET

F-POL | 924



SOCKET

SQUARE | 925



SOCKET

KERAS ELT | 925



SOCKET

SITRA | 925



LED

IPERI | 926



SOCKET

QUADRASYL | 927



SOCKET

SQUARE TURN | 927



LED

TODAY PRO | 929



LED

ESKINA D | 929

SOCKET

MYRA DISPLAY | 929

LED

LED SPOT | 931



SOCKET

NAUTILUS | 931



SOCKET

MYRA | 931



LED

RASTERLYS | 933



SOCKET

RASTERLYS | 935



LED

R-CUBE | 935



LED

S-CUBE | 935



LED

ESKINA SPOT SENSOR | 937



LED

ESKINA SPOT | 937



SOCKET

SITRA 360 | 938



SOCKET

THEO BRACKET | 938



LED

HELIA | 939



LED

HELIA | 939



SOCKET

MYRA | 941

LED

OUT-BEAM FRAME | 941



LED

QUADRULO | 941

LED

AINOS | 942



LED

AINOS | 943

LED

AINOS | 943



LED

AINOS | 943



LED

RUBA | 944



LED

TERANG 200 | 944



SOCKET

BULAN | 945



SOCKET

BULAN GRID | 945


1007511 843

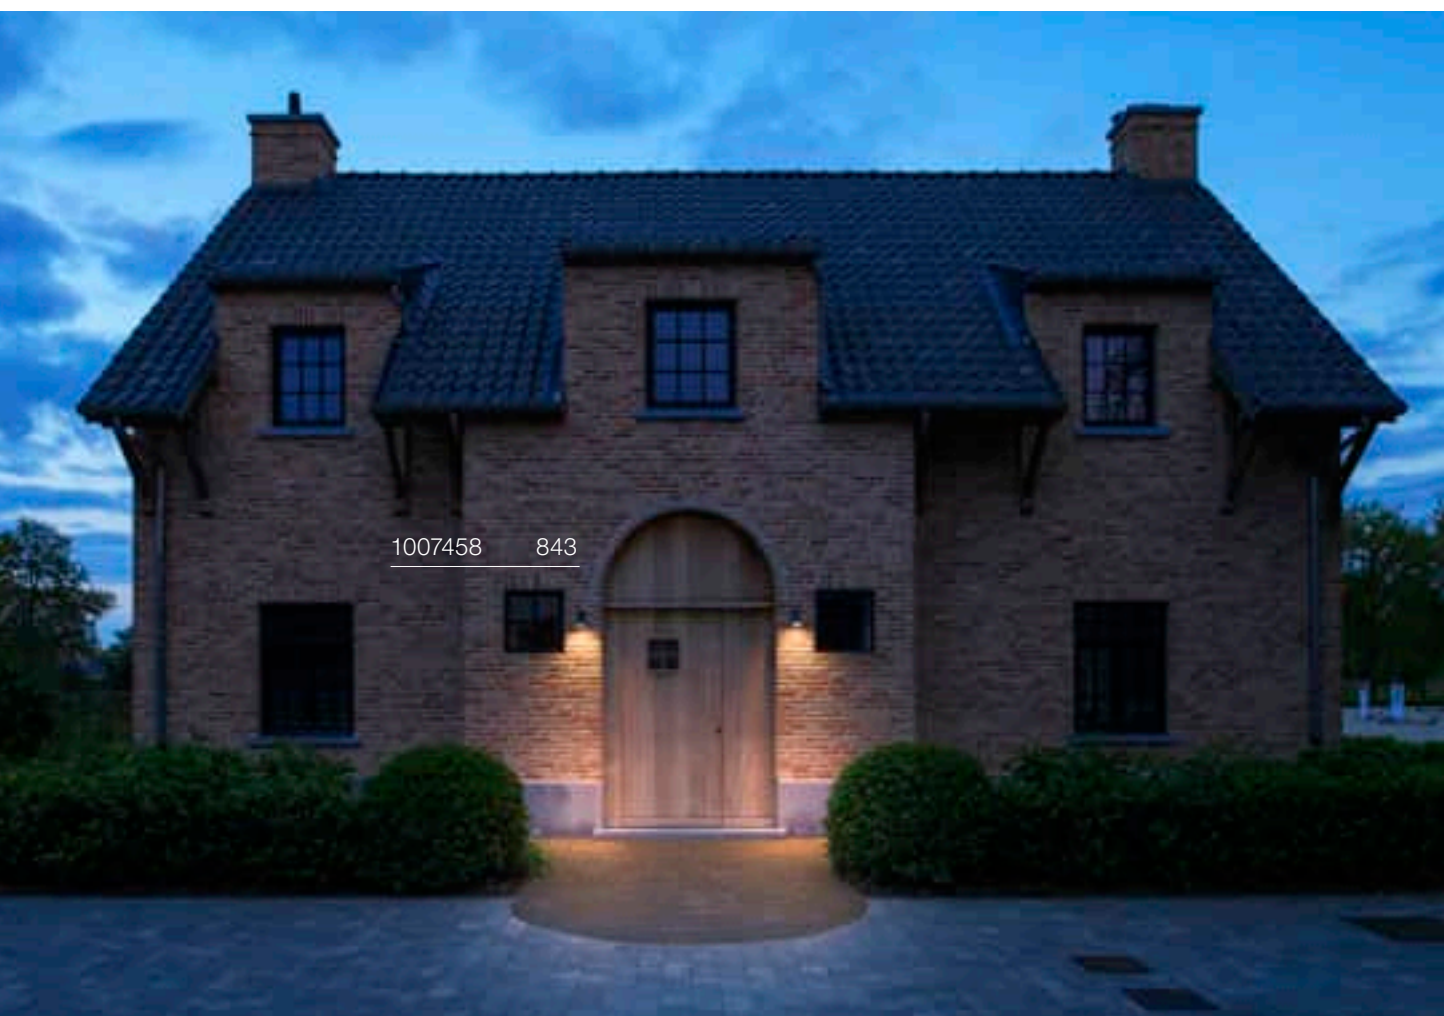
1007458 843

R-CUBE
W

CCT





C | IP 65 | IK04 | 70° | L70B20 | 350° | 130°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	800lm | 2700K	800lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007511**	**133.00**

S-CUBE
CW

CCT





C | IP 65 | IK04 | 80° | L70B20 | 130°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	1000lm | 2700K	1200lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007458**	**133.00**

PHOTONI CYL
WL

NEW





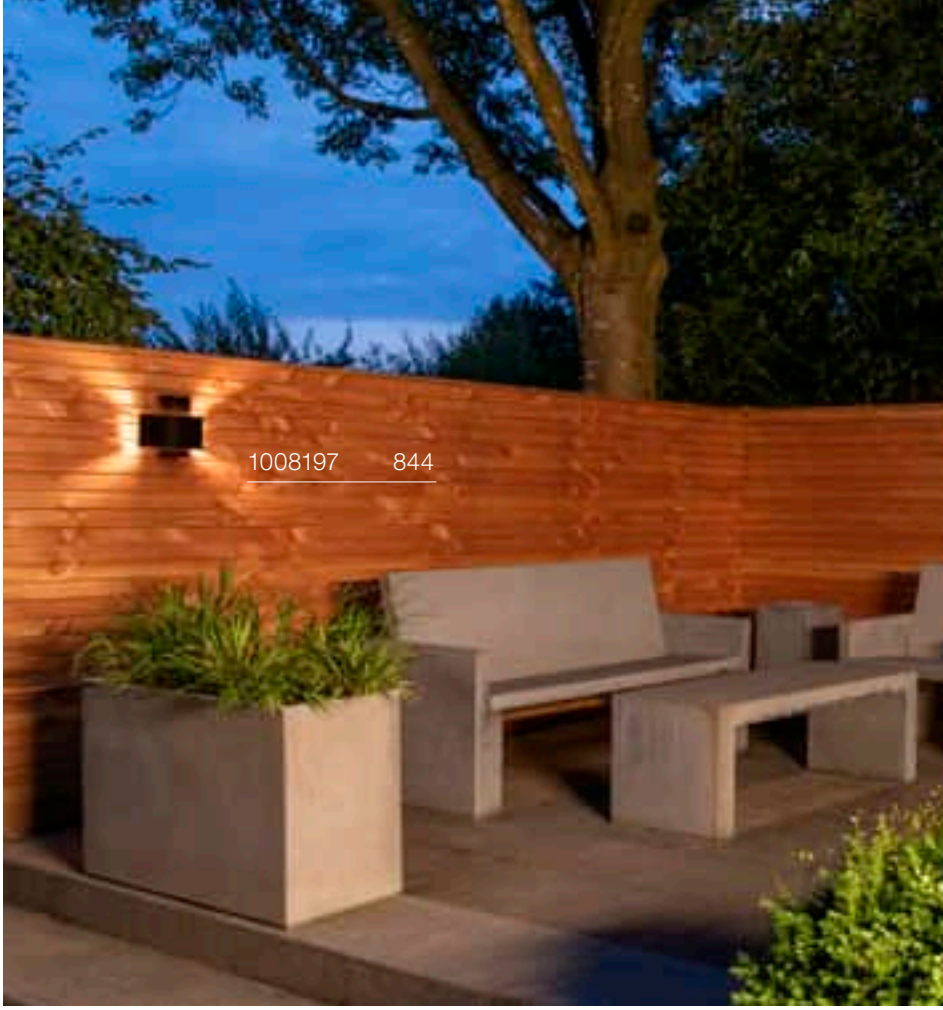

IP65 IK08

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
black	1008197	85.00
rust	1008198	85.00

LED A60 | 7.5W | 180°
2700K | 720lm | EEC=F
8kWh/1000h

Prod. no.: 1005305 | 17.00 GBP

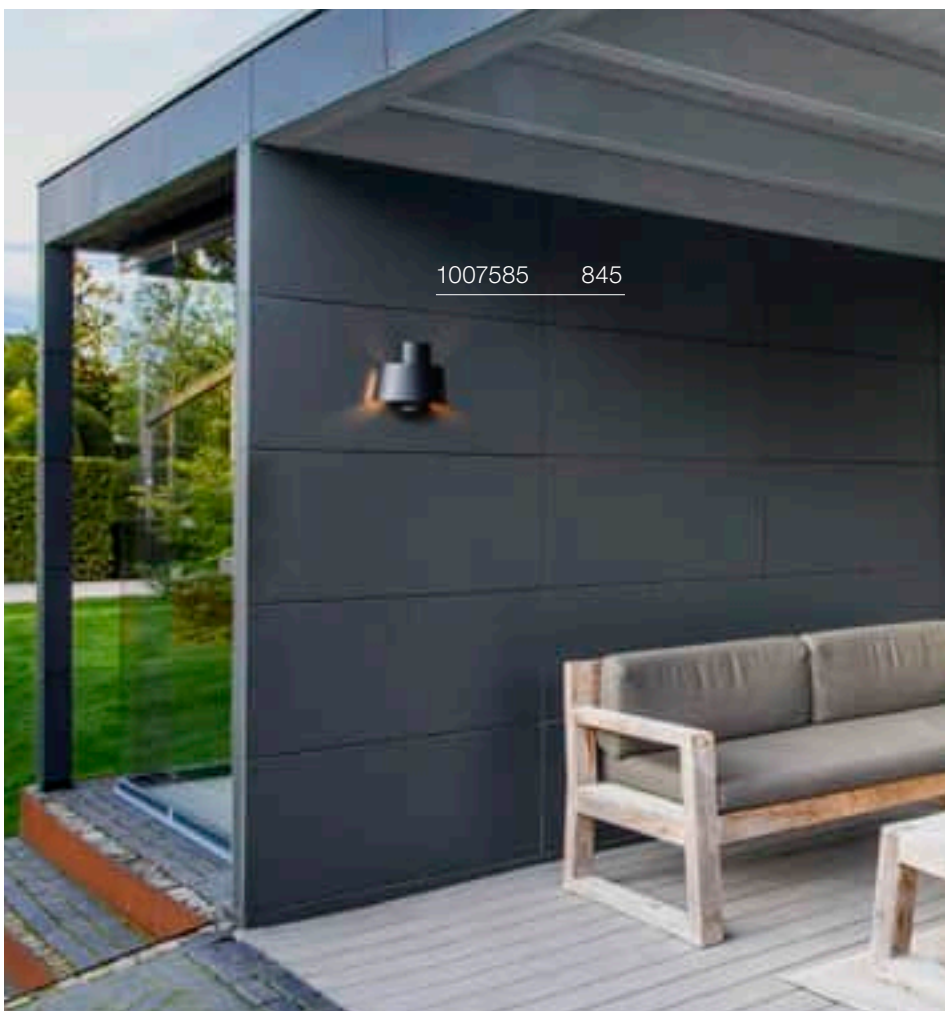

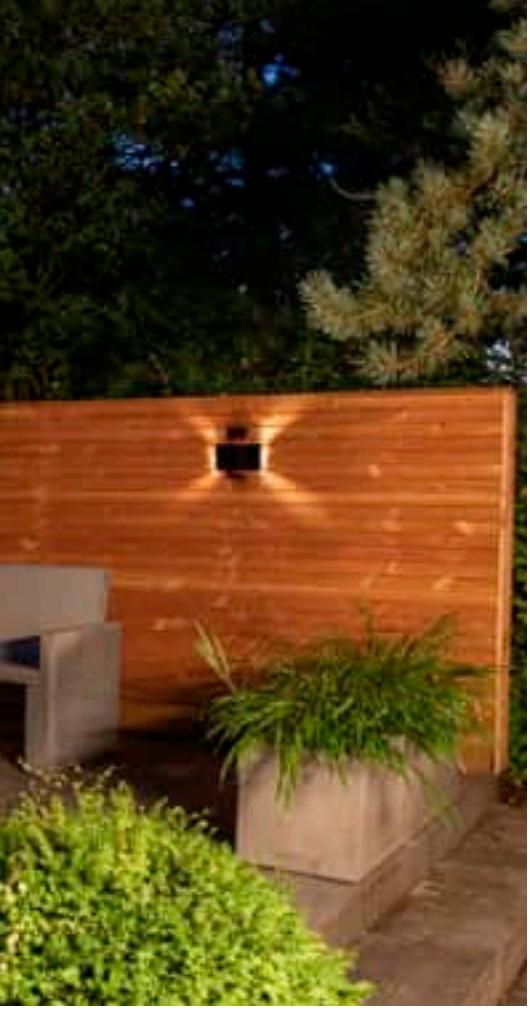

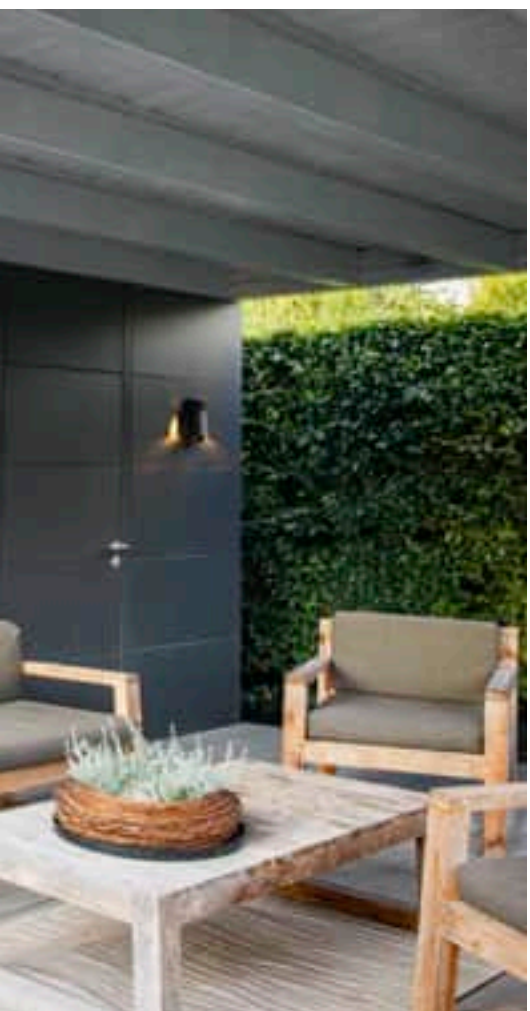

PHOTONI
WL, E27





IP65 IK08

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <13 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
● black	**1007585**	**85.00**
● rust	**1007581**	**85.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005289 | 9.00 GBP

LID I
WL, single

CCT





C | IP65 | IK07 | 100° | L70B20 | 330°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	900lm | 2700K	1050lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007667**	**124.00**

LID I
WL, double

CCT





C | IP65 | IK07 | 100° | 100° | L70B20 | 330° / 30

220-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium

LED INSIDE | CRI 80

Spot 1	850lm | 2700K	1000lm | 3000K
Spot 2	850lm | 2700K	1000lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007668**	**197.00**

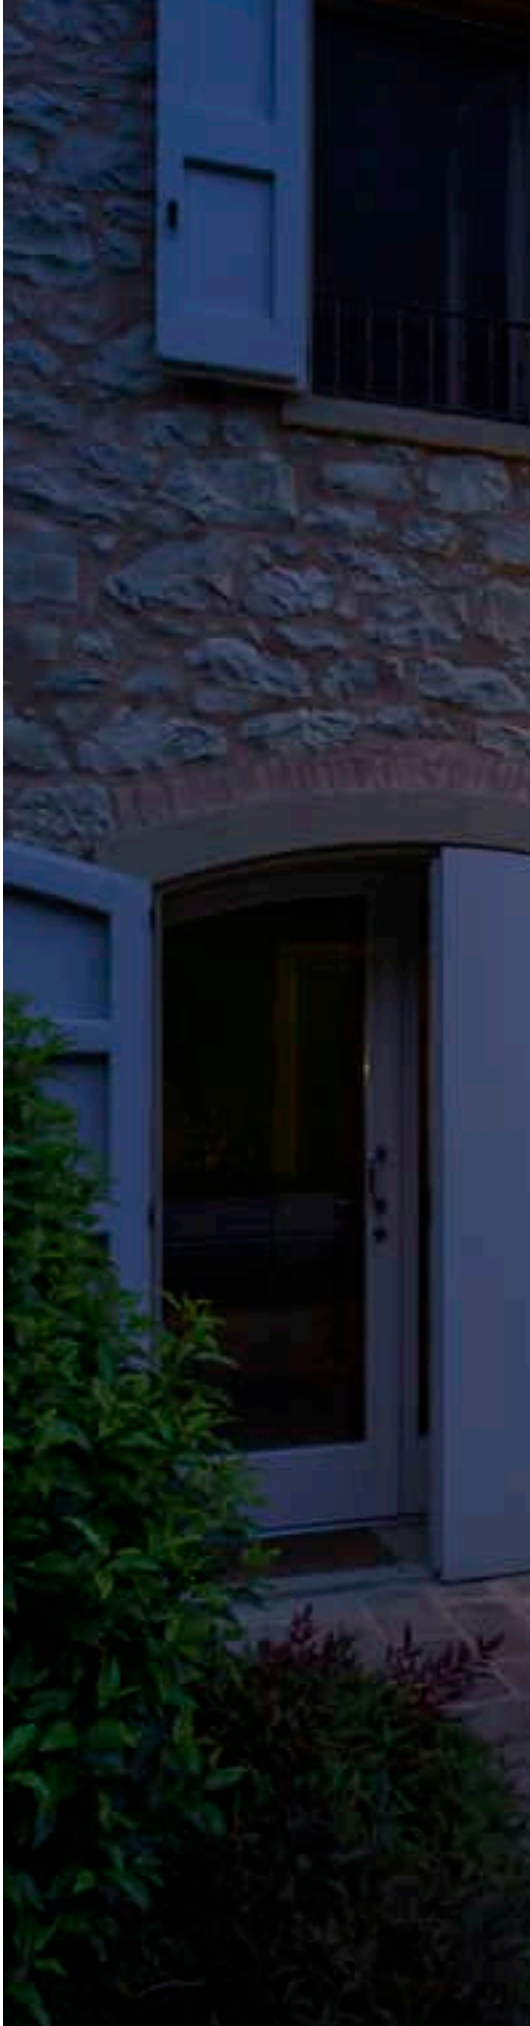



LID II

CCT





C | IP 65 | IK02 | 100° | L70B20

20

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	800lm | 2700K	800lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007282**	**94.00**

LID II
WL. up/down

CCT





C | IP 65 | IK03 | 100° | 100° | L70B20

20

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium

LED INSIDE | CRI 80

Up	750lm | 2700K	750lm | 3000K
Down	750lm | 2700K	750lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007281**	**111.00**


1007916 849

Q-RING
WL

NEW





IP65 IK06 L80B50 20

220-240V ~50/60Hz | 240mA
Total wattage: 10W
Material: aluminium/plastic

LED INSIDE CRI 80

Down 950lm | 3000K

Variant	Prod. no.	GBP
● black	1007918	137.00
○ white	1007919	137.00

Q-RING
WL. Sensor

IR

NEW





IP54 IK06 L80B50 20

220-240V ~50/60Hz | 240mA
Total wattage: 10W
Material: aluminium/plastic

LED INSIDE CRI 80

Down 950lm | 3000K

Variant	Prod. no.	GBP
● black	1007916	154.00
○ white	1007917	154.00


1007912 851

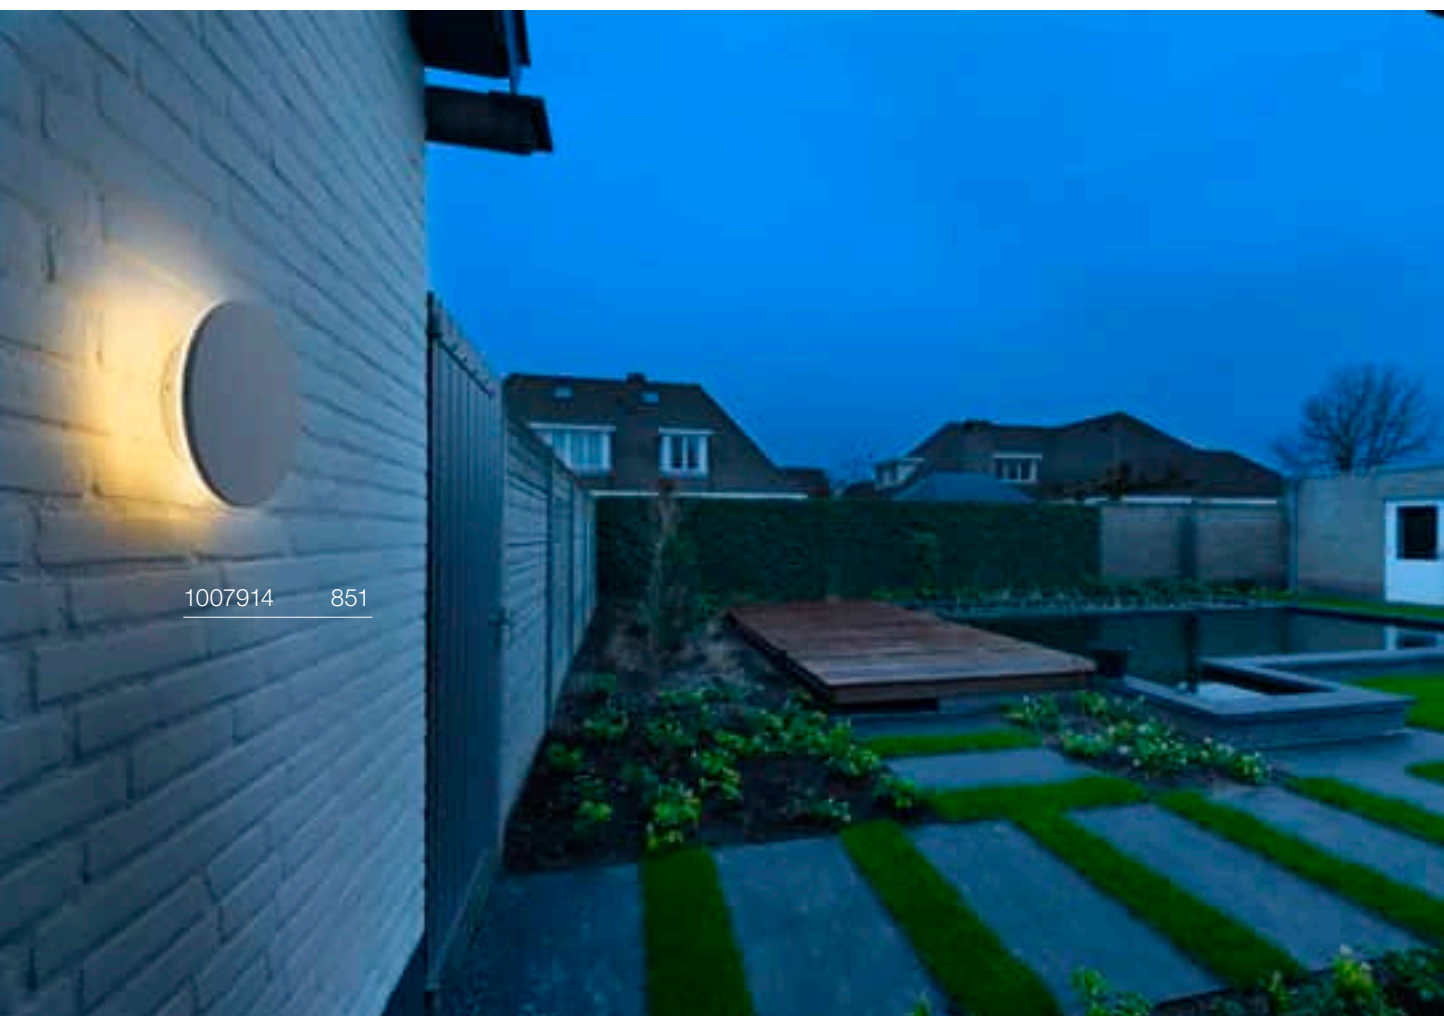
1007914 851

D-RING S
WL, PHASE

CCT

NEW





C,L | IP65 | IK06 | L80B20 | 160

220-240V ~50Hz | 95mA
Total wattage: 7.5W
Material: aluminium

LED INSIDE | CRI 80

Down	630lm | 2700K	650lm | 3000K

Variant	Prod. no.	GBP
● black 630/650lm	**1007911**	**85.00**
○ white 790/820lm	**1007912**	**85.00**

D-RING M
WL, PHASE

CCT

NEW





C,L | IP65 | IK06 | L80B20 | 80

220-240V ~50Hz | 190mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	1540lm | 2700K	1590lm | 3000K

Variant	Prod. no.	GBP
● black 1260/1360lm	**1007913**	**128.00**
○ white 1540/1590lm	**1007914**	**128.00**

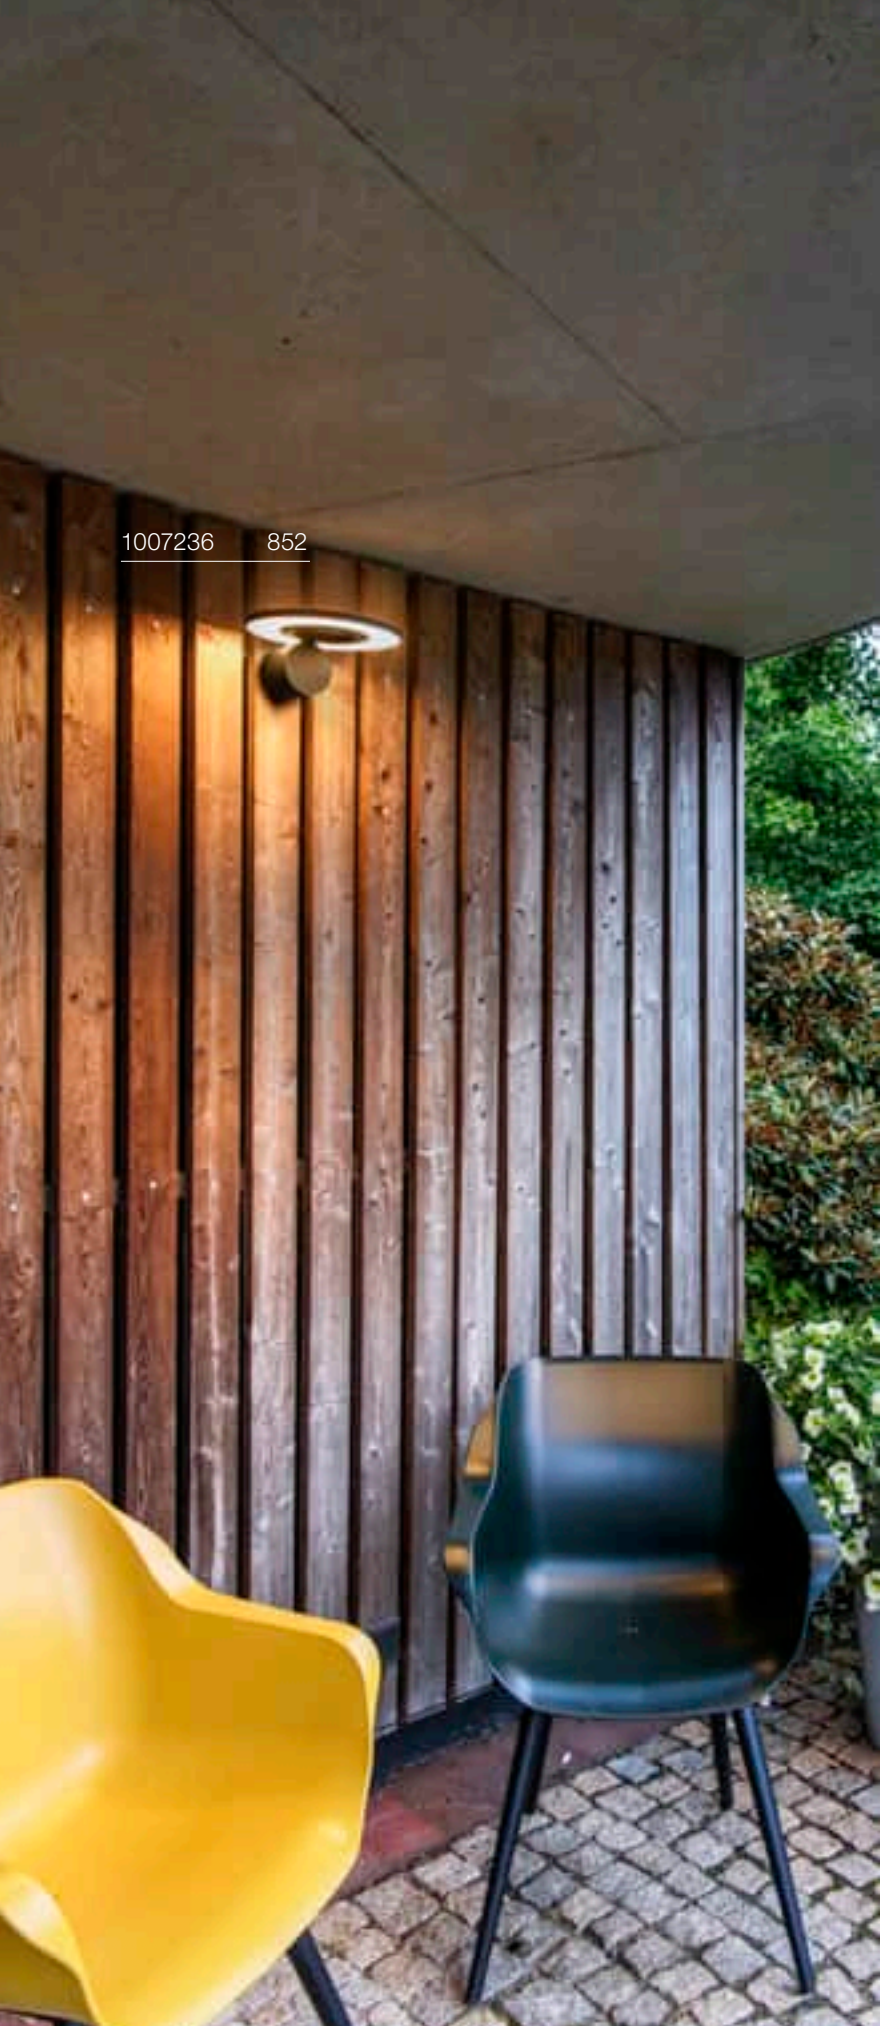

I-RING
WL







IP 65 | IK05 | L70B50 | 350° | 90° | 20

100-240V ~50/60Hz | 350mA
Total wattage: 9.2W
Material: aluminium

LED INSIDE | CRI 80

Down 670lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1007236**	**141.00**

OVAL 14
WL, up/down





IP 65 | IK08 | L70B50 | 74

220-240V ~50/60Hz | 145mA
Total wattage: 5.7W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Up	280lm	2700K		280lm	3000K
Down	280lm	2700K		280lm	3000K

Variant	Prod. no.	GBP
● black	**1007142**	**63.00**
○ white	**1007143**	**63.00**

OVAL 18
WL, up/down





IP 65 | IK08 | L70B50 | 71

220-240V ~50/60Hz | 275mA
Total wattage: 9.3W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Up	430lm	2700K		430lm	3000K
Down	430lm	2700K		430lm	3000K

Variant	Prod. no.	GBP
● black	**1007144**	**75.00**
○ white	**1007145**	**75.00**


1006405 855

CONCRETO M
WL





IP 65 IK02 L80B50

220-240V ~50/60Hz | 700mA
Total wattage: 8.5W
Material: concrete/aluminium

LED INSIDE CRI 80

Down 270lm | 3000K

Variant	Prod. no.	GBP
grey	**1006404**	**172.00**

CONCRETO L
WL





IP 65 IK03 L80B50

220-240V ~50/60Hz | 700mA
Total wattage: 12W
Material: concrete/aluminium

LED INSIDE CRI 80

Down 470lm | 3000K

Variant	Prod. no.	GBP
grey	**1006405**	**224.00**


1006270 857

VANO WING
SP, DALI





Dali 2.0 | IP 65 | IK06 | 120° | L70B50 | 180°

220-240V ~50/60Hz | 500mA
Total wattage: 25W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 1400lm | 3000K

Variant	Prod. no.	GBP
grey	**1006268**	**368.00**

VANO WING
SP, DALI





Dali 2.0 | IP 65 | IK06 | 120° | L70B50 | 180°

220-240V ~50/60Hz | 1050mA
Total wattage: 49W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 3140lm | 3000K

Variant	Prod. no.	GBP
grey	**1006270**	**454.00**

MANA BASE
WL, round, PHASE





IP 65 L80B50 68

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)

Down	800lm | 2700K / 820lm | 3000K

Variant	Prod. no.	GBP
anthracite	1006319	163.00

RUSTY® MANA
Shade, square



L: 28 cm W: 28 cm H: 1.5 cm
Material: FeCSi steel

Variant	Prod. no.	GBP
rust	1006317	51.00

RUSTY® MANA
Shade, round



H: 1.5 cm
Diameter: 28 cm
Material: FeCSi steel

Variant	Prod. no.	GBP
rust	1006318	51.00

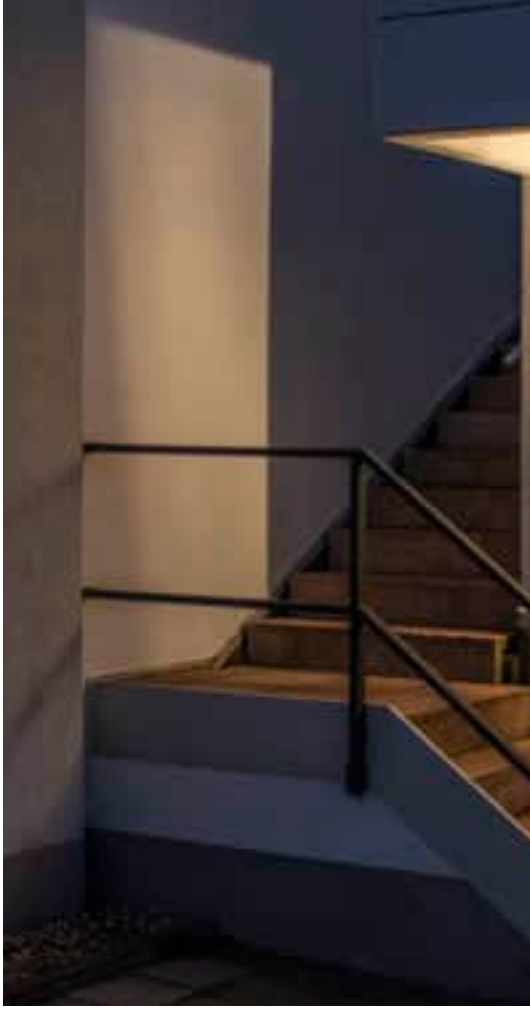



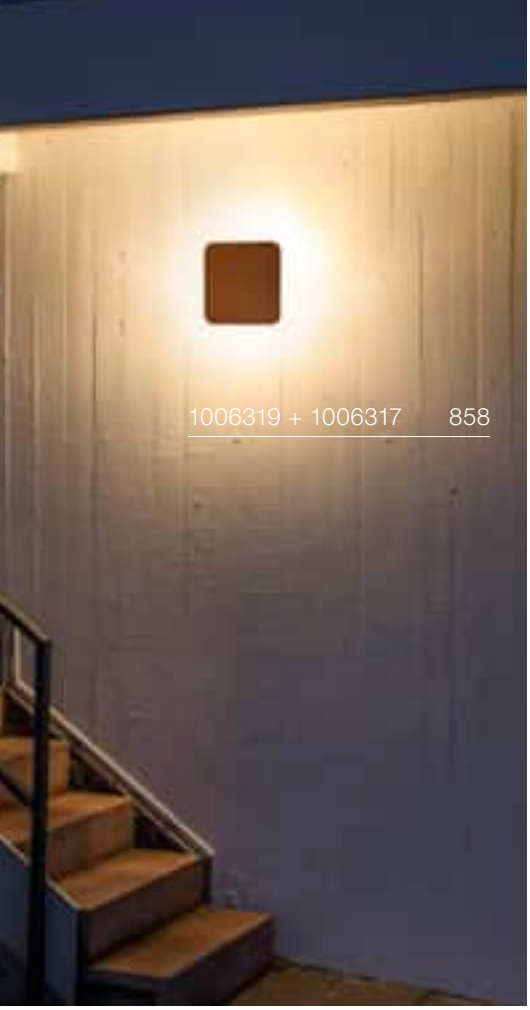



MANA OUT
WL, PHASE







IP 65 | IK02 | 60° | 60° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/aluminium

- Incl. 2 shutters for spotlight

LED INSIDE | CRI 80

Up	325lm	3000K
Down	325lm	3000K

Variant	Prod. no.	GBP
anthracite	**1002900**	**205.00**

MANA OUT
WL, set







IP 65 | IK02 | 60° | 60° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/concrete

- Incl. 2 shutters for spotlight

LED INSIDE | CRI 80

Up	325lm	3000K
Down	325lm	3000K

Variant	Prod. no.	GBP
grey	**1003470**	**236.00**


229532 861


234515 861

THEO UP/DOWN
WL, QPAR51





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <35 W

Base: 2xGU10

Variant	Prod. no.	GBP
anthracite	229535	77.00
white	229531	77.00
grey	229532	77.00

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

BIG THEO BEAM UP/ FLOOD DOWN
WL







IP 44 IK02 24° 2° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 29W
Material: aluminium/glass

- The 2° light effect is particularly suitable for contouring and structuring high surfaces and building facades such as hotels, restaurants or even apartment blocks and shopping centres.

LED INSIDE CRI 80

Up 130lm
Down 2000lm | 3000K

Variant	Prod. no.	GBP
anthracite	234515	240.00

BIG THEO UP/DOWN
WL, QPAR111





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <75 W

Base: 2xGU10

Variant	Prod. no.	GBP
anthracite	229575	154.00
grey	229574	154.00

QPAR111 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h

Prod. no.: 1005278 | 48.00 GBP

THEO
WL, QPAR51





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <35 W

Base: 1xGU10

Variant	Prod. no.	GBP
anthracite	**229525**	**64.00**
grey	**229524**	**64.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

BIG THEO FLOOD UP/DOWN
WL





IP 44 IK02 24° 24° L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/glass

LED INSIDE CRI 80

Up	2000lm | 3000K
Down	2000lm | 3000K

Variant	Prod. no.	GBP
anthracite	**234505**	**270.00**









234525 863

BIG THEO
WL, QPAR111





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <75 W

Base: 1xGU10

Variant	Prod. no.	GBP
anthracite	229565	97.00
grey	229564	97.00

QPAR111 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h

C,L



Prod. no.: 1005278 | 48.00 GBP

BIG THEO
WL





IP 44 IK02 24° L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass

LED INSIDE CRI 80

Down 2000lm | 3000K

Variant	Prod. no.	GBP
anthracite	234525	193.00


1006328 865

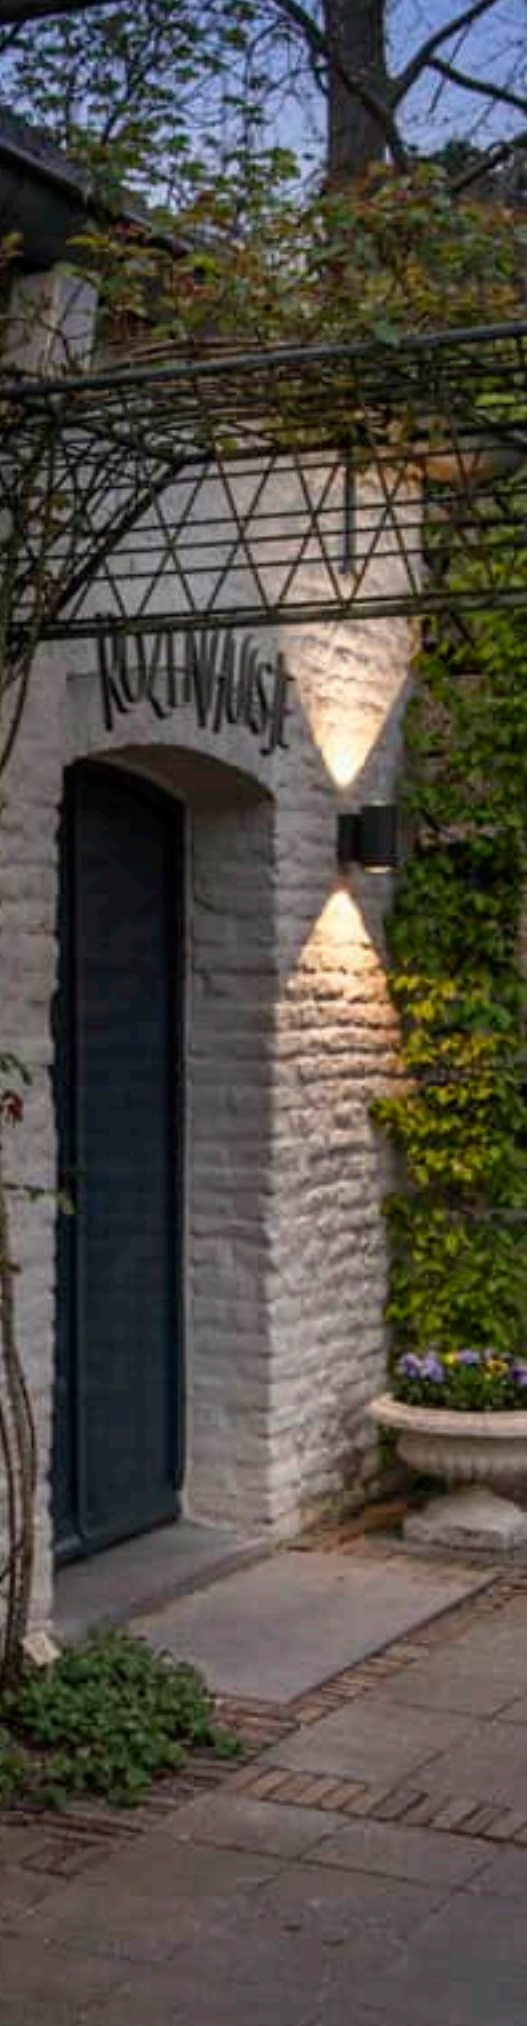

ENOLA OCULUS
WL, single

CCT





IP 65 | IK03 | 100° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- The light colour must be set prior to installation
- The Occulus optic creates a contoured, cleanly defined light effect on the respective surface

LED INSIDE | CRI 90

Down	1000lm | 3000K	1100lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1006328**	**235.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**

ENOLA OCULUS
WL, up/down

CCT





IP 65 | IK03 | 100° | 100° | L70B50 | 37

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/glass

- The light colour must be set prior to installation
- The Occulus optic creates a contoured, cleanly defined light effect on the respective surface

LED INSIDE | CRI 90

Up	940lm | 3000K	1060lm | 4000K
Down	940lm | 3000K	1060lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1006329**	**296.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**


1003440 867

ENOLA ROUND S
WL, single

CCT





IP 65 | IK06 | 30° | L70B50 | 10

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Down	450lm | 3000K	500lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003422	172.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005262	15.00

ENOLA ROUND M
WL, single

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE | CRI 90

Down	860lm | 3000K	980lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003423	211.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA ROUND L
WL, single

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Down	3300lm | 3000K	3700lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003440	295.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005263	19.00


1003441 869

ENOLA ROUND S UP/DOWN
WL

CCT





IP 65 | IK06 | 30° | 30° | L80B20

10

220-240V ~50/60Hz | 350mA
Total wattage: 7.8W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Up	310lm	3000K	350lm	4000K
Down	310lm	3000K	350lm	4000K

Variant	Prod. no.	GBP
anthracite	1003424	211.00

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005262	15.00

ENOLA ROUND M UP/DOWN
WL

CCT





IP65 | IK06 | 38° | 38° | L70B50 | 37

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE | CRI 90

Up	830lm	3000K	950lm	4000K
Down	830lm	3000K	950lm	4000K

Variant	Prod. no.	GBP
anthracite	1003425	258.00

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA ROUND L UP/DOWN
WL

CCT





IP 65 | IK06 | 38° | 38° | L70B50 | 10

220-240V ~50/60Hz | 700mA
Total wattage: 55W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE | CRI 90

Up	2700lm	3000K	3000lm	4000K
Down	2700lm	3000K	3000lm	4000K

Variant	Prod. no.	GBP
anthracite	1003441	404.00

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005263	19.00

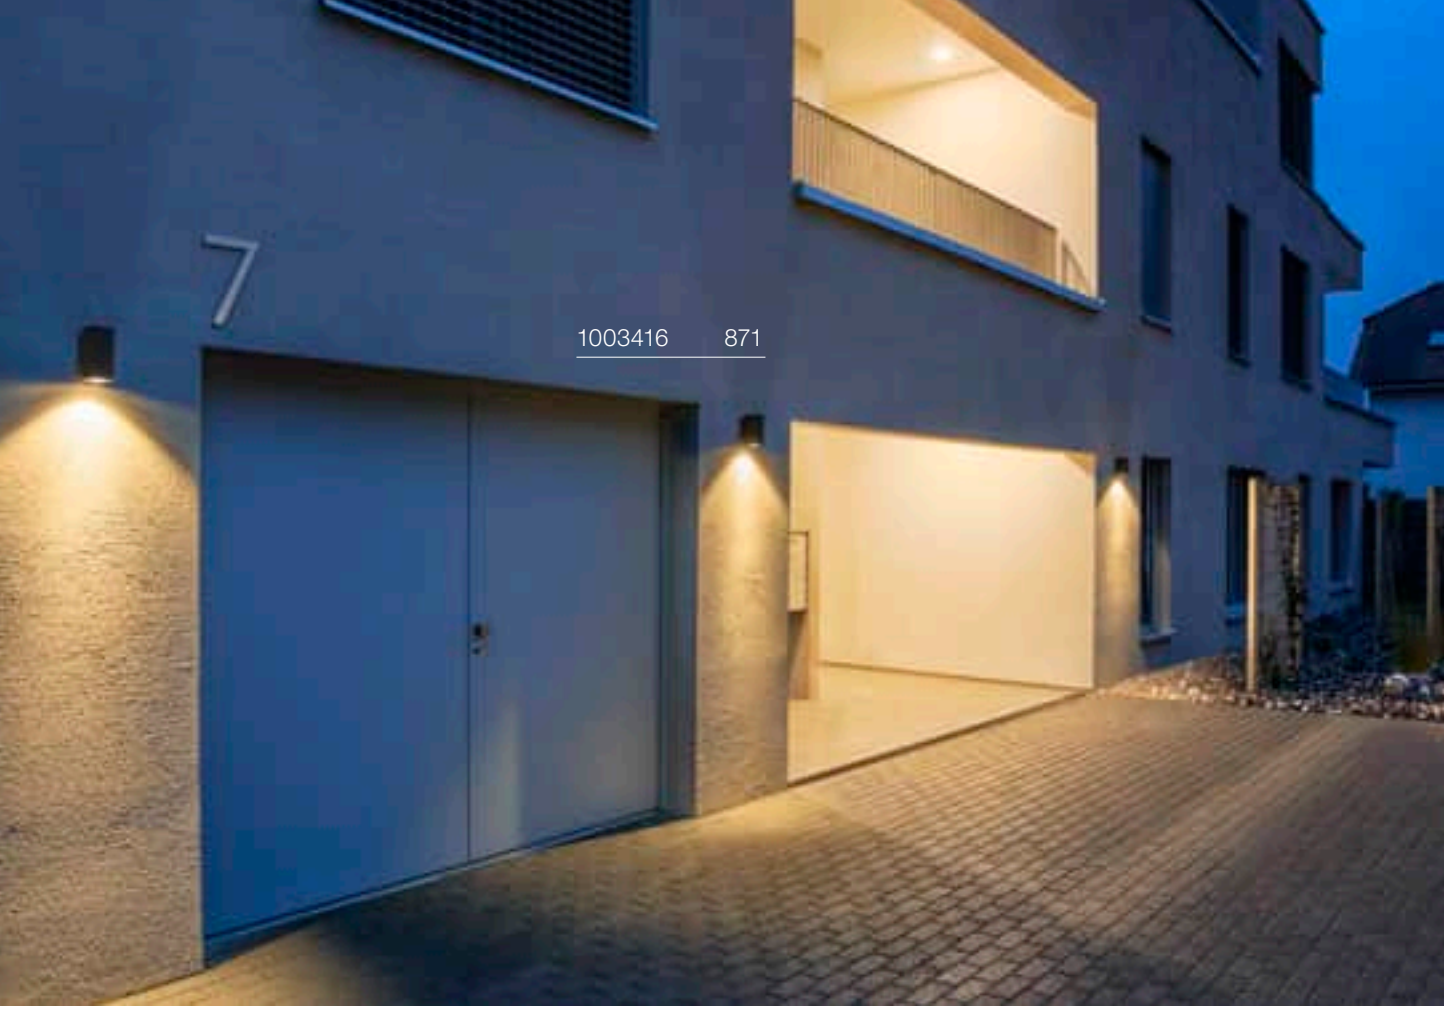
7
1003416 871

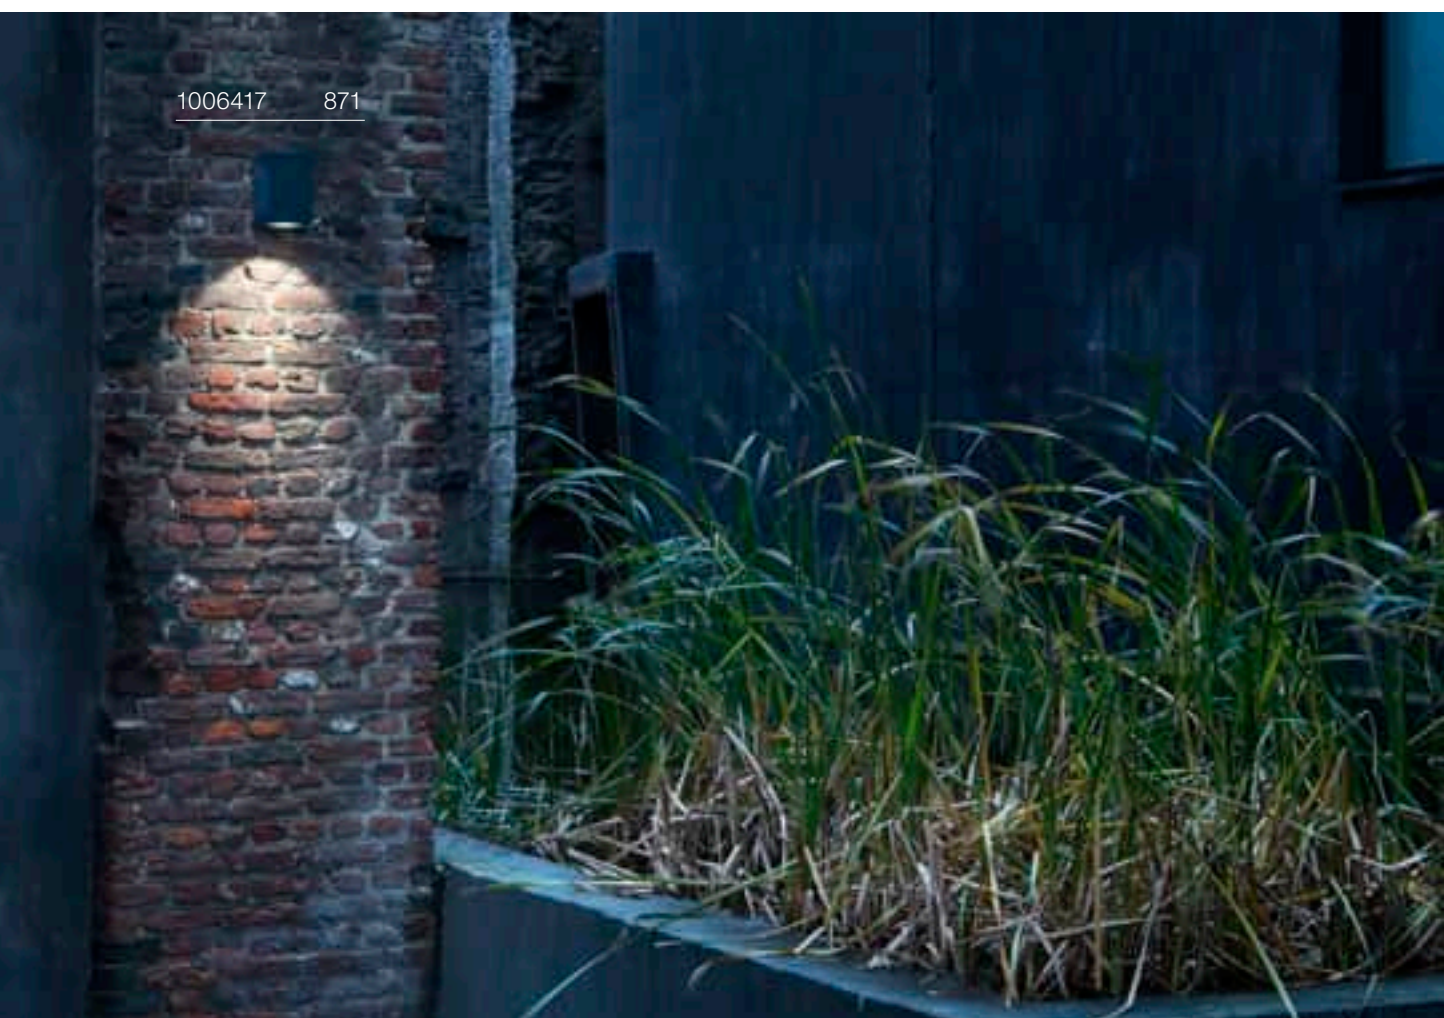
1006417 871

ENOLA SQUARE S
WL, single

CCT





IP 65 | IK06 | 30° | L70B50 | 10

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

Down	450lm | 3000K	500lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003416	172.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005262	15.00

ENOLA SQUARE M
WL, single

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

Down	860lm | 3000K	980lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003417	211.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA SQUARE L
WL, single

CCT





IP 65 | IK06 | 38° | L70B50 | 10

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

Down	3300lm | 3000K	3700lm | 4000K

Variant	Prod. no.	GBP
anthracite	1003437	295.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005263	19.00

ENOLA SQUARE S UP/DOWN
WL





IP 65 | IK06 | 30° | 30° | L80B20 | 10

220-240V ~50/60Hz | 350mA
Total wattage: 7.8W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

Up	310lm	3000K	350lm	4000K
Down	310lm	3000K	350lm	4000K

Variant	Prod. no.	GBP
anthracite	1003418	211.00

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005262	15.00

ENOLA SQUARE M UP/DOWN
WL





IP65 | IK06 | 38° | 38° | L70B50 | 37

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

Up	830lm	3000K	950lm	4000K
Down	830lm	3000K	950lm	4000K

Variant	Prod. no.	GBP
anthracite	1003419	258.00

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA SQUARE L UP/DOWN
WL





IP 65 | IK06 | 38° | 38° | L70B50 | 10

220-240V ~50/60Hz | 700mA
Total wattage: 55W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

Up	2700lm	3000K	3000lm	4000K
Down	2700lm	3000K	3000lm	4000K

Variant	Prod. no.	GBP
anthracite	1003438	404.00

Product	Prod. no.	GBP
Spacer		
anthracite	1002853	7.00
Reflector 60°		
chrome	1005263	19.00

ENOLA S/M/L
Reflector




60°

S | H: 1.85 cm, diameter: 4.5 cm
M | H 4 cm, diameter: 7.5 cm
L | H: 6.96 cm, diameter: 11 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
chrome | **S**	**1005262**	**15.00**
chrome | **M**	**1005207**	**22.00**
chrome | **L**	**1005263**	**19.00**

ENOLA M
Lens 34°




34/12°

H: 3.8 cm
Diameter: 7.5 cm
Material: steel/polycarbonate (PC)

Variant	Prod. no.	GBP
black	**1005205**	**36.00**

ENOLA M
Asymmetrical lens




23°

H: 3 cm
Diameter: 7.5 cm
Material: steel/polycarbonate (PC)

Variant	Prod. no.	GBP
black/chrome	**1005206**	**36.00**







EASY TO INSTALL

1

WALL MOUNTING.

Screw the mounting plate into the wall with the fixing screw.

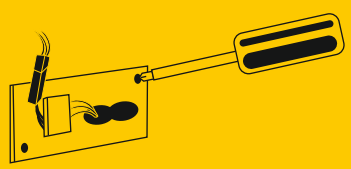

2

SIMPLY PLUG TOGETHER.

Connect the power supply plug connection to the LED lights.

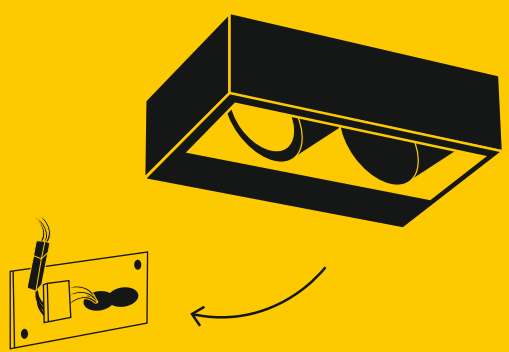

3

SIMPLE AND SECURE ASSEMBLY.

Hook the light into the useful guiding groove on the mounting plate and screw the light body to the mounting plate.



DONE!

Because efficiency always pays off, SLV lights are easy, quick and safe to install. On account of the fixed mounting plates, detachable lamp heads, spring clamps, through wiring, cable entries and various other features, they offer crucial benefits: in that they save you time, effort, and expense.

MOUNTABLE LAMP HEADS.

With our ENOLA® family, the lamp head can be separated from the mounting plate attached to the wall. This way, after mounting using the integrated nib and establishing the electrical connection using the plug connection, both hands remain free to securely screw on the lights.







PRACTICAL SPRING CLAMPS.

The cube-shaped SITRA CUBE wall lights offer wonderful modern simplicity. This means they are also fast and simple to install: Simply directly connect the connection cable (no tools required) and connect the mounting plate coupling to the light connector - done!



Connecting the power



Simply plug together

FEED-THROUGH WIRING.

Our QUADRULO wall and ceiling lights show how simply through-wiring functions in practice. Two cable entries in a figure of 8 configuration are provided in the light's baseplate. In addition to two cable entries, the spring terminal also has two connection options. This means that multiple lights can be quickly and simply installed simultaneously.



Secure cable entry



Feed-through wiring


1005149 877

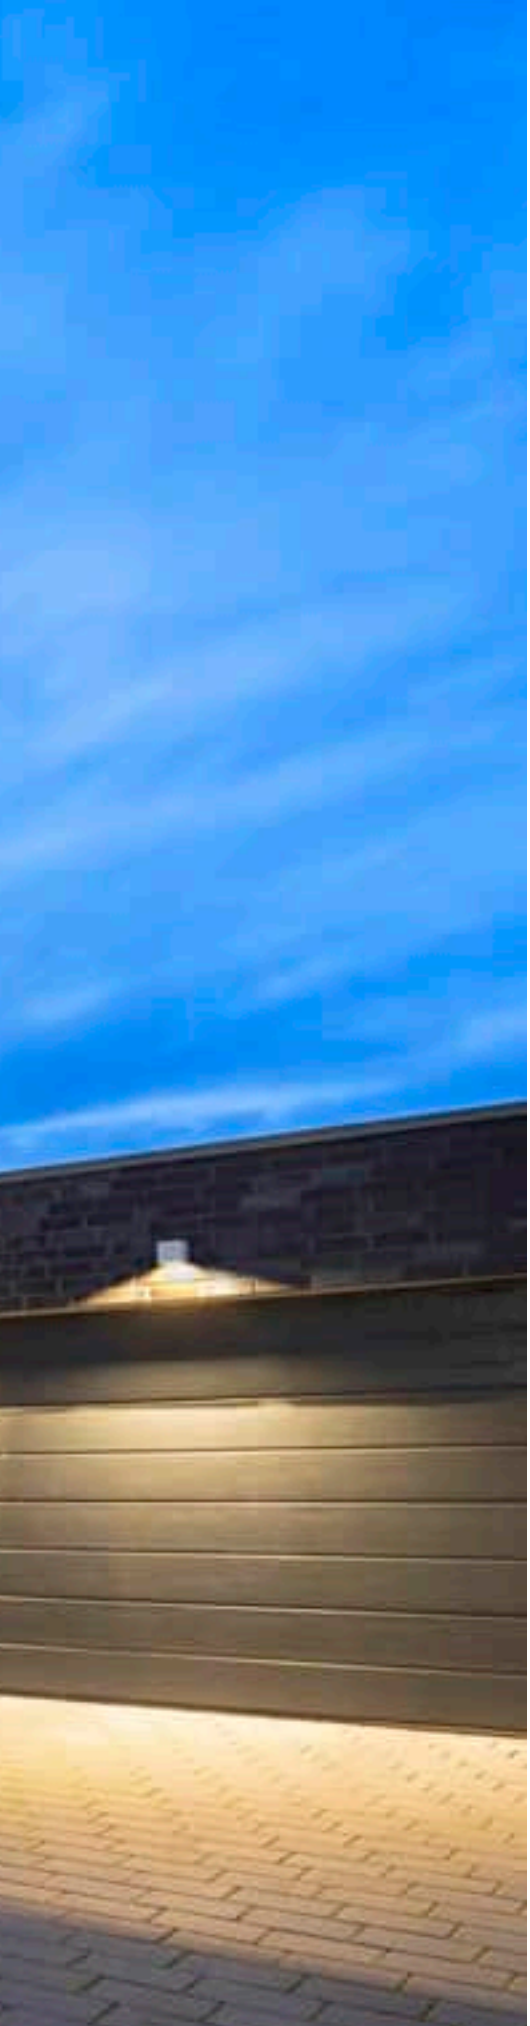

SITRA S
WL, single, square

CCT





IP 65 | IK05 | 105° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: aluminium

LED INSIDE | CRI 80

Down	580lm | 3000K	620lm | 4000K

Variant	Prod. no.	GBP
anthracite	1005148	85.00
white	1005149	85.00
rust	1005150	85.00

SITRA S
WL, single, square

CCT





IP 65 | IK05 | 105° | 105° | L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

LED INSIDE | CRI 80

Up	550lm | 3000K	635lm | 4000K
Down	550lm | 3000K	635lm | 4000K

Variant	Prod. no.	GBP
anthracite	1002032	103.00
white	1002033	103.00
rust	1002034	103.00


232531 879

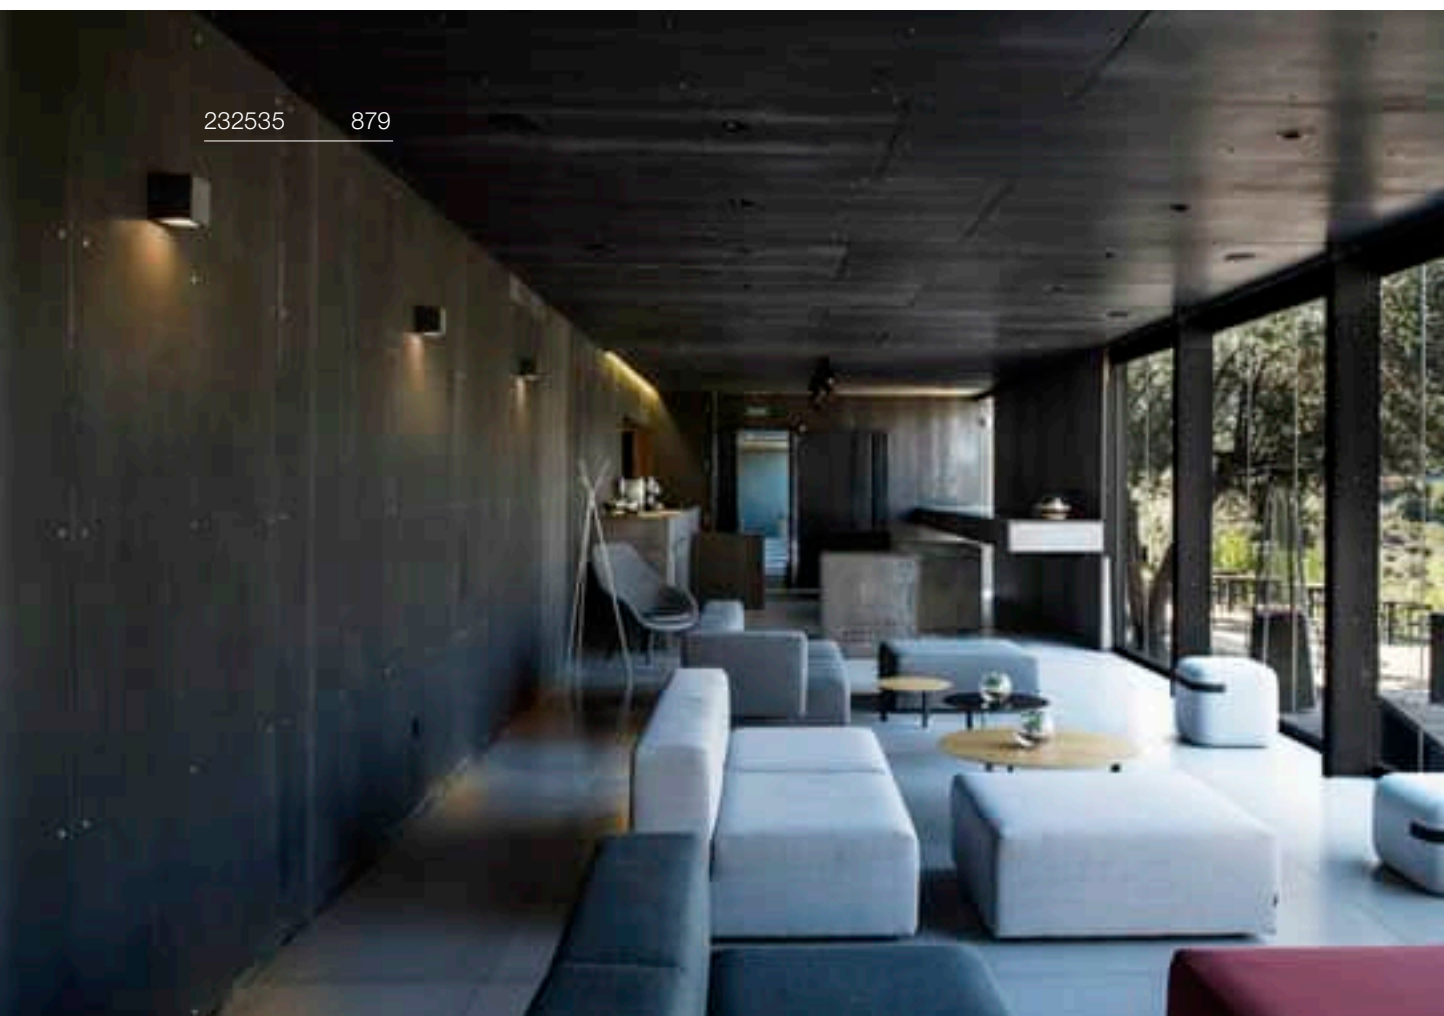
232535 879

SITRA M
WL, up/down, square

CCT





IP 65 | IK05 | 95° | 95° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

LED INSIDE | CRI 80

Up	850lm	3000K	940lm	4000K
Down	850lm	3000K	940lm	4000K

Variant	Prod. no.	GBP
anthracite	1005151	124.00
white	1005153	124.00
rust	1005154	124.00

SITRA L
WL, up/down, square

CCT





IP 65 | IK05 | 105° | 105° | L70B50

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium

LED INSIDE | CRI 80

Up	1400lm	3000K	1530lm	4000K
Down	1400lm	3000K	1530lm	4000K

Variant	Prod. no.	GBP
anthracite	1005155	158.00
white	1005156	158.00
rust	1005157	158.00

SITRA CUBE
WL, TCR-TSE, up/down





IP 44 | IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE | <9 W

Base: 2xG53 | Max. Ø: 7.5 cm | L: 2.7 cm

Variant	Prod. no.	GBP
anthracite	232535	64.00
white	232531	64.00
rust	232537	64.00

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

C,L

Prod. no.: 1005271 | 10.00 GBP

GRAFIT
WL, round, sensor, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/acrylic

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**1006179**	**78.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289 | 9.00 GBP

GRAFIT
WL, round, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/acrylic

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**1006178**	**69.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

Prod. no.: 1005303 | 9.00 GBP







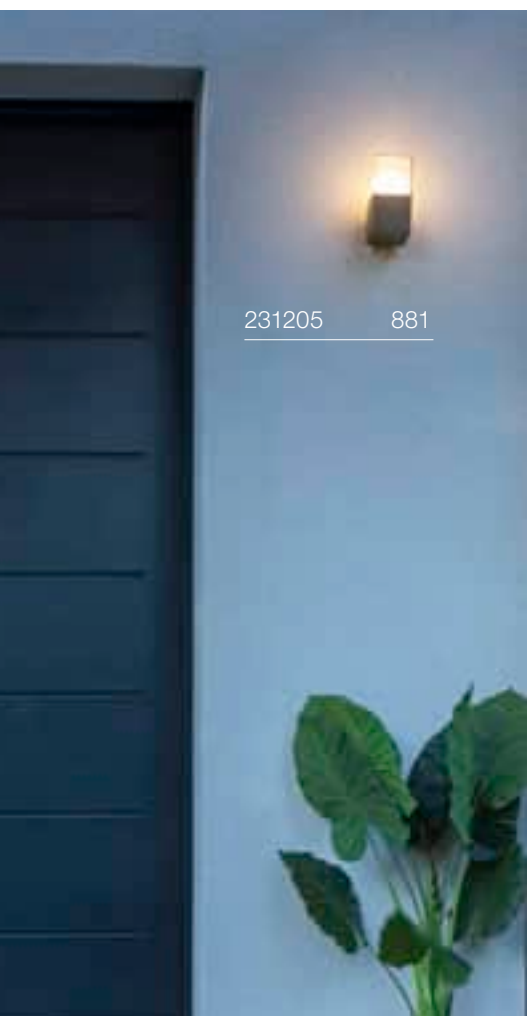

GRAFIT
WL, square, sensor, E27

IR





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/acrylic

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 6 cm	L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**1006183**	**78.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

GRAFIT
WL, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/plastic

SOCKET INSIDE <11 W

Base: 1xE27	Max. Ø: 6 cm	L: 11.5 cm

Variant	Prod. no.	GBP
● anthracite	**231205**	**69.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005303 | 9.00 GBP

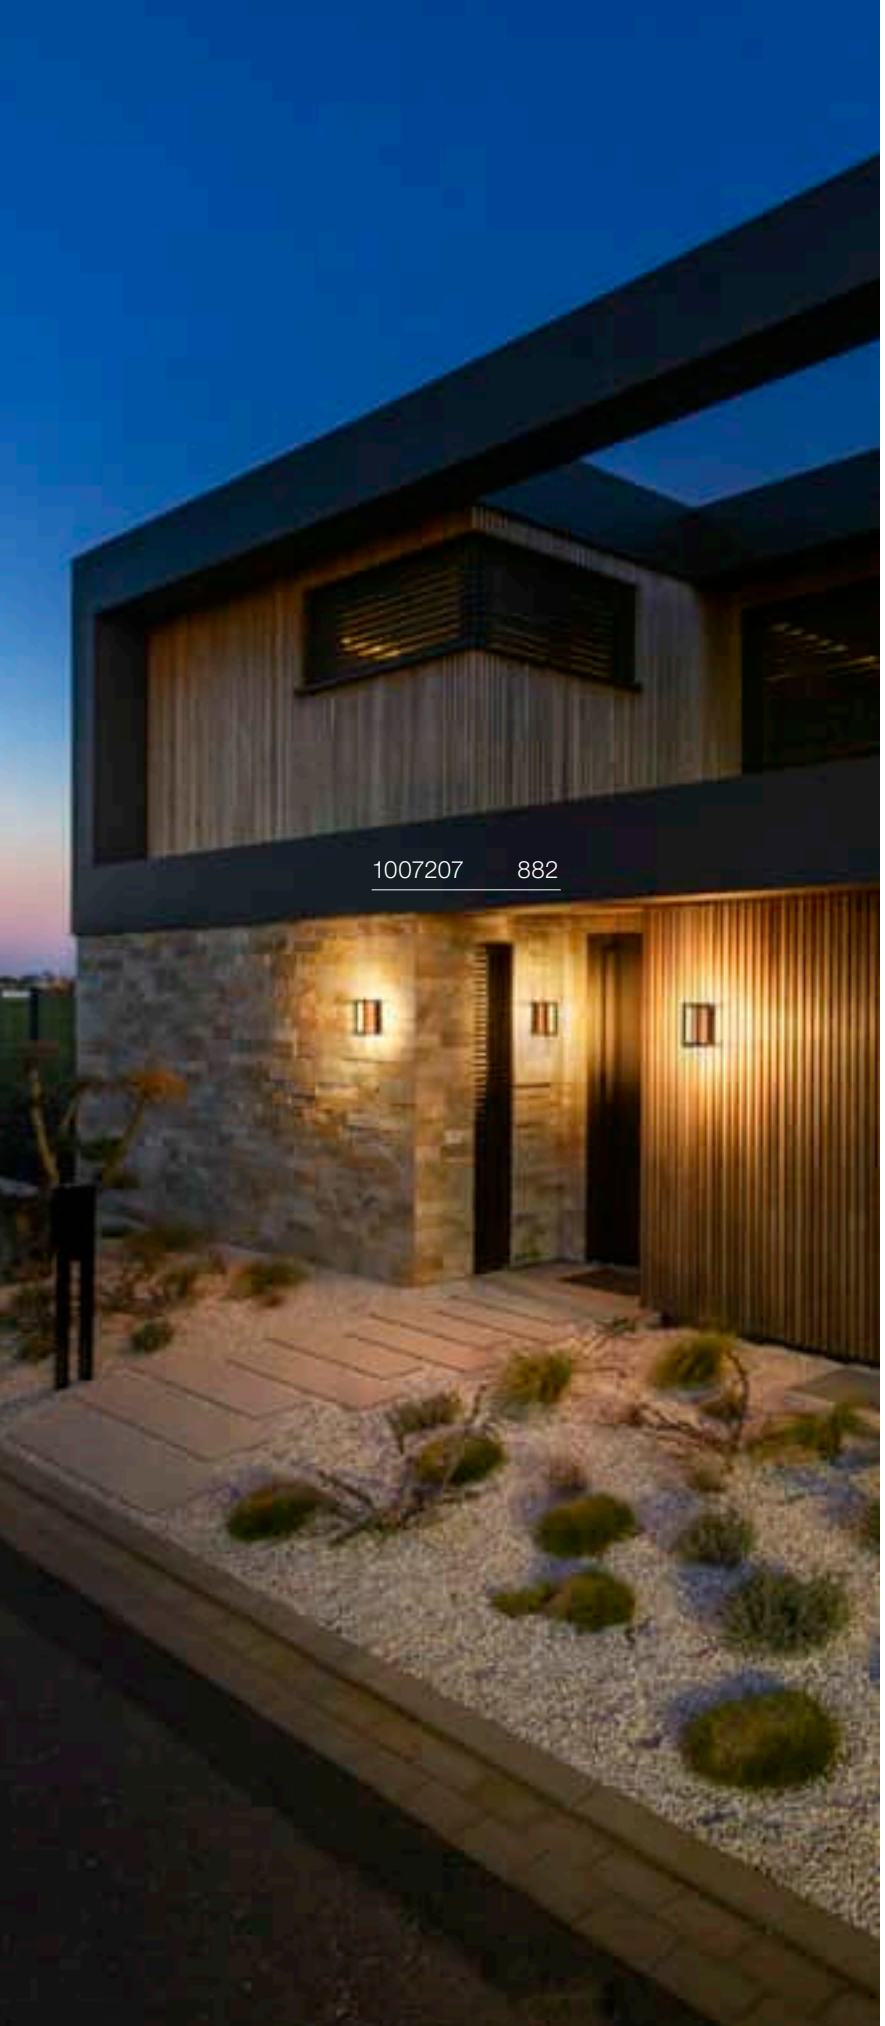

QUADRULO
WL







IP 55 IK04 L70B50 20

100-277V ~50/60Hz | 350mA
Total wattage: 7.4W
Material: aluminium/polyvinyl chloride (PVC)

LED INSIDE CRI 80

Down 270lm | 3000K

Variant	Prod. no.	GBP
anthracite 270lm	**1005201**	**141.00**
anthracite/wood 280lm	**1007207**	**128.00**

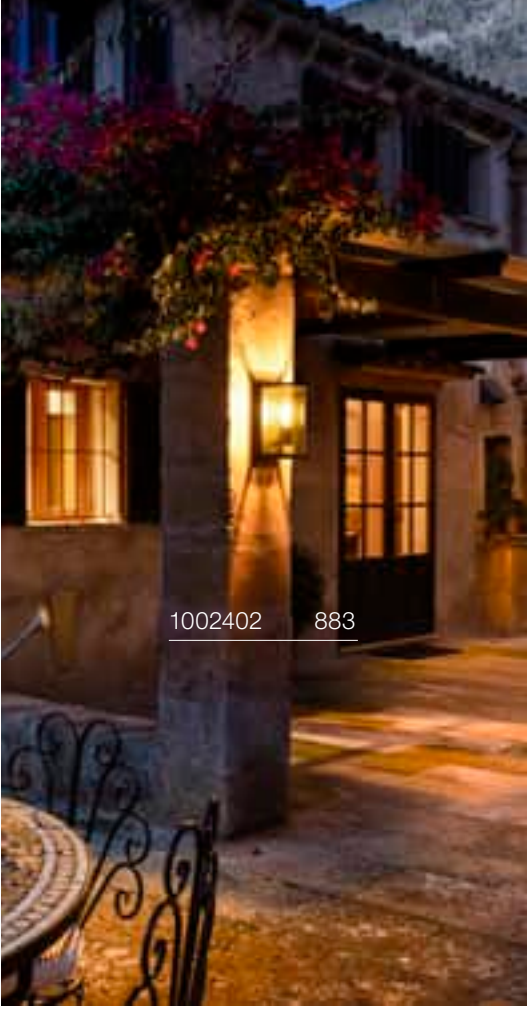

QUADRULO SENSOR
WL, E27

IR





IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <15 W

Base: 1xE27 | Max. Ø: 8 cm | L: 18 cm

Variant	Prod. no.	GBP
● anthracite	**1002402**	**145.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP

QUADRULO
WL, E27





IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <15 W

Base: 1xE27 | Max. Ø: 8 cm | L: 18 cm

Variant	Prod. no.	GBP
● anthracite	**1002403**	**128.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP

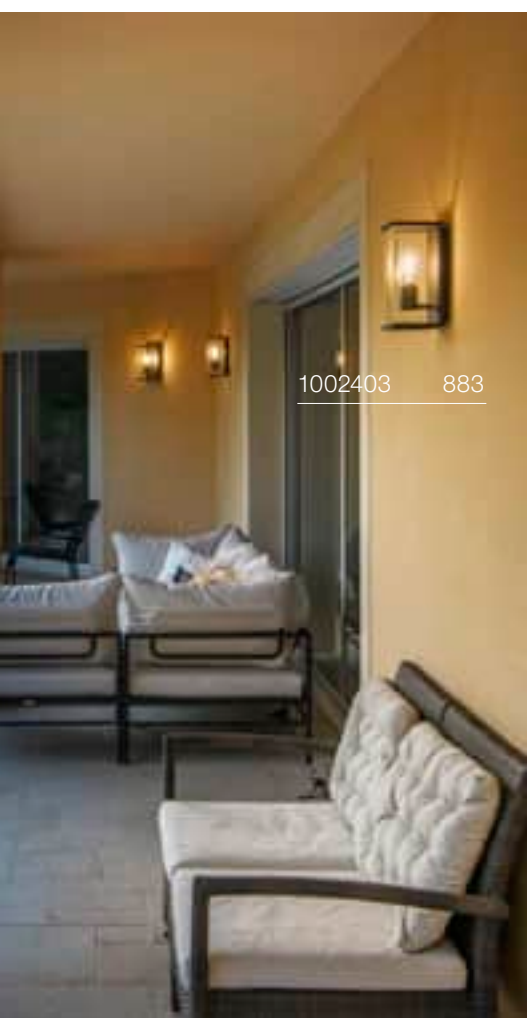

MERIDIAN
WL, E27





IP 54 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE <25 W

Base: 1xE27 | Max. Ø: 7 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	230445	68.00
grey	230444	68.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005289 | 9.00 GBP

MERIDIAN BOX
WL, E27





IP 54 IK02

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE <25 W

Base: 1xE27 | Max. Ø: 7 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	230045	85.00
grey	230044	85.00

| 13.5W | 240°
4000K | 1600lm | EEC=E
14kWh/1000h

C,L

Prod. no.: 1005308 | 11.00 GBP





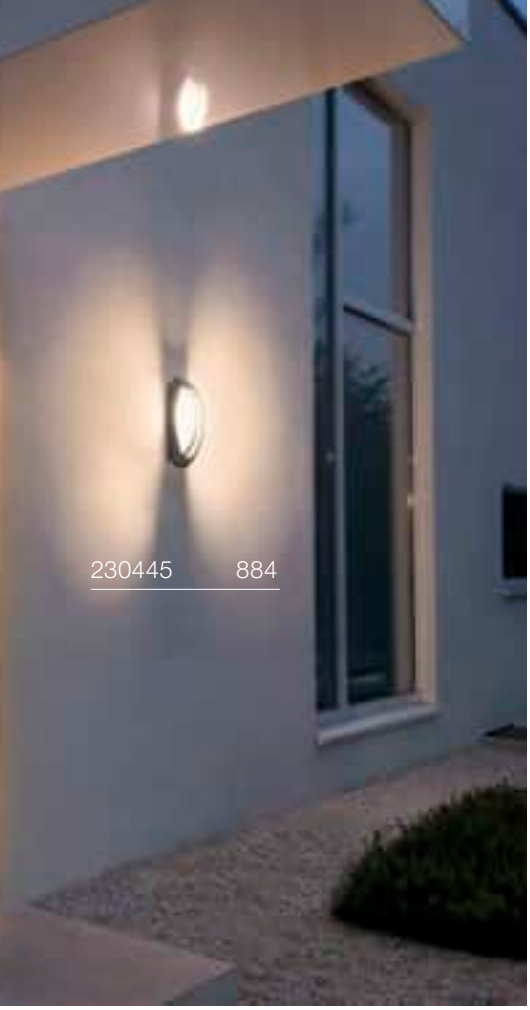

MERIDIAN BOX SENSOR
WL, E27

IR





IP 54 IK02

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- The ambient brightness and operating time can be adjusted.

SOCKET INSIDE <25 W

Base: 1xE27 | Max. Ø: 7 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	230085	141.00
grey	230084	141.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L

Prod. no.: 1005289 | 9.00 GBP

MERIDIAN BOX
WL, E27





IP 54 IK02

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE <25 W

Base: 1xE27 | Max. Ø: 7 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	230655	94.00
rust	230657	94.00

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h

C,L

Prod. no.: 1005265 | 23.00 GBP




1004748 887

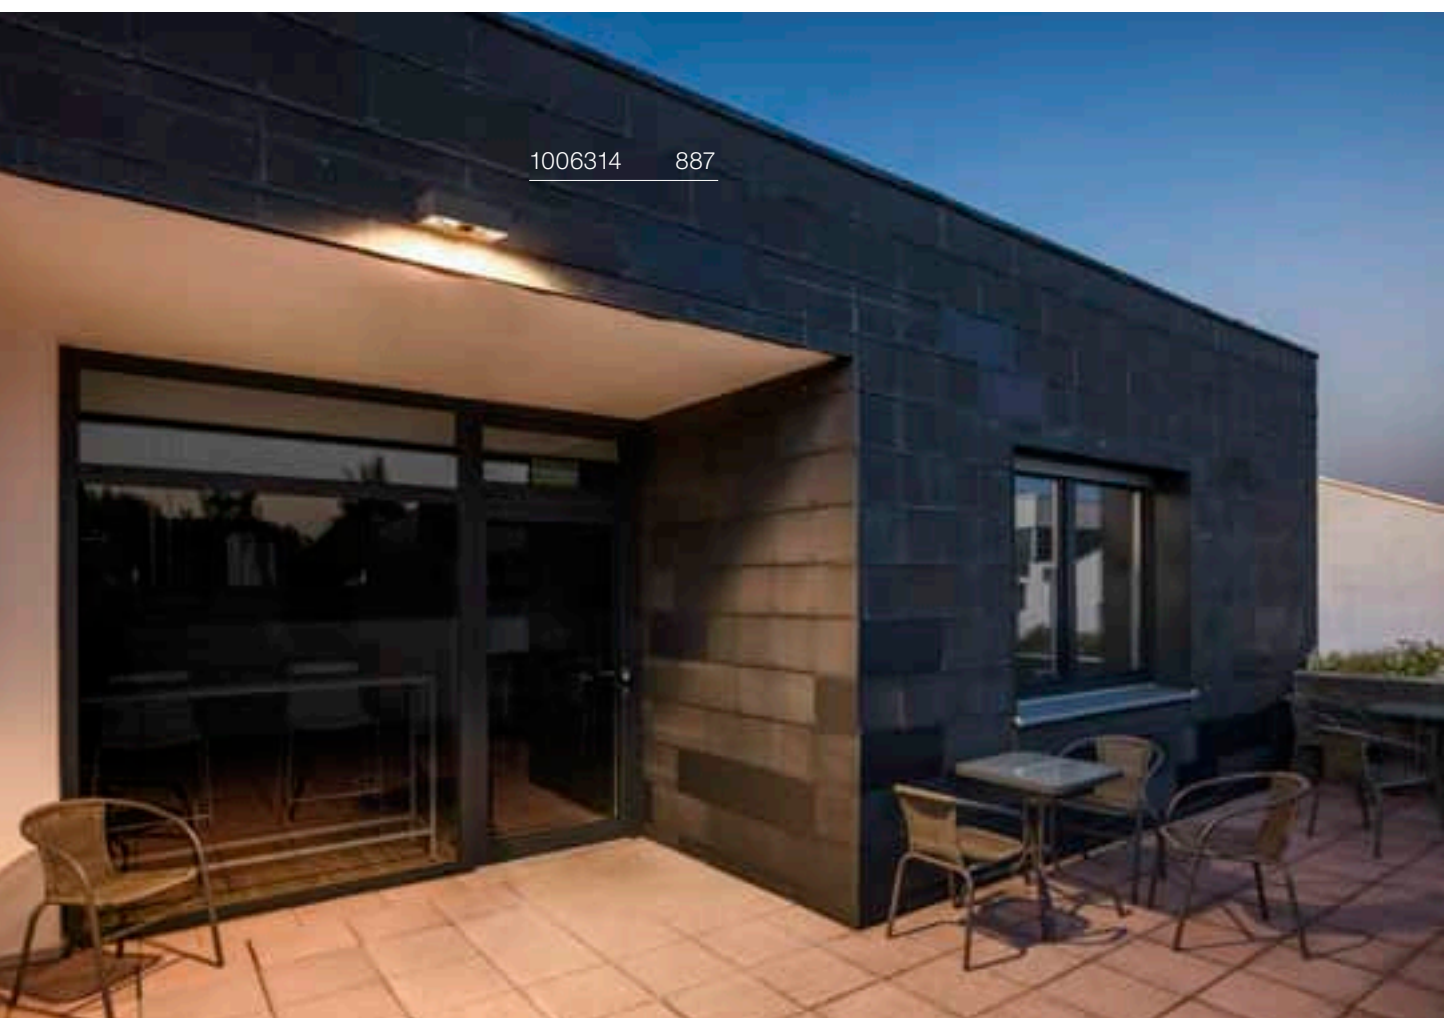
1006314 887

ESKINA FRAME
WL

CCT





IP 65 | IK06 | 95° | L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	1100lm | 3000K	1200lm | 4000K

Variant	Prod. no.	GBP
anthracite	1004747	191.00

ESKINA FRAME
WL, double

CCT





IP 65 | IK06 | 2x95° | L70B50 | 2x320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

LED INSIDE | CRI 80

Spot 1 Spot 2	1100lm | 3000K 1100lm | 3000K	1200lm | 4000K 1200lm | 4000K

Variant	Prod. no.	GBP
anthracite	1004748	234.00

ESKINA FRAME
WL, double

CCT





IP 65 | IK06 | 2x95° | L70B50 | 2x320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

LED INSIDE | CRI 80

Spot 1 Spot 2	1100lm | 3000K 1100lm | 3000K	1200lm | 4000K 1200lm | 4000K

Variant	Prod. no.	GBP
anthracite	1006314	234.00



1005443 889

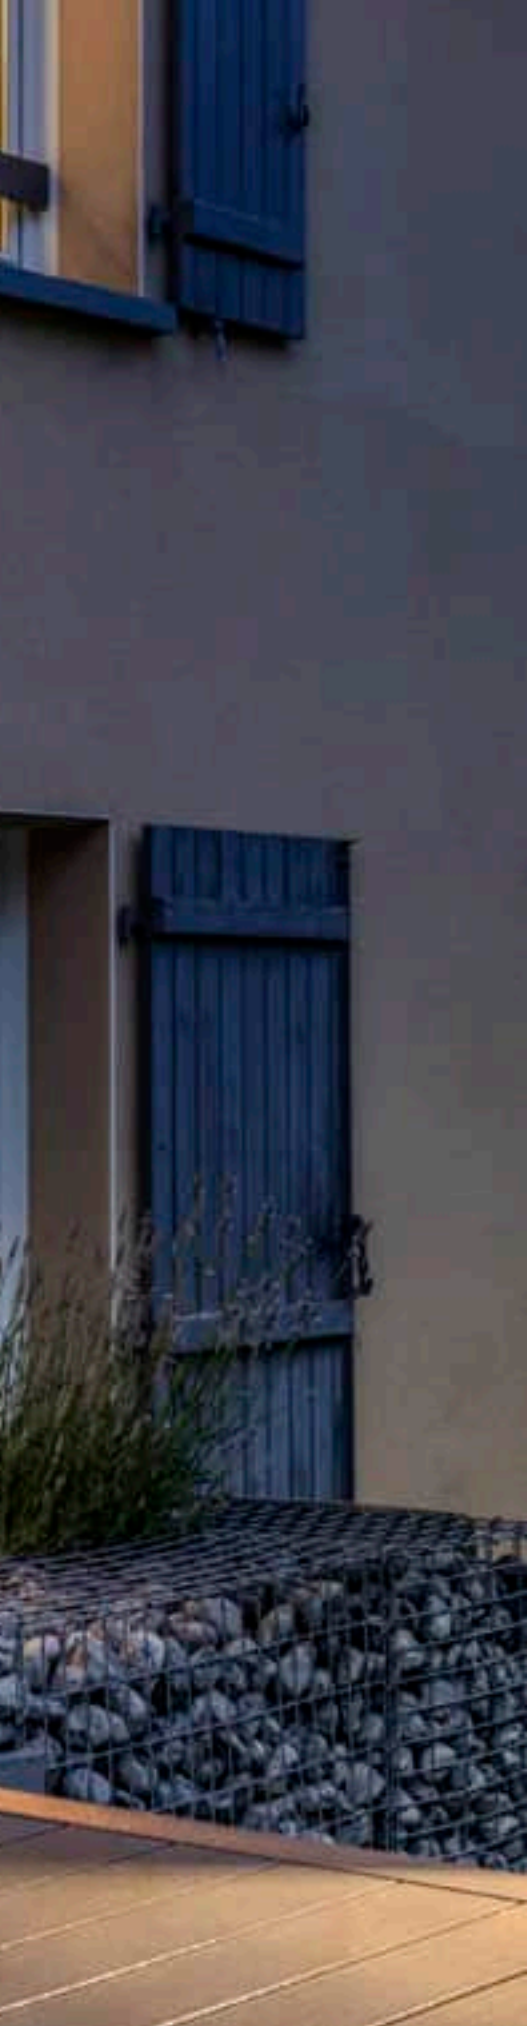

BOOKAT
WL

CCT





IP 65 | IK05 | L70B50 | 20

100-277 V ~50/60 Hz | 700 mA
Total wattage: 15W
Material: aluminium

LED INSIDE | CRI 80

Down	920lm | 3000K	990lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1005443**	**173.00**

BIG QUAD
WL





IP 44 IK05 110° L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 4.5W
Material: aluminium/glass

LED INSIDE CRI 96

Down 260lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232435**	**103.00**
○ white	**232431**	**103.00**

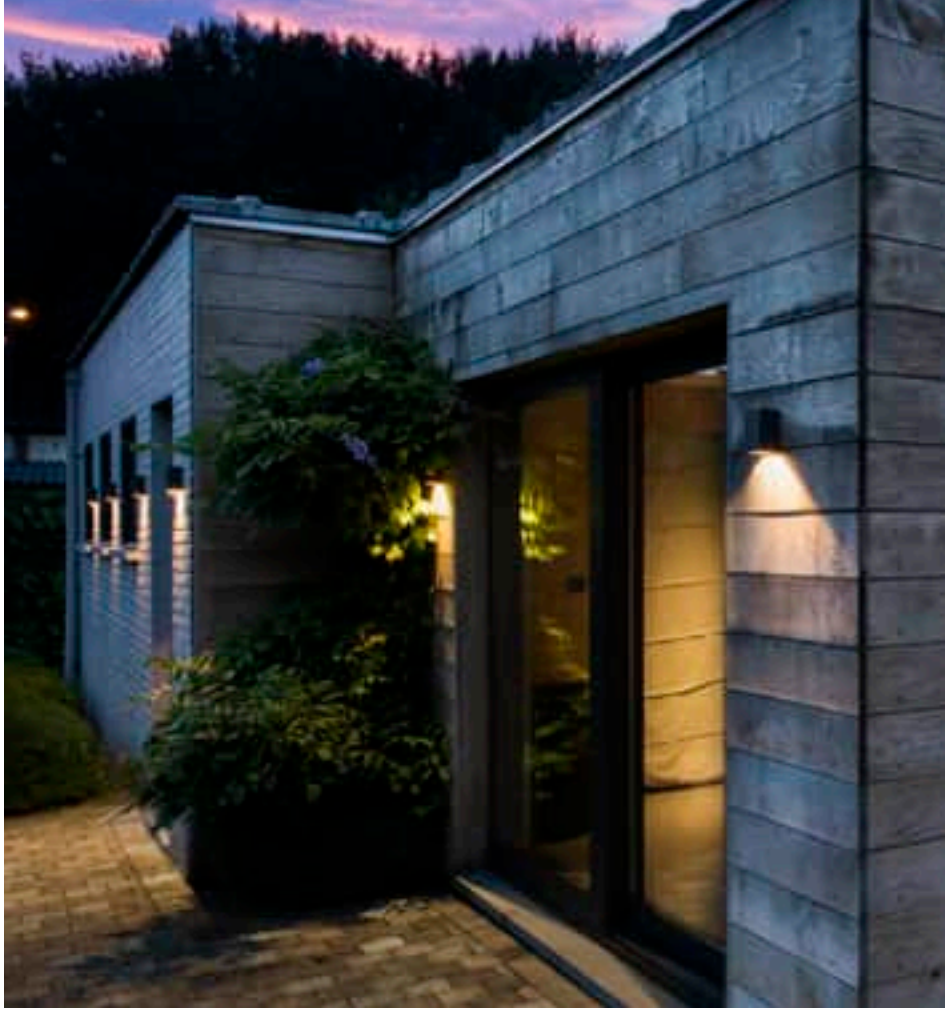

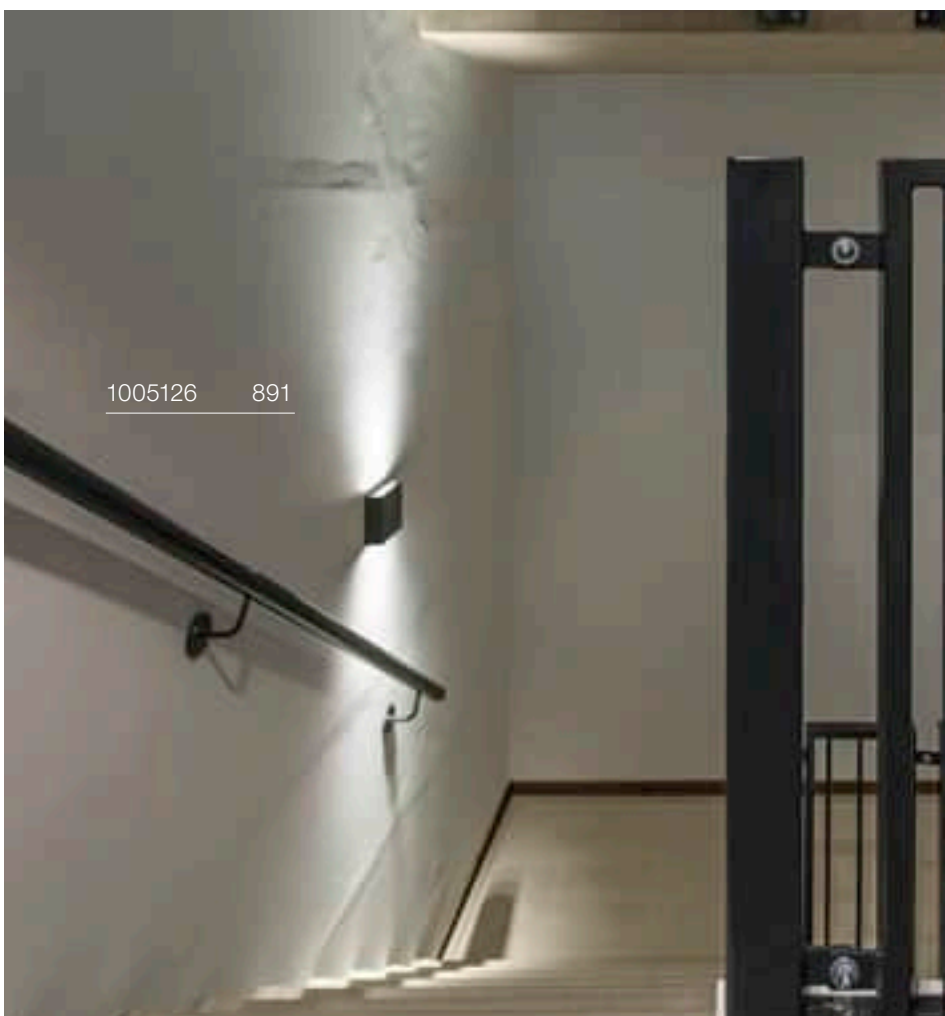

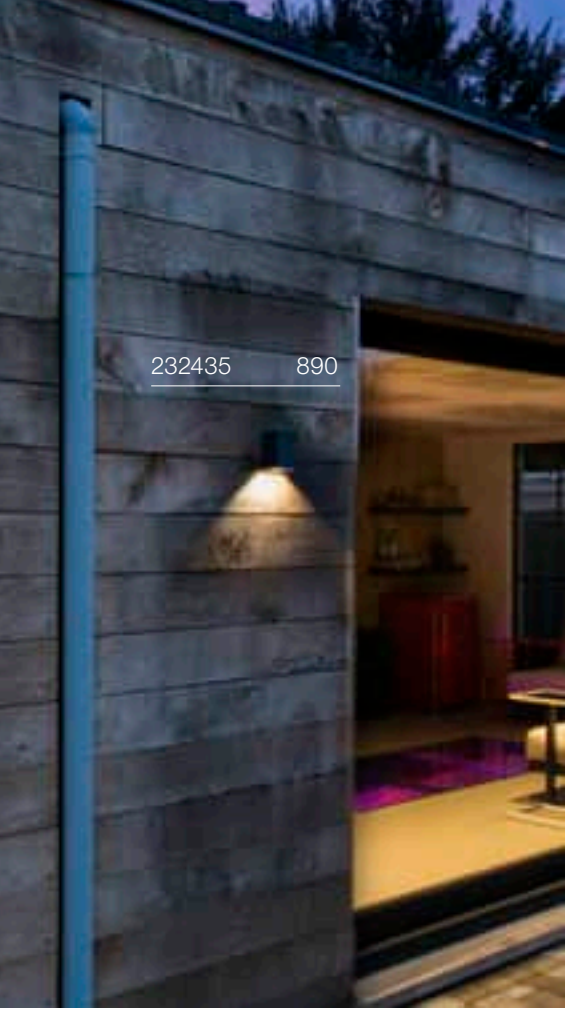

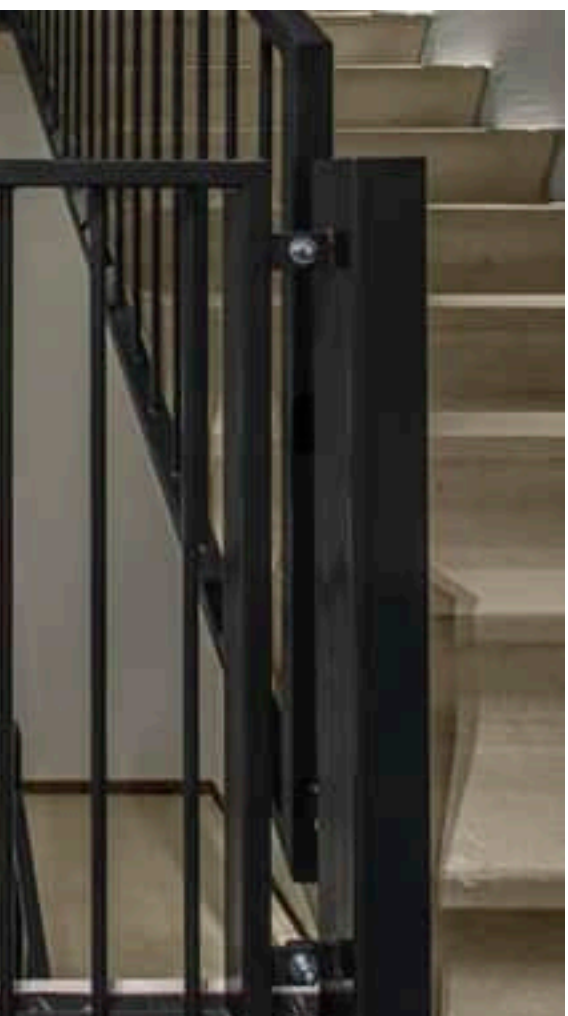

BIG QUAD UP/DOWN
WL





IP 54 IK02 30° 30° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 8.2W
Material: aluminium/glass

LED INSIDE CRI 80

Up	320lm	3000K
Down	320lm	3000K

Variant	Prod. no.	GBP
● anthracite	**1005126**	**145.00**
○ white	**1005125**	**145.00**

QUAD
WL





IP 44 IK02 90° L70B50

200-240V ~50/60Hz | 700mA
Total wattage: 4.6W
Material: aluminium/glass

LED INSIDE CRI 80

Down	80lm 100lm	3000K

Variant	Prod. no.	GBP
● anthracite 80lm	**232465**	**73.00**
○ white 100lm	**232461**	**73.00**

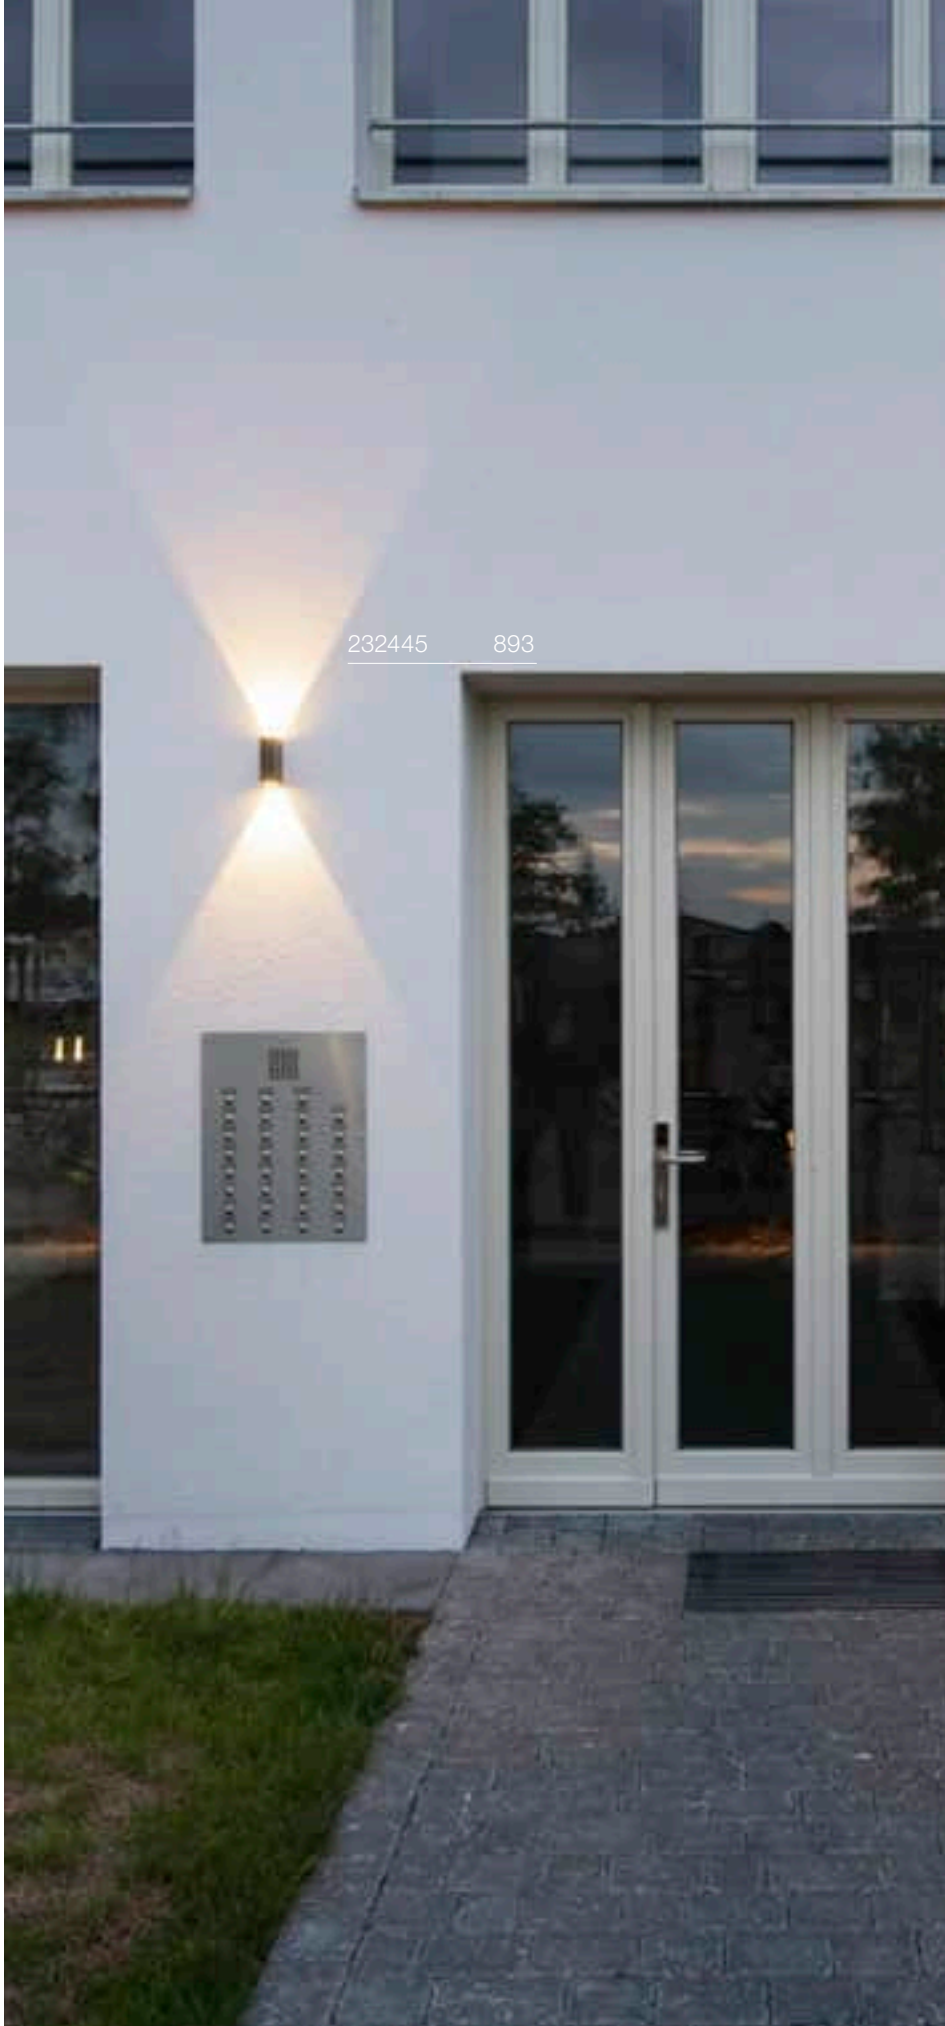



QUAD UP/DOWN 15
WL





IP 44 | IK002 | 110° | 110° | L70B50

100-277V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium/glass

LED INSIDE | CRI 80

Up	260lm | 3000K
Down	260lm | 3000K

Variant	Prod. no.	GBP
● anthracite 520lm	**232445**	**111.00**
○ white 580lm	**232441**	**111.00**

RUSTY® UP/DOWN
WL, square





IP 65 | IK02 | 65° | 65° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium

INSIDE | CRI 80

Up	259lm	3000K	260lm	4000K
Down	285lm		288lm	

Variant	Prod. no.	GBP
rust/anthracite	**1004650**	**240.00**

RUSTY® UP/DOWN
WL, round





IP 65 | IK02 | 65° | 65° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium

INSIDE | CRI 80

Up	249lm	3000K	254lm	4000K
Down	267lm		271lm	

Variant	Prod. no.	GBP
rust/anthracite	**1004651**	**240.00**

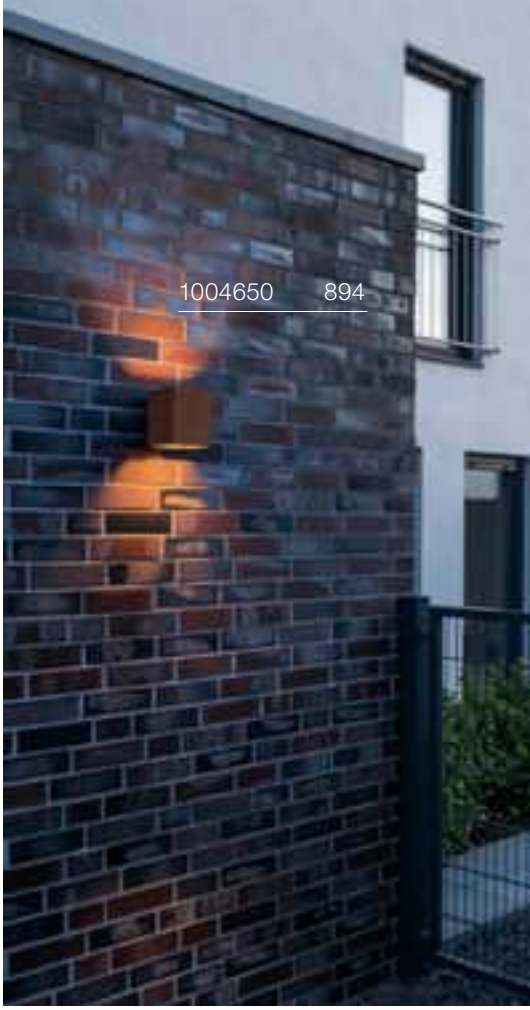







OVALISK SENSOR
WL

CCT

IR





IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.6W
Material: aluminium/glass

LED INSIDE CRI 80

Down	580lm | 3000K	630lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1004679**	**248.00**

OVALISK
WL

CCT





IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass

LED INSIDE CRI 80

Down	580lm | 3000K	630lm | 4000K

Variant	Prod. no.	GBP
anthracite	**1004678**	**231.00**

PEMA®
WL





IP 55 IK02 L70B50

220-240V ~50/60Hz
Total wattage: 3.8W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down 190lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**231015**	**102.00**
○ white	**231010**	**102.00**
● grey	**231012**	**102.00**



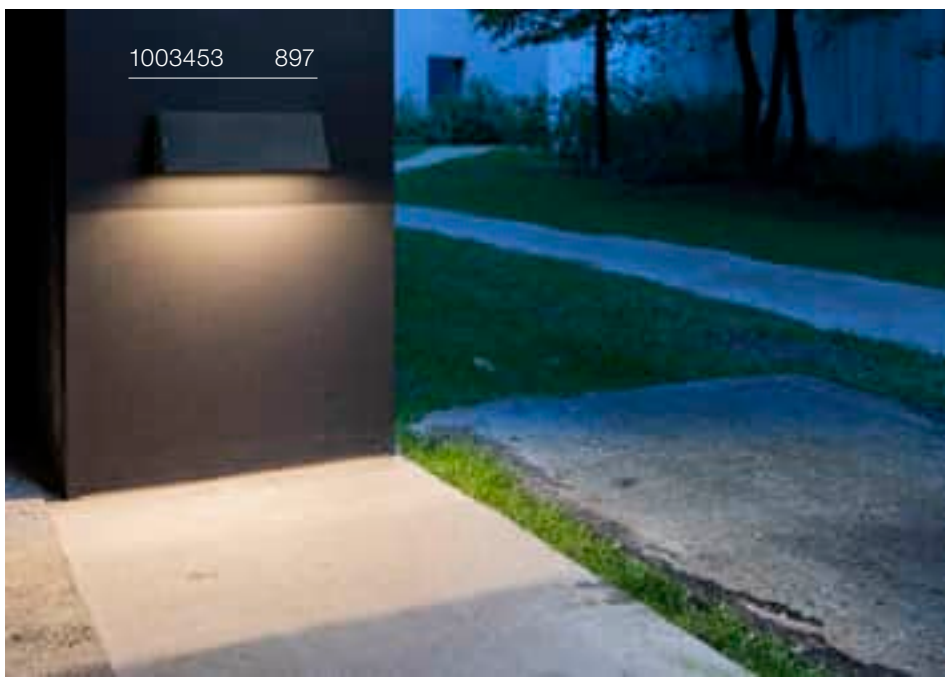



PEMA®
WL





IP 54 | IK05 | 110° | L70B50

220-240V ~50/60Hz
Total wattage: 7.7W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 640lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1002069**	**111.00**
white	**1002070**	**111.00**

PEMA®
WL

CCT





IP 65 | IK02 | L70B50 | 10

100-277V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 1340lm | 3000K | 1420lm | 4000K

Variant	Prod. no.	GBP
black	**1003453**	**124.00**
grey	**1003454**	**124.00**

PEMA®
WL, E27





IP 65 | 20

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE | <15 W

Base: 1xE27 | Max. Ø: 4.5 cm | L: 21 cm

Variant	Prod. no.	GBP
black	**230030**	**91.00**
grey	**230034**	**91.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L



Prod. no.: 1005289 | 9.00 GBP

FLATT
WL

CCT





IP 65 IK03 L70B50

100-240V ~50/60Hz | 300mA
Total wattage: 13W
Material: aluminium/aluminium

INSIDE CRI 80

Down	500lm 500lm	3000K 3000K	530lm 550lm	4000K 4000K

Variant	Prod. no.	GBP
anthracite 500/530lm	**1002952**	**147.00**
anthracite/brown 500/550lm	**1002953**	**147.00**

FLATT SENSOR
WL

CCT

IR





IP 54 IK03 L70B50

100-240V ~50/60Hz | 300mA
Total wattage: 13W
Material: aluminium/aluminium

INSIDE CRI 80

Down	500lm 500lm	3000K 3000K	530lm 550lm	4000K 4000K

Variant	Prod. no.	GBP
anthracite 500/530lm	**1002954**	**181.00**
anthracite/brown 500/550lm	**1002955**	**181.00**



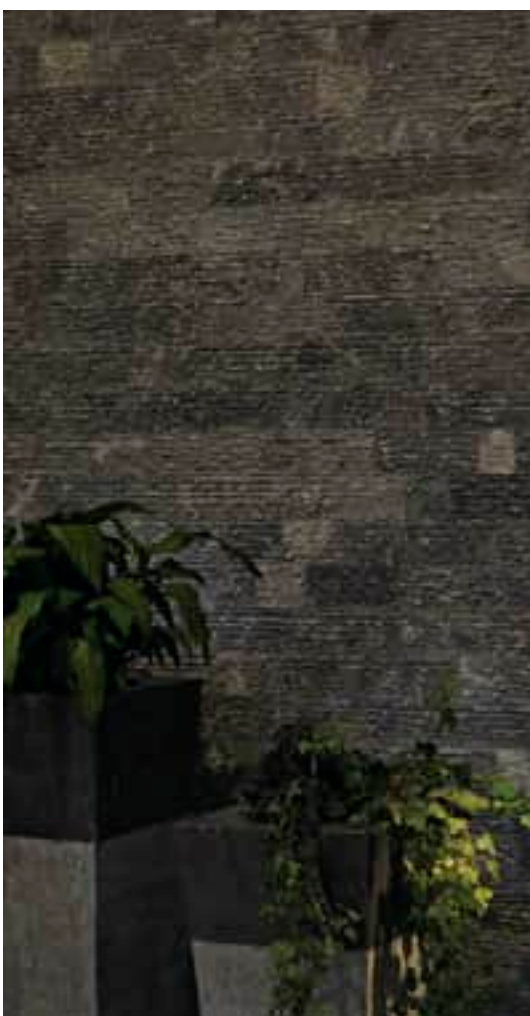



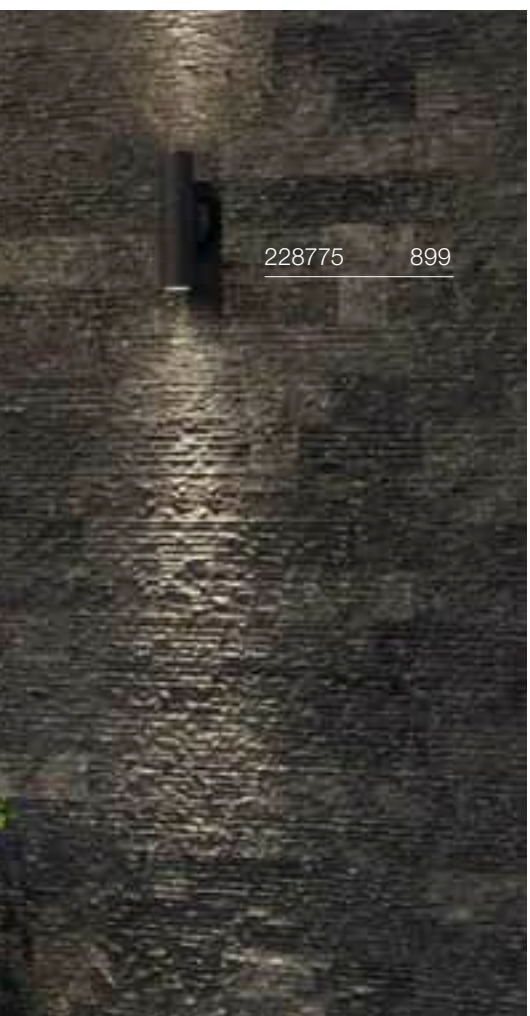

ASTINA
WL, QPAR51





IP 44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <11 W

Base: 2xGU10 max. L: 9 cm

Variant	Prod. no.	GBP
anthracite	228775	72.00
white	228771	72.00
aluminium	228776	76.00

LED QPAR51 | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP

ASTINA STEEL
WL, QPAR51





IP 44

220-240V ~50/60Hz
Material: stainless steel 304

SOCKET INSIDE <35 W

Base: 2xGU10 Max. Ø: 5.1 cm L: 5.7 cm

Variant	Prod. no.	GBP
stainless steel	233302	107.00

LED QPAR51 | 2.4W | 36°
3000K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007231 | 5.00 GBP


1007809 901

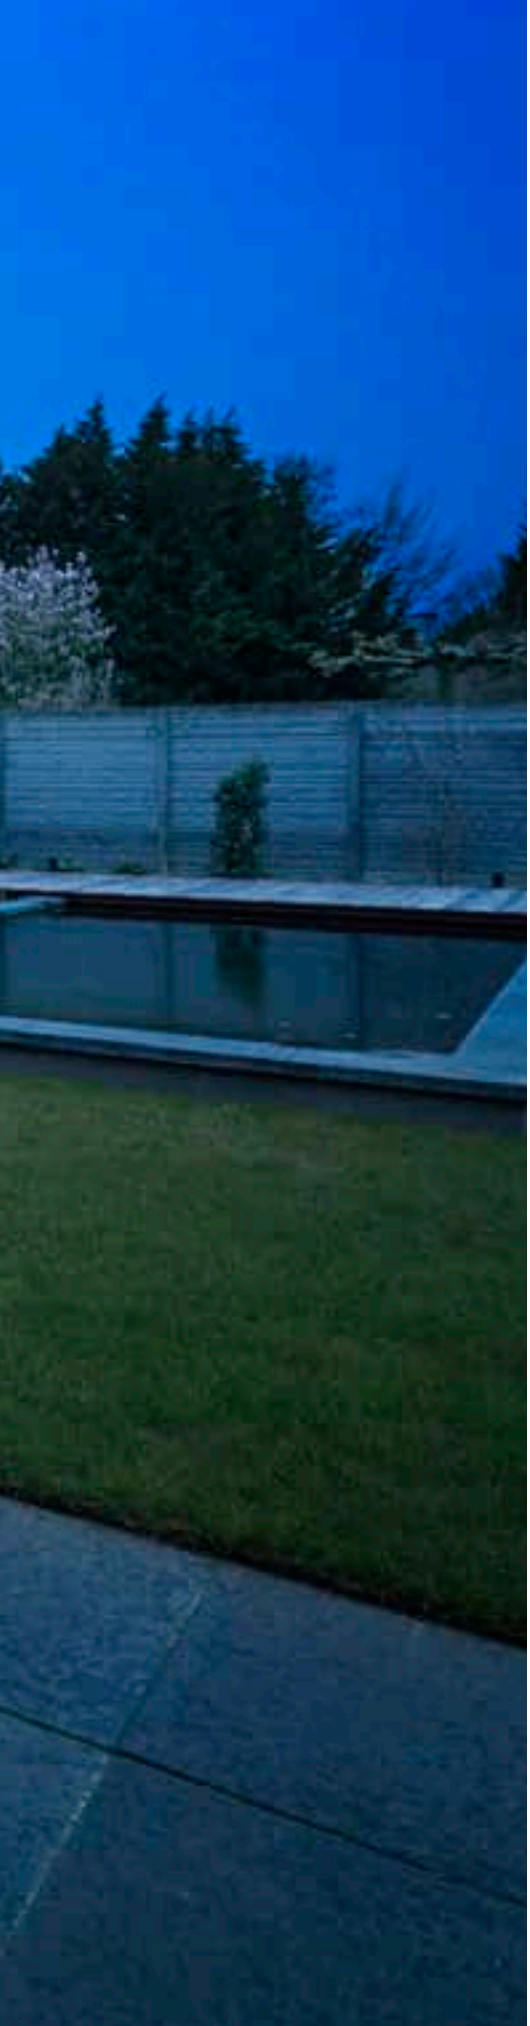

MODELA
WL, up/down

NEW







220-240V ~50Hz | 95mA
Total wattage: 7.5W
Material: aluminium

LED INSIDE | CRI 80

Up	385lm 400lm 405lm	2700K
Down	385lm 400lm 405lm	

Variant	Prod. no.	GBP
● black 770lm	**1007808**	**128.00**
◐ black/gold 810lm	**1007807**	**128.00**
○ white 800lm	**1007809**	**128.00**
◐ white/gold 810lm	**1007806**	**128.00**

ANGOLUX SENSOR
WL





IP 44 | IK02 | 100° | L80B50 | 20

100-240V ~50/60Hz | 240mA
Total wattage: 9.8W
Material: aluminium

- Detection angle 120°, max. detection distance 9m, sensitivity setting
- IP44 protection rating only when mounted with light emission downwards.

LED INSIDE | CRI 80

Down 750lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1001969**	**156.00**
○ white	**1001970**	**156.00**

ANGOLUX
WL





IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 80mA
Total wattage: 6.8W
Material: aluminium

- IP44 protection rating only when mounted with light emission downwards.

LED INSIDE | CRI 80

Down 550lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**231355**	**139.00**
○ white	**231351**	**139.00**

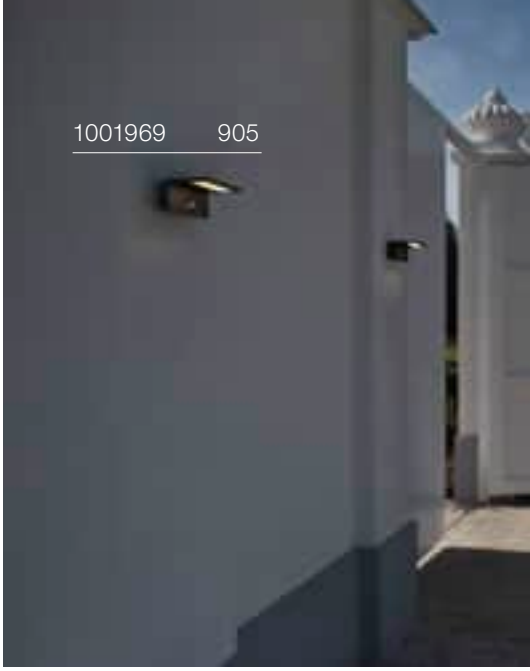





VILUA S
WL





IP 54 IK02 100° L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 9W
Material: aluminium/glass

LED INSIDE CRI 80

Down	405lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1002503**	**137.00**

VILUA L
WL





IP 54 IK02 100° L70B50

100-277V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium/glass

LED INSIDE CRI 80

Down	940lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1002504**	**171.00**

VILUA
UP/DOWN, WL





IP 54 IK02 100° 100° L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 16W
Material: aluminium/glass

LED INSIDE CRI 80

Up	400lm | 3000K
Down	400lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1002505**	**171.00**

MYRA UP/DOWN
WL, QPAR51





IP 55 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <35 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
anthracite	**233115**	**85.00**
grey	**233114**	**85.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP

Product	Prod. no.	GBP
Surface-mounting frames		
anthracite	**233215**	**19.00**

233114 904



SITRA UP/DOWN
WL





IP 44 IK02 55° 55° L70B50

220-240V ~50/60Hz
Total wattage: 18W
Material: aluminium/glass

LED INSIDE CRI 80

Up	488lm	3000K
Down	488lm	3000K

Variant	Prod. no.	GBP
anthracite	1002018	128.00

SITRA UP/DOWN
WL, TCR-TSE





IP 44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <9 W

Base: 2xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
anthracite	230365	85.00

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP


1000334 907

ROX UP/DOWN
WL, QPAR111





IP 44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <50 W

Base: 2xGU10

Variant	Prod. no.	GBP
aluminium	**1000334**	**164.00**

QPAR111 | 12.5W | 10°
3000K | 950lm | EEC=F
13kWh/1000h

C,L



Prod. no.: 1005278 | 48.00 GBP

DELWA
WL





IP 44 IK02 100° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 10W
Material: aluminium/glass

LED INSIDE CRI 80

Down 840lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1000342**	**182.00**
white	**1000340**	**182.00**

T-TUBE
WL GU10 single, Sensor

IR

from spring 2025



IP44 IK06

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008010	115.00

LED QPAR51 | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP

T-TUBE
WL GU10 double, Sensor

IR

from spring 2025



IP44 IK06

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008011	141.00

LED QPAR51 | 2.4W | 36°
3000K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007231 | 5.00 GBP





T-TUBE
WL GU10 single

from spring 2025



IP65 IK06

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008012 ●	94.00

LED QPAR51 | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

T-TUBE
WL GU10 double

from spring 2025



IP65 IK06

220-240V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008013 ●	128.00

LED QPAR51 | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP

WALLYX
WL, QPAR51





IP 44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <50 W

Base: 1xGU10 max. L: 7.6 cm

Variant	Prod. no.	GBP
● anthracite	**227195**	**103.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP





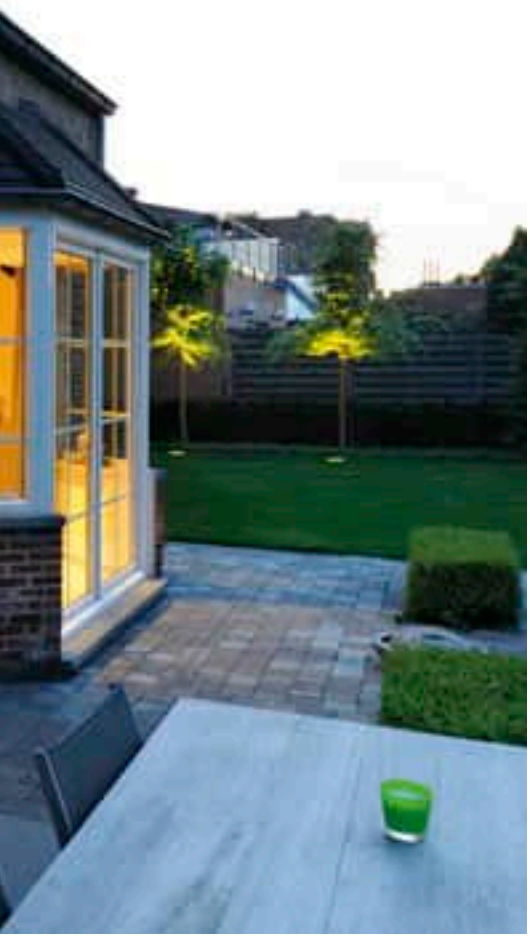



DOWNUNDER OUT
WL, round

CCT





IP 65 IK02 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 4.3W
Material: aluminium

LED INSIDE CRI 80

Down	150lm | 3000K	160lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002868**	**115.00**

DOWNUNDER OUT
WL, square

CCT





IP 65 IK02 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 4.3W
Material: aluminium

LED INSIDE CRI 80

Down	150lm | 3000K	160lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002869**	**115.00**


1008542 913

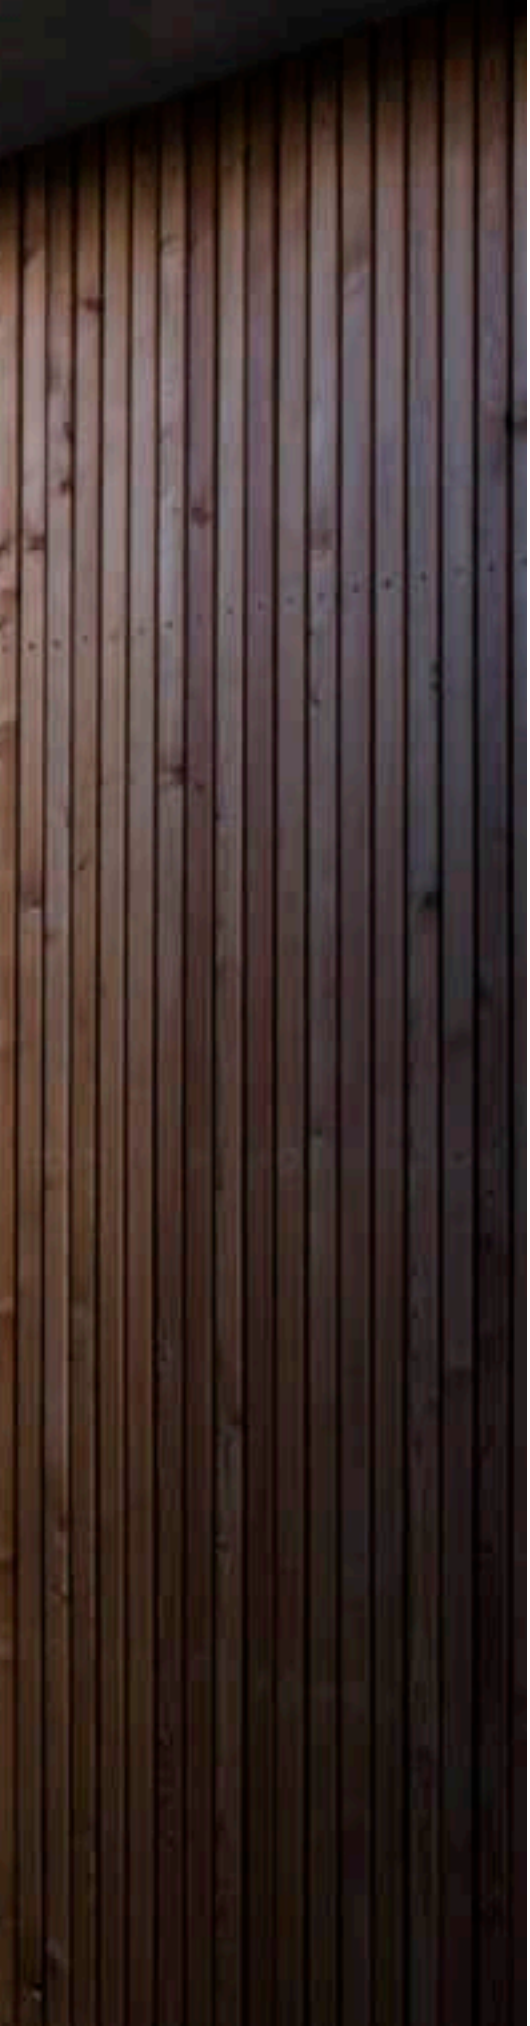

ABRIDOR
WL, HYBRID

CCT

NEW





IP65 IK07

100-240V ~50/60Hz | 380mA battery-powered
Total wattage: 6.8W
Material: aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar

LED INSIDE CRI 80

Down	600lm | 2200K	650lm | 2700K

Variant	Prod. no.	GBP
anthracite	1008542	171.00


1002990 915

ABRIDOR
WL

CCT





IP 55 | IK03 | 100° | L70B50 | 90°

100-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: aluminium

LED INSIDE | CRI 80

Down	950lm | 3000K	980lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002989**	**156.00**

ABRIDOR SENSOR
WL

CCT

IR





IP 54 | IK03 | 100° | L70B50 | 90°

100-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: aluminium

LED INSIDE | CRI 80

Down	950lm | 3000K	980lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002990**	**173.00**

ORDI II SENSOR
WL

IR

from spring 2025



IP 54 IK02

220-240V ~50/60Hz
Total wattage: 10W
Material: aluminium

- Primary and replica functionality, multiple lights can be switched

LED INSIDE

Down	700lm | 2200K	700lm | 3000K

Variant	Prod. no.	GBP
● black	1008723	180.00
○ white	1008724	180.00

ORDI II
WL

from spring 2025



IP 65 IK02

220-240V ~50/60Hz
Total wattage: 10W
Material: aluminium

LED INSIDE

Down	700lm | 2200K	700lm | 3000K

Variant	Prod. no.	GBP
● black	1008721	163.00
○ white	1008722	163.00







ORDI SENSOR
WL

IR





IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 110mA
Total wattage: 9W
Material: aluminium

LED INSIDE CRI 80

Down 740lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232915**	**128.00**

ORDI
WL





IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 110mA
Total wattage: 9W
Material: aluminium

LED INSIDE CRI 80

Down 740lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**232905**	**111.00**

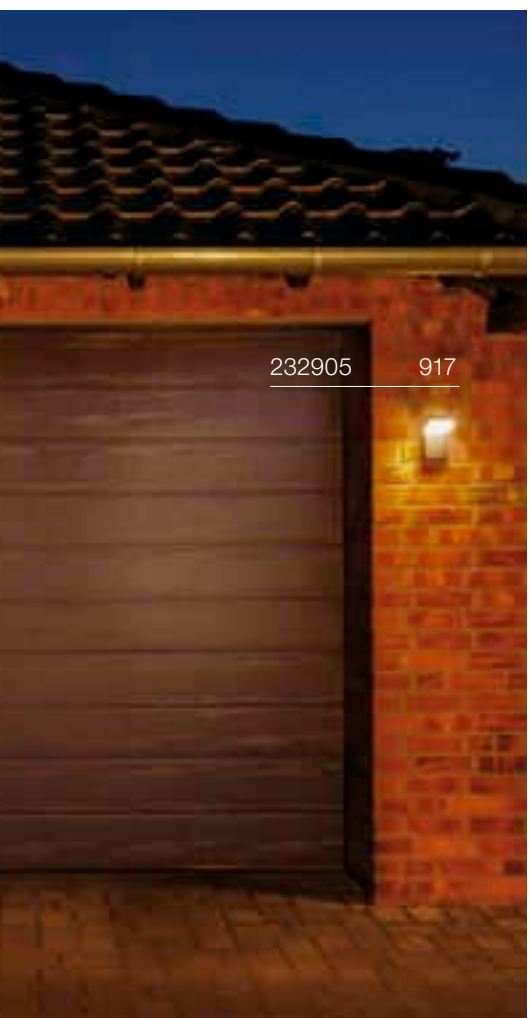

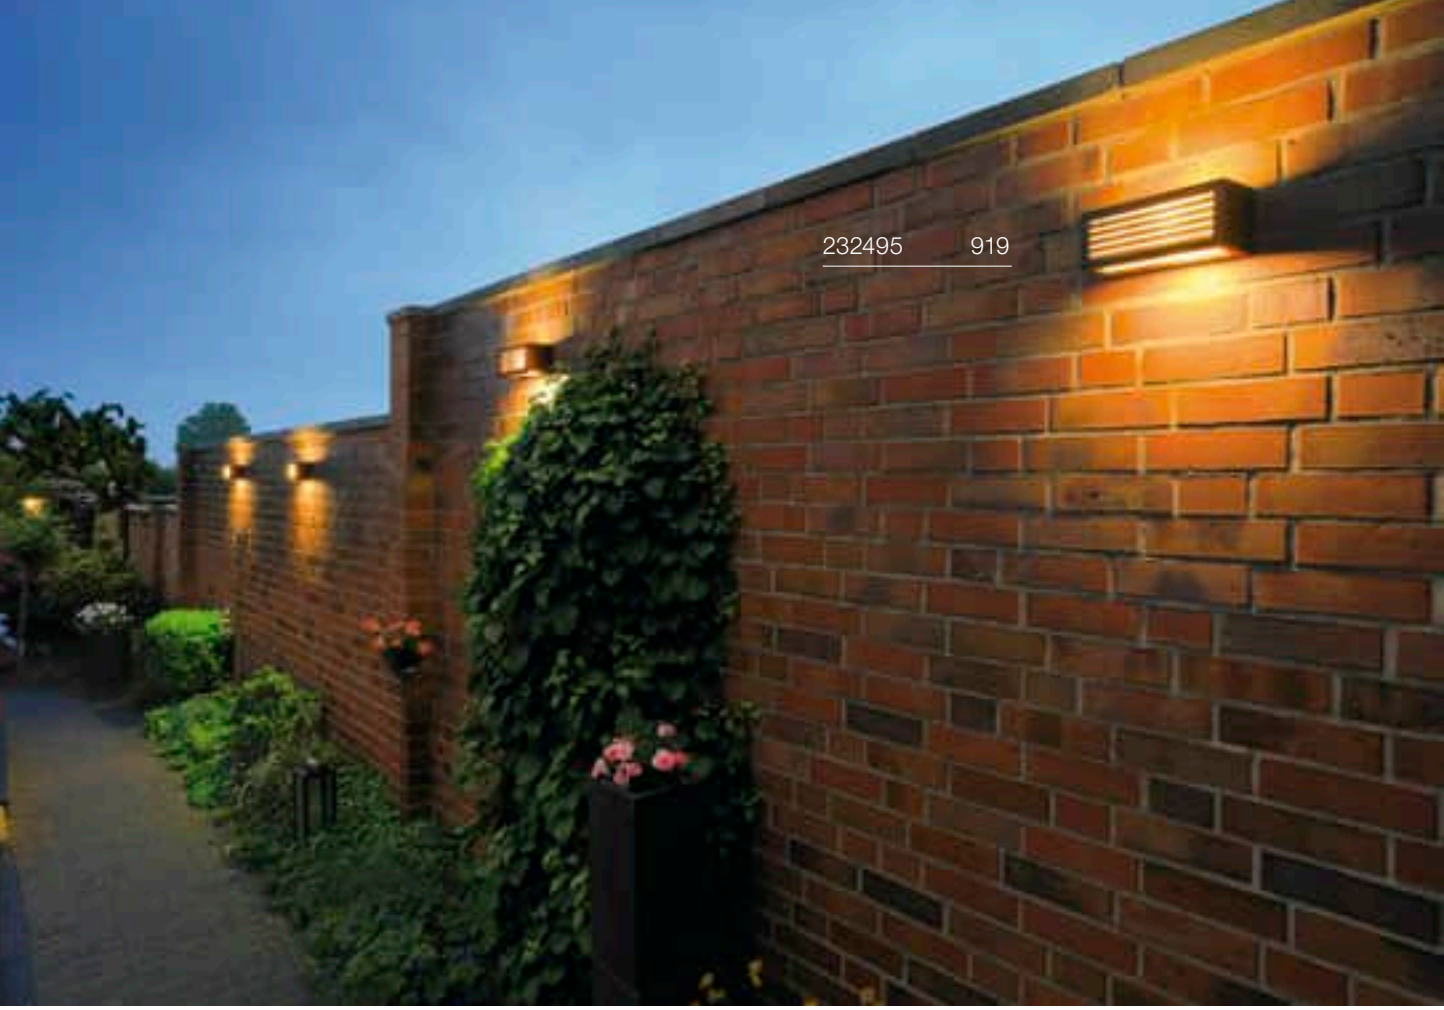
232495 919


1002035 919


232485 919

BOX-L
WL, E27





IP 54

220-240V ~50/60Hz
Material: aluminium/acrylic

SOCKET INSIDE <18 W

Base: 1xE27 | Max. Ø: 6 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	**232495**	**90.00**
white	**232491**	**90.00**
rust	**232497**	**90.00**

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

C,L



Prod. no.: 1005289 | 9.00 GBP

BOX-L
WL





IP 54 IK05 L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/acrylic

LED INSIDE CRI 90

Down | 600lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1002035**	**110.00**

BOX UP/DOWN
WL, QT-DE12





IP 44 IK03

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <80 W

Base: 1xR7s 78 mm

Variant	Prod. no.	GBP
anthracite	**232485**	**86.00**

LED R7s | 9W | 330°
3000K | 1050lm | EEC=E
9kWh/1000h

L



Prod. no.: 1005287 | 21.00 GBP


232101 921

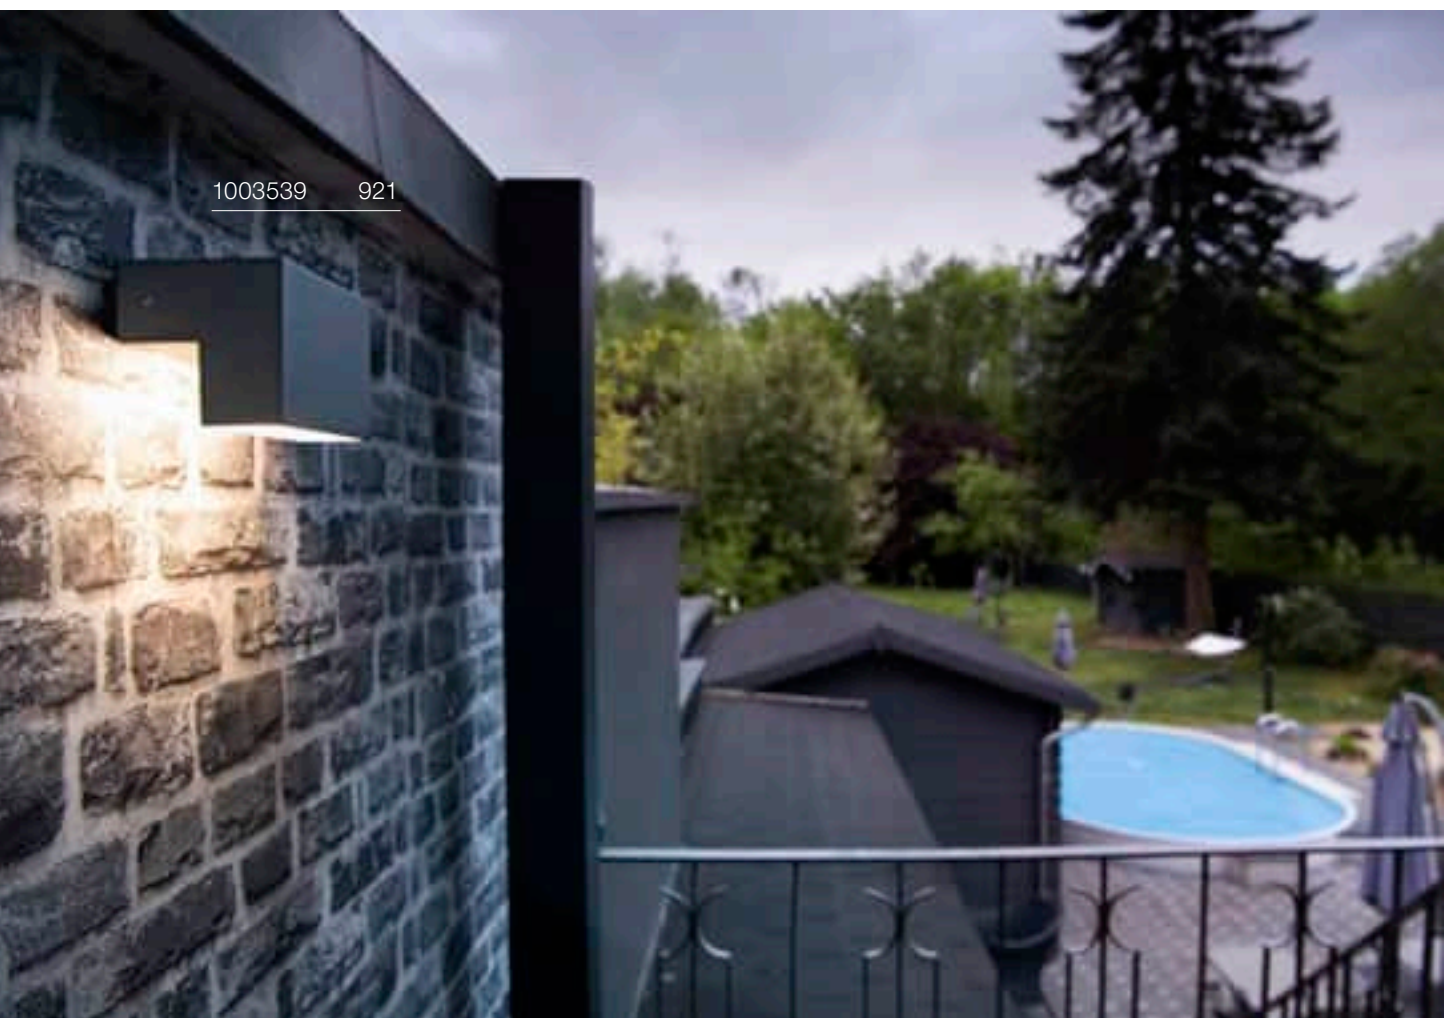
1003539 921

LOGS
WL





IP 65 IK04 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

INSIDE CRI 80

Down 520lm | 3000K

Variant	Prod. no.	GBP
● anthracite 520lm	**232105**	**172.00**
○ white 800lm	**232101**	**172.00**

OUT-BEAM UP/ FLOOD DOWN
WL





IP 44 IK03 80° 2° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

- The 2° light effect is particularly suitable for contouring and structuring surfaces and building facades.

INSIDE CRI 80

Up 50lm | 3000K
Down 690lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**229665**	**236.00**
● grey	**229664**	**236.00**

L-LINE OUT
WL

CCT





IP 65 IK02 L70B50 10

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

INSIDE CRI 80

Down 500lm | 3000K | 570lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1003539**	**121.00**


232045 923

PHOTONIA
WL, E27





IP 55 IK03 20

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <60 W

Base: 1xE27 | Max. Ø: 9 cm | L: 15 cm

Variant	Prod. no.	GBP
● anthracite	**232045**	**163.00**

LED E27 | 7.5W | 320°
2500K | 700lm | EEC=F
8kWh/1000h



Prod. no.: 1005265 | 23.00 GBP

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**

MOLAT
WL, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1xE27 | Max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.	GBP
● anthracite	**1000820**	**85.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h



Prod. no.: 1005303 | 9.00 GBP

GLOO PURE
WL, E27





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <23 W

Base: 1xE27 | Max. Ø: 4.8 cm | L: 18 cm

Variant	Prod. no.	GBP
● anthracite	**1002002**	**84.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h



Prod. no.: 1005290 | 9.00 GBP



F-POL
WL, E27





IP 54 IK07

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE <20 W

Base: 1xE27 | Max. Ø: 5.1 cm | L: 14 cm

Variant	Prod. no.	GBP
● anthracite	**231585**	**121.00**

LED E27 | 8W | 240°
4000K | 920lm | EEC=E
8kWh/1000h

Prod. no.: 1005290 | 9.00 GBP



SQUARE
WL, E27





IP 44 IK02

220-240V ~50/60Hz
Material: stainless steel 304

SOCKET INSIDE <20 W

Base: 1xE27 | Max. Ø: 7 cm | L: 13 cm

Variant	Prod. no.	GBP
stainless steel	**1000336**	**193.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h



Prod. no.: 1005303 | 9.00 GBP

KERAS ELT
WL, E27





IP 54 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE <25 W

Base: 1xE27 | Max. Ø: 7 cm | L: 17.5 cm

Variant	Prod. no.	GBP
anthracite	**227176**	**139.00**

A60 | 7.5W | 320°
2700K | 800lm | EEC=F
8kWh/1000h



Prod. no.: 1005303 | 9.00 GBP

SITRA
WL, TCR-TSE





IP 44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <9 W

Base: 1xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
anthracite	**230355**	**59.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP

IPERI
WL







IP 44 IK02 L70B50

220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium

- IP44 protection rating only when mounted with light emission downwards.

LED INSIDE CRI 80

Down 400lm | 4000K

Variant	Prod. no.	GBP
● black	**231315**	**111.00**







QUADRASYL
WL, TCR-TSE





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <11 W

Base: 1xG53 | Max. Ø: 7.5 cm | L: 2.7 cm

Variant	Prod. no.	GBP
anthracite	232285	55.00

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP

SQUARE TURN
WL, G9





IP 44

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <42 W

Base: 1xG69 | Max. Ø: 3.5 cm | L: 8 cm

Variant	Prod. no.	GBP
grey	1000335	180.00

LED G9 | 3.6W | 300°
3000K | 400lm | EEC=E
4kWh/1000h

Prod. no.: 1005286 | 8.00 GBP

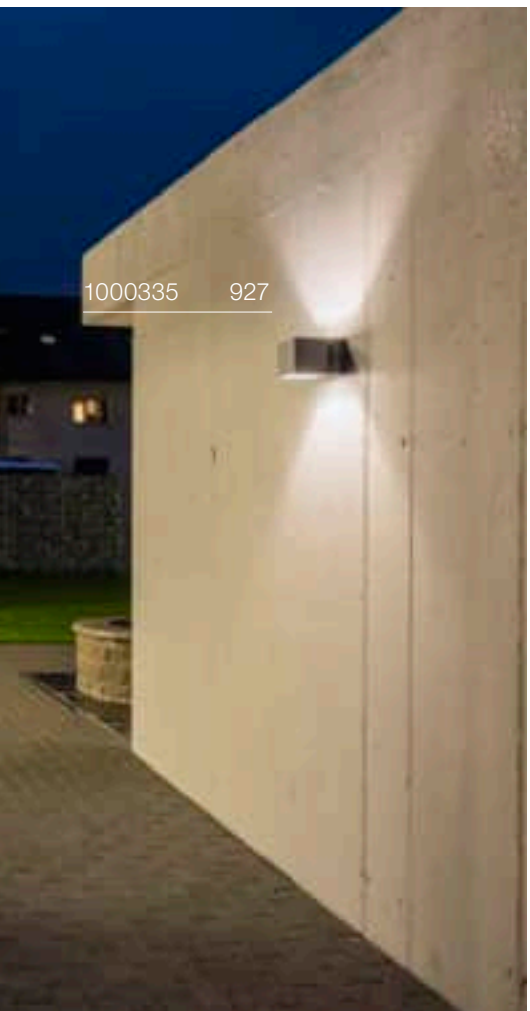



1002905 929



233134 929

TODAY PRO
Display





IP 65 | IK02 | 140° | L70B50 | 90° | 20

220-240V ~50/60Hz | 640mA
Total wattage: 29W
Material: aluminium

LED INSIDE | CRI 70

Down	2800lm | 4000K

Variant	Prod. no.	GBP
● black	**1000880**	**196.00**
○ white	**1000881**	**196.00**

ESKINA D
Display, PHASE

CCT





C | IP 65 | IK02 | 95° | L70B50 | 340° | 105° | 20

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

• CCT switch on lamp head

LED INSIDE | CRI 80

Down	1000lm | 3000K	1000lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002905**	**234.00**

MYRA DISPLAY
WL, curved, QPAR51





IP 55 | IK02 | 340° | 45°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE | <50 W

Base: 1xGU10	Max. Ø: 5.1 cm	L: 5.7 cm

Variant	Prod. no.	GBP
● anthracite	**233135**	**154.00**
● grey	**233134**	**154.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

Product	Prod. no.	GBP
Surface-mounting frames		
● anthracite	**233215**	**19.00**

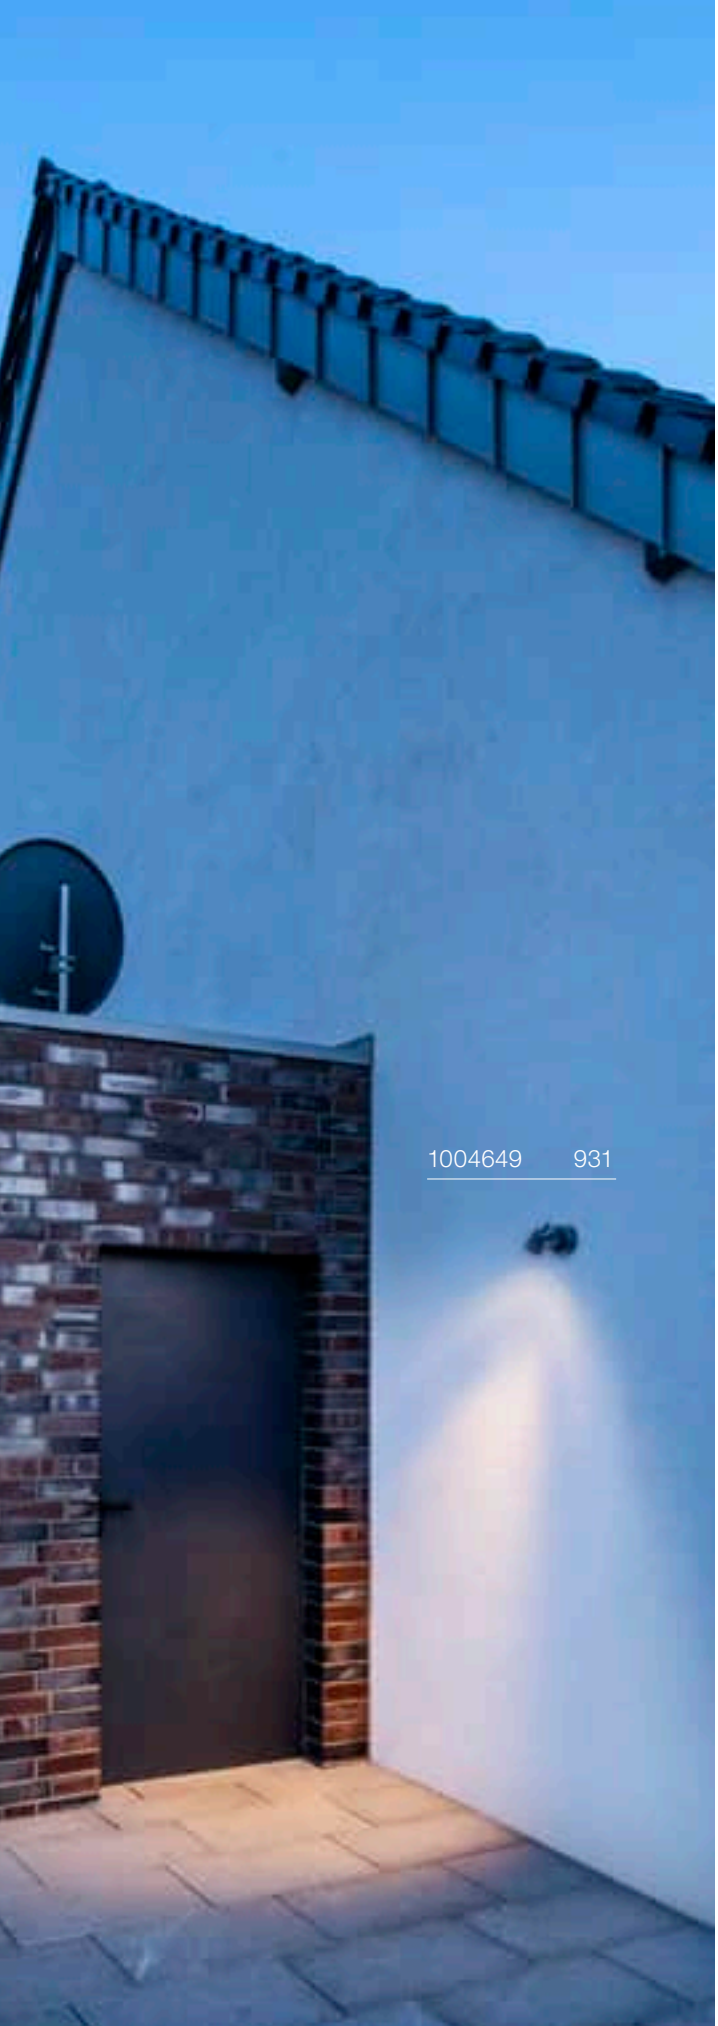
1004649 931


233104 931

LED SPOT
SP





IP 55 | IK06 | 40° | L80B50 | 330° | 180°

100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

LED INSIDE | CRI 80

Down 400lm | 3000K

Variant	Prod. no.	GBP
anthracite	1004649	62.00
rust	1004957	62.00

Product	Prod. no.	GBP
NAUTILUS | Mounting plate		
black	1002884	5.00

NAUTILUS
WL QPAR51





IP 54 | IK02 | 330° | 180°

220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE | <11 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 8.3 cm

Variant	Prod. no.	GBP
black	1002867	43.00

LED QPAR51 | 2.4W | 36°
3000K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007231 | 5.00 GBP

Product	Prod. no.	GBP
NAUTILUS | Mounting plate		
black	1002884	5.00

MYRA
CW, single, QPAR51





IP 55 | IK02 | 340° | 45°

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE | <50 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
anthracite	233105	77.00
grey	233104	77.00

LED QPAR51 | 2.4W | 36°
2700K | 230lm | EEC=E
3kWh/1000h



Prod. no.: 1007230 | 5.00 GBP

Product	Prod. no.	GBP
Surface-mounting frames		
grey	233214	19.00


1008384 933

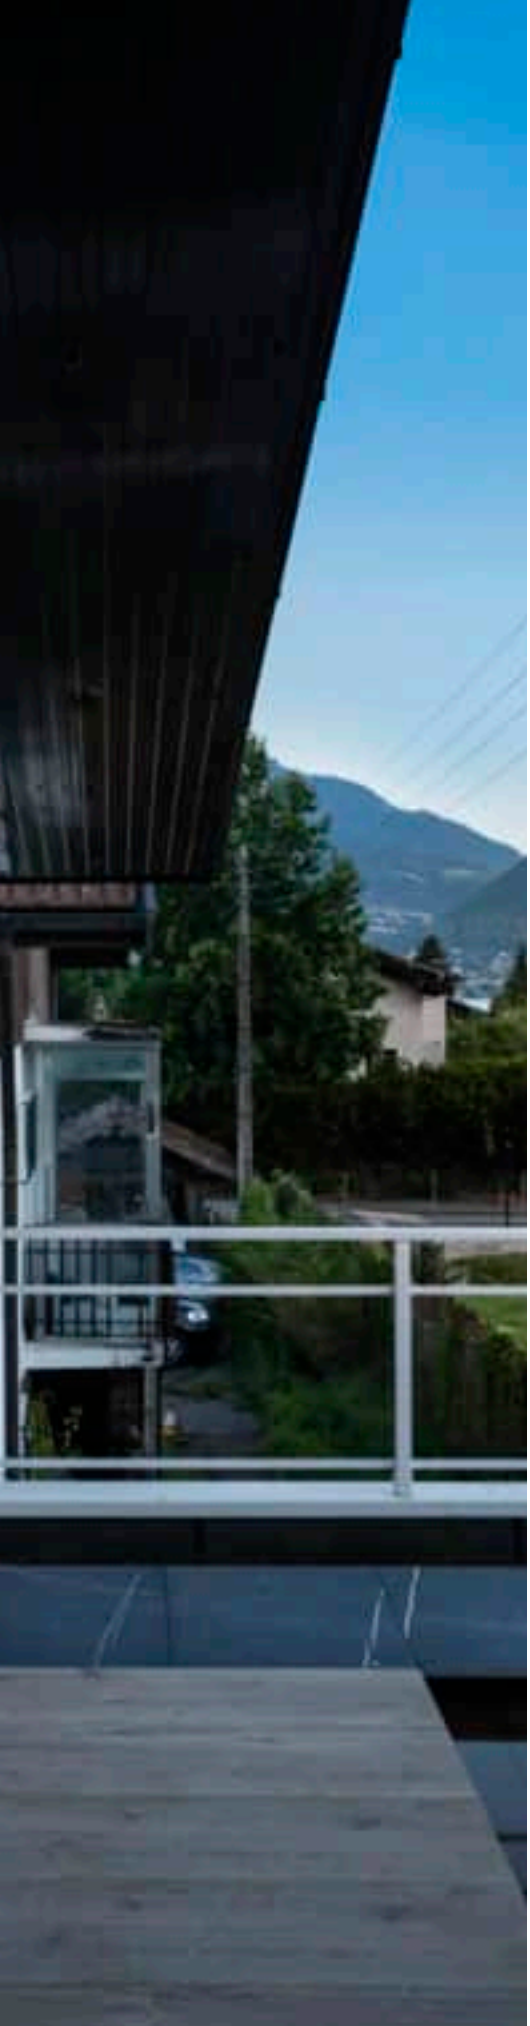

RASTERLYS
WL

CCT

from spring 2025



C,L | | IP65 | IK06 | 70° | L80B50 | 50

220-240V ~50/60 Hz | 350 mA
Total wattage: 14W
Material: aluminium

LED INSIDE | CRI 80

Down	350lm | 2700K	400lm | 3000K

Variant	Prod. no.	GBP
anthracite	1008384	154.00


1007653 935

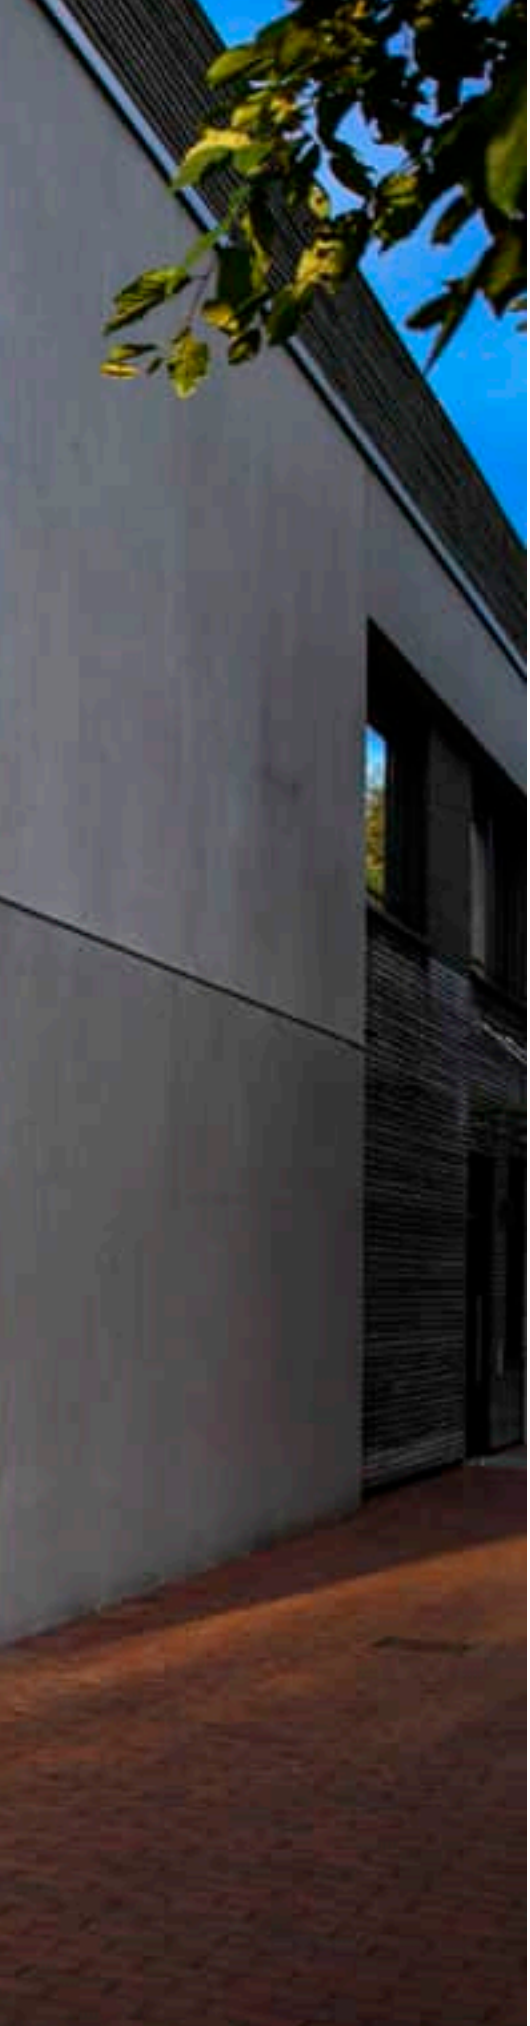

S-TUBE
CW







220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1007653**	**85.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP


1002904 937

ESKINA SPOT SENSOR
CW, PHASE

IR





IP 54 | IK02 | 95° | L70B50 | 340° | 105° | 20

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

• Motion sensor in the wall rosette.

LED INSIDE | CRI 80

Down	1000lm | 3000K	1000lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002904**	**234.00**

ESKINA SPOT
CW, PHASE





IP 65 | IK02 | 95° | L70B50 | 340° | 105° | 20

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

LED INSIDE | CRI 80

Down	1000lm | 3000K	1000lm | 4000K

Variant	Prod. no.	GBP
● anthracite	**1002903**	**217.00**

SITRA 360
CW, TCR-TSE





IP 44 | IK02 | 90° | 90°

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <9 W

Base: 1xG53 | Max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
● anthracite	**231515**	**94.00**

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271 | 10.00 GBP

THEO BRACKET
CW





IP 65 | IK02 | 340° | 70°

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <7 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● anthracite	**1004653**	**64.00**

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

Prod. no.: 1005273 | 9.00 GBP



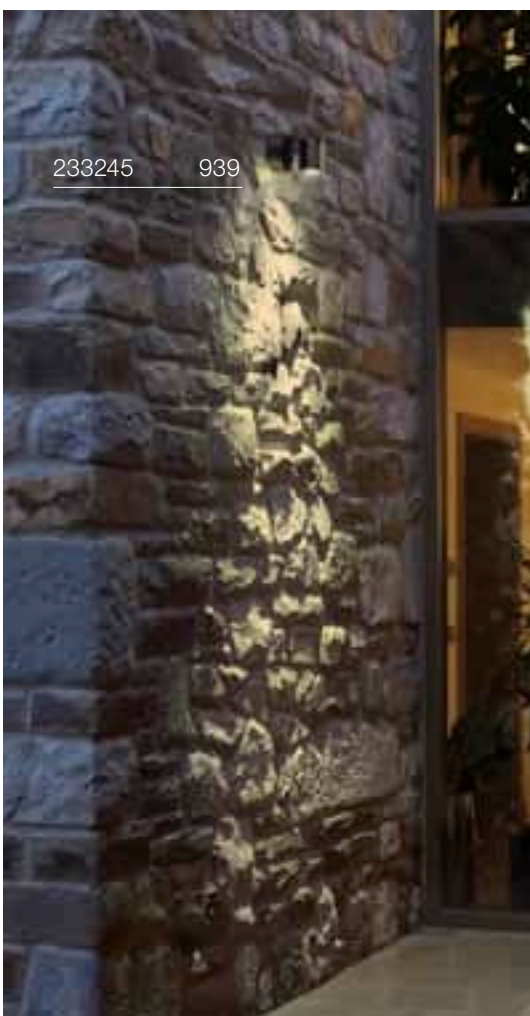





HELIA
CW, single





IP 65 | IK04 | 35° | L70B50 | 350° | 90° | 20

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium/glass

LED INSIDE | CRI 80

Down	440lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**233245**	**151.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**

HELIA
CW, double





IP 65 | IK04 | 35° | L70B50 | 350° | 90° | 20

220-240V ~50/60Hz | 500mA
Total wattage: 13W
Material: aluminium/glass

LED INSIDE | CRI 80

Spot 1	440lm | 3000K
Spot 2	440lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**233255**	**266.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**


1003518 941

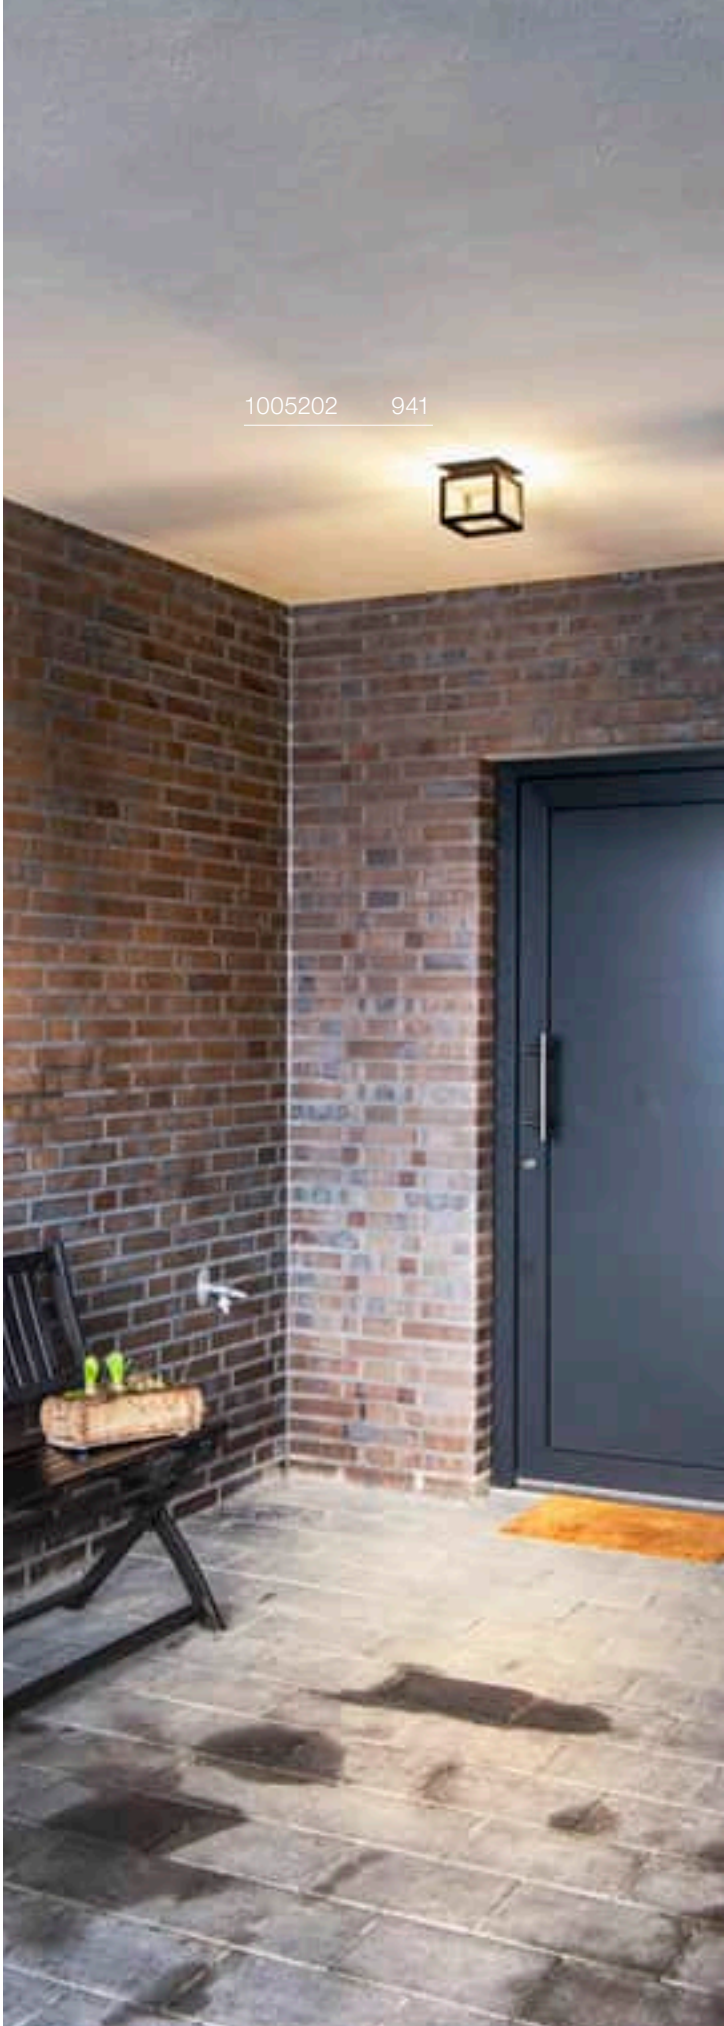
1005202 941

MYRA
WL, double, QPAR51





IP 55 | IK02 | 340° | 45° | 20

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <50 W

Base: 2xGU10 | Max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
anthracite	**233095**	**145.00**
grey	**233094**	**145.00**

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**

OUT-BEAM FRAME
SP



IP 55 | IK03 | 5° | L70B50 | 10

100-240V ~50/60Hz | 700mA
Total wattage: 3.5W
Material: aluminium/acrylic

- All-round lighting effect to emphasise archways, windows and door frames, for example

LED INSIDE CRI 80

Down | 60lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1003518**	**102.00**
white	**1003519**	**102.00**

QUADRULO
CL





IP 55 | IK02 | L70B50 | 20

100-277V ~50/60Hz | 480mA
Total wattage: 7.5W
Material: aluminium/acrylic

LED INSIDE CRI 80

Down | 230lm | 3000K

Variant	Prod. no.	GBP
anthracite	**1005202**	**141.00**



AINOS
CW





IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

Down 1430lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**229965**	**128.00**
○ white	**229961**	**128.00**

AINOS
CW SENSOR





IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/polycarbonate (PC)

• Sensor in the light housing.

LED INSIDE | CRI 80

Down	1430lm | 3000K

Variant	Prod. no.	GBP
● anthracite	229975	168.00
○ white	229971	168.00

AINOS
CW, square

CCT



IP 65 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 17W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	1300lm | 3000K	1300lm | 4000K

Variant	Prod. no.	GBP
● anthracite	1003450	139.00
○ white	1003449	139.00

AINOS
CW SENSOR, square

CCT

IR





IP 65 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

• Sensor in the light housing.

LED INSIDE | CRI 80

Down	1300lm | 3000K	1300lm | 4000K

Variant	Prod. no.	GBP
● anthracite	1003452	173.00
○ white	1003451	173.00

RUBA
CW

CCT





IP 65 | IK08 | 120° | L70B50 | 10

220-240V ~50/60Hz | 600mA
Total wattage: 22W
Material: polycarbonate (PC)

LED INSIDE | CRI 90

Down	960lm 2000lm	3000K	1100lm 2300lm	4000K

Variant	Prod. no.	GBP
○ white | Ø: 27cm 960/1100lm | 12W	**1005089**	**94.00**
○ white | Ø: 42cm 2000/2300lm | 22W	**1005090**	**188.00**

TERANG 200
CW





IP 44 | IK03 | 120° | L70B50

220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

Down	830lm | 3000K	

Variant	Prod. no.	GBP
● anthracite	**229935**	**68.00**
○ white	**229931**	**68.00**

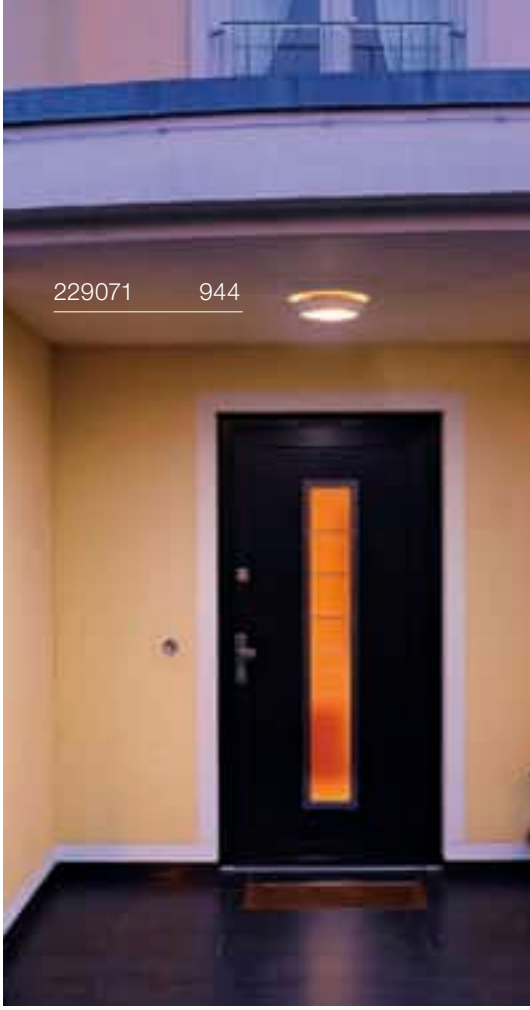





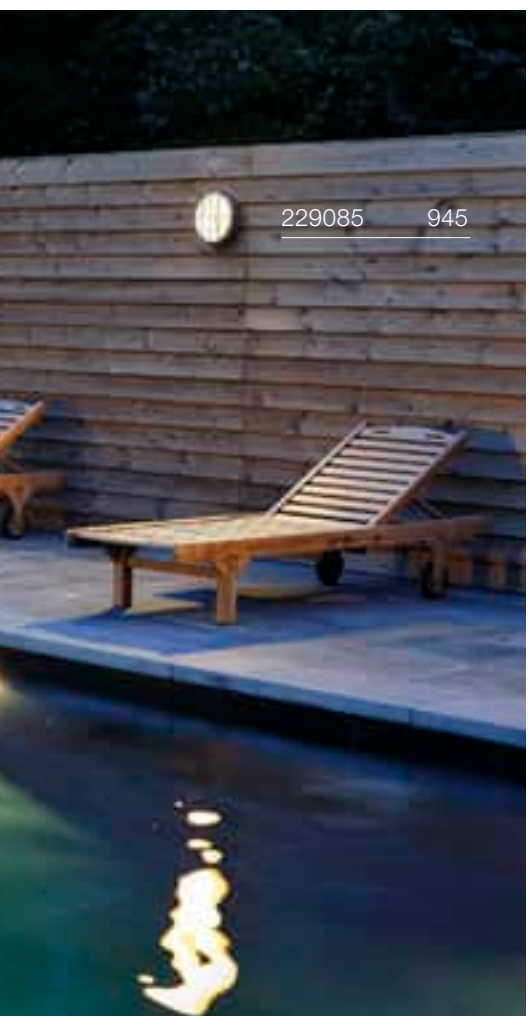

BULAN
CW, E14





IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <60 W

Base: 1xE14 | Max. Ø: 4.8 cm | L: 13 cm

Variant	Prod. no.	GBP
anthracite	229075	57.00
white	229071	57.00
grey	229072	57.00

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

C,L

Prod. no.: 1005285 | 8.00 GBP

BULAN GRID
CW, E27





IP 55 IK02

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE <25 W

Base: 2xE27 | Max. Ø: 5.2 cm | L: 17.3 cm

Variant	Prod. no.	GBP
anthracite	229085	61.00
white	229081	61.00

| 13.5W | 240°
4000K | 1600lm | EEC=E
14kWh/1000h

C,L

Prod. no.: 1005308 | 11.00 GBP


233605 951



CONCRETO | 949



CONCRETO | 949



ADI | 950



DOWNUNDER
OUT S | 951



DOWNUNDER
OUT M | 951



DOWNUNDER
OUT L | 951



BRICK MESH | 953



BRICK | 953



BRICK | 953



SOCKET

BRICK
DOWNUNDER | 955



BRICK
DOWNUNDER | 955

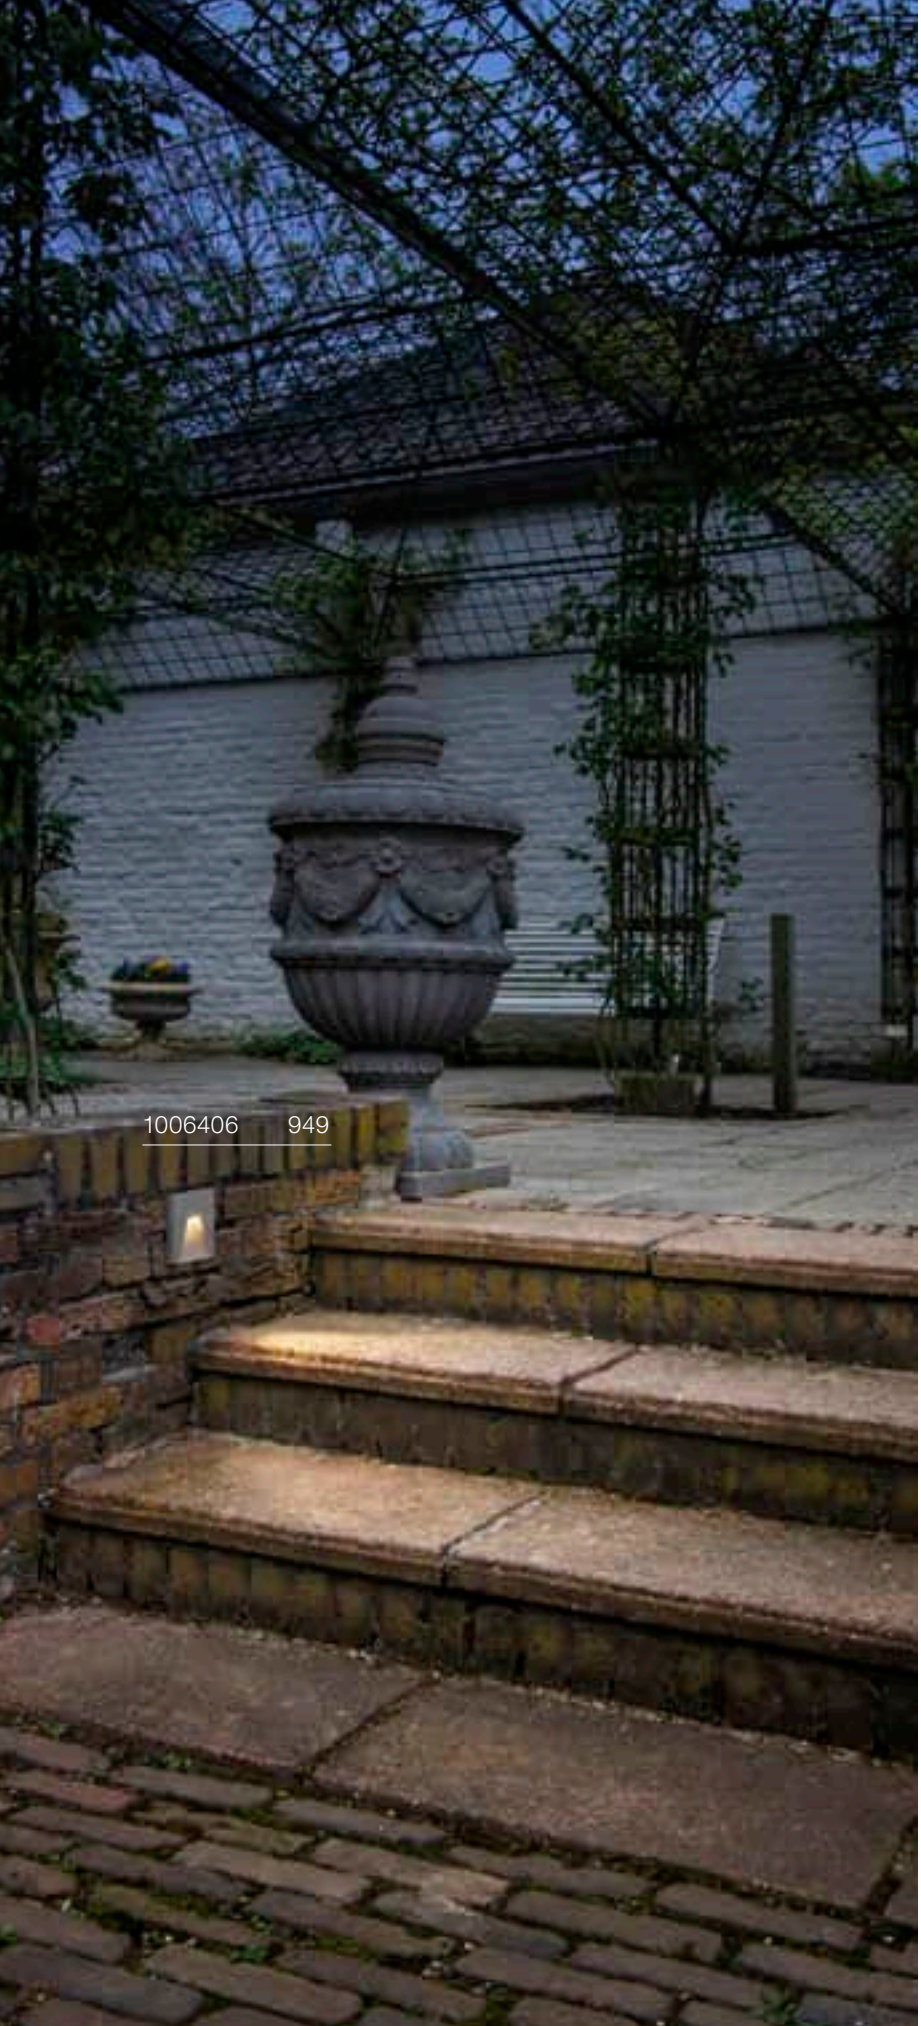
1006406 949

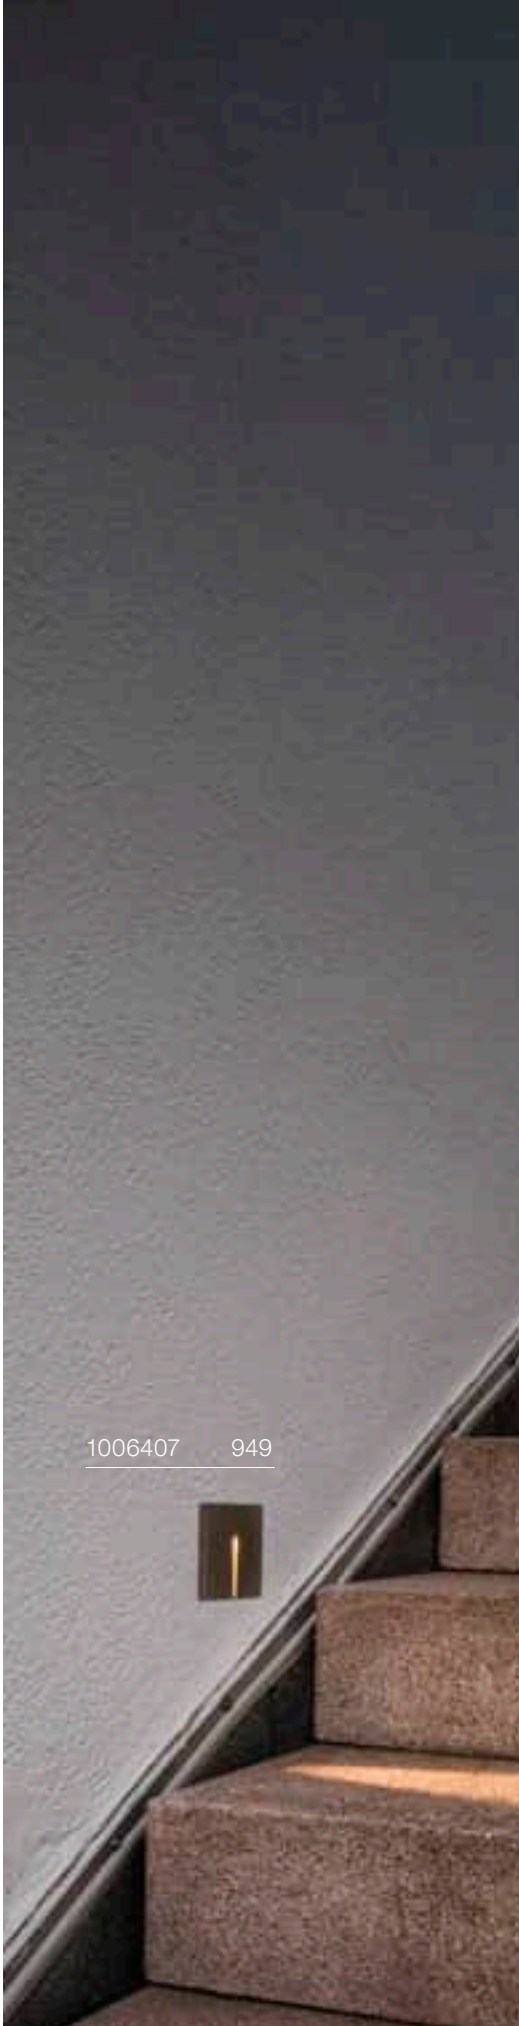
1006407 949

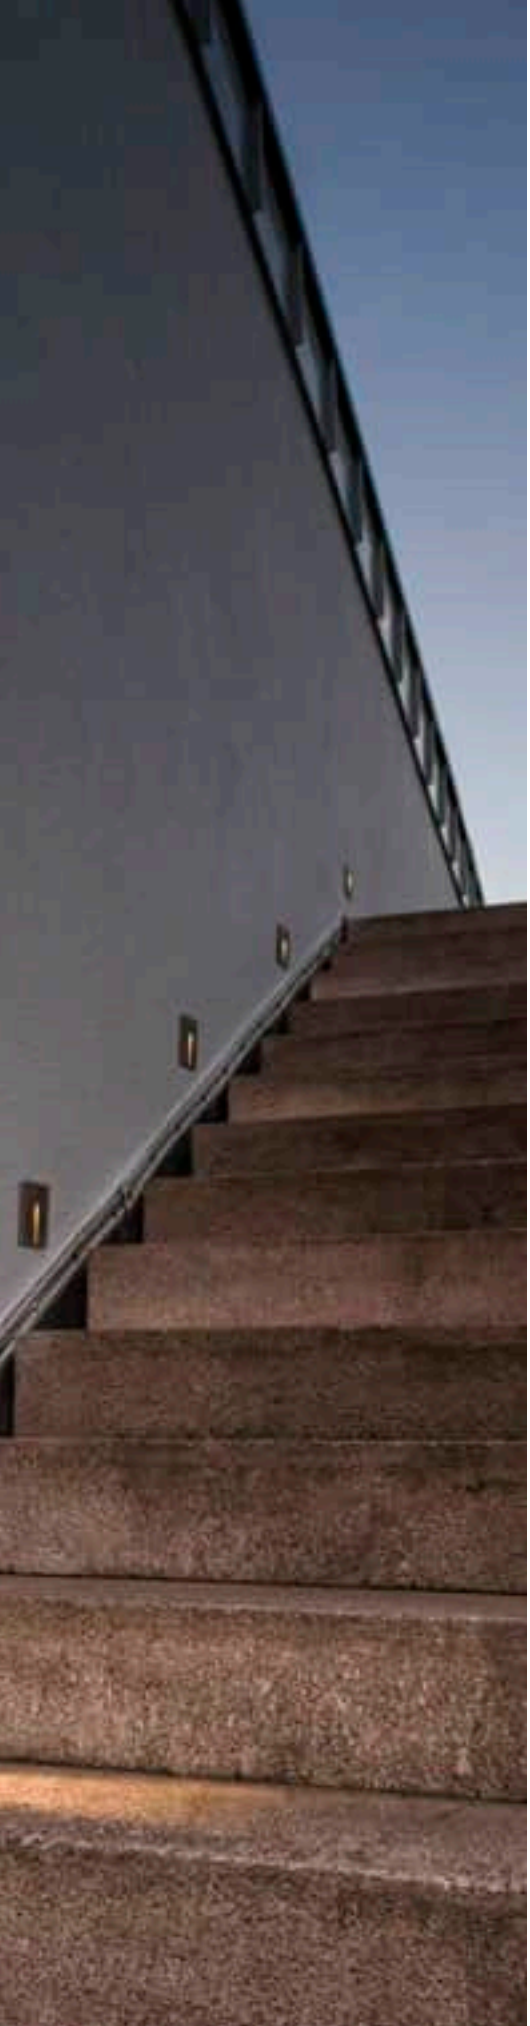

CONCRETO
EL, Wing





IP 65 | IK03 | 120° | L80B50

100-240V ~50/60Hz | 700mA
Total wattage: 3.2W
Material: concrete/aluminium

- Recessed fixing kit included

LED INSIDE | CRI 80

Down 45lm | 3000K

Variant	Prod. no.	GBP
grey	1006406	85.00

CONCRETO
EL, Cut





IP 65 | IK03 | 15° | L80B50

100-240V ~50/60Hz | 700mA
Total wattage: 3.2W
Material: concrete/aluminium

- Recessed fixing kit included

LED INSIDE | CRI 80

Down 15lm | 3000K

Variant	Prod. no.	GBP
grey	1006407	85.00

ADI
EL







IP 55 IK02 L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit must be ordered separately

LED INSIDE CRI 80

Down 940lm | 3000K



Variant	Prod. no.	GBP
● anthracite	**233635**	**225.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit		
● black	**233639**	**17.00**

DOWNUNDER OUT S
EL





IP 55 IK02 L70B50

220-240V ~50/60Hz | 300mA
Total wattage: 1.7W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

LED INSIDE CRI 80

Down 25lm 65lm | 3000K

Variant	Prod. no.	GBP
● anthracite 25lm	**233605**	**55.00**
○ white 65lm	**233601**	**55.00**

DOWNUNDER OUT M
EL





IP 55 IK02 L70B50

220-240V ~50/60Hz | 300mA
Total wattage: 4W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

LED INSIDE CRI 80

Down 85lm 155lm | 3000K

Variant	Prod. no.	GBP
● anthracite 85lm	**233625**	**65.00**
○ white 155lm	**233621**	**65.00**

DOWNUNDER OUT L
EL





IP 55 IK02 L70B50

220-240V ~50/60Hz | 300mA
Total wattage: 4W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

LED INSIDE CRI 80

Down 85lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**233615**	**77.00**


233650 953

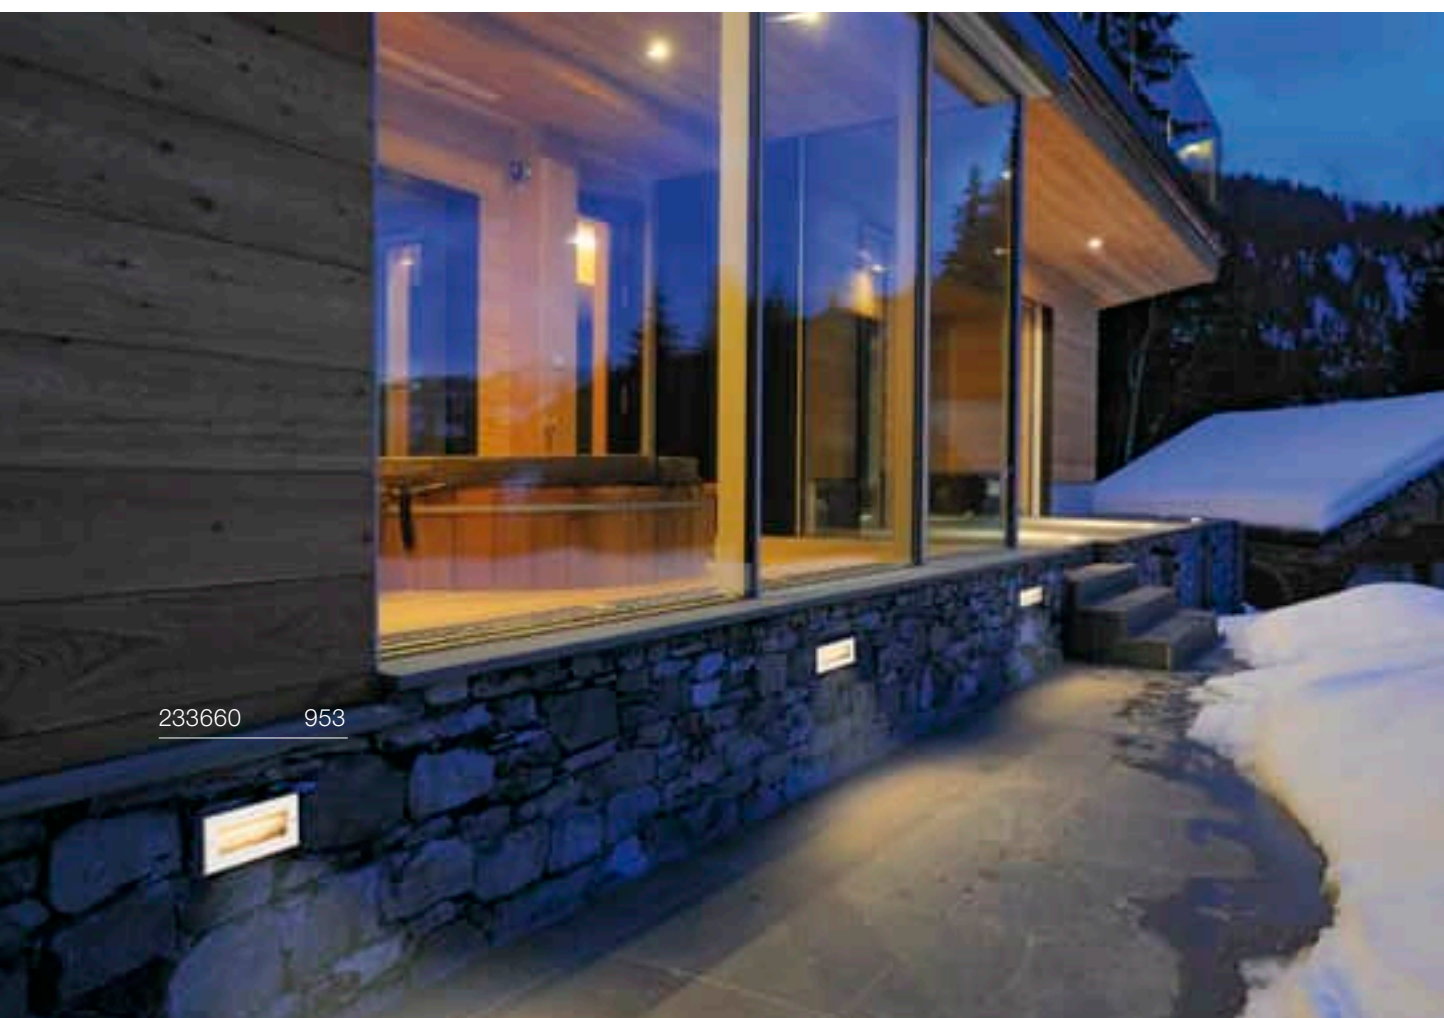
233660 953

BRICK MESH
EL





IP65 IK08 L80B50

220-240V ~50/60 Hz | 500 mA
Total wattage: 5W
Material: aluminium

• Recessed fixing kit included

LED INSIDE CRI 80

Down 150lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1008481**	**209.00**

BRICK
EL, symmetrical





IP 65 IK02 40° L70B50 20

220-240V ~50/60Hz | 144mA
Total wattage: 9.5W
Material: aluminium/stainless steel 316

• Recessed fixing kit included

LED INSIDE CRI 80

Down 950lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**233650**	**260.00**

BRICK
EL, asymmetrical





IP 65 IK02 L70B50 20

220-240V ~50/60Hz | 144mA
Total wattage: 9.5W
Material: aluminium/stainless steel 316

• Recessed fixing kit included

LED INSIDE CRI 80

Down 850lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**233660**	**260.00**


229062 955



BRICK DOWNUNDER
EL, E14





IP 44 IK02 10

220-240V ~50/60Hz
Material: aluminium/glass

• No recessed fixing kit required

SOCKET INSIDE <40 W

Base: 1xE14 | Max. Ø: 4.3 cm | L: 12 cm

Variant	Prod. no.	GBP
grey	229062	36.00

C35 | 4.2W | 320°
2700K | 350lm | EEC=G
5kWh/1000h

C,L

Prod. no.: 1005285 | 8.00 GBP

BRICK DOWNUNDER
EL





IP 54 IK02 L70B50

220-240V ~50/60Hz
Total wattage: 1.4W
Material: aluminium/glass

• Recessed fixing kit included

LED INSIDE CRI 80

Down | 30lm | 3000K

Variant	Prod. no.	GBP
grey	229702	58.00





DASAR® 600 | 959



DASAR® 1200 | 959



DASAR® S | 961



DASAR® S | 961

NEW



DASAR® M | 962

NEW



DASAR® M | 963



DASAR® L | 965



DASAR® L | 965



DASAR® XL | 966



DASAR® XL | 967



DASAR®
FLAT 80 | 969



DASAR®
FLAT 120 | 969



DASAR® 255 | 969



DASAR® 920 | 970



DASAR® 920 | 970



DASAR® 270 | 971



DASAR® 270 | 971



SOCKET

DASAR® 115 | 973



SOCKET

DASAR® 115 | 973



SOCKET

DASAR® 115 | 973



SOCKET

DASAR®
EXACT 116 | 975



SOCKET

DASAR®
EXACT 116 | 975



SOCKET

DASAR® 215 | 976



SOCKET

DASAR® 215 | 977



SOCKET

DASAR® 215 | 977



DASAR® 370 | 977



TRAIL-LITE® 60 | 978



POWER
TRAIL-LITE® | 979



POWER
TRAIL-LITE® | 979



SMALL PLOT | 981



SMALL PLOT | 981



SMALL PLOT | 983



BIG PLOT | 983



ROCCI | 984



ROCCI | 984



ROCCI 200 | 985



ROCCI 200 | 985



SOCKET

SOLASTO | 987



SOCKET

SOLASTO | 987



1007196 959

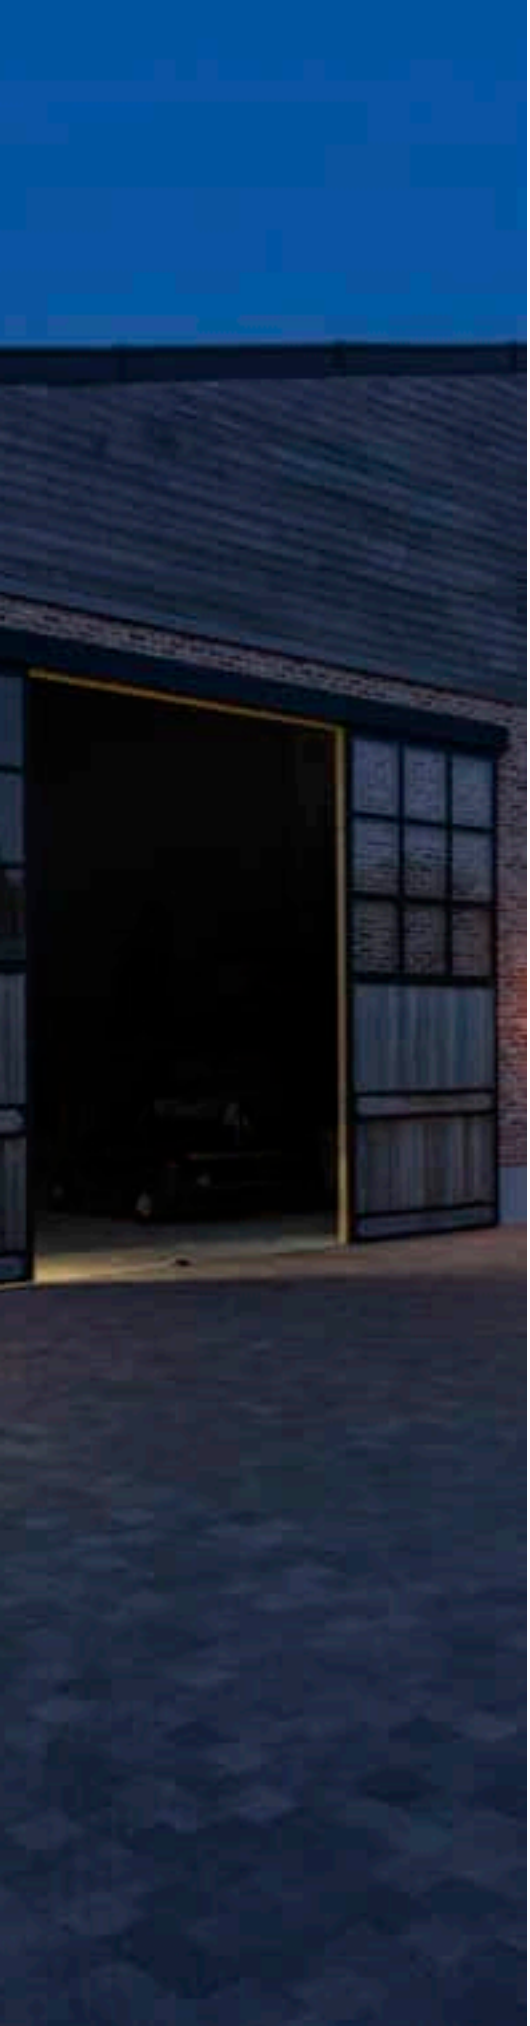

DASAR® 600
EL





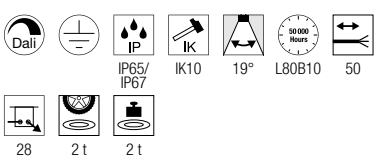

220-240V ~50/60Hz | 550mA
Total wattage: 18W
Material: stainless steel 316

- marked installation direction
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

Down 2200lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007195**	**471.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit		
black	**1007198**	**25.00**

DASAR® 1200
EL





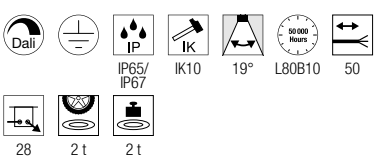

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: stainless steel 316

- marked installation direction
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

Down 4100lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007196**	**626.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit		
black	**1007197**	**43.00**


1007680 961

DASAR® S
RL, round





IP67 IK10 24° L80B50 15° 50

2 t

220-240V ~50/60Hz | 200mA
Total wattage: 4W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 50°
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

Down 350lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007680**	**180.00**

Product	Prod. no.	GBP
Floor-recessed fixing kit S		
black	**1007682**	**43.00**
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**

DASAR® S
RL, square





IP67 IK10 24° L80B50 15° 50

2 t

220-240V ~50/60Hz | 200mA
Total wattage: 4W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 50°
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

Down 350lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007681**	**180.00**

Product	Prod. no.	GBP
Floor-recessed fixing kit S		
black	**1007682**	**43.00**
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**

DASAR® M
RL, round

NEW





18 cm

Dali | | IP67 | IK10 | 24° | L80B50 | 15°

50 | 20 | 2 t

220-240V ~50/60Hz | 300mA
Total wattage: 6.5W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 50°
- Recessed fixing kit incl. cover can be ordered separately

LED INSIDE | CRI 80

Down 450lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007810**	**299.00**

Product	Prod. no.	GBP
Recessed floor fixing kit M		
black	**1007822**	**68.00**
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**

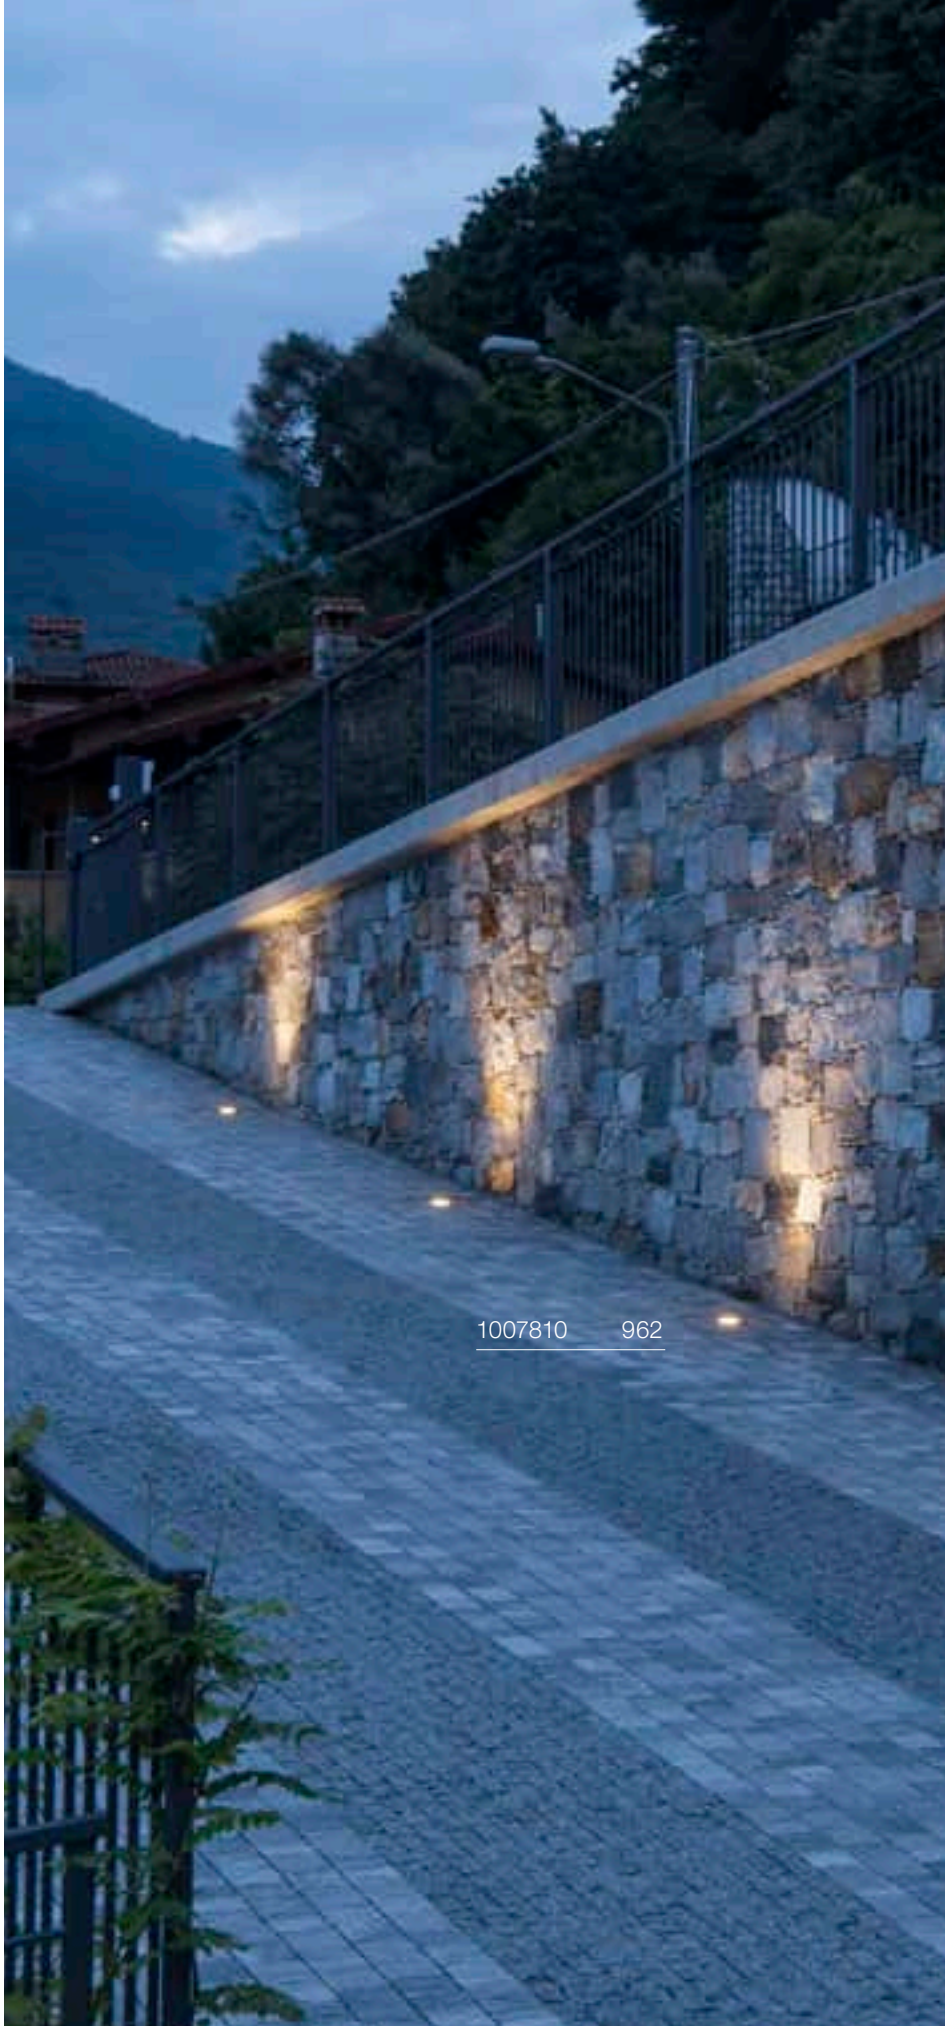

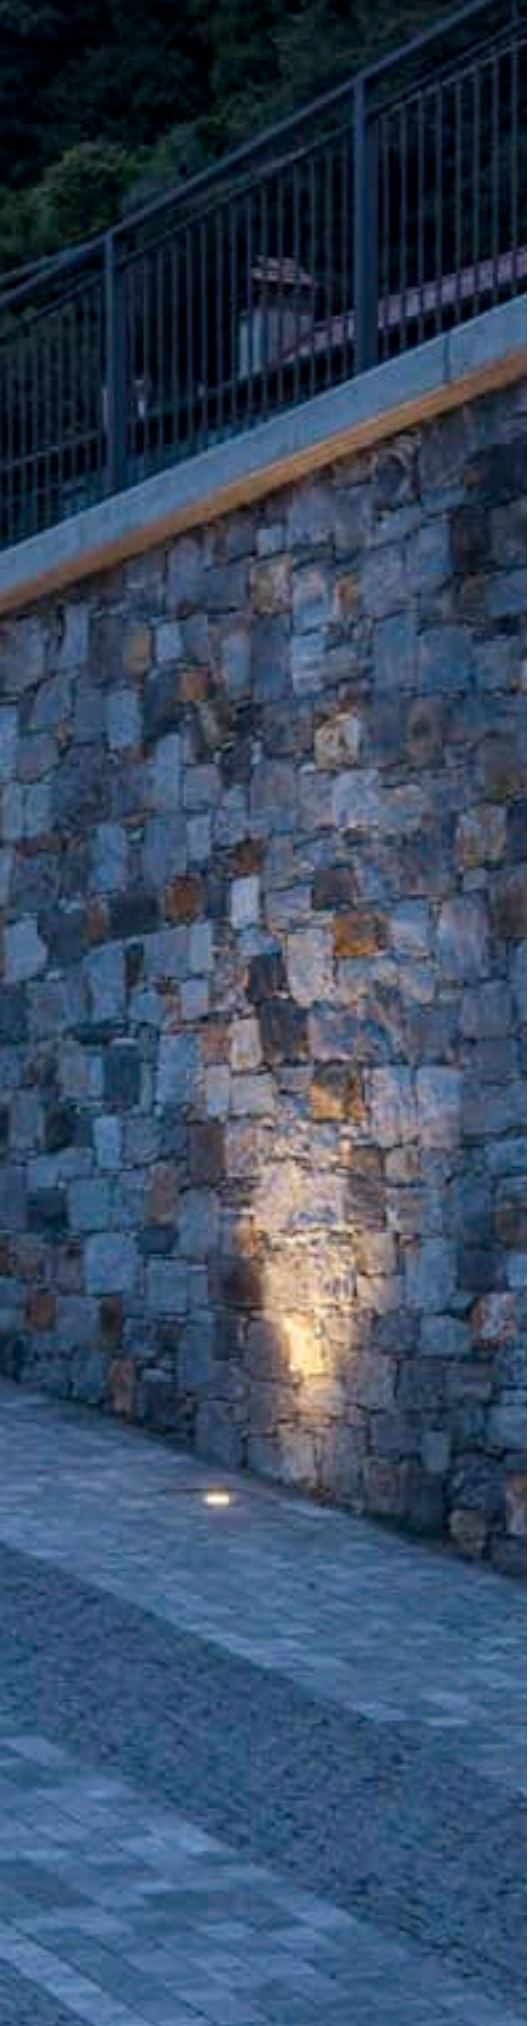

DASAR® M
RL, square

NEW





Dali | IP67 | IK10 | 24° | L80B50 | 15° | 50 | 20 | 2 t

220-240V ~50/60Hz | 300mA
Total wattage: 6.5W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 50°
- Recessed fixing kit incl. cover can be ordered separately

LED INSIDE | CRI 80

Down 450lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	1007811	299.00

Product	Prod. no.	GBP
Recessed floor fixing kit M		
black	1007822	68.00
Reflector 15°		
silver	1007683	6.00
Reflector 36°		
silver	1007684	6.00
Reflector 50°		
silver	1007685	6.00



1007243 965



1007244 965

DASAR® L
RL, round







220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 60°
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box

LED INSIDE CRI 80

Down 1950lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007243**	**411.00**

Product	Prod. no.	GBP
Recessed fixing kit for DASAR® L		
black	**1007245**	**43.00**
Reflector 15° for DASAR® L / XL		
silver	**1007238**	**11.00**
Reflector 36° for DASAR® L / XL		
silver	**1007239**	**11.00**
Reflector 60° for DASAR® L / XL		
silver	**1007240**	**11.00**

DASAR® L
RL, square





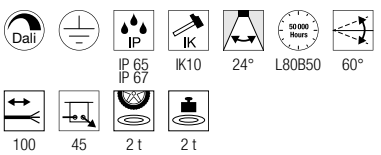

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 60°
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box

LED INSIDE CRI 80

Down 1950lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007244**	**411.00**

Product	Prod. no.	GBP
Recessed fixing kit for DASAR® L		
black	**1007245**	**43.00**
Reflector 15° for DASAR® L / XL		
silver	**1007238**	**11.00**
Reflector 36° for DASAR® L / XL		
silver	**1007239**	**11.00**
Reflector 60° for DASAR® L / XL		
silver	**1007240**	**11.00**

DASAR® XL
RL, round

DALI









220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 60°
- Recessed fixing kit incl. cover an be ordered separately
- Y-IP68 connection box

LED INSIDE CRI 80

Down 2790lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007241**	**497.00**

Product	Prod. no.	GBP
Recessed fixing kit for DASAR® XL		
black	**1007246**	**51.00**
Reflector 15° for DASAR® L / XL		
silver	**1007238**	**11.00**
Reflector 36° for DASAR® L / XL		
silver	**1007239**	**11.00**
Reflector 60° for DASAR® L / XL		
silver	**1007240**	**11.00**



1007242 967



DASAR® XL
RL, square







220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics 36° and 60°
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box

LED INSIDE CRI 80

Down 2790lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1007242**	**497.00**

Product	Prod. no.	GBP
Recessed fixing kit for DASAR® XL		
black	**1007246**	**51.00**
Reflector 15° for DASAR® L / XL		
silver	**1007238**	**11.00**
Reflector 36° for DASAR® L / XL		
silver	**1007239**	**11.00**
Reflector 60° for DASAR® L / XL		
silver	**1007240**	**11.00**



228412 969



229383 969

DASAR® FLAT 80
EL





IP 65 IP 67 | IK08 | L70B50 | 150 | 0.5 t

220-240V ~50/60Hz
Total wattage: 3.5W
Material: stainless steel 304/glass

- Recessed fixing kit included
- This light is suitable for installation in wood.
- open cable end

INSIDE CRI 80

Up	140lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**228412**	**94.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**15.00**

DASAR® FLAT 120
EL





IP 65 IP 67 | IK08 | L70B50 | 150 | 0.5 t

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: stainless steel 304/aluminium

- Recessed fixing kit included
- open cable end

INSIDE CRI 80

Down	490lm | 3000K 540lm | 4000K

Variant	Prod. no.	GBP
Stainless steel 490lm | 3000K	**1006106**	**130.00**
Stainless steel 540lm | 4000K	**1006107**	**130.00**

DASAR® 255
EL





IP 65 IP 67 | IK08 | L70B50 | 2 t

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: stainless steel 316/glass

- Recessed fixing kit included

INSIDE CRI 90

Down	1660lm | 3000K 1720lm | 4000K

Variant	Prod. no.	GBP
Stainless steel 1660lm | 3000K	**229383**	**346.00**
Stainless steel 1720lm | 4000K	**229381**	**346.00**

DASAR® 920
EL





IP 67 IK08 40° L70B50 150 1 t

12-24V DC
Total wattage: 6.5W
Material: stainless steel 316/glass

- Recessed fixing kit included
- open cable end

LED INSIDE CRI 80

Down 520lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**233500**	**130.00**

DASAR® 920
EL





IP 67 IK08 40° L70B50 150 1 t

220-240V ~50/60Hz | 400mA
Total wattage: 5.5W
Material: stainless steel 316/glass

- Recessed fixing kit included
- open cable end

LED INSIDE CRI 80

Down 300lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**233520**	**169.00**

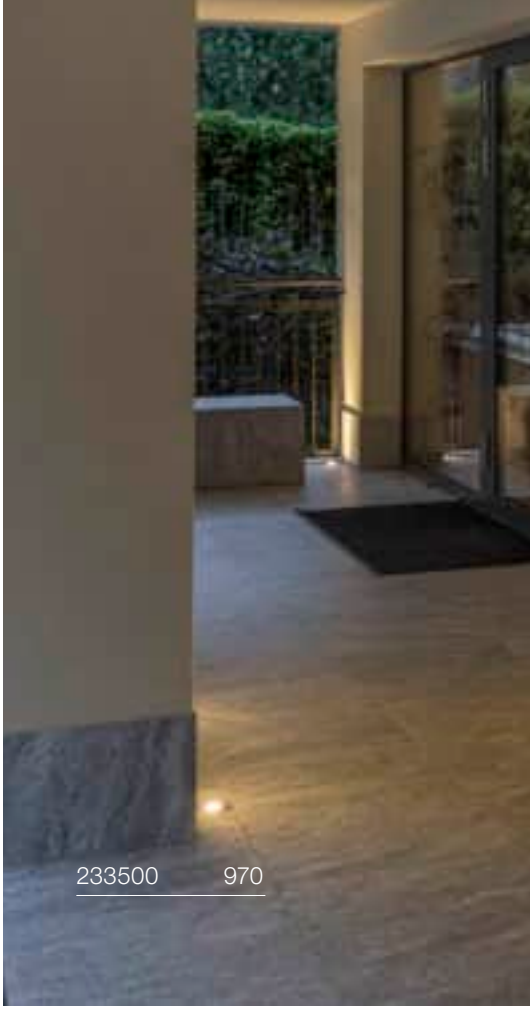







1002893 971

DASAR® 270
EL, asymmetrical







220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

Down 2200lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1002893**	**390.00**

DASAR® 270
EL, symmetrical





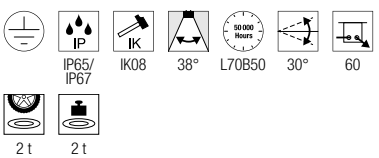

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: stainless steel 316/glass

LED INSIDE CRI 80

Down 2500lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1002897**	**390.00**

⊕

Product	Prod. no.	GBP
DASAR® 270 | Honeycomb cover		
black	**1002899**	**11.00**


229320 973

DASAR® 115
RL, round, QPAR51





IP 67 | IK08 | 90° | 30° | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <35 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
Stainless steel	**229320**	**98.00**

GU10 LED 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005075 | 7.00 GBP

DASAR® 115
RL, square, QPAR51





IP 67 | IK08 | 90° | 30° | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <35 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
Stainless steel	**229324**	**98.00**

GU10 LED 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP

DASAR® 115
RL, square, QPAR51





IP 67 | IK08 | 90° | 30° | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <35 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
Stainless steel	**229374**	**98.00**

GU10 LED 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h



Prod. no.: 1005273 | 9.00 GBP



228430 975

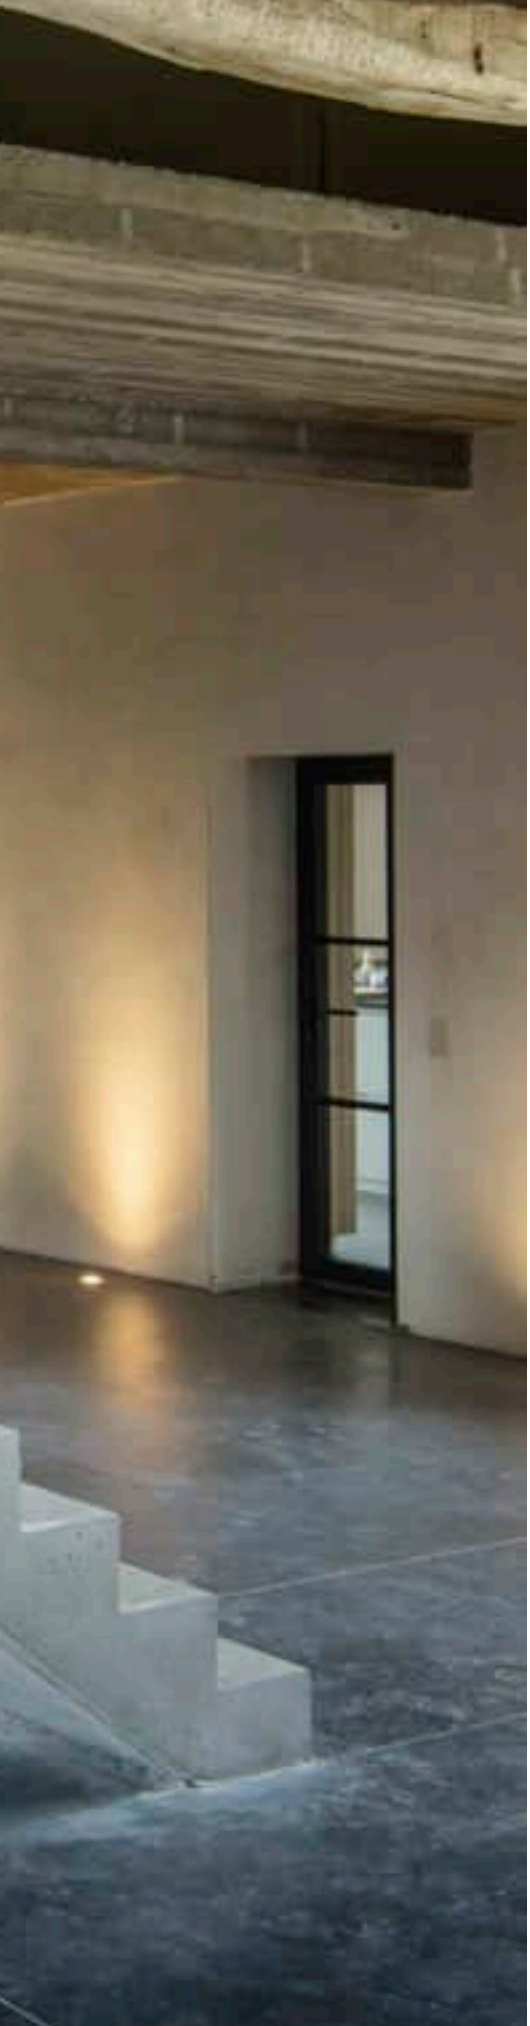

DASAR® EXACT 116
EL, square, QPAR51





IP 67 | IK08 | 90° | 30° | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <35 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
Stainless steel	228434	107.00

GU10 LED 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h

L



Prod. no.: 1005075 | 7.00 GBP

DASAR® EXACT 116
EL, round, QPAR51





IP 67 | IK08 | 90° | 30° | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <35 W

Base: 1xGU10 | Max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
Stainless steel	228430	107.00

GU10 LED 51mm | 6W | 36°
2200-2700K | 360lm | EEC=G
6kWh/1000h

C,L



Prod. no.: 1005273 | 9.00 GBP

DASAR® 215
RL, round, QPAR111









220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included



Base: 1xGU10

Variant	Prod. no.	GBP
Stainless steel	**229230**	**230.00**

QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h



Prod. no.: 1005278 | 48.00 GBP

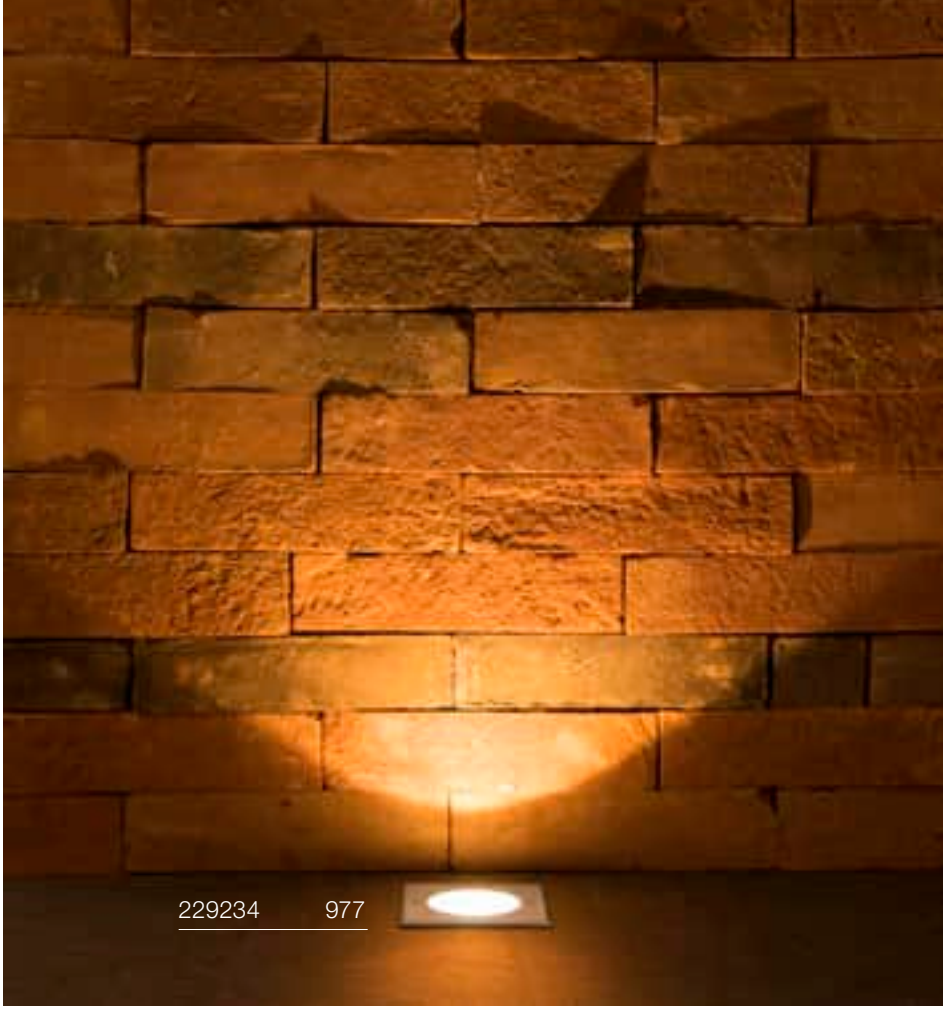



DASAR® 215
RL, square, QPAR111





IP 67 | IK08 | 20 | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <75 W

Base: 1xGU10

Variant	Prod. no.	GBP
Stainless steel	229234	230.00

QPAR111 | 12.5W | 10°
2700K | 900lm | EEK=G
13kWh/1000h



Prod. no.: 1005275 | 48.00 GBP

DASAR® 215
RL, round, E27





IP 67 | IK08 | 20 | 2 t

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE <11 W

Base: 1xE27 | Max. Ø: 4.5 cm | L: 13.4 cm

Variant	Prod. no.	GBP
Stainless steel	229200	220.00

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h



Prod. no.: 1005289 | 9.00 GBP

DASAR® 370
EL, round





IP 67 | IK08 | 30° | L70B50 | 150 | 0.25 t

12-24V DC
Power consumption: 2W
Material: stainless steel 316/glass

- This light is suitable for installation in wood
- open cable end

LED INSIDE CRI 80

Down | 120lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	233540	147.00

TRAIL-LITE® 60
EL









IP 65 IK08 L70B50 40

12V ~50/60Hz
Power consumption: 0.3W
Material: stainless steel 316/glass

- Only operate with conventional transformer.
- Recessed fixing kit included
- This light is suitable for installation in wood

LED INSIDE CRI 80

Down 4lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**227462**	**61.00**

228332 979

POWER TRAIL-LITE®
EL, square





IP 67 | IK08 | 60° | L70B50 | 200

350mA
Power consumption: 1W
Material: stainless steel 316/glass

- Only operate only with 350mA driver. Only wire together multiple power LEDs in series! Installation sleeve included.
- The light is suitable for installation in wood
- open cable end

LED INSIDE | CRI 90

Down | 45lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	228342	69.00

POWER TRAIL-LITE®
EL, round





IP 67 | IK08 | 60° | L70B50 | 200

350mA
Power consumption: 1W
Material: stainless steel 316/glass

- Only operate only with 350mA driver. Only wire together multiple power LEDs in series!
- This light is suitable for installation in wood
- open cable end

LED INSIDE | CRI 90

Down | 45lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	228332	69.00



1006171 + 1006173 981

SMALL PLOT
Modules





IP 67 IK06 180° L70B50 50

24V DC
Power consumption: 2.6W
Material: aluminium/polymethylacrylate (PMMA)

- This product is delivered without a cover.
- open cable end

LED INSIDE CRI 80

Down 240lm | 3000K

Variant	Prod. no.	GBP
aluminium	**1006172**	**68.00**

SMALL PLOT
Modules





IP 67 IK06 180° L70B50 50

24V DC
Power consumption: 2.6W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover.
- open cable end

LED INSIDE CRI 80

Down 240lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1006171**	**81.00**

SMALL PLOT
Cover, 2-pack



500 kg

H: 1.7 cm
Ø: 10.3 cm
Material: aluminium

Variant	Prod. no.	GBP
anthracite	**1006174**	**37.00**
Stainless steel	**1006173**	**120.00**

SMALL PLOT
Cover, 4-pack



800 kg

H: 1.7 cm
Ø: 10.3 cm
Material: stainless steel

Variant	Prod. no.	GBP
anthracite	**1006176**	**37.00**
Stainless steel	**1006175**	**120.00**



1001359 + 1001255 983

BIG PLOT
Modules





IP 67 IK06 180° L70B50 150

220-240V ~50/60Hz
Total wattage: 4.9W
Material: aluminium/polymethylacrylate (PMMA)

- This product is delivered without a cover
- open cable end

LED INSIDE CRI 80

Down 540lm | 3000K

Variant	Prod. no.	GBP
aluminium	**1008000**	**79.00**

⊕

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Connection box IP68, 3-pole		
black	**228730**	**15.00**

BIG PLOT
Modules





IP 67 IK06 180° L70B50 150

220-240V ~50/60Hz
Total wattage: 4.9W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- open cable end

LED INSIDE CRI 80

Down 540lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1008001**	**115.00**

⊕

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Connection box IP68, 3-pole		
black	**228730**	**15.00**

BIG PLOT
Cover, 2-pack



500 kg

H: 2 cm
Diameter: 17 cm
Material: aluminium

- 1001262 loadable up to 0.5t
- 1001255 loadable up to 0.8t

Variant	Prod. no.	GBP
anthracite	**1001262**	**49.00**
Stainless steel	**1001254**	**170.00**

BIG PLOT
Cover, 4-pack



800 kg

H: 2 cm
Diameter: 17 cm
Material: stainless steel 316

- 1001255 loadable up to 0.8t
- 1001263 loadable up to 0.8t

Variant	Prod. no.	GBP
anthracite	**1001263**	**49.00**
Stainless steel	**1001255**	**170.00**

ROCCI
EL, square





IP 67 IK08 120° L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

Up 580lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**227604**	**144.00**

ROCCI
EL, round





IP 67 IK08 120° L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

Up 580lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**227600**	**144.00**







ROCCI 200
EL, square





IP 65
IP 67 | IK08 | 120° | L70B50 | 10 | 0.5 t

100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE | CRI 80

Up 1530lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1006105**	**161.00**

ROCCI 200
EL, round





IP 65
IP 67 | IK08 | 120° | L70B50 | 10 | 0.5 t

100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE | CRI 80

Up 1530lm | 3000K

Variant	Prod. no.	GBP
Stainless steel	**1006104**	**161.00**




227680 987

SOLASTO
EL, square





IP 67 IK08 0.6 t

220-240V ~50/60Hz
Material: stainless steel 304/glass

- Recessed fixing kit included

SOCKET INSIDE <6 W

Base: 1xGU10

Variant	Prod. no.	GBP
Stainless steel	**227684**	**59.00**

GU10 LED 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005077 | 7.00 GBP

SOLASTO
EL, round





IP 67 IK08 0.6 t

220-240V ~50/60Hz
Material: stainless steel 304/glass

- Recessed fixing kit included

SOCKET INSIDE <6 W

Base: 1xGU10

Variant	Prod. no.	GBP
Stainless steel	**227680**	**59.00**

GU10 LED 51mm | 6W | 38°
2700K | 450lm | EEC=F
6kWh/1000h



Prod. no.: 1005075 | 7.00 GBP



1007655 1002

NEW

PANEL C 600 | 990

NEW

PANEL C
DALI 600 | 991

NEW

PANEL C 625 | 993

NEW

PANEL C
DALI 625 | 993

NEW

PANEL C 1200 | 995

NEW

PANEL C
DALI 1200 | 995

PANEL V 600 | 996

PANEL V 600 | 997

PANEL V
DALI 600 | 997

PANEL V 625 | 998

PANEL V 625 | 999

PANEL V
DALI 625 | 999

SURFACE
V 390 | 1001

SURFACE
V 390 | 1001



TRACKSPOT V | 1002

TRACKSPOT V | 1003

NEW



DOWNLIGHT C | 1005

NEW



DOWNLIGHT C | 1005

NEW



DOWNLIGHT C | 1006

NEW



DOWNLIGHT C | 1007



DOWNLIGHT
V 100 | 1008



DOWNLIGHT
V 150 | 1008



DOWNLIGHT
V 200 | 1008

NEW



UNIVERSAL
DOWNLIGHT | 1011

NEW



WATERPROOF
V 600 | 1013

NEW



WATERPROOF
V DALI 600 | 1013

NEW



WATERPROOF
V 1200 | 1014

NEW



WATERPROOF
V DALI 1200 | 1015

NEW



WATERPROOF
V 1500 | 1017

NEW



WATERPROOF
V DALI 1500 | 1017

NEW

INDUSTRY BATTEN
V 1200 | 1018

NEW

INDUSTRY BATTEN
V 1500 | 1019

NEW



HIGHBAY C 340 | 1021

NEW



HIGHBAY C 400 | 1021

NEW



HIGHBAY C
DALI 400 | 1021

NEW



HIGHBAY V 330 | 1024

NEW



OUTDOOR BULKHEAD
V 360 | 1027

NEW



OUTDOOR BULKHEAD
V 360 | 1027



FLOODI S | 1029



FLOODI M | 1029

FLOODI L | 1029

NEW

LED TUBE | 1031

PANEL C 600
34W 830/840 UGR

CCT

NEW



IP20/ IP54 | IK03 | 90° | UGR 19 | 70 000 Hours L80B10

220-240V ~50/60 Hz | 850 mA
Total wattage: 34W
Material: aluminium

- IP54 room side

LED INSIDE | CRI 80

Down	4550lm | 3000K	4650lm | 4000K

Variant	Prod. no.	GBP
○ white	**1008597** ●	**98.00**





PANEL C DALI 600
34W 830/840 UGR

CCT

DALI

NEW



Dali | IP20/IP54 | IK03 | 90° | UGR 19 | L80B10

220-240V ~50/60 Hz | 850 mA
Total wattage: 34W
Material: aluminium

- IP54 room side
- DC-capable

LED INSIDE | CRI 80

Down	4550lm | 3000K	4650lm | 4000K

Variant	Prod. no.	GBP
○ white	**1008601** ●	**98.00**


1008598 993

PANEL C 625
34W 830/840 UGR

CCT

NEW



IP20/ IP54 | IK03 | 90° | UGR 19 | L80B10

220-240V ~50/60 Hz | 850 mA
Total wattage: 34W
Material: aluminium

- IP54 room side

LED INSIDE | CRI 80

Down	4550lm | 3000K	4650lm | 4000K

Variant	Prod. no.	GBP
○ white	1008598 ●	98.00

PANEL C DALI 625
34W 830/840 UGR

CCT

DALI

NEW



Dali | IP20/ IP54 | IK03 | 90° | UGR 19 | L80B10

220-240V ~50/60 Hz | 850 mA
Total wattage: 34W
Material: aluminium

- IP54 room side
- DC-capable

LED INSIDE | CRI 80

Down	4550lm | 3000K	4650lm | 4000K

Variant	Prod. no.	GBP
○ white	1008602 ●	98.00


1008607 995

PANEL C 1200
34W 830/840 UGR

CCT

NEW



IP20/IP54 | IK03 | 90° | UGR 19 | L80B10

220-240V ~50/60 Hz | 850 mA
Total wattage: 34W
Material: aluminium

- IP54 room side

LED INSIDE | CRI 80

Down	4550lm | 3000K	4650lm | 4000K

Variant	Prod. no.	GBP
white	1008605	120.00

PANEL C DALI 1200
34W 830/840 UGR

CCT

DALI

NEW



Dali | IP20/IP54 | IK03 | 90° | UGR 19 | L80B10

220-240V ~50/60 Hz | 850 mA
Total wattage: 34W
Material: aluminium

- IP54 room side
- DC-capable

LED INSIDE | CRI 80

Down	4550lm | 3000K	4650lm | 4000K

Variant	Prod. no.	GBP
white	1008607	120.00

PANEL C
Suspension kit 1500

NEW



L: 150 cm
Material: steel

Variant	Prod. no.	GBP
silver	1008609	17.00

PANEL C
Spring fasteners

NEW



L: 4 cm W: 3.5 cm H: 3.2 cm
Material: steel

Variant	Prod. no.	GBP
silver	1008610	13.00

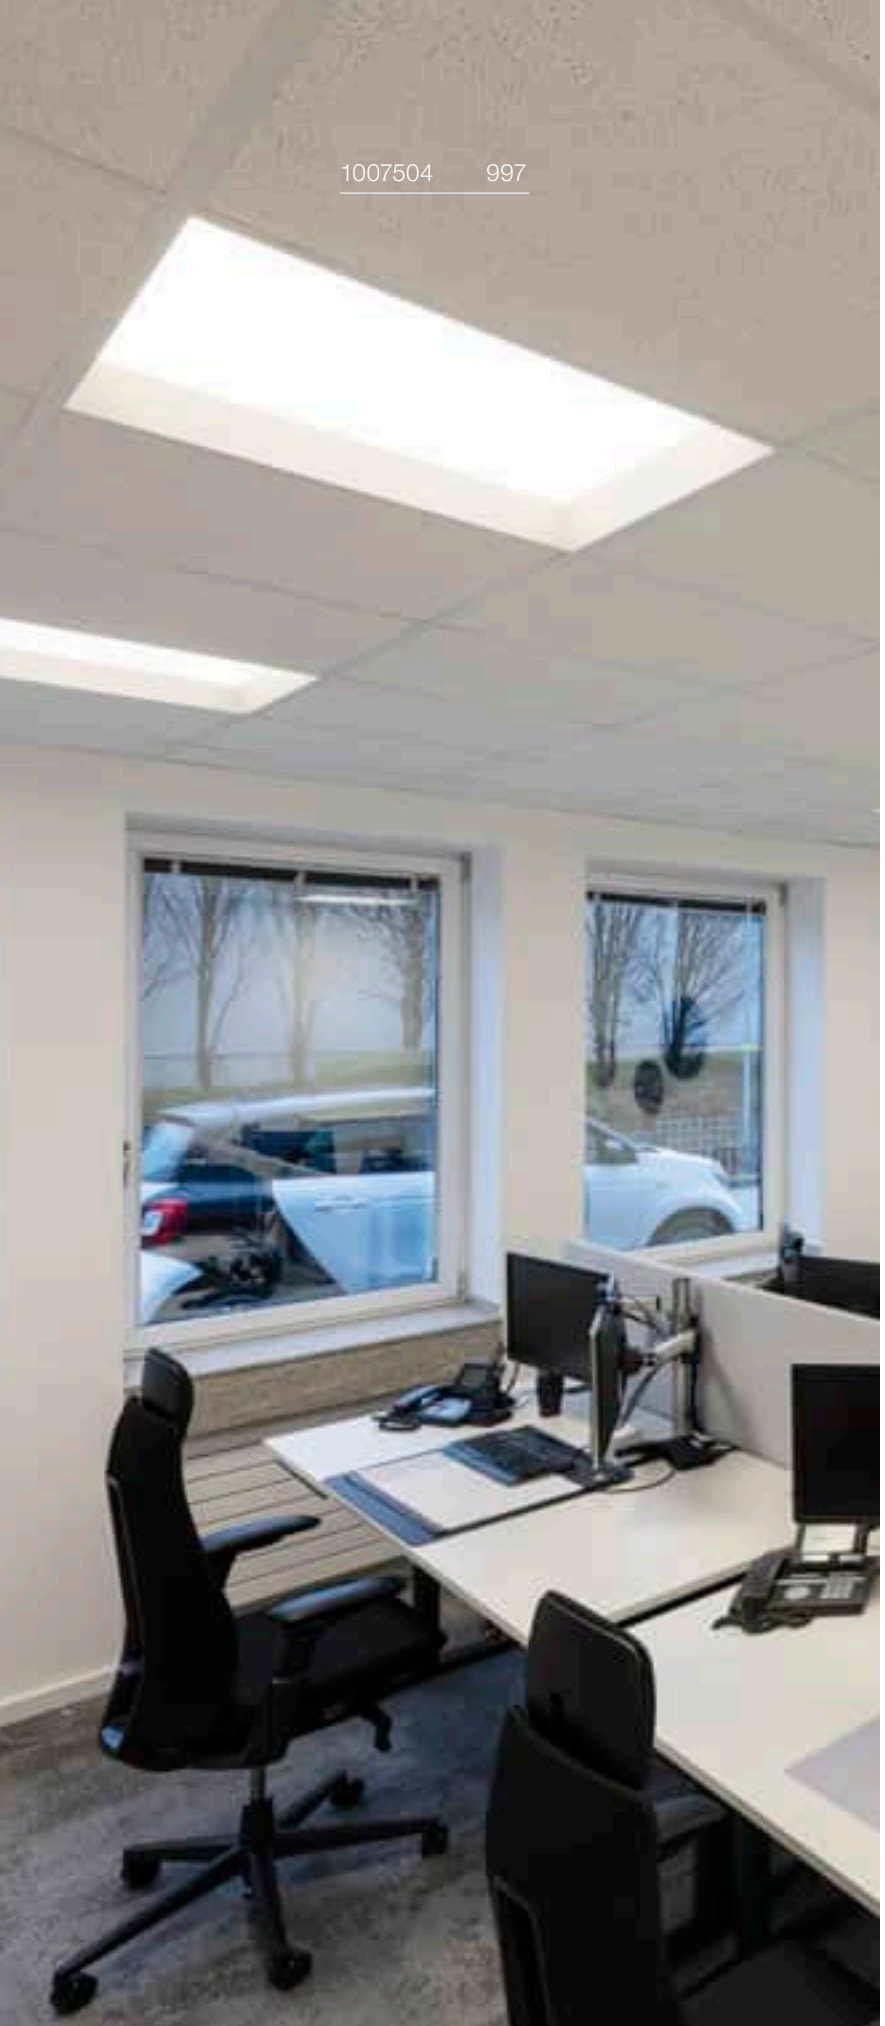

PANEL V 600
34W 830/840

CCT

NEW







220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: steel/aluminium

- Material thickness of mounting surface: max. 30 mm
- IP54 room side

LED INSIDE CRI 80

Down	4100lm | 3000K	4300lm | 4000K

Variant	Prod. no.	GBP
○ white	**1007496** ●	**56.00**

⊕

Product	Prod. no.	GBP
Safety rope 1.5m		
◐ Stainless steel	**1007577** ●	**13.00**

PANEL V 600
34W 830/840 UGR

CCT

NEW



IP 40 IP 54 | 85° | UGR 19 | L80B10

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: steel/aluminium

- Material thickness of mounting surface: max. 30 mm
- IP54 room side

LED INSIDE | CRI 80

Down	4000lm | 3000K	4200lm | 4000K

Variant	Prod. no.	GBP
white	1007498	65.00

Product	Prod. no.	GBP
Safety rope 1.5m		
Stainless steel	1007577	13.00

PANEL V DALI 600
34W 830/840 UGR

CCT

DALI

NEW



Dali | IP 40 IP 54 | 85° | UGR 19 | L80B10

200-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: steel/aluminium

- Material thickness of mounting surface: max. 30 mm
- IP54 room side

LED INSIDE | CRI 80

Down	4000lm | 3000K	4200lm | 4000K

Variant	Prod. no.	GBP
white	1007504	95.00

Product	Prod. no.	GBP
Safety rope 1.5m		
Stainless steel	1007577	13.00

PANEL 600
Surface-mounting frame

NEW



L: 60 cm
W: 60 cm
H: 6.3 cm
Material: steel

Variant	Prod. no.	GBP
white	1007474	39.00

PANEL 600
Recessed mounting frame

NEW

L: 60 cm
W: 60 cm
H: 7.1 cm
Material: steel

Variant	Prod. no.	GBP
white	1007575	56.00

PANEL V 625
34W 830/840

CCT

NEW





IP 40
IP 54

115°

UGR 22

50 000 Hours L80B10

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: steel/aluminium

- Material thickness of mounting surface: max. 30 mm
- IP54 room side

LED INSIDE

CRI 80

Down	4100lm | 3000K	4300lm | 4000K

Variant	Prod. no.	GBP
white	**1007497**	**56.00**

Product	Prod. no.	GBP
Safety rope 1.5m Stainless steel	**1007577**	**13.00**



PANEL V 625
34W 830/840 UGR

CCT

NEW



IP 40
IP 54
85°
19
L80B10

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: steel/aluminium

- Material thickness of mounting surface: max. 30 mm
- IP54 room side

LED INSIDE
CRI 80

Down	4000lm | 3000K	4200lm | 4000K

Variant	Prod. no.	GBP
white	1007499	65.00

Product	Prod. no.	GBP
Safety rope 1.5m		
Stainless steel	1007577	13.00

PANEL V DALI 625
34W 830/840 UGR

CCT
DALI

NEW



Dali
IP 40
IP 54
85°
19
L80B10

200-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: steel/aluminium

- Material thickness of mounting surface: max. 30 mm
- IP54 room side

LED INSIDE
CRI 80

Down	4000lm | 3000K	4200lm | 4000K

Variant	Prod. no.	GBP
white	1007505	95.00

Product	Prod. no.	GBP
Safety rope 1.5m		
Stainless steel	1007577	13.00

PANEL 625
Surface-mounting frame

NEW

L: 62.5 cm
W: 62.5 cm
H: 6.3 cm
Material: steel

Variant	Prod. no.	GBP
white	1007475	39.00

PANEL 625
Recessed mounting frame

NEW

L: 62.5 cm
W: 62.5 cm
H: 7.1 cm
Material: steel

Variant	Prod. no.	GBP
white	1007576	56.00


1007517 1001

SURFACE V 390
10/15/20W 830/840 IP44

CCT

NEW





IP44 IK02 120° L80B10 10

220-240V ~50/60Hz | 165/120/84mA
Total wattage: 20W
Material: steel

LED INSIDE CRI 80

Down	1850lm | 3000K	2000lm | 4000K

Variant	Prod. no.	GBP
○ white	**1007516** ●	**43.00**

SURFACE V 390
10/15/20W 830/840 IP44 Sensor

CCT

NEW





IP44 IK02 120° L80B10 10

220-240V ~50/60Hz | 165/120/84mA
Total wattage: 20W
Material: steel

LED INSIDE CRI 80

Down	1850lm | 3000K	2000lm | 4000K

Variant	Prod. no.	GBP
○ white	**1007517** ●	**56.00**

TRACKSPOT V
3Ph. 10/15/20W
927/930/940 24…60°

CCT







IP 20 | IK05 | 24-60° | L70B50 | 330° | 90°

220-240V ~50/60Hz | 240/380/500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

- Three light colours can be set, with the lumen values varying depending on the selection. Only the minimum and maximum values for all settings are displayed

LED INSIDE | CRI 90

1800lm | 2700K | 1980lm | 3000K | 1920lm | 4000K

Variant	Prod. no.	GBP
● black	**1007655**	**137.00**
○ white	**1007654**	**137.00**

1007655 1002

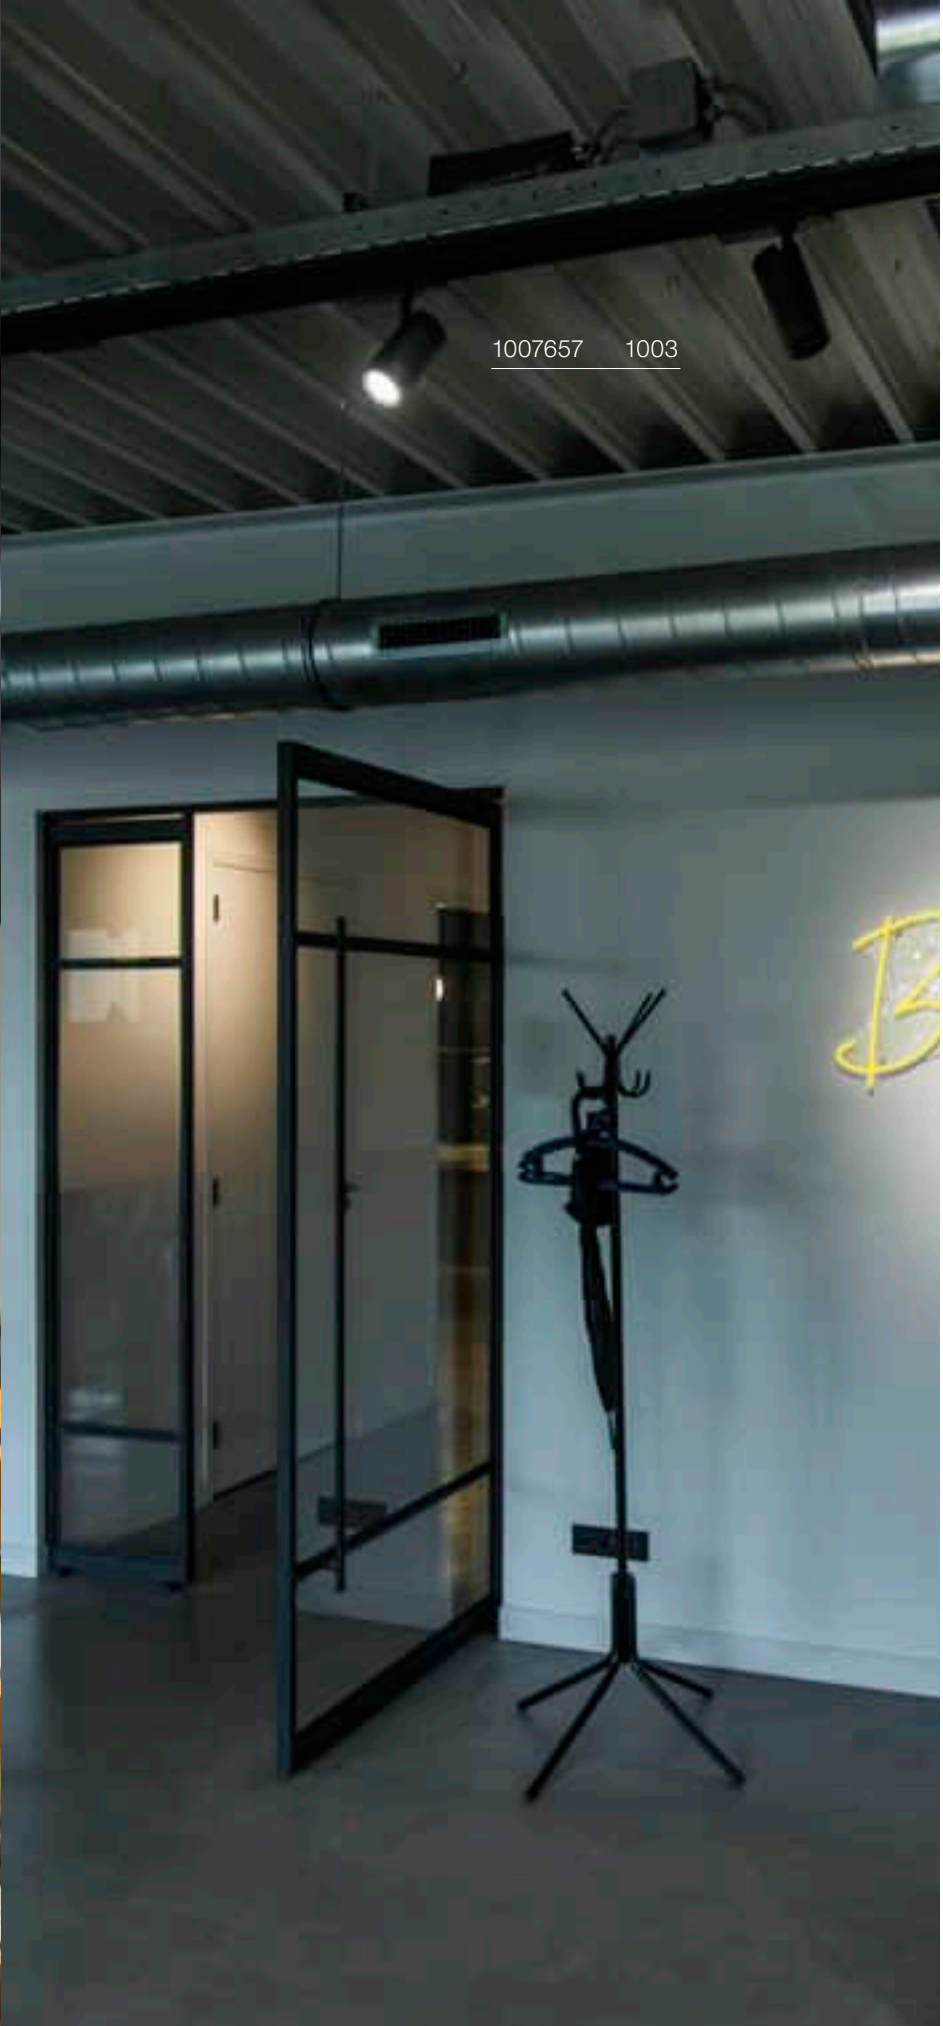

1007657 1003

TRACKSPOT V
3Ph. 25/30/35W
927/930/940 24…60°

CCT





IP 20 | IK05 | 24°-60° | L70B50 | 330° | 90°

220-240V ~50/60Hz | 620/750/850mA
Total wattage: 35W
Material: aluminium/polycarbonate (PC)

- Three light colours can be set, with the lumen values varying depending on the selection. Only the minimum and maximum values for all settings are displayed

LED INSIDE | CRI 90

3090lm | 2700K | 3470lm | 3000K | 3300lm | 4000K

Variant	Prod. no.	GBP
● black	**1007657**	**154.00**
○ white	**1007656**	**154.00**



DOWNLIGHT C
150 930/940 IP54

NEW







220-240V ~50/60 Hz | 200/350/500mA
Total wattage: 8|14|20W
Material: aluminium

- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 90

8W	950lm	3000K
	1000lm	4000K
14W	1550lm	3000K
	1650lm	4000K
20W	2250lm	3000K
	2400lm	4000K

Variant	Prod. no.	GBP
○ white 3000K	**1008621** ●	**77.00**
○ white 4000K	**1008622** ●	**77.00**

DOWNLIGHT C
200 930/940 IP54

NEW







220-240V ~50/60 Hz | 200/400/600mA
Total wattage: 8|16|24W
Material: aluminium

- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 90

8W	1000lm	3000K
	1080lm	4000K
16W	1900lm	3000K
	2050lm	4000K
24W	2850lm	3000K
	3100lm	4000K

Variant	Prod. no.	GBP
○ white 3000K	**1008623** ●	**93.00**
○ white 4000K	**1008624** ●	**93.00**

DOWNLIGHT C
150 930/940 DALI IP54

NEW






9 cm



IP20/54 IK02 55° 22 L80B10

220-240V ~50/60 Hz | 500 mA
Total wattage: 20W
Material: aluminium

- Material thickness of mounting surface: max. 25 mm
- DC-capable

LED INSIDE CRI 90

Down	2250lm | 3000K 2400lm | 4000K

Variant	Prod. no.	GBP
○ white 2250lm | 3000K	**1008625** ●	**111.00**
○ white 2400lm | 4000K	**1008626** ●	**111.00**



DOWNLIGHT C
200 930/940 DALI IP54

NEW







220-240V ~50/60 Hz | 600 mA
Total wattage: 24W
Material: aluminium

- Material thickness of mounting surface: max. 25 mm
- DC-capable

LED INSIDE | CRI 90

Down	2850lm | 3000K 3100lm | 4000K

Variant	Prod. no.	GBP
○ white 2850lm | 3000K	**1008627**	**128.00**
○ white 3100lm | 4000K	**1008628**	**128.00**

DOWNLIGHT V 100
6W 830/840 IP54

CCT

NEW



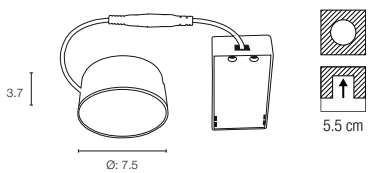

IP20/54 IK02 105° L70B50 15

220-240V ~50/60Hz | 140mA
Total wattage: 6W
Material: polyamide (PA)

LED INSIDE CRI 80

Down	610lm | 3000K	640lm | 4000K

Variant	Prod. no.	GBP
● black	1007508 ●	39.00

DOWNLIGHT V 150
9/15W 830/840 IP54

CCT

NEW



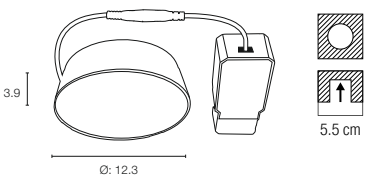

IP20/54 IK02 105° L70B50 15

220-240V ~50/60Hz | 250/400mA
Total wattage: 9/15W
Material: polyamide (PA)

LED INSIDE CRI 80

Down	1750lm | 3000K	1900lm | 4000K

Variant	Prod. no.	GBP
● black	1007509 ●	46.00

DOWNLIGHT V 200
15/21W 830/840 IP54

CCT

NEW



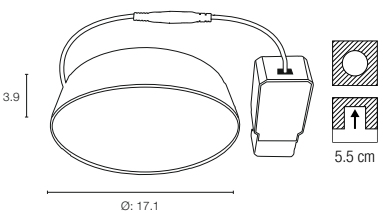

IP20/54 IK02 105° L70B50 15

220-240V ~50/60Hz | 380/550mA
Total wattage: 15/21W
Material: polyamide (PA)

LED INSIDE CRI 80

Down	2360lm | 3000K	2490lm | 4000K

Variant	Prod. no.	GBP
● black	1007510 ●	52.00

The DOWNLIGHT V is only to be used in conjunction with the covers shown on the right-hand side







DOWNLIGHT V 100
Cover, flat

Polycarbonate (PC)
H: 2.5cm
Ø: 10.6cm



Variant	Prod. no.	GBP
● black	1007477	5.00
○ white	1007476	5.00

DOWNLIGHT V 150
Cover, flat

Polycarbonate (PC)
H: 2.5cm
Ø: 16.8cm



Variant	Prod. no.	GBP
● black	1007481	7.00
○ white	1007480	7.00

DOWNLIGHT V 200
Cover, flat

Polycarbonate (PC)
H: 2.5cm
Ø: 21.4cm



Variant	Prod. no.	GBP
● black	1007485	9.00
○ white	1007484	9.00

DOWNLIGHT V 100
Cover, recessed

Polycarbonate (PC)
H: 2.5cm
Ø: 11cm



Variant	Prod. no.	GBP
● black	1007479	5.00
○ white	1007478	5.00

DOWNLIGHT V 150
Cover, recessed

Polycarbonate (PC)
H: 2.5cm
Ø: 17.6cm



Variant	Prod. no.	GBP
● black	1007483	7.00
○ white	1007482	7.00

DOWNLIGHT V 200
Cover, recessed

Polycarbonate (PC)
H: 2.5cm
Ø: 22.6cm



Variant	Prod. no.	GBP
● black	1007487	9.00
○ white	1007486	9.00

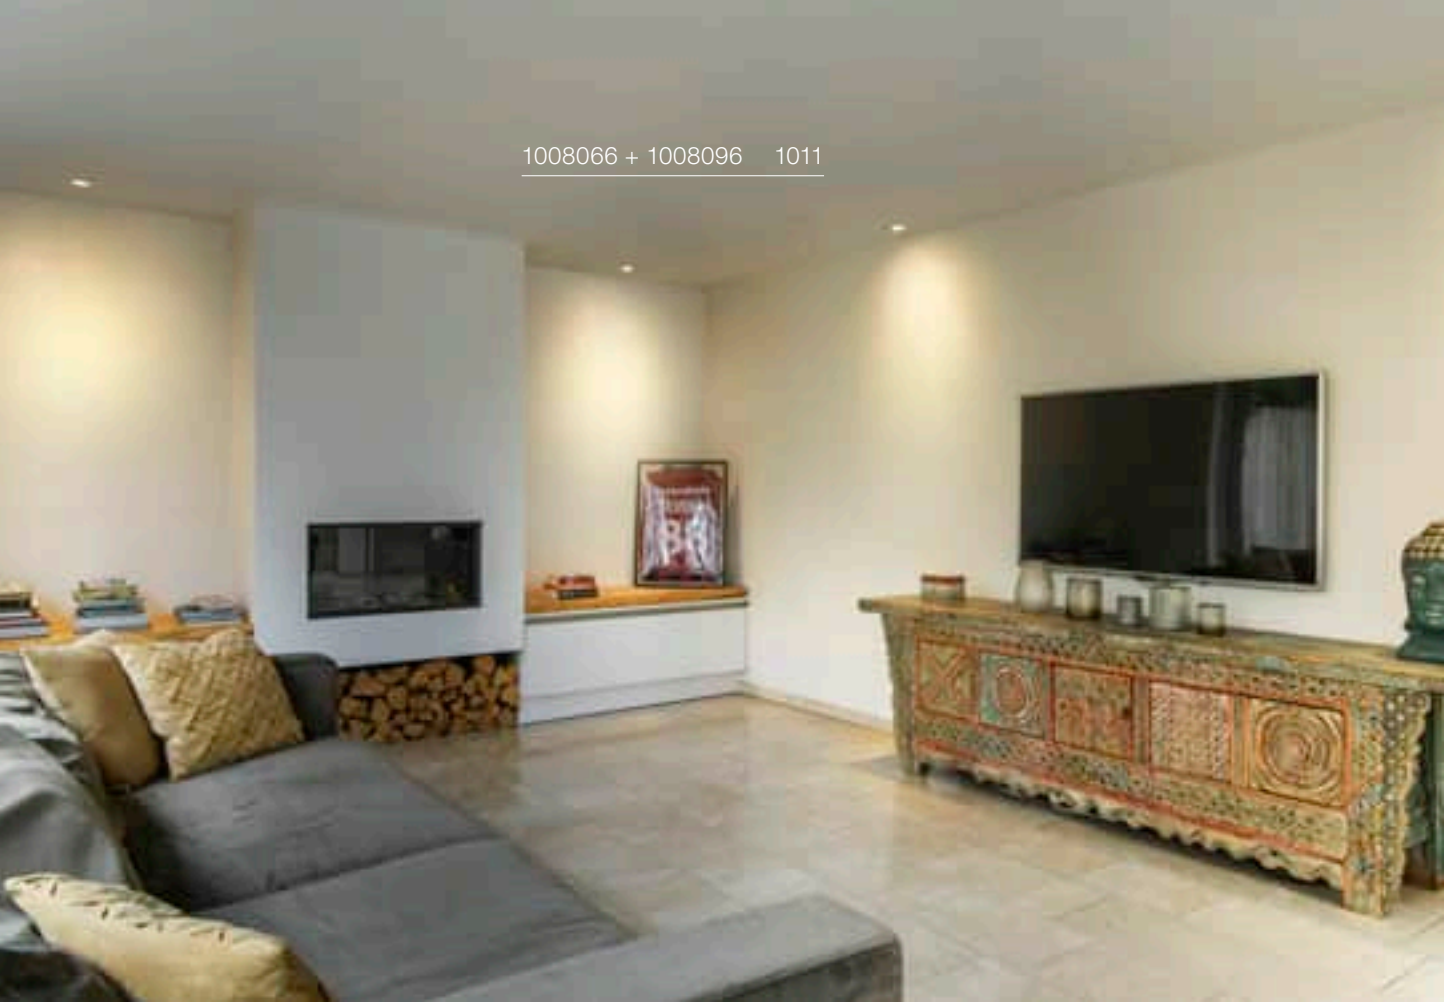

1008066 + 1008096 1011

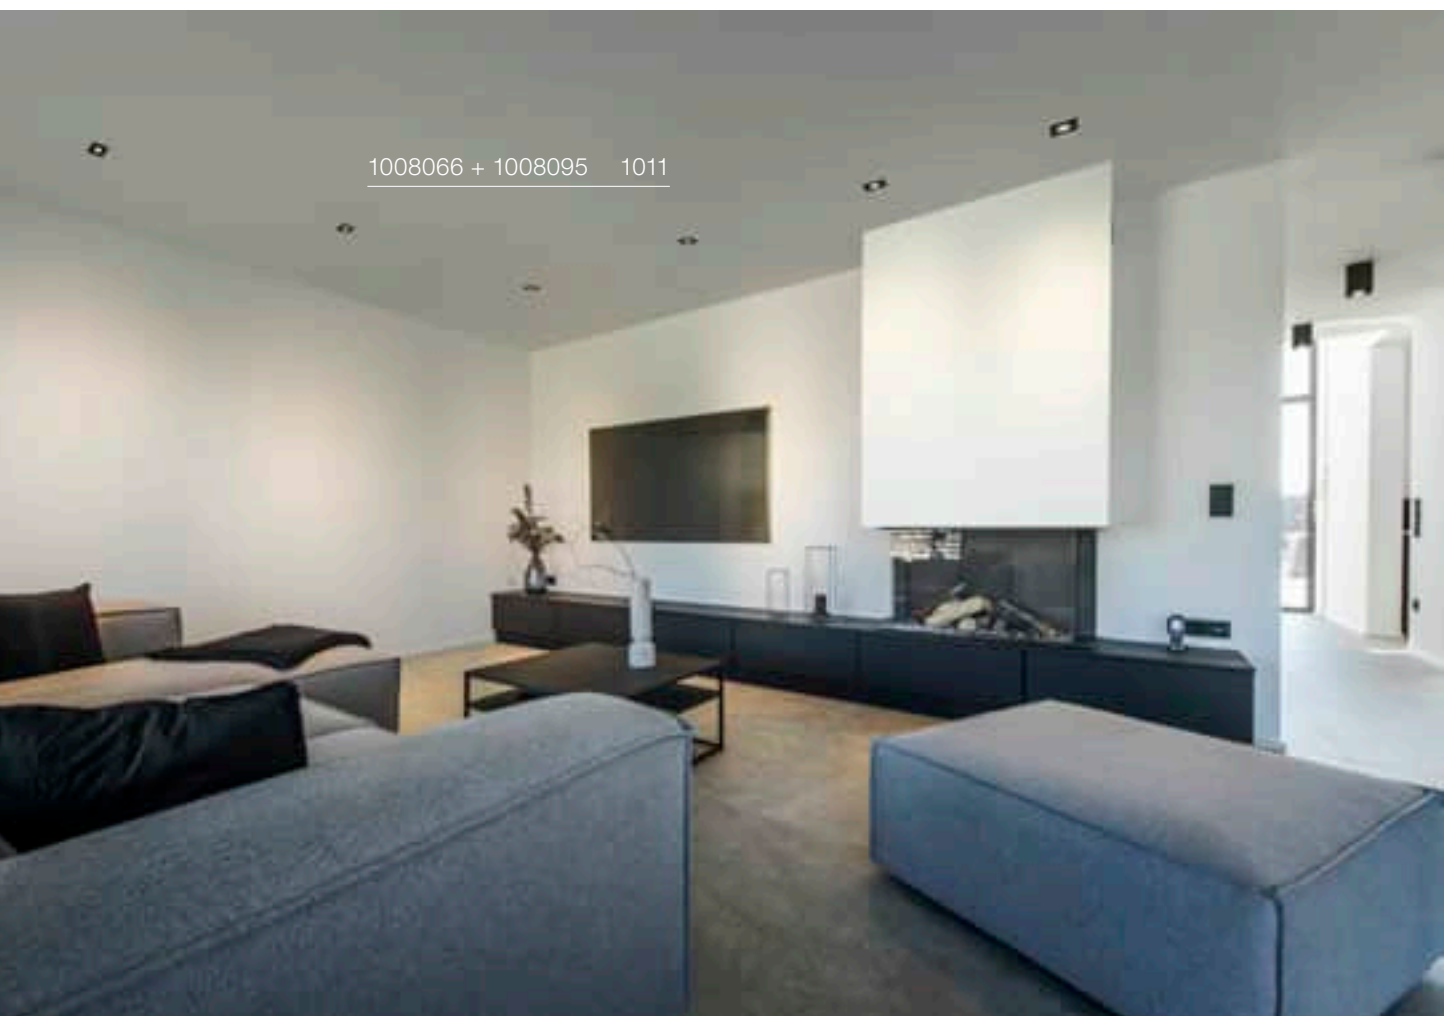

1008066 + 1008095 1011

UNIVERSAL DOWNLIGHT
DL, PHASE, Multipack

CCT

NEW







C | IP20 IP65 | IK02 | 38° | L80B50 | 30° | 10

220-240V ~50/60Hz | 60/mA
Total wattage: 5W/7W
Material: steel

- Material thickness of mounting surface: max. 30 mm
- Content: 12 pieces
- Multipack is supplied without cover, must be ordered separately

LED INSIDE | CRI 90

5W	470lm	2700K
	490lm	3000K
	500lm	4000K
	490lm	6500K
7W	670lm	2700K
	680lm	3000K
	690lm	4000K
	680lm	6500K

Variant	Prod. no.	GBP
● black	1008066	249.00

UNIVERSAL DOWNLIGHT
Cover, non tilt, round

Ø: 8.8 cm
H: 0.5 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
● black	1008067	2.60
○ white	1008068	2.60

UNIVERSAL DOWNLIGHT
Cover, non tilt, square



L: 8.8 cm
W: 8.8 cm
H: 0.55 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
● black	1008096	2.60
○ white	1008095	2.60

UNIVERSAL DOWNLIGHT
Cover, tilt, round



Ø: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
● black	1007091	3.00
○ white	1007092	3.00

UNIVERSAL DOWNLIGHT
Cover, tilt, square



L: 8.8 cm
W: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
● black	1007184	4.00
○ white	1007185	4.00



WATERPROOF V 600
9/18W 830/840 IP66

CCT

NEW





IP66 IK08 L80B10 50

220-240V ~50/60Hz | 350/300/250mA
Total wattage: 17W
Material: polycarbonate (PC)

LED INSIDE CRI 80

Down	2010lm | 3000K	2120lm | 4000K

Variant	Prod. no.	GBP
grey	1008088	56.00

WATERPROOF V DALI 600
18W 840 IP66

DALI

NEW





Dali IP66 IK08 L80B10 17

220-240V ~50/60Hz | 250mA
Total wattage: 18W
Material: polycarbonate (PC)

LED INSIDE CRI 80

Down	2380lm | 4000K

Variant	Prod. no.	GBP
grey	1008087	99.00



WATERPROOF V 1200
18/32W 830/840 IP66

CCT

NEW





IP66 IK08 L80B10 50

220-240V ~50/60Hz | 350/300/250mA
Total wattage: 18/32W
Material: polycarbonate (PC)

LED INSIDE CRI 80

Down	3860lm | 3000K	4130lm | 4000K

Variant	Prod. no.	GBP
grey	1007490	69.00





WATERPROOF V DALI 1200
36W 840 IP66

NEW





Dali | IP 66 | IK08 | L80B10 | 15

220-240V ~50/60Hz | 350mA
Total wattage: 36W
Material: polycarbonate (PC)

LED INSIDE | CRI 80

Down 4470lm | 4000K

Variant	Prod. no.	GBP
grey	1007493	116.00

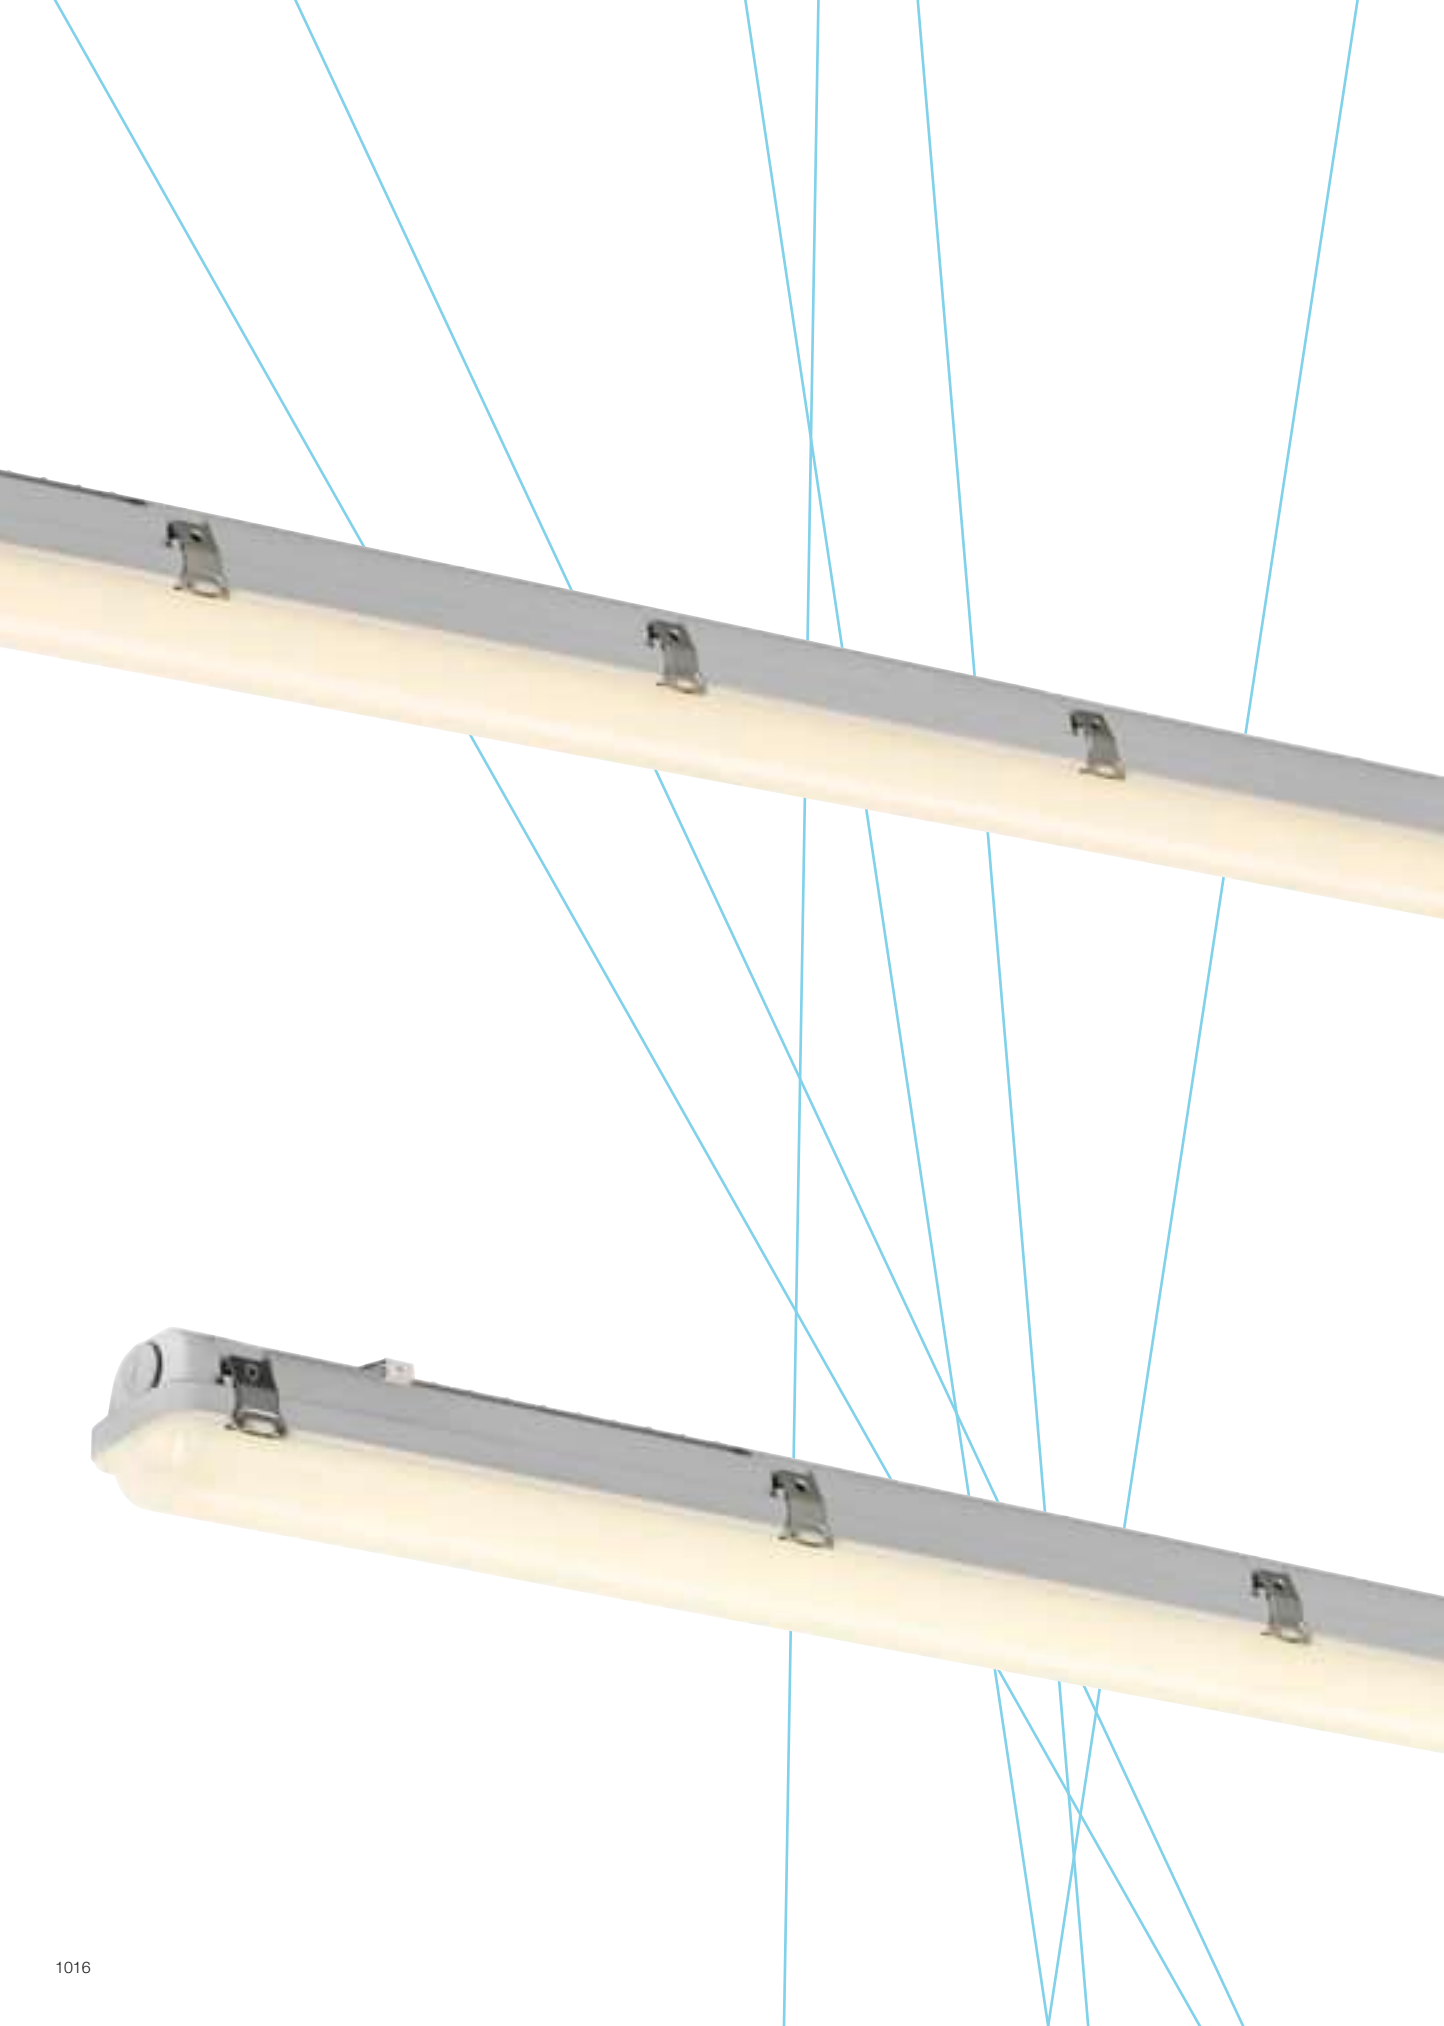

WATERPROOF V 1500
26/45W 830/840 IP66

CCT

NEW







IP66 IK08 L80B10 30

220-240V ~50/60Hz | 350/300/250mA
Total wattage: 26W/45W
Material: polycarbonate (PC)

LED INSIDE CRI 80

Down	5670lm | 3000K	5970lm | 4000K

Variant	Prod. no.	GBP
grey	1007491	82.00

WATERPROOF V DALI 1500
50W 840 IP66

DALI

NEW





Dali IP 66 IK08 L80B10 15

220-240V ~50/60Hz | 350mA
Total wattage: 50W
Material: polycarbonate (PC)

LED INSIDE CRI 80

Down	6640lm | 4000K

Variant	Prod. no.	GBP
grey	1007495	129.00



INDUSTRY BATTEN V 1200
18/32W 830/840/857

CCT

NEW



IP20 IK04 150° L70B50

220-240V ~50/60Hz | 400/720mA
Total wattage: 18/32W
Material: steel

LED INSIDE CRI 80

18W	2300lm	3000K
	2500lm	4000K
	2450lm	5700K
32W	3910lm	3000K
	4350lm	4000K
	4140lm	5700K

Variant	Prod. no.	GBP
○ white	**1007506** ●	**61.00**

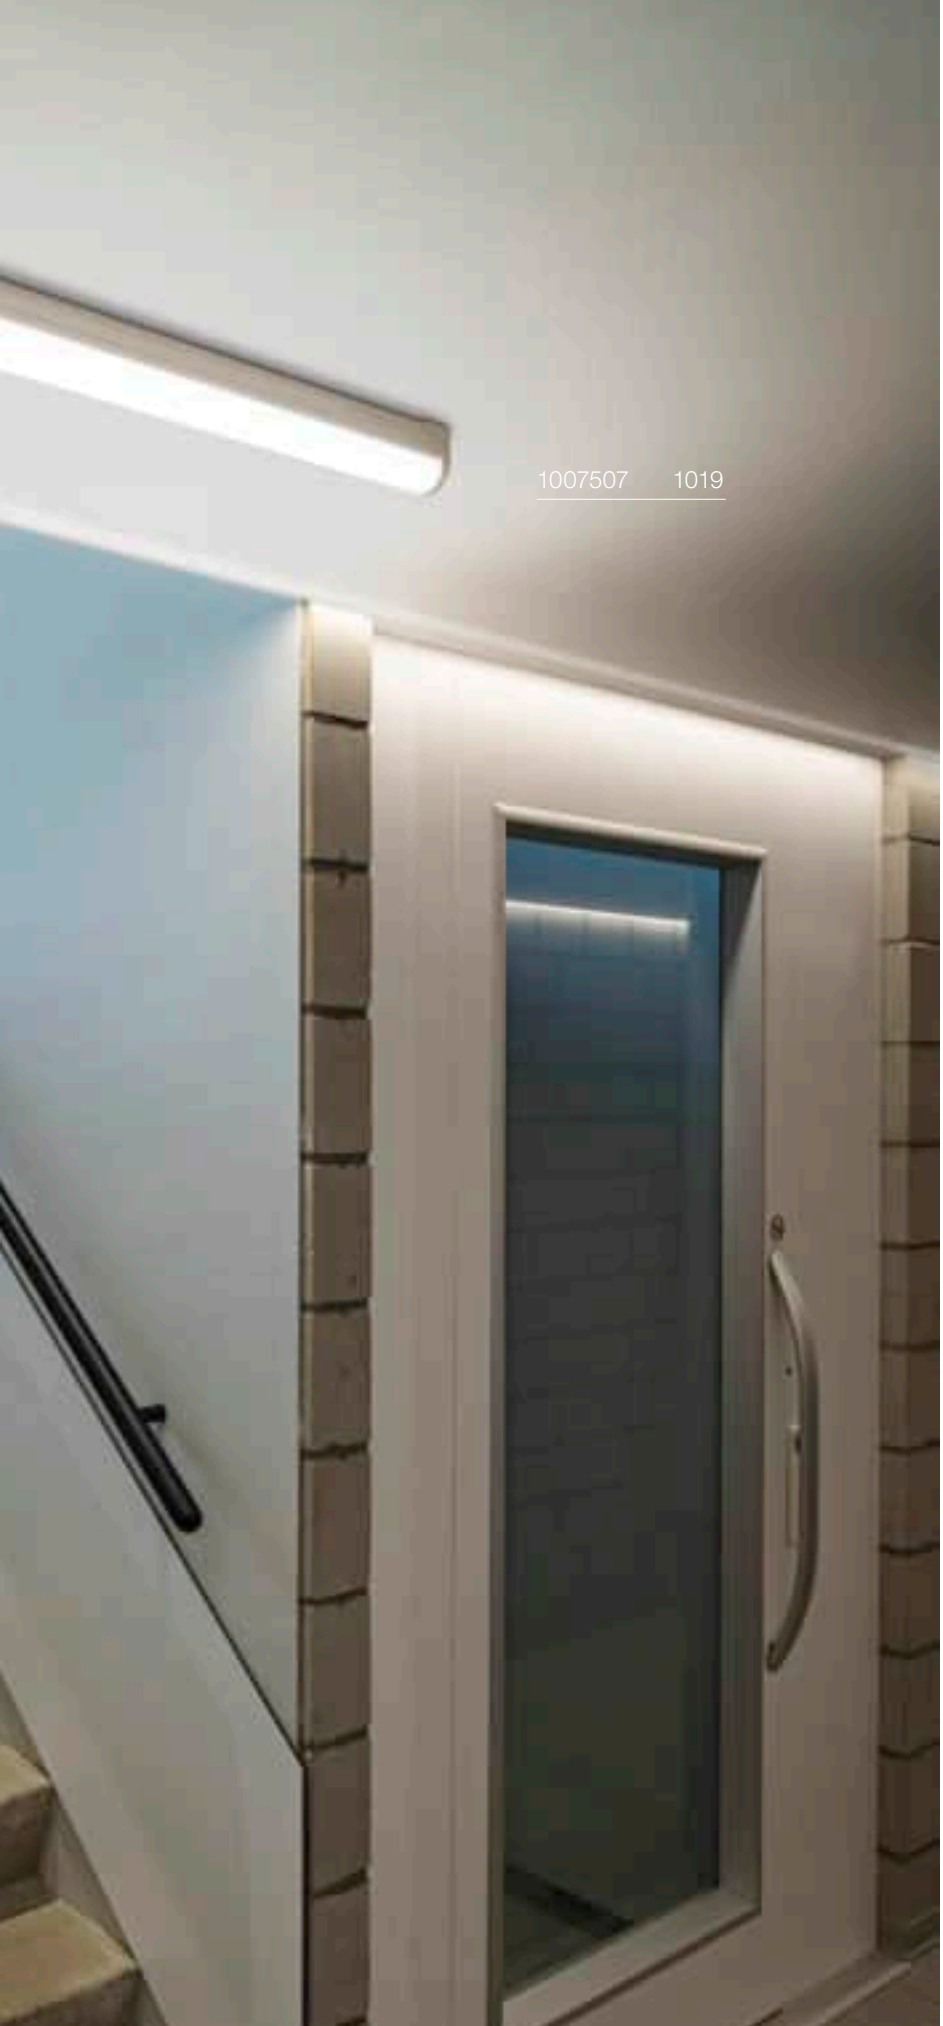

INDUSTRY BATTEN V 1500
22/42W 830/840/857

CCT

NEW



IP20 IK04 150° L70B50

220-240V ~50/60Hz | 500/960mA
Total wattage: 22/42W
Material: steel

LED INSIDE CRI 80

22W	2900lm	3000K
	3150lm	4000K
	3100lm	5700K
42W	5220lm	3000K
	5760lm	4000K
	5460lm	5700K

Variant	Prod. no.	GBP
○ white	**1007507** ●	**73.00**



1008526 1021

HIGHBAY C 340
60/80/100W 840 IP65





IP65 | IK08 | 90° | UGR 22 | L80B10

220-240V ~50/60 Hz | 260/350/440mA
Total wattage: 55|78|100W
Material: aluminium

- open cable end

LED INSIDE	CRI 80		
55W		9700lm	4000K
78W		13650lm	
100W		17500lm	

Variant	Prod. no.	GBP
black	1008525	231.00

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	228730	15.00

HIGHBAY C 400
120/160/200W 840 IP65





IP65 | IK08 | 90° | UGR 22 | L80B10

220-240V ~50/60 Hz | 530/700/880mA
Total wattage: 120|160|200W
Material: aluminium

- open cable end

LED INSIDE	CRI 80		
120W		21450lm	4000K
160W		28000lm	
200W		35000lm	

Variant	Prod. no.	GBP
black	1008526	257.00

Product	Prod. no.	GBP
Connection box IP68 3-pin		
black	228730	15.00

HIGHBAY C DALI 400
200W 840 IP65





Dali | IP65 | IK08 | 90° | UGR 22 | L80B10

220-240V ~50/60 Hz | 530/700/880mA
Total wattage: 200W
Material: aluminium

- open cable end

LED INSIDE	CRI 80		
200W		35000lm	4000K

Variant	Prod. no.	GBP
black	1008527	300.00

Product	Prod. no.	GBP
Connection box IP68 5-pole		
black	228725	17.00



HIGHBAY C
CASAMBI module

NEW



IP65

H: 2 cm
Ø: 5.2 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
○ white	**1008576** ●	**111.00**

HIGHBAY C 340
PC reflector

NEW



H: 17.6 cm
Ø: 41.3 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
transparent	1008529	59.00

HIGHBAY C 400
PC reflector

NEW



H: 18.5 cm
Ø: 48 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
transparent	1008530	77.00

HIGHBAY C
U mounting bracket

NEW



L: 25 cm
W: 4 cm
H: 3.3 cm
Material: steel

Variant	Prod. no.	GBP
silver	1008528	12.00

HIGHBAY C
HF sensor

NEW



IP65

H: 2 cm
Ø: 5.2 cm
Material: plastic PC

Variant	Prod. no.	GBP
white	1008531	42.00

HIGHBAY C
PIR sensor

NEW



IP65

H: 2.8 cm
Ø: 6.1 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
white	1008532	42.00

HIGHBAY C
Remote control

NEW



IP20

L: 14.7 cm
W: 6.9 cm
H: 2.5 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
white	1008575	42.00

HIGHBAY V 330
100/120/170/200W 840 90° IP65

NEW





IP65 IK08 90° L80B50 150

220-240V ~50/60Hz | 830mA
Total wattage: 100/120/170/200W
Material: aluminium

- open cable end

LED INSIDE CRI 80

100W	17000lm	4000K
120W	20000lm	
170W	27000lm	
200W	32000lm	

Variant	Prod. no.	GBP
● black	**1007679** ●	**202.00**

Product	Prod. no.	GBP
Connection box IP68 3-pin		
● black	**228730**	**15.00**

1007679 + 1007677 1024 + 1025



HIGHBAY V 330
Mounting bracket 60°

NEW



L: 20.25 cm
W: 4.96 cm
H: 13.2 cm
Material: steel

Variant	Prod. no.	GBP
black	1007678	21.00

HIGHBAY V 330
Suspension kit 1500

NEW



W: 1.92 cm
H: 150 cm
Material: steel

Variant	Prod. no.	GBP
Stainless steel	1007676	21.00

HIGHBAY V 330
Reflector 100°

NEW



Ø: 43.5 cm
H: 13 cm
Material: aluminium

Variant	Prod. no.	GBP
aluminium	1007677	43.00


1007515 1027

OUTDOOR BULKHEAD V 360
20W 830/840 IP65 IK10

CCT

NEW





IP 65 IK10 110° L80B50

200-240V ~0/50/60Hz | 500mA
Power consumption: 16.5 W
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

1750lm | 3000K | 1850lm | 4000K | 1900lm | 6500K

Variant	Prod. no.	GBP
● black	**1007514** ●	**73.00**

OUTDOOR BULKHEAD V 360
20W 830/840 IP65 IK10 S

CCT

FR

NEW





IP 65 IK10 110° L80B50

200-240V ~0/50/60Hz | 500mA
Power consumption: 16.5 W
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

1750lm | 3000K | 1850lm | 4000K | 1900lm | 6500K

Variant	Prod. no.	GBP
● black	**1007515** ●	**95.00**


1006193 1029

FLOODI S
SP





IP 65 | IK06 | 100° | L70B50 | 180°

220-240V ~50/60Hz
Total wattage: 9.3W
Material: aluminium

LED INSIDE | CRI 80

Down 1040lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1006191**	**26.00**

⊕

Product	Prod. no.	GBP
Sensor		
● black	**1006326**	**25.00**

FLOODI M
SP





IP 65 | IK06 | 100° | L70B50 | 180°

220-240V ~50/60Hz
Total wattage: 30W
Material: aluminium

LED INSIDE | CRI 80

Down 2980lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1006192**	**39.00**

⊕

Product	Prod. no.	GBP
Sensor		
● black	**1006326**	**25.00**

FLOODI L
SP





IP 65 | IK06 | 100° | L70B50 | 180°

220-240V ~50/60Hz
Total wattage: 48W
Material: aluminium

LED INSIDE | CRI 80

Down 5150lm | 3000K

Variant	Prod. no.	GBP
● anthracite	**1006193**	**52.00**

⊕

Product	Prod. no.	GBP
Sensor		
● black	**1006326**	**25.00**



LED TUBE V T8 EM 1200
16W



IP20

220-240V ~50/60Hz
Wattage: 16W
Material: polycarbonate (PC) / glass
Ø: 2.8 cm L: 121 cm
Packaging contents: 10 units

Luminous flux	2000lm
Lamp current	0.073A
Colour rendering index	80
Output	16W
Energy consumption/1000h	16kWh

Variant	Prod. no.	GBP
white | 3000K	**1008680**	**77.00**
white | 4000K	**1008681**	**77.00**
white | 6500K	**1008682**	**77.00**

LED TUBE V T8 EM 1500
22W



IP20

220-240V ~50/60Hz
Wattage: 22W
Material: polycarbonate (PC) / glass
Ø: 2.8 cm L: 151 cm
Packaging contents: 10 units

Luminous flux	2700lm
Lamp current	0.102A
Colour rendering index	80
Output	22W
Energy consumption/1000h	22kWh

Variant	Prod. no.	GBP
white | 3000K	**1008683**	**94.00**
white | 4000K	**1008684**	**94.00**
white | 6500K	**1008685**	**94.00**

LED TUBE C T8 EM 1200
16W



IP20

220-240V ~50/60Hz
Wattage: 16W
Material: polycarbonate (PC) / glass
Ø: 2.8 cm L: 121 cm
Packaging contents: 10 units

Luminous flux	2400lm
Lamp current	0.073A
Colour rendering index	80
Output	16W
Energy consumption/1000h	16kWh

Variant	Prod. no.	GBP
white | 3000K	**1008686**	**120.00**
white | 4000K	**1008687**	**120.00**
white | 6500K	**1008688**	**120.00**

LED TUBE C T8 EM 1500
24W



IP20

220-240V ~50/60Hz
Wattage: 24W
Material: polycarbonate (PC) / glass
Ø: 2.8 cm L: 151 cm
Packaging contents: 10 units

Luminous flux	3600lm
Lamp current	0.108A
Colour rendering index	80
Output	24W
Energy consumption/1000h	24kWh

Variant	Prod. no.	GBP
white | 3000K	**1008689**	**138.00**
white | 4000K	**1008690**	**138.00**
white | 6500K	**1008691**	**138.00**

LED TUBE C T5 EM 1200
26W



IP20

220-240V ~50/60Hz
Wattage: 26W
Material: polycarbonate (PC) / glass
Ø: 1.9 cm L: 116 cm
Packaging contents: 10 units

Luminous flux	4100lm
Lamp current	0.12A
Colour rendering index	80
Output	26W
Energy consumption/1000h	26kWh

Variant	Prod. no.	GBP
white | 3000K	**1008692**	**301.00**
white | 4000K	**1008693**	**301.00**
white | 6500K	**1008694**	**301.00**

LED TUBE C T5 EM 1500
34W



IP20

220-240V ~50/60Hz
Wattage: 34W
Material: polycarbonate (PC) / glass
Ø: 1.9 cm L: 146 cm
Packaging contents: 10 units

Luminous flux	5100lm
Lamp current	0.141A
Colour rendering index	80
Output	34W
Energy consumption/1000h	34kWh

Variant	Prod. no.	GBP
white | 3000K	**1008695**	**361.00**
white | 4000K	**1008696**	**361.00**
white | 6500K	**1008697**	**361.00**



1008163 1040



LED QT | 1034



LED CANDLE | 1034



LED G45 | 1034



LED C35 | 1034,1035

LED TCR-TSE | 1035



LED QR51 | 1035



LED A60 | 1035, 1038, 1039, 1043



LED T32 | 1036



LED QPAR51 | 1036



LED | 1036



LED QPAR111 | 1037, 1038



LED A19 | 1039



LED FLOATING GLOBE | 1040, 1041



LED GLOBE | 1040, 1043



LED TUBE SOFT SPIRAL | 1041



LED SOFT TUBE | 1041



LED T38 | 1041



LED T45 | 1042



LED ST64 | 1042



LED TUBE | 1042



LED RUSTIKA SOFT CAGE | 1042



LED ST58 | 1042



LED G125 | 1043

LED QT14
G9



NEW

IP 20 300°

220-240V ~50/60Hz
Wattage: 3.6W
Material: ceramic
Ø: 1.8 cm L: 5.4 cm

Luminous flux	450lm
Lamp current	0.033A
Colour rendering index	90
Output	3,6W
Energy consumption/1000h	4kWh

Variant	Prod. no.	GBP
white 2700K	**1007455**	**8.00**
white 3000K	**1005286**	**8.00**

LED CANDLE
G9



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 3.5 cm L: 9.5 cm

Manufacturer: Segula GmbH

Luminous flux	260lm
Lamp current	0.016A
Colour rendering index	90
Output	3W
Energy consumption/1000h	3kWh

Variant	Prod. no.	GBP
transparent 2200K	**1008158**	**29.00**

LED QT-DE12
R7S, 78 mm



330°

220-240V ~50/60Hz
Wattage: 9W
Material: polycarbonate (PC)
Diameter: 2.9 cm L: 2.9 cm

Luminous flux	1050lm
Lamp current	0.043A
Colour rendering index	95
Output	9W
Energy consumption/1000h	9kWh

Variant	Prod. no.	GBP
grey 3000K	**1005287**	**21.00**

LED QT-DE12
R7S, 118 mm



330°

220-240V ~50/60Hz
Wattage: 15W
Material: polycarbonate (PC)
Diameter: 2.9 cm L: 2.9 cm

Luminous flux	2000lm
Lamp current	0.068A
Colour rendering index	92
Output	15W
Energy consumption/1000h	15kWh

Variant	Prod. no.	GBP
grey 3000K	**1005288**	**25.00**

LED G45
E14 gold curly filament



NEW

IP20 320°

220-240V ~50/60Hz
Wattage: 2W
Material: glass
Ø: 4.5 cm L: 7.5 cm

Lamp current	10mA
Colour rendering index	>80
Output	2W
Energy consumption/1000h	2kWh

Variant	Prod. no.	GBP
smoky gold 80lm | 1800K	**1008649**	**4.20**
smoky gold 90lm | 2200K	**1008650**	**4.20**

LED C35
E14 gold curly filament



NEW

IP20 320°

220-240V ~50/60Hz
Wattage: 2W
Material: glass
Ø: 3.5 cm L: 9.8 cm

Lamp current	10mA
Colour rendering index	>80
Output	2W
Energy consumption/1000h	2kWh

Variant	Prod. no.	GBP
transparent 80lm | 1800K	**1008647**	**4.50**
transparent 90lm | 2200K	**1008648**	**4.50**

LED C35
E14



320°

220-240V ~50/60Hz
Wattage: 4.2W
Material: glass
Ø: 3.5 cm L: 9.8 cm

Luminous flux	380lm
Lamp current	0.025A
Colour rendering index	90
Output	4,2W
Energy consumption/1000h	5kWh

Variant	Prod. no.	GBP
transparent 2700K	**1005284**	**6.00**

LED C35
E14



320°

220-240V ~50/60Hz
Wattage: 4.2W
Material: glass
Ø: 3.5 cm L: 9.8 cm

Luminous flux	350lm
Lamp current	0.025A
Colour rendering index	90
Output	4,2W
Energy consumption/1000h	5kWh

Variant	Prod. no.	GBP
white 2700K	**1005285**	**8.00**

LED TCR-TSE
GX53

120°

220-240V ~50/60Hz
Wattage: 6.1W
Material: polycarbonate (PC) / polycarbonate (PC)
Diameter: 7.5 cm L: 2.4 cm

Luminous flux	490lm
Lamp current	0.034A
Colour rendering index	93
Output	6,1W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
white 2700K	**1005272**	**10.00**
white 3000K	**1005271**	**10.00**
white 4000K	**1005269**	**10.00**

LED QR51
GU5.3



IP 20 36°

12V AC
Wattage: 5.8W
Material: glass
Ø: 5 cm L: 4.5 cm

Manufacturer: Signify Netherlands B.V.

Luminous flux	450lm
Lamp current	0.63A
Max. luminosity	1300cd
Colour rendering index	90
Output	5,8W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
transparent 2700K	**1001574**	**31.00**
transparent 3000K	**1001575**	**31.00**

LED A60
GU10



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 6 cm L: 11 cm

Manufacturer: Segula GmbH

Luminous flux	400lm
Lamp current	0.035A
Colour rendering index	90

Variant	Prod. no.	GBP
transparent 2200K	**1008154** ●	**38.00**

LED A60
GU10



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 6 cm L: 11 cm

Manufacturer: Segula GmbH

Luminous flux	650lm
Lamp current	0.035A
Colour rendering index	90

Variant	Prod. no.	GBP
transparent 2200K	**1008375** ●	**38.00**

LED T32 FILAMENT GU10 BULB
GU10



IP 20

220-240V ~50/60Hz
Wattage: 3.2W
Material: glass
Ø: 3.2 cm L: 10 cm

Manufacturer: Segula GmbH

Luminous flux	270lm
Lamp current	0.0175A
Colour rendering index	90
Output	3,2W

Variant	Prod. no.	GBP
transparent 2700K	**1006321**	**34.00**

LED QPAR51
GU10



IP 20 36°

220-240V ~50/60Hz
Wattage: 6W
Material: glass
Ø: 5 cm L: 5 cm

Luminous flux	360lm
Lamp current	0.033A
Max. luminosity	680cd
Colour rendering index	93
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
silver 2200-2700K	**1005273**	**9.00**

LED QPAR51
GU10



IP 20 38°

220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Ø: 5 cm L: 5 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Colour rendering index	92
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
black 2700K	**1005077**	**7.00**
black 3000K	**1005080**	**7.00**
black 4000K	**1005083**	**7.00**

LED
GU10



IP 20 38°

220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Ø: 5 cm L: 5 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Colour rendering index	92
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
white 2700K	**1005076**	**7.00**
white 3000K	**1005079**	**7.00**
white 4000K	**1005082**	**7.00**

LED QPAR51
GU10



IP 20 38°

220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Ø: 5 cm L: 5 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Colour rendering index	92
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
grey 2700K	**1005075**	**7.00**
grey 3000K	**1005078**	**7.00**
grey 4000K	**1005081**	**7.00**

LED QPAR51
GU10



NEW

IP 20 36°

220-240V ~50/60Hz
Wattage: 2.4W
Material: glass
Ø: 5 cm L: 5.4 cm

Luminous flux	230lm
Lamp current	0.025A
Max. luminosity	450cd
Colour rendering index	80
Output	2,4W
Energy consumption/1000h	3kWh

Variant	Prod. no.	GBP
transparent 2700K	**1007230**	**5.00**
transparent 3000K	**1007231**	**5.00**

LED QPAR111
GU10



IP 20 55°

220-240V ~50/60Hz
Wattage: 12W
Material: aluminium
Ø: 11 cm L: 7 cm

Luminous flux	670lm
Lamp current	0.05A
Max. luminosity	906cd
Colour rendering index	90
Output	12W
Energy consumption/1000h	12kWh

Variant	Prod. no.	GBP
aluminium 2700K	**1005297**	**73.00**
aluminium 3000K	**1005298**	**73.00**
aluminium 4000K	**1005299**	**73.00**

LED QPAR 111
GU10



IP 20 10°

220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Ø: 11.1 cm L: 7 cm

Luminous flux	900lm
Lamp current	0.058A
Max. luminosity	11000cd
Colour rendering index	90
Output	12,5W
Energy consumption/1000h	13kWh

Variant	Prod. no.	GBP
silver 2700K	**1005275**	**48.00**
silver 3000K	**1005278**	**48.00**
silver 4000K	**1005281**	**48.00**

LED QPAR 111
GU10



IP 20 30°

220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Ø: 11.1 cm L: 7 cm

Luminous flux	950lm
Lamp current	0.058A
Max. luminosity	3000cd
Colour rendering index	93
Output	12,5W
Energy consumption/1000h	13kWh

Variant	Prod. no.	GBP
silver 2700K	**1005276**	**43.00**
silver 3000K	**1005279**	**43.00**
silver 4000K	**1005282**	**43.00**

LED QPAR 111
GU10



IP 20 60°

220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Ø: 11.1 cm L: 7 cm

Luminous flux	1000lm
Lamp current	0.058A
Max. luminosity	1000cd
Colour rendering index	93
Output	12,5W
Energy consumption/1000h	13kWh

Variant	Prod. no.	GBP
silver 2700K	**1005277**	**43.00**
silver 3000K	**1005280**	**43.00**
silver 4000K	**1005283**	**43.00**

LED QPAR111
GU10



IP 20 38°

220-240V ~50/60Hz
Wattage: 8W
Material: glass
Ø: 11.1 cm L: 6.1 cm

Luminous flux	680lm
Lamp current	0.046A
Max. luminosity	1300cd
Colour rendering index	93
Output	8W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
transparent 2700K	**1005274**	**26.00**

LED QPAR111
GU10



IP 20 25°

220-240V ~50/60Hz
Wattage: 7.3W
Material: plastic/aluminium
Ø: 11.1 cm L: 7.1 cm

Luminous flux	530lm
Lamp current	0.051A
Max. luminosity	1400cd
Colour rendering index	93
Output	7,3W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
silver 2700K	**1005291**	**22.00**
silver 3000K	**1005292**	**22.00**



LED QPAR111
GU10



IP 20 40°

220-240V ~50/60Hz
Wattage: 7.3W
Material: plastic/aluminium
Ø: 11.1 cm L: 7.1 cm

Luminous flux	500lm
Lamp current	0.051A
Max. luminosity	1000cd
Colour rendering index	93
Output	7,3W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
silver 2700K	**1005294**	**22.00**
silver 3000K	**1005295**	**22.00**
silver 4000K	**1005296**	**22.00**

LED A60
E27, tunable 2700-6500K, smart



IP 20 230°

220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66)
Ø: 6 cm L: 11 cm

Luminous flux	800lm
Lamp current	0.067A
Colour rendering index	92
Output	9W
Energy consumption/1000h	9kWh

Variant	Prod. no.	GBP
white 2700-6500K	**1005317**	**28.00**

LED A60
E27, RGBW, smart



IP 20 230°

220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Ø: 6 cm L: 11 cm

Luminous flux	800lm
Lamp current	0.073A
Colour rendering index	92
Output	9W
Energy consumption/1000h	9kWh

Variant	Prod. no.	GBP
white	**1005318**	**39.00**

LED A19 SOFT CAGE
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 6 cm L: 11 cm

Manufacturer: Segula GmbH

Luminous flux	570lm
Lamp current	0.034A
Colour rendering index	90
Output	6W

Variant	Prod. no.	GBP
transparent 2200K	**1008153**	**46.00**

LED A60
E27



IP 20 220°

220-240V ~50/60Hz
Wattage: 13.2W
Material: plastic
Ø: 6 cm L: 12 cm

Luminous flux	1300lm
Lamp current	0.062A
Colour rendering index	93
Output	13,2W
Energy consumption/1000h	13kWh

Variant	Prod. no.	GBP
white 2700K	**1005302**	**11.00**

LED A60
E27 clear filament high efficiency



NEW

IP20 320°

220-240V ~50/60Hz
Wattage: 3.8W
Material: glass
Ø: 6 cm L: 10.8 cm

Luminous flux	806lm
Lamp current	37mA
Max. luminosity	840lm
Colour rendering index	>80
Output	3.8W
Energy consumption/1000h	4kWh

Variant	Prod. no.	GBP
transparent 2700K	**1008641**	**6.50**
transparent 3000K	**1008642**	**6.50**

LED A60
E27 clear filament



NEW

IP20 320°

220-240V ~50/60Hz
Wattage: 7W
Material: glass
Ø: 6 cm L: 10.8 cm

Luminous flux	806lm
Lamp current	46mA
Max. luminosity	810lm
Colour rendering index	>80
Output	7W
Energy consumption/1000h	7kWh

Variant	Prod. no.	GBP
transparent 2700K	**1008643**	**2.75**
transparent 3000K	**1008644**	**2.75**

LED A60
E27



320°

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Ø: 6 cm L: 10.5 cm

Luminous flux	800lm
Lamp current	0.038A
Colour rendering index	93
Output	7,5W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
transparent 2700K	**1005303**	**9.00**

LED FLOATING GLOBE 150
twisted smokey grey, E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 15 cm L: 18.5 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	230lm
Lamp current	0.035A
Colour rendering index	85
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
smoky grey 1900K	**1008151**	**72.00**

LED GLOBE 125
Illusion, two Crescent, E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 12.5 cm L: 18 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	400lm
Lamp current	0.04A
Colour rendering index	90
Output	8W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
smoky grey 1900K	**1008159**	**77.00**

LED GLOBE 125
Illusion, slanting top, E27

A G



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 12.5 cm L: 18 cm

Manufacturer: Segula GmbH

Luminous flux	350lm
Lamp current	0.035A
Colour rendering index	90
Output	5W
Energy consumption/1000h	5kWh

Variant	Prod. no.	GBP
smoky grey 2200K	**1008160**	**68.00**

LED GLOBE 125
Illusion, crescent slanting, E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 12.5 cm L: 18 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	310lm
Lamp current	0.03A
Colour rendering index	90
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
smoky grey 1900K	**1008161**	**59.00**

LED FLOATING GLOBE 125
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 12.5 cm L: 16.5 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	220lm
Lamp current	0.035A
Colour rendering index	85
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
smoky grey 1900K	**1008155**	**59.00**

LED FLOATING GLOBE 150
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 15 cm L: 18.5 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	260lm
Lamp current	0.035A
Colour rendering index	85
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
smoky grey 2200K	**1008163**	**72.00**

LED FLOATING GLOBE 200
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 20 cm L: 23 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	220lm
Lamp current	0.035A
Colour rendering index	85
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
smoky grey 1900K	**1008164**	**89.00**

LED FLOATING GLOBE 300
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 30 cm L: 32 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	300lm
Lamp current	0.045A
Colour rendering index	85
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
smoky grey 1900K	**1008165**	**214.00**

LED BULB SOFT CAGE A19
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 6 cm L: 11 cm

Lamp current	0.035A
Colour rendering index	90

Variant	Prod. no.	GBP
smoky grey	**1008153**	**46.00**

LED TUBE SOFT SPIRAL
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 3.2 cm L: 19 cm

Manufacturer: Segula GmbH

Luminous flux	570lm
Lamp current	0.035A
Colour rendering index	90
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
transparent 2200K	**1008152**	**55.00**

LED SOFT TUBE T300
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 3.2 cm L: 30 cm

Due to the colour temperature of 1900K, this light source is a decorative item and does not require energy labelling.

Manufacturer: Segula GmbH

Luminous flux	400lm
Lamp current	0.045A
Colour rendering index	90
Output	8W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
transparent 1900K	**1008374**	**42.00**

LED T38
E27



IP 20 240°

220-240V ~50/60Hz
Wattage: 8W
Material: plastic
Ø: 3.8 cm L: 11.6 cm

Luminous flux	880lm
Lamp current	0.035A
Colour rendering index	94
Output	8W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
white 3000K	**1005289**	**9.00**
white 4000K	**1005290**	**9.00**

LED T45
E27



IP 20 240°

220-240V ~50/60Hz
Wattage: 13.5W
Material: plastic
Ø: 4.5 cm L: 14 cm

Luminous flux	1520lm
Lamp current	0.06A
Colour rendering index	94
Output	13,5W
Energy consumption/1000h	14kWh

Variant	Prod. no.	GBP
white		
3000K	**1005307**	**11.00**
white		
4000K	**1005308**	**11.00**

LED TUBE
High Brightness, E27



NEW

IP20 330°

220-240V ~50/60Hz
Output: 11W
Material: glass
Ø: 3.2 cm L: 17.5 cm

Manufacturer: Segula GmbH

Luminous flux	1250lm
Lamp current	0.06A
Colour rendering index	90
Output	11W
Energy consumption/1000h	11kWh

Variant	Prod. no.	GBP
transparent		
2700K	**1008162**	**72.00**

LED ST64
E27



320°

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Ø: 6.4 cm L: 14.5 cm

Luminous flux	700lm
Lamp current	0.038A
Colour rendering index	90
Output	7,5W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
gold		
2500K	**1005265**	**23.00**

LED RUSTIKA SOFT CAGE
E27



NEW

IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 6.5 cm L: 14.5 cm

Manufacturer: Segula GmbH

Luminous flux	570lm
Lamp current	0.034A
Colour rendering index	90
Output	6W
Energy consumption/1000h	6kWh

Variant	Prod. no.	GBP
transparent	**1008156**	**46.00**

LED ST64
E27 gold curly filament



NEW

IP20 320°

220-240V ~50/60Hz
Wattage: 2W
Material: glass
Ø: 6.4 cm L: 14.2 cm

Luminous flux	300lm
Lamp current	34mA
Colour rendering index	>80
Output	4W
Energy consumption/1000h	4kWh

Variant	Prod. no.	GBP
smoky gold		
260lm | 1800K	**1008645**	**5.00**
smoky gold		
300lm | 2200K	**1008646**	**5.00**

LED ST58
E27



320°

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Ø: 5.8 cm L: 14.2 cm

Luminous flux	800lm
Lamp current	0.038A
Colour rendering index	93
Output	7,5W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
transparent		
2700K	**1005268**	**11.00**

LED A60
E27, Mirrorhead, Chrom



180°

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Ø: 6 cm L: 10.5 cm

Luminous flux	720lm
Lamp current	0.038A
Colour rendering index	92
Output	7,5W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
chrome		
2700K	**1005305**	**17.00**

LED G125
E27



320°

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Ø: 12.5 cm L: 17.8 cm

Luminous flux	800lm
Lamp current	0.038A
Colour rendering index	93
Output	7,5W
Energy consumption/1000h	8kWh

Variant	Prod. no.	GBP
transparent		
2700K	**1005310**	**16.00**

LED GLOBE 125
Half Moon frosted, E27



IP20 330°

220-240V ~50/60Hz
Material: glass
Ø: 12.5 cm L: 18 cm

Manufacturer: Segula GmbH

Luminous flux	650lm
Lamp current	0.035A
Colour rendering index	90
Output	6,5W
Energy consumption/1000h	7kWh

Variant	Prod. no.	GBP
frosted		
2700K	**1008157**	**42.00**




132690 + 132670
299 + 1057



E-TRANSFORMER | 1046



TENSEO TRANSFORMER | 1046



DALI INTERFACE | 1046



CONVERTER | 1046



DALI UNIVERSAL DIMMER | 1046



DALI CONTROLLER | 1047



CONTROLLER | 1047



LED POWER SUPPLY | 1047, 1048, 1049



DIMMABLE LED POWER SUPPLY | 1049, 1050



LED DRIVER | 1050, 1051, 1052, 1053, 1054



DRIVER STRAIN RELIEF | 1054



DIMMABLE LED DRIVER | 1055



ZIGBEE MODULE FOR DALI DRIVER | 1056



CASAMBI MODULE FOR DALI DRIVER | 1056



DT8 CONTROLLER | 1056



SMART REMOTE CONTROL | 1056



EMERGENCY LIGHT FEATURE | 1056



CEILING HOOK | 1057



CABLE CLAMP | 1057



GLENOS® | 1057



TEXTILE CABLE | 1057



GU10 LED CONNECTION BOX | 1057



GU10 CONNECTION BOX | 1057



CABLE | 1058



GU10 SOCKET | 1058



CONNECTION BOX | 1058



T-CONNECTOR BOX | 1058



CONNECTION BOX | 1058

E-TRANSFORMER
60W | 12V Dimmable



NEW

C,L | IP20 | IK02

220-240V ~50/60Hz
L: 10.6 cm W: 3.3 cm H: 2.2 cm

Output voltage	11.2V-11.5V
Wattage of	3W
Wattage up to	60W
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008675**	**24.00**

TENSEO TRANSFORMER
12V AC | 50VA conventional



L | IP 20

220-240V ~50/60Hz
H: 11 cm Ø: 11.1 cm
Material: steel/brass

Output voltage	12V AC
Wattage up to	60W
Thermal protection	130°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
black	**1002691**	**96.00**
white	**1002692**	**96.00**
chrome	**1002693**	**99.00**

TENSEO TRANSFORMER
12V AC | 105VA conventional



L | IP 20

220-240V ~50/60Hz
H: 11 cm Ø: 11.1 cm
Material: brass/glass

Output voltage	12V AC
Wattage up to	105W
Thermal protection	130°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**138981**	**116.00**
chrome	**138982**	**127.00**

TENSEO TRANSFORMER
12V AC | 210VA conventional



L | IP | IP 20

220-240V ~50/60Hz
H: 11 cm Ø: 13.5 cm
Material: steel/brass

Output voltage	12V AC
Wattage up to	210W
Thermal protection	130°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**138991**	**175.00**
chrome	**138992**	**183.00**

DALI INTERFACE
1-10V + on/off



1-10V | IP | IP 20

L: 5.85 cm W: 3.25 cm H: 1.5 cm
Material: plastic

- Suitable for controlling electronic ballasts with 1-10V control input
- Galvanic isolation of DALI input and 1-10V output

Output voltage	250V AC
Wattage up to	1000W

Variant	Prod. no.	GBP
grey	**1002218**	**231.00**

CONVERTER
Trailing-edge phase dimmer, with DALI control input



Uni | Dali | IP | IP 20

100-240V ~50/60Hz
L: 4.6 cm W: 4.5 cm H: 2 cm
Material: polycarbonate (PC)

- The dimmer converter is a phase-cut dimmer with DALI and push control interface.

Output voltage	100-240
Wattage of	0W
Wattage up to	200W

Variant	Prod. no.	GBP
white	**1006452**	**68.00**

DALI UNIVERSAL DIMMER
10-300W



IP 20

L: 12.02 cm W: 3.02 cm H: 2.16 cm
Material: plastic

- Suitable for R, L, and C thanks to automatic load detection. DALI power consumption: 6mA

Output voltage	230V AC
Wattage of	10W
Wattage up to	300W

Variant	Prod. no.	GBP
grey	**1002221**	**308.00**

DALI CONTROLLER
24V DC



IP 20

10V-24V DC
L: 11.6 cm W: 4.2 cm H: 1.8 cm
Material: polycarbonate (PC)

- 1 channel LED strip push-dim and DALI control

Output voltage	10-24V DC
Number of secondary outputs	1

Variant	Prod. no.	GBP
white/grey	**1003106**	**55.00**

CONTROLLER
LED Stip CCT / RGBW



IP 20

12V/24V DC
L: 14.5 cm W: 4.65 cm H: 1.6 cm
Material: polycarbonate (PC)

- Brightness control for single-colour LED strips
- Colour temparture controller for CCT strips
- Full colour control of RGB+CCT strips
- Controllable via Zigbee radio protocol

Output voltage	12-24V DC
Wattage of	48W
Wattage up to	96W
Thermal protection	100°C

Variant	Prod. no.	GBP
white	**1006348**	**69.00**

LED POWER SUPPLY
24V | 24W



IP20

220-240V ~50/60Hz
L: 13.7 cm W: 5 cm H: 1.55 cm

Output voltage	24 0
Wattage of	0W
Wattage up to	24W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008653**	**34.00**

LED POWER SUPPLY
24V | 36W



IP20

220-240V ~50/60Hz
L: 17 cm W: 5.7 cm H: 1.8 cm

Output voltage	24 0
Wattage of	0W
Wattage up to	36W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008654**	**47.00**

LED POWER SUPPLY
24V | 60W



IP20

220-240V ~50/60Hz
L: 17 cm W: 5.7 cm H: 1.8 cm

Output voltage	24 0
Wattage of	0W
Wattage up to	60W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008655**	**56.00**

LED POWER SUPPLY
12V | 24W, round



NEW

IP20

220-240V ~50/60Hz
H: 2.5 cm Ø: 5.5 cm

Output voltage	12 0
Wattage of	1,2W
Wattage up to	24W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008651	23.00

LED POWER SUPPLY
24V | 25W, round



NEW

IP20

220-240V ~50/60Hz
H: 2.5 cm Ø: 5.5 cm

Output voltage	24 0
Wattage of	1,2W
Wattage up to	25W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008652	23.00

LED POWER SUPPLY
30W | 24V DC including strain relief



IP 20

220-240V ~50/60Hz
L: 30 cm W: 3 cm H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	30W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007250	43.00

LED POWER SUPPLY
100W | 24V DC including strain relief



IP 20

220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007251	69.00

LED POWER SUPPLY
150W | 24V DC including strain relief



IP 20

220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	150W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007252	86.00

LED POWER SUPPLY
250W | 24V DC including strain relief



IP 20

220-240V ~50/60Hz
L: 40 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	250W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007253	103.00

LED POWER SUPPLY
25W | 24V



IP 20

220-240V ~50/60Hz
L: 12.8 cm W: 5.2 cm H: 3 cm
Material: polycarbonate (PC) / polycarbonate (PC)

Output voltage	24V/DC
Wattage of	9.6W
Wattage up to	25W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
○ white/blue	**1006336**	**31.00**

LED POWER SUPPLY
50W | 24V



IP 20

220-240V ~50/60Hz
L: 18.4 cm W: 6.1 cm H: 3.2 cm
Material: polycarbonate (PC) / polycarbonate (PC)

Output voltage	24V DC
Wattage of	12W
Wattage up to	50W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
○ white/blue	**1003104**	**43.00**

LED POWER SUPPLY
100W | 24V DC



IP 20

220-240V ~50/60Hz
L: 21 cm W: 6.7 cm H: 3.4 cm
Material: polycarbonate (PC) / polycarbonate (PC)

Output voltage	24V DC
Wattage of	33W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
○ white/blue	**1003105**	**104.00**

LED POWER SUPPLY
30W | 24V DC DALI dimmable including strain relief



IP 20

220-240V ~50/60Hz
L: 30 cm W: 3 cm H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	12W
Wattage up to	30W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
○ white	**1007254**	**52.00**

LED POWER SUPPLY
100W | 24V DC DALI dimmable including strain relief



IP 20

220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	30W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
○ white	**1007255**	**95.00**

LED POWER SUPPLY
150W | 24V DC DALI dimmable including strain relief



IP 20

220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	45W
Wattage up to	150W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
○ white	**1007256**	**121.00**

LED POWER SUPPLY
250W | 24V DC DALI dimmable including strain relief



IP 20

220-240V ~50/60Hz
L: 40 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	75W
Wattage up to	250W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1007257**	**138.00**

LED POWER SUPPLY
60W | DALI, 24V, 2 channel DALI dimmable



IP 20

220-240V ~50/60Hz
L: 20.2 cm W: 5.8 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	5W
Wattage up to	60W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	2

Variant	Prod. no.	GBP
white	**1006133**	**132.00**

LED POWER SUPPLY
100W | 24V | 2 channel DALI dimmable



IP 20

220-240V ~50/60Hz
L: 34.7 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	5W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	2

Variant	Prod. no.	GBP
white	**1006134**	**158.00**

LED DRIVER
4W | 350mA



NEW

IP20

220-240V ~50/60Hz
L: 4.75 cm W: 2.72 cm H: 2 cm
Material: plastic PC

Output voltage	2.7V-9.5V
Wattage of	1W
Wattage up to	3,32W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008656**	**16.00**

LED DRIVER
4W | 700mA



NEW

IP20

220-240V ~50/60Hz
L: 4.75 cm W: 2.72 cm H: 2 cm
Material: plastic PC

Output voltage	2.7V-4.5V
Wattage of	1,9W
Wattage up to	3,15W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008657**	**16.00**

LED DRIVER
10W | 350mA round



NEW

IP44

220-240V ~50/60Hz
H: 202 cm Ø: 4.23 cm
Material: plastic PC

Output voltage	19V-29V
Wattage of	6,65W
Wattage up to	10,15W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008658**	**25.00**

LED DRIVER
15W | 700mA round



NEW

IP44

220-240V ~50/60Hz
H: 2.1 cm Ø: 5 cm
Material: plastic PC

Output voltage	13 21
Wattage of	9,1W
Wattage up to	14,7W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008659	25.00

LED DRIVER
20W | 350mA



IP 20 IK03

220-240V 0/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	2-54V DC
Wattage of	0.7W
Wattage up to	19W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007225	26.00

LED DRIVER
21W | 500mA including strain relief



IP 20 IK03

220-240V 0/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	2-42V DC
Wattage of	1W
Wattage up to	21W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007226	26.00

LED DRIVER
20W | 350mA | Dimmable



IP 20 IK03

220-240V 0/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	28-50V DC
Wattage of	9.8W
Wattage up to	17.5W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007228	35.00

LED DRIVER
20W | 350mA/500mA | PHASE



IP 20 IK03

220-240V 0/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

- Adjustable via DIP:
  350mA (10.5W) | 500mA (15W)

Output voltage	10-30V DC
Wattage of	3.5W
Wattage up to	15W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007227	35.00

LED DRIVER
10W | 180-270mA PHASE



NEW

220-240V ~50/60Hz
L: 12.2 cm W: 4.1 cm H: 2.3 cm
Material: plastic PC

Output voltage	26V-38V
Wattage of	4,68W
Wattage up to	10W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008660	28.00



LED DRIVER
10W | 500-700mA PHASE



NEW

220-240V ~50/60Hz
L: 12.2 cm W: 4.1 cm H: 2.3 cm
Material: plastic PC

Output voltage	8V-14V
Wattage of	4W
Wattage up to	9,8W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1008661**	**31.00**

LED DRIVER
15W | 200-350mA PHASE



NEW

IP20

220-240V ~50/60Hz
L: 12.2 cm W: 4.1 cm H: 2.3 cm
Material: plastic PC

Output voltage	26V-42V
Wattage of	5,2W
Wattage up to	14,7W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008662	35.00

LED DRIVER
20W | 350-500mA PHASE



NEW

IP20

220-240V ~50/60Hz
L: 13.76 cm W: 4.4 cm H: 3 cm
Material: plastic PC

Output voltage	26V-28V
Wattage of	9,1W
Wattage up to	19W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008663	40.00

LED DRIVER
30W | 500-700mA PHASE



NEW

IP20

220-240V ~50/60Hz
L: 13.76 cm W: 4.4 cm H: 3 cm
Material: plastic PC

Output voltage	26V-42V
Wattage of	13W
Wattage up to	29,4W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008664	45.00

LED DRIVER
40W | 700-1050mA PHASE



NEW

IP20

220-240V ~50/60Hz
L: 17.23 cm W: 4.4 cm H: 3 cm

Output voltage	27V-38V
Wattage of	26,6W
Wattage up to	39,9W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008665	49.00

LED DRIVER
25W | 150-700mA | DALI Dimmable



IP 20 IK03

220-240V 0/~50/60Hz
L: 11.9 cm W: 5.2 cm H: 2.25 cm
Material: polycarbonate (PC)

- Adjustable via DIP:
  150mA (6.3W) | 200mA (8.4W)
  260mA (10.9W) | 300mA (12.6W)
  350mA (14.7W) | 500mA (21W)
  600mA (25W) | 700mA (25W)

Output voltage	2-50V DC
Wattage of	0.3W
Wattage up to	25W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1007229	61.00

LED DRIVER
15W | 100-700mA DALI



NEW

IP20

220-240V ~50/60Hz
W: 10.34 cm H: 3 cm D: 2.1 cm
Material: plastic PC

Output voltage	2.5V-46V
Wattage of	0,25W
Wattage up to	15W
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008666	61.00

LED DRIVER
3W | 100-700mA DALI



NEW

IP20

220-240V ~50/60Hz
W: 10.34 cm H: 3 cm D: 2.1 cm
Material: plastic PC

Output voltage	2.5V-46V
Wattage of	0,25W
Wattage up to	23,1W
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008667	66.00

LED DRIVER
36W | 100-900mA DALI



NEW

IP20

220-240V ~50/60Hz
W: 12.8 cm H: 3 cm D: 2.1 cm
Material: plastic PC

Output voltage	2.5V-50V
Wattage of	0,37W
Wattage up to	36W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008668	71.00

LED DRIVER
53W | 650-1400mA DALI



NEW

IP20

Material: plastic PC

Output voltage	1.62V-44V
Wattage of	1,62W
Wattage up to	53,2W
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	1008669	79.00

DRIVER STRAIN RELIEF
Standard



NEW

L: 3.4 cm W: 3 cm H: 2.1 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Variant	Prod. no.	GBP
white	1008672	0.70

DRIVER STRAIN RELIEF
Standard



NEW

Material: plastic PC

- For DALI dimmable drivers: 1008669

Variant	Prod. no.	GBP
white	1008674	0.70

LED DRIVER
Compatible with through-wiring



NEW

L: 9.8 cm W: 5.8 cm H: 2.3 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Variant	Prod. no.	GBP
white	1008673	20.00

LED DRIVER
10,7W | 200mA | DALI Dimmable



IP 20

220-240V ~50/60Hz
L: 14.18 cm W: 4.38 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	1.5W
Wattage up to	10.7W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1006456**	**73.00**

LED DRIVER
12W | 250mA DALI dimmable with RF interface



IP 20

220-240V ~50/60Hz
L: 14.18 cm W: 4.38 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	1.5W
Wattage up to	12W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1006194**	**73.00**

LED DRIVER
40W | 500mA DALI dimmable with RF interface



IP 20

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-42V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1006195**	**86.00**

LED DRIVER
40W | 700mA DALI dimmable with RF interface



IP 20

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-42V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1006196**	**86.00**

LED DRIVER
40W | 1050mA DALI dimmable with RF interface



IP 20

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Variant	Prod. no.	GBP
white	**1006197**	**86.00**

LED DRIVER
40W | 1050mA DALI CCT tunable



IP 20

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	7

Variant	Prod. no.	GBP
white	**1006198**	**133.00**

ZIGBEE MODULE FOR DALI DRIVER, 1-CHANNEL



3.3V
L: 4.3 cm W: 3.1 cm H: 1.2 cm
Material: polycarbonate (PC)

Nominal voltage	3,3V

Variant	Prod. no.	GBP
white	1006199	33.00

CASAMBI MODULE FOR DALI DRIVER



3.3V
L: 4.3 cm W: 3.1 cm H: 1.2 cm
Material: polycarbonate (PC)

Nominal voltage	3,3V

Variant	Prod. no.	GBP
white	1006454	111.00

ZIGBEE MODULE FOR DALI DRIVER, 2-CHANNEL



3.3V
L: 4.3 cm W: 3.1 cm H: 1.2 cm
Material: polycarbonate (PC)

Nominal voltage	3,3V

Variant	Prod. no.	GBP
white	1006455	33.00

DT8 CONTROLLER WITH PUSH-DIM FUNCTION



NEW

IP20

12-36V DC
L: 17 cm W: 5.34 cm H: 2.8 cm
Material: polycarbonate (PC)

Output voltage	12-36VDC
Wattage of	60W
Wattage up to	180W
Number of secondary outputs	5

Variant	Prod. no.	GBP
white	1007997	104.00

SMART REMOTE CONTROL
Zigbee, CCT/RGBW



NEW

IP20

Battery operation
L: 14 cm W: 4.4 cm H: 1.7 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
white	1007827	68.00

EMERGENCY LIGHT FEATURE
DALI 2



NEW

IP20 IK02

Material: polycarbonate (PC)

for use with and without DALI control line for remote status enquiry

Data in emergency lighting mode:
6-54V
383-42@3.2V

Light output:
2.3W

Variant	Prod. no.	GBP
white	1007892	110.00

CEILING HOOK



IP 20

L: 4.6 cm Ø: 1.8 cm
Material: aluminium

Variant	Prod. no.	GBP
● black	**132670**	**17.00**
○ white	**132671**	**17.00**

CABLE CLAMP



IP 20

L: 3.1 cm Ø: 1.4 cm
Material: aluminium

Variant	Prod. no.	GBP
● black	**132680**	**11.00**
○ white	**132681**	**11.00**

GLENOS®



IP 20

220-240V ~50/60Hz
L: 8.5 cm W: 8.5 cm H: 2.7 cm
Material: aluminium

Nominal voltage	220-240V ~50/60Hz
Max. current load	8.5A

Variant	Prod. no.	GBP
● black	**210060**	**28.00**
○ white	**210061**	**28.00**
● grey	**210064**	**28.00**

TEXTILE CABLE
10m



IP 20

L: 1000 cm
Diameter: 0.6 cm
Material: polyvinyl chloride (PVC)/textile

Max. voltage	300V ACV

Variant	Prod. no.	GBP
● black	**961270**	**54.00**

GU10 LED CONNECTION BOX
with base, max. 10W



IP 20

220-240V ~50/60Hz
L: 3.8 cm W: 3.1 cm H: 1.7 cm
Material: plastic

Nominal voltage	220-240V ~50/60Hz

Variant	Prod. no.	GBP
● black	**1007283**	**6.00**

GU10 CONNECTION BOX
with base, universal



IP 20

L: 2.8 cm W: 2.8 cm H: 3.7 cm
Material: ceramic/plastic

Variant	Prod. no.	GBP
○● white/black	**1000909**	**7.00**

CABLE
3-pin, 3 x 0,75 mm², 10 m



L: 1000 cm

Max. voltage	300V

Variant	Prod. no.	GBP
	961250	**24.00**

GU10 SOCKET



IP 20

230V ~50Hz
H: 1.6 cm Ø: 2.8 cm
Material: ceramic

Nominal voltage	230V ~50Hz

Variant	Prod. no.	GBP
○ white	**955135**	**2.00**

CONNECTION BOX
IP68, 3-pin



IP 68

230V ~50Hz
L: 11.5 cm Ø: 2.7 cm
Material: polyamide (PA)

Nominal voltage	230V ~50Hz
Max. voltage	450V
Max. current load	17.5A

Variant	Prod. no.	GBP
● black	**228730**	**15.00**

T-CONNECTOR BOX
IP68, 3-pin



IP 68

230V ~50Hz
L: 11 cm W: 6.4 cm H: 3 cm
Material: polyamide (PA)

Nominal voltage	230V ~50Hz
Max. voltage	500V
Max. current load	17.5A

Variant	Prod. no.	GBP
● black	**228726**	**28.00**

CONNECTION BOX
IP68, 5-pin



IP 68

230V ~50Hz
L: 13 cm Ø: 3.2 cm
Material: polyamide (PA)

Nominal voltage	230V ~50Hz
Max. voltage	450V
Max. current load	32A

Variant	Prod. no.	GBP
● black	**228725**	**17.00**

CONNECTION BOX
5 poles, DALI



IP 68

450V
L: 18 cm W: 6.3 cm H: 3.3 cm
Material: polyamide 66 (PA 66)

Nominal voltage	450V
Max. current load	16A

Variant	Prod. no.	GBP
● black	**1006453**	**31.00**


1000666 774

Please note: 7-digit product no. can be found from page 1063

111000
111262 156
111292 157
111382 131

112000
112221 145
112222 145
112225 145
112242 152
112682 145
112692 145
112720 156
112721 156
112780 156, 157
112781 156, 157
112910 138
112911 138

113000
113140 137
113141 137
113150 137
113151 137
113160 138
113161 138
113170 139
113171 139
113262 156
113292 157
113540 131
113541 131
113550 131
113830 131
113840 131
113841 131
113930 181
113931 181
113940 181
113941 181
113970 130
113971 130
113976 130

114000
114420 163
114421 163
114426 163
114430 163
114431 163
114436 163
114440 164
114441 164
114450 165
114451 165

115000
115510 66
115511 66
115520 66
115521 66
115530 66
115531 66
115540 67
115541 67
115550 67
115551 67

117000
117100 205
117101 205
117110 205
117111 205
117311 148
117321 202
117331 148
117351 202

132000
132020 457
132021 457
132024 457
132600 226, 227, 279, 281
132601 226, 227, 279, 281
132605 226, 227, 279, 281
132610 299, 309
132611 299, 309
132660 300
132661 300
132662 300
132670 299, 1057
132671 299, 1057
132680 299, 1057
132681 299, 1057
132690 299
132691 299
132835 772

133000
133444 311

135000
135250 242, 243, 244, 245
135251 191, 242, 243, 244, 245
135254 250, 251, 352, 353

138000
138981 543, 1046
138982 543, 1046
138991 543, 1046
138992 543, 1046

139000
139004 540
139006 541
139024 540
139026 541
139030 540
139031 540
139040 540
139041 540
139050 541
139051 541
139060 541
139061 541
139070 544
139071 544
139072 544
139080 544
139081 544
139082 544
139090 545
139091 545
139092 545
139100 547
139101 547
139102 547
139120 549
139121 549
139122 549
139130 547
139131 547
139132 547

143000
143010 553
143011 553
143012 553
143020 553
143021 553
143022 553
143030 555
143031 555
143032 555
143040 555
143041 555
143042 555
143050 555
143051 555
143052 555
143060 555
143061 555
143062 555
143070 555
143071 555
143072 555
143080 555
143081 555
143082 555
143090 555
143091 555
143092 555
143100 555
143101 555
143102 555
143110 555
143111 555
143112 555
143120 226, 227, 279, 281
143121 226, 227, 279, 281
143124 226, 227, 279, 281
143130 555
143131 555
143132 555
143151 555
143152 555
143160 555
143161 555
143162 555
143169 555
143170 554, 557
143171 554, 557
143172 554, 557
143190 591
143191 591
143221 557
143230 557
143231 557
143241 557
143251 557
143261 557
143271 557
143281 557
143350 599
143351 599
143390 591
143391 591
143392 591
143430 597
143431 597
143432 597
143440 597
143441 597
143442 597
143450 593
143451 593
143454 593
143540 581
143541 581
143544 581
143580 589
143581 589
143594 592
143731 581
143811 598
143941 594
143951 594
143960 595
143961 595

144000
144200 593
144201 593
144204 593

145000
145100 613
145102 613
145200 613
145202 613

145300 613
145302 613
145510 615
145514 615
145520 615
145524 615
145530 615
145534 615
145551 617
145560 615
145564 615
145580 615
145584 615
145590 615
145594 615
145600 615
145604 615
145630 615
145634 615
145640 615
145644 615
145660 615
145664 615
145670 615
145674 615
145680 615
145684 615
145690 615
145694 615
145700 615
145710 615
145714 615
145720 615
145724 615
145730 615
145734 615
145830 615
145834 615
145990 226, 227, 279, 281
145994 226, 227, 279, 281

146000
146010 499
146332 417
146682 415
146692 415

147000
147301 453
147306 453
147311 453
147316 453
147321 453
147326 453
147360 431
147361 431
147370 431
147371 431
147380 431
147381 431
147441 435
147442 435
147443 435
147444 435
147529 402
147550 457
147551 457
147559 457

148000
148001 211
148002 211
148004 210
148005 211
148010 387
148012 391
148013 391
148016 391
148018 386
148019 389
148060 390
148070 151
148071 151
148091 389
148540 416

149000
149452 409
149762 359
149772 359

151000
151271 396
151275 396
151282 365
151320 392
151321 392
151410 397
151411 397
151450 397
151451 397
151511 203
151531 203, 456
151591 402
151710 398
151711 398
151740 398
151741 398
151781 360
151786 360
151791 360
151796 360
151800 407
151801 407
151803 407
151810 197
151811 197
151830 455
151831 455
151840 197, 407, 455
151850 309
151851 309
151853 309
151950 160
151952 160
151960 160
151962 160

152000
152010 455
152011 455
152020 455
152021 455
152101 197
152230 663
152231 663
152232 663
152240 663
152241 663
152242 663
152320 658
152321 658
152330 445
152331 445
152340 411
152341 411
152360 305
152370 307
152380 150
152381 150
152430 665
152431 665
152600 662
152601 662
152610 662
152611 662
152750 658
152751 658
152780 658
152781 658
152640 665
152641 665
152960 665
152961 665

153000
153420 659
153421 659
153560 661
153561 661
153564 661
153850 659
153851 659

155000
155156 213
155236 469
155373 209
155490 497
155540 495
155550 206
155551 206
155582 207, 301, 497
155583 207, 301, 497
155592 207, 301, 497
155780 495
155790 495

156000
156050 208
156051 208
156100 207, 301
156111 207, 301, 497
156113 207, 301, 497
156122 207, 301, 497

158000
158400 305
158410 307

161000
161271 149
161291 149
161461 212

165000
165359 321
165390 319
165400 319
165410 319

175000
175060 607
175080 607
175160 607
175180 607
175190 607
175210 607

181000
181530 543
181531 543
181532 543

186000
186300 543
186301 543
186302 543
186310 543
186311 543
186312 543
186330 543
186331 543
186332 543
186340 543
186341 543
186342 543
186350 543
186351 543
186352 543

186360 543
186361 543
186362 543
186640 543
186641 543
186642 543

210000
210060 320, 1057
210061 1057
210064 1057

227000
227176 925
227195 910
227219 769
227220 769
227221 769
227410 810
227418 810
227462 978
227505 807
227600 984
227604 984
227680 987
227684 987
227922 779, 780

228000
228100 779
228130 779
228332 979
228342 979
228412 969
228430 975
228434 975
228555 817
228560 817
228712 765, 765, 777, 801
228722 765, 777
228725 1058
228726 1058
228730 1058
228752 801
228753 718, 771, 787
228754 743, 747
228771 899
228775 899
228776 899
228925 777
228935 777
228945 777
228960 775
228965 775

229000
229020 758
229021 758
229022 758
229062 955
229071 945
229072 945
229075 945
229081 945
229085 945
229090 813
229162 780
229172 780
229200 977
229230 976
229234 977
229320 973
229324 973
229374 973
229381 969
229383 969
229410 751
229411 751
229420 755
229421 755
229422 752, 753, 754, 755, 759, 774
229423 757
229430 757
229431 757
229432 757
229524 862
229525 862
229531 861
229532 861
229535 861
229551 833
229554 833
229555 833
229564 863
229565 863
229574 861
229575 861
229664 921
229665 921
229702 955
229740 811
229741 813
229931 944
229935 944
229961 942
229965 942
229971 943
229975 943

230000
230030 897
230034 897
230044 884
230045 884
230060 739, 773, 783, 801
230061 783
230063 783
230066 783
230069 783
230084 885
230085 885
230090 752
230355 925
230365 905
230435 772
230444 884
230445 884
230465 771
230655 885
230657 885

231000
231010 896
231012 896
231015 896
231035 812
231072 809
231205 881
231215 747
231225 747
231230 743, 747, 750, 751
231231 798
231233 760
231234 767, 781, 785
231235 761
231305 798
231315 926
231351 902
231355 902
231370 761
231371 761
231410 759
231411 759
231420 760
231440 761
231455 787
231457 787
231475 784
231505 801
231515 938
231525 821
231535 821
231541 835
231545 835
231585 924
231595 784
231815 787
231817 787
231960 808
231961 808

232000
232045 923
232075 771
232085 771
232101 921
232105 921
232115 743
232119 743
232125 743
232135 791
232145 791
232155 788
232165 788
232185 789
232195 788, 789
232285 927
232294 799
232295 799
232431 890
232435 890
232441 893
232445 893
232461 892
232465 892
232485 919
232491 919
232495 919
232497 919
232531 879
232535 879
232537 879
232905 917
232915 917

233000
233094 941
233095 941
233104 931
233105 931
233114 904
233115 904
233134 929
233135 929
233145 801
233165 801
233185 801
233214 931
233215 904, 929
233245 939
233255 939
233302 899
233427 754
233437 755
233447 750
233457 750
233500 970
233520 970
233540 977
233570 815
233571 815
233580 815
233582 815
233601 951
233605 951
233615 951
233621 951
233625 951
233635 950
233639 950

233650 953
233660 953

234000
234505 862
234515 861
234525 863
234535 833

900000
900011 813, 815

955000
955135 1058

961000
961250 1058
961270 1057

1000100
1000127 451
1000128 451
1000129 451
1000130 451
1000131 451
1000132 451
1000135 451
1000136 451

1000300
1000327 405
1000329 405
1000330 405
1000332 837
1000334 907
1000335 927
1000336 925
1000339 837
1000340 907
1000342 907
1000343 785
1000344 785
1000345 785
1000346 785
1000398 773

1000400
1000458 671
1000459 671
1000461 671
1000462 671
1000464 671
1000465 671
1000466 673, 675
1000468 673, 675
1000469 673, 675
1000473 673
1000474 673
1000476 673
1000477 673
1000479 673
1000480 673
1000487 673
1000489 673
1000497 677
1000498 677

1000500
1000524 677
1000525 677
1000533 677
1000534 677
1000535 679
1000536 679
1000540 678
1000546 678
1000549 678
1000557 679
1000558 679
1000560 678
1000561 678
1000566 678
1000567 678
1000571 678
1000574 157
1000575 157
1000576 156
1000577 156
1000579 207, 301, 497
1000580 207, 301, 497

1000600
1000613 381
1000614 383
1000616 381
1000618 381
1000621 383
1000623 383
1000634 397
1000638 392
1000639 392
1000640 392
1000665 774
1000666 774
1000668 368
1000669 368
1000670 368
1000682 778
1000683 778
1000685 215
1000686 215
1000688 215
1000689 215
1000691 215
1000692 215
1000694 215
1000695 215

1000700
1000702 453
1000703 453
1000704 453
1000711 594
1000712 594
1000714 146
1000715 146
1000716 146
1000717 146
1000718 146
1000719 146
1000720 146
1000721 146
1000726 191, 253
1000729 407
1000730 407
1000735 817
1000736 801, 817
1000773 300
1000777 367
1000780 367
1000783 217
1000784 217
1000785 217
1000786 217

1000800
1000807 199
1000809 199, 310
1000813 310
1000820 923
1000821 773
1000822 773
1000823 834
1000833 155
1000880 929
1000881 929
1000886 433
1000887 433
1000889 433
1000890 433
1000892 433
1000893 433
1000895 433
1000896 433

1000900
1000909 1057
1000910 405
1000911 405
1000914 136
1000915 136
1000917 136
1000926 295
1000927 295
1000929 295
1000930 295
1000932 295
1000933 295
1000935 295
1000936 295
1000957 207, 301

1001000
1001015 155
1001016 155
1001019 473
1001020 473

1001100
1001165 153
1001166 153
1001167 153
1001168 153
1001169 153
1001171 153
1001172 153

1001200
1001254 983
1001255 983
1001262 983
1001263 983
1001264 155
1001272 408
1001273 408
1001274 408
1001275 408
1001276 408
1001283 369, 475
1001284 369, 475
1001286 369, 475
1001287 369, 475
1001299 369

1001300
1001300 369
1001303 369
1001304 369
1001309 295
1001310 295
1001380 607
1001382 607
1001390 607
1001392 607
1001393 607
1001395 607

1001400
1001400 293
1001403 293
1001406 293
1001409 293
1001460 498
1001461 498
1001462 498
1001463 498
1001468 416
1001472 416
1001488 781
1001489 781

1001490 781
1001494 781

1001500
1001510 613
1001511 613
1001512 613
1001513 615
1001514 615
1001515 615
1001516 615
1001517 615
1001518 615
1001519 615
1001520 615
1001521 615
1001522 615
1001523 615
1001524 615
1001525 615
1001526 615
1001527 615
1001528 615
1001529 615
1001530 615
1001531 617
1001532 617
1001533 617
1001534 617
1001536 617
1001537 617
1001538 617
1001539 617
1001542 226, 227, 279, 281
1001574 1035
1001575 1035

1001800
1001861 598
1001868 591
1001869 591
1001871 661
1001872 661

1001900
1001930 152
1001931 152
1001939 212
1001950 191, 242, 243, 244
1001951 250, 251, 352, 353
1001952 242, 243, 244, 245
1001962 813
1001963 813
1001964 810
1001965 810
1001969 902
1001970 902
1001999 767

1002000
1002000 767
1002001 767
1002002 923
1002003 181
1002004 193
1002005 193
1002006 193
1002008 181
1002010 193
1002011 193
1002012 193
1002013 193
1002015 193
1002018 905
1002020 465
1002021 465
1002022 465
1002023 453
1002024 453
1002025 453
1002029 431
1002030 431
1002032 877
1002033 877
1002034 877
1002035 919
1002069 897
1002070 897
1002075 467
1002076 467
1002077 467
1002098 162
1002099 162

1002100
1002100 162
1002101 162
1002102 162
1002110 595
1002111 595
1002113 595
1002117 415
1002118 415
1002140 411
1002151 553
1002152 553
1002153 553
1002163 226, 227, 279, 281
1002190 363
1002191 363
1002192 363

1002200
1002201 819
1002203 819
1002215 203, 456
1002216 203
1002218 1046
1002221 1047
1002228 364
1002229 364
1002238 387
1002239 361
1002240 361

1002400
1002402 883
1002403 883
1002430 415
1002431 415

1002500
1002503 903
1002504 903
1002505 903
1002591 139
1002592 139
1002594 139
1002596 139

1002600
1002602 540
1002603 540
1002604 540
1002607 415
1002608 415
1002631 605
1002632 605
1002633 605
1002634 605
1002635 605
1002636 605
1002637 607
1002638 607
1002639 607
1002640 607
1002641 607, 611
1002642 607, 611
1002643 607
1002644 607
1002645 607
1002646 607
1002655 607
1002656 607
1002657 607
1002658 607
1002659 607, 611
1002660 607, 611
1002690 549
1002691 543, 1046
1002692 543, 1046
1002693 543, 1046
1002694 549
1002695 549
1002696 549
1002697 543
1002698 543
1002699 543

1002700
1002700 543
1002701 543
1002702 543
1002703 543
1002704 543
1002705 543

1002800
1002842 393
1002843 393
1002844 393
1002845 555, 607, 615, 865
1002854 581
1002855 409
1002860 417
1002861 547
1002862 547
1002863 547
1002864 548
1002865 548
1002866 548
1002867 931
1002868 911
1002869 911
1002871 764
1002882 191, 253
1002884 931
1002893 971
1002897 971
1002899 971

1002900
1002900 859
1002903 937
1002904 937
1002905 929
1002906 739
1002907 739
1002909 271
1002910 271
1002911 273
1002912 273
1002913 275
1002914 275
1002915 357
1002917 357
1002918 357
1002919 357
1002922 161
1002928 393
1002929 393
1002931 407
1002933 407
1002934 198
1002936 198
1002937 309
1002939 309
1002940 468
1002941 468
1002949 315

1002950 315
1002951 315
1002952 898
1002953 898
1002954 898
1002955 898
1002956 793
1002957 793
1002958 793
1002959 793
1002967 212
1002968 212
1002979 159
1002980 159
1002981 159
1002982 161
1002983 161
1002984 161
1002989 915
1002990 915
1002991 797
1002992 797

1003000
1003001 800
1003004 281
1003005 281
1003006 281
1003007 281
1003008 141
1003009 141
1003010 141
1003011 143
1003012 143
1003013 143
1003014 461
1003015 461
1003016 461
1003017 459
1003018 459
1003019 459
1003040 217
1003041 217
1003042 217
1003043 217
1003044 291
1003045 291
1003046 291
1003047 291

1003100
1003104 687, 689, 1049
1003105 688, 1049
1003106 692, 1047

1003300
1003316 399

1003400
1003416 871
1003417 871
1003418 872
1003419 872
1003420 831
1003421 831
1003422 867
1003423 867
1003424 869
1003425 869
1003426 829
1003427 829
1003428 403
1003429 403
1003430 403
1003431 403
1003432 311
1003435 304
1003436 304
1003437 871
1003438 872
1003439 831
1003440 867
1003441 869
1003442 829
1003443 283
1003444 283
1003447 808
1003448 808
1003449 943
1003450 943
1003451 943
1003452 943
1003453 897
1003454 897
1003455 412
1003456 413
1003457 412
1003458 413
1003459 413
1003460 413
1003467 395
1003468 395
1003470 859
1003479 828, 829, 831

1003500
1003506 367
1003507 367
1003508 367
1003518 941
1003519 941
1003530 292
1003532 292
1003535 763
1003536 762
1003537 763
1003538 763
1003539 921
1003553 82

1003600
1003625 84
1003697 86
1003769 70
1003841 72
1003913 74
1003985 76

1004000
1004054 100
1004055 99
1004058 99
1004059 102
1004062 101
1004064 100
1004065 101
1004066 102
1004067 99
1004069 100
1004070 101
1004071 102
1004074 628
1004098 336

1004100
1004122 182
1004146 232
1004170 630
1004194 338

1004200
1004218 184
1004242 234
1004266 632
1004290 340

1004300
1004314 186
1004338 236
1004386 336

1004400
1004410 182
1004434 232
1004482 338

1004500
1004506 184
1004530 234
1004578 340

1004600
1004602 186
1004626 236
1004649 931
1004650 894
1004651 894
1004652 819
1004653 938
1004660 378
1004661 378
1004662 378
1004663 378
1004664 445
1004665 445
1004666 196
1004667 196
1004668 147
1004669 147
1004670 385
1004671 385
1004672 296
1004673 296
1004674 299, 320, 653
1004675 299, 653
1004677 833
1004678 895
1004679 895
1004680 765
1004681 765
1004682 404
1004684 607
1004685 607
1004686 649
1004687 649
1004688 649
1004689 649
1004690 649
1004691 649
1004692 649
1004693 649
1004694 141
1004695 141
1004696 141
1004697 143
1004698 143
1004699 143

1004700
1004700 461
1004701 461
1004702 461
1004705 459
1004706 410
1004720 690
1004721 690
1004722 691
1004723 691
1004725 692
1004726 695
1004727 693
1004730 358
1004731 358
1004732 389
1004733 386
1004734 694
1004735 694
1004736 694
1004737 695
1004738 404
1004739 404

1004740 401
1004741 401
1004742 401
1004743 401
1004744 226, 227, 279, 281
1004745 226, 227, 279, 281
1004747 887
1004748 887
1004749 737
1004750 737
1004751 737
1004757 809
1004759 271
1004760 271
1004761 271
1004762 271
1004763 273
1004764 273
1004765 274
1004766 274
1004767 274
1004768 274
1004771 643
1004772 643
1004773 300, 497
1004774 207, 301, 497
1004775 207, 301, 497
1004783 555
1004784 555
1004785 555
1004786 99
1004787 99
1004788 99
1004789 99
1004790 100
1004791 100
1004792 100
1004793 100
1004794 101
1004795 101
1004796 101
1004797 101
1004798 102
1004799 102

1004800
1004800 102
1004801 102
1004889 674
1004890 674
1004893 675
1004894 675
1004895 675
1004896 681
1004897 681
1004898 681
1004899 681

1004900
1004900 682
1004901 682
1004902 682
1004903 683
1004904 683
1004905 681
1004906 681
1004907 681
1004908 681
1004909 682
1004910 682
1004911 683
1004912 682
1004913 682
1004914 682
1004915 682
1004916 682
1004917 682
1004932 679
1004933 589
1004934 589
1004935 589
1004936 589
1004937 605
1004938 605
1004939 607
1004940 607
1004957 931
1004969 378
1004971 365

1005000
1005075 973, 975, 987, 1036
1005076 1036
1005077 1036
1005078 1036
1005079 1036
1005080 1036
1005081 1036
1005082 1036
1005083 1036
1005085 462
1005086 462
1005087 463
1005088 463
1005089 944
1005090 944

1005100
1005125 891
1005126 891
1005148 877
1005149 877
1005150 877
1005151 879
1005153 879
1005154 879
1005155 879
1005156 879
1005157 879
1005177 271
1005178 274

1005200
1005201 882
1005202 941
1005205 829, 831, 867, 869, 871
1005206 829, 831, 867, 869, 871
1005207 829, 831, 867, 869, 871
1005214 320
1005215 320
1005216 320
1005217 320
1005218 320
1005262 829, 831, 867, 869, 871
1005263 829, 831, 867, 869, 871
1005265 1042
1005268 1042
1005269 1035
1005271 1035
1005272 1035
1005273 973, 975, 1036
1005274 1037
1005275 977, 1037
1005276 1037
1005277 1037
1005278 976, 1037
1005279 1037
1005280 1037
1005281 1037
1005282 1037
1005283 1037
1005284 1035
1005285 1035
1005286 1034
1005287 1034
1005288 1034
1005289 977, 1041
1005290 1041
1005291 1037
1005292 1037
1005294 1038
1005295 1038
1005296 1038
1005297 1037
1005298 1037
1005299 1037

1005300
1005302 1039
1005303 1039
1005305 1043
1005307 1042
1005308 1042
1005310 1043
1005317 1038
1005318 1039
1005319 80
1005390 493
1005391 493
1005392 493
1005394 493
1005395 290
1005396 290
1005397 648
1005399 648

1005400
1005400 648
1005401 648
1005402 648
1005435 138
1005436 138
1005439 738
1005440 738
1005441 800
1005442 749
1005443 889
1005499 68

1005500
1005553 78

1005600
1005609 98
1005610 98
1005611 98
1005612 98
1005613 98
1005614 98
1005615 98
1005687 188

1005700
1005705 238
1005723 634
1005741 342
1005759 188
1005777 238
1005813 88
1005867 90
1005921 92
1005975 94

1006000
1006029 96
1006083 342

1006100
1006104 985
1006105 985
1006106 969
1006107 969
1006108 636
1006121 137
1006122 137
1006123 471
1006124 471
1006125 471
1006126 471
1006127 471

1006128 471
1006133 692, 695, 1050
1006134 695, 1050
1006136 103
1006138 103
1006140 103
1006142 103
1006144 103
1006146 103
1006148 103
1006150 103
1006152 103
1006154 103
1006155 587
1006156 587
1006157 653
1006158 653
1006159 653
1006160 653
1006161 410
1006162 410
1006167 182, 184, 232, 23
1006168 630
1006169 186, 236, 632
1006170 188, 238, 634
1006171 981
1006172 981
1006173 981
1006174 981
1006175 981
1006176 981
1006178 880
1006179 880
1006180 745
1006181 745
1006182 745
1006183 881
1006184 747
1006185 277
1006186 277
1006187 277
1006188 277
1006189 277
1006190 277
1006191 1029
1006192 1029
1006193 1029
1006194 1055
1006195 1055
1006196 1055
1006197 1055
1006198 1055
1006199 1056

1006200
1006268 857
1006270 857

1006300
1006307 385
1006308 385
1006314 887
1006316 827
1006317 377, 858
1006318 377, 858
1006319 377, 858
1006321 1036
1006326 1029
1006327 828
1006328 865
1006329 865
1006336 686, 1049
1006343 493
1006344 493
1006345 290
1006346 753
1006347 753
1006348 692, 693, 695, 1047
1006350 483
1006351 483
1006352 483
1006353 483
1006354 483
1006355 483
1006377 226, 227, 279, 281
1006378 299
1006379 729
1006380 729
1006381 729
1006382 720, 721, 722, 723
1006383 722
1006384 725
1006385 724
1006386 727
1006387 723
1006388 726
1006389 723
1006390 725
1006391 724
1006392 727
1006393 723
1006394 726
1006395 281
1006396 281
1006397 281
1006398 281
1006399 281

1006400
1006400 281
1006402 281
1006403 281
1006404 855
1006405 855
1006406 949
1006407 949
1006408 733
1006409 733
1006410 320
1006423 443
1006424 443
1006425 443
1006426 443
1006427 443
1006428 443
1006429 443
1006430 443
1006431 287
1006432 287
1006433 287
1006434 287
1006435 287
1006436 287
1006437 287
1006438 287
1006439 201
1006440 201
1006441 375
1006442 375
1006443 375
1006444 375
1006445 585
1006446 585
1006449 201, 287, 375, 443, 585
1006450 201, 287, 375, 443, 585
1006451 201, 287, 375, 443, 585
1006452 1046
1006453 1058
1006454 1056
1006455 1056
1006456 1055
1006457 98
1006458 99
1006459 100
1006460 101
1006461 102

1006500
1006511 609
1006512 609
1006513 609
1006514 609
1006515 609
1006516 609
1006517 609
1006518 609
1006519 611
1006520 611
1006521 611
1006522 611
1006523 611
1006524 611
1006525 611
1006526 611
1006527 611
1006528 611
1006529 611
1006530 611
1006531 611
1006532 611
1006533 611
1006534 611
1006535 611
1006536 611
1006537 611
1006538 611
1006539 611
1006540 611
1006541 503
1006542 503
1006543 503
1006544 503
1006545 503
1006546 503
1006547 503
1006548 503
1006549 507
1006550 507
1006551 507
1006552 507
1006553 507
1006554 507
1006555 507
1006556 507
1006557 511
1006558 511
1006559 511
1006560 511
1006561 511
1006562 511
1006563 511
1006564 511
1006565 504, 508, 512
1006566 504, 508, 512
1006567 504, 508, 512
1006568 504, 508, 512
1006569 505, 509, 513
1006570 505, 509, 513
1006571 505, 509, 513
1006572 505, 509, 513
1006573 505, 509, 513
1006574 505, 509, 513
1006575 505
1006576 505
1006577 505
1006578 505
1006579 505
1006580 505
1006581 509
1006582 509
1006583 509
1006584 509
1006585 509
1006586 509
1006587 513
1006588 513
1006589 513
1006590 513
1006591 513
1006592 513

1006593 505
1006594 505
1006595 509
1006596 509
1006597 513
1006598 513
1006599 505, 509, 513

1006600
1006600 505, 509, 513
1006601 505, 509, 513
1006602 505, 509, 513
1006603 505, 509, 513
1006604 505, 509, 513
1006605 505, 509, 513
1006606 505, 509, 513
1006607 505, 509, 513
1006608 505, 509, 513
1006609 505, 509
1006610 513
1006611 505
1006612 505
1006613 505, 509, 513
1006614 505, 509, 513
1006615 523
1006616 523
1006617 523
1006618 523
1006619 523
1006620 523
1006621 525
1006622 525
1006623 525
1006624 525
1006625 525
1006626 525
1006627 523
1006628 523
1006629 523
1006630 523
1006631 523
1006632 523
1006633 525
1006634 525
1006635 525
1006636 525
1006637 525
1006638 525
1006639 527
1006640 527
1006641 527
1006642 527
1006643 527
1006644 527
1006645 527
1006646 527
1006647 527
1006648 527
1006649 527
1006650 527
1006651 514

1006700
1006705 516
1006759 518
1006813 520

1007000
1007083 505, 509, 513
1007084 505, 509, 513
1007091 59, 1011
1007092 59, 1011
1007093 59

1007100
1007137 505, 509, 513
1007138 505, 509, 513
1007142 853
1007143 853
1007144 853
1007145 853
1007146 807
1007147 807
1007184 59, 1011
1007185 59, 1011
1007186 59
1007188 509, 513
1007189 509, 513
1007190 201, 287, 375, 443, 585
1007191 59
1007194 59
1007195 959
1007196 959
1007197 959
1007198 959

1007200
1007200 359
1007201 358
1007202 359
1007207 882
1007225 141, 143, 1051
1007226 1051
1007227 1051
1007228 1051
1007229 1053
1007230 1036
1007231 1036
1007232 720
1007233 720
1007234 721
1007235 721
1007236 852
1007237 718
1007238 965, 966, 967
1007239 965, 966, 967
1007240 965, 966, 967
1007241 966
1007242 967
1007243 965
1007244 965
1007245 965, 966, 967
1007250 1048
1007251 1048
1007252 1048
1007253 1048
1007254 1049
1007255 1049
1007256 1049
1007257 1050
1007281 847
1007282 847
1007283 1057
1007284 242, 344
1007285 242, 344
1007286 246, 348
1007287 246, 348
1007288 242, 344
1007289 242, 344
1007290 246, 348
1007291 246, 348
1007292 243, 345
1007293 243, 345
1007294 247, 349
1007295 247, 349
1007296 243, 345
1007297 243, 345
1007298 247, 349
1007299 247, 349

1007300
1007300 244, 346
1007301 244, 346
1007302 248, 350
1007303 248, 350
1007304 244, 346
1007305 244, 346
1007306 248, 350
1007307 248, 350
1007308 245, 347
1007309 245, 347
1007310 249, 351
1007311 249, 351
1007312 245, 347
1007313 245, 347
1007314 249, 351
1007315 249, 351
1007316 250, 352
1007317 250, 352
1007318 250, 352
1007319 250, 352
1007320 250, 352
1007321 250, 352
1007322 251, 353
1007323 251, 353
1007324 251, 353
1007325 251, 353
1007326 251, 353
1007327 251, 353
1007328 120
1007329 120
1007330 120
1007331 120
1007332 120
1007333 120
1007334 120
1007335 120
1007336 121
1007337 121
1007338 121
1007339 121
1007340 122
1007341 122
1007342 122
1007343 122
1007344 122
1007345 121
1007346 121
1007347 121
1007348 121
1007349 122
1007350 122
1007351 122
1007352 583
1007353 583
1007354 583
1007355 645
1007356 645
1007357 485, 703
1007358 485, 703
1007359 485, 703
1007360 485, 703
1007361 485, 703
1007362 485, 703
1007363 491
1007364 491
1007365 491
1007366 491
1007368 113
1007369 113
1007370 113
1007371 113
1007372 113
1007373 113
1007374 115
1007375 115
1007376 115
1007377 115
1007378 115
1007379 115
1007380 488, 707
1007381 119
1007382 119
1007383 119
1007384 119
1007385 105
1007386 105
1007387 105
1007388 105
1007389 105

1007390 105
1007391 105
1007392 105
1007393 105
1007394 105
1007395 105
1007396 105
1007397 105
1007398 105
1007399 105

1007400
1007400 105
1007401 107
1007402 107
1007403 107
1007404 107
1007405 107
1007406 107
1007407 107
1007408 107
1007409 125
1007410 125
1007411 125
1007412 125
1007421 119
1007422 119
1007423 109
1007424 109
1007425 109
1007426 109
1007427 109
1007428 109
1007429 109
1007430 109
1007431 119
1007432 119
1007433 111
1007434 111
1007435 111
1007436 111
1007437 111
1007438 111
1007439 111
1007440 111
1007441 111
1007442 111
1007443 125
1007444 125
1007445 125
1007446 125
1007447 125
1007448 125
1007449 122
1007450 122
1007451 121
1007452 125
1007453 121
1007454 125
1007455 1034
1007458 843, 935
1007459 714
1007460 714
1007461 826
1007462 492
1007463 492
1007464 492
1007465 492
1007466 492
1007467 492
1007468 289
1007469 289
1007470 289
1007471 289
1007472 289
1007473 289
1007474 997
1007475 999
1007476 1009
1007477 1009
1007478 1009
1007479 1009
1007480 1009
1007481 1009
1007482 1009
1007483 1009
1007484 1009
1007485 1009
1007486 1009
1007487 1009
1007488 122
1007489 122
1007490 1014
1007491 1017
1007493 1015
1007495 1017
1007496 996
1007497 998
1007498 997
1007499 999

1007500
1007504 997
1007505 999
1007506 1018
1007507 1019
1007508 1008
1007509 1008
1007510 1008
1007511 843, 935
1007512 715
1007513 715
1007514 1027
1007515 1027
1007516 1001
1007517 1001
1007518 258
1007519 258
1007520 258
1007521 260, 534
1007522 260, 534
1007523 260, 534
1007524 260, 534
1007525 260, 534
1007526 260, 534
1007527 260
1007528 260
1007529 260
1007530 260, 535
1007531 260, 535
1007532 260, 535
1007533 261, 535
1007534 261, 535
1007535 261, 535
1007536 261, 535
1007537 261, 535
1007538 261, 535
1007539 261
1007540 261
1007541 261
1007542 260, 535
1007543 260, 535
1007544 260, 535
1007545 260, 535
1007546 260, 535
1007547 260, 535
1007548 259
1007549 259
1007550 259
1007551 65
1007552 65
1007559 65
1007560 65
1007567 65
1007568 65
1007575 997
1007576 999
1007577 996, 997, 998, 999
1007580 713
1007581 845
1007582 825
1007583 713
1007584 713
1007585 845
1007586 825
1007587 713
1007588 279
1007589 279
1007590 437
1007591 437
1007592 437
1007593 437
1007594 373
1007595 373
1007596 279, 585
1007597 279, 585
1007598 279
1007599 279

1007600
1007608 439
1007609 439
1007610 439
1007611 439
1007612 331
1007613 331
1007614 331
1007615 331
1007616 331
1007617 331
1007618 331
1007619 331
1007624 115
1007625 115
1007626 115
1007627 115
1007628 115
1007629 115
1007630 123
1007631 123
1007632 123
1007633 123
1007634 123
1007635 123
1007636 123
1007637 123
1007638 582
1007639 582
1007640 582
1007641 583
1007642 583
1007643 583
1007644 644
1007645 644
1007646 644
1007647 644
1007648 645
1007649 645
1007651 709
1007652 709
1007653 935
1007654 1002
1007655 1002
1007656 1003
1007657 1003
1007658 257
1007659 257
1007660 257
1007661 269
1007662 269
1007663 269
1007664 269
1007665 269
1007666 269
1007667 846
1007668 846
1007669 719
1007670 719
1007671 269
1007672 269

1007673 582
1007674 582
1007676 1025
1007677 1025
1007678 1025
1007679 1024
1007680 961
1007681 961
1007682 961
1007683 961, 962, 963
1007684 961, 962, 963
1007685 961, 962, 963
1007692 487, 705
1007693 487, 705
1007694 487, 705
1007695 487, 705
1007696 487, 705
1007697 487, 705
1007698 487, 705

1007700
1007701 265
1007702 265
1007703 265
1007710 170
1007711 170
1007712 170
1007714 170
1007715 170
1007716 441
1007717 441
1007718 441
1007720 441
1007721 441
1007722 171
1007723 171
1007724 171
1007726 171
1007727 171
1007728 171
1007729 171
1007730 171
1007732 171
1007733 171
1007734 171
1007735 171
1007736 171
1007738 171
1007739 171
1007740 57
1007741 57
1007742 57
1007744 57
1007745 57
1007746 269, 273
1007747 533
1007748 533
1007749 533

1007800
1007806 901
1007807 901
1007808 901
1007809 901
1007810 962
1007811 963
1007816 607
1007817 607
1007818 606
1007819 606
1007820 606
1007821 606
1007822 962, 963
1007827 1056
1007855 265
1007856 265
1007857 265
1007858 177, 225, 333, 479
1007859 177, 225, 333, 479
1007860 177, 225, 333, 479
1007868 816
1007869 816
1007870 505, 509, 513
1007871 505, 509, 513
1007872 505, 509, 513
1007873 505, 509, 513
1007876 283
1007877 283
1007878 283
1007879 283
1007880 283
1007881 283
1007892 1056

1007900
1007911 851
1007912 851
1007913 851
1007914 851
1007916 849
1007917 849
1007918 849
1007919 849
1007926 555
1007927 555
1007928 555
1007997 1056

1008000
1008000 983
1008001 983
1008002 267
1008003 267
1008004 267
1008005 127
1008006 127
1008007 127
1008008 127
1008009 127
1008010 908
1008011 908
1008012 909
1008013 909
1008014 740
1008015 740
1008016 741
1008017 741
1008023 177, 225, 333, 479
1008024 439
1008025 439
1008026 439
1008029 487, 487, 705
1008032 223
1008033 223
1008034 223
1008035 329
1008036 329
1008037 329
1008038 481
1008039 481
1008040 481
1008041 559
1008042 559
1008043 559
1008044 226
1008045 227
1008046 227
1008047 227
1008052 587
1008053 587
1008054 587
1008055 651
1008056 651
1008057 651
1008058 587
1008059 587
1008060 587
1008061 651
1008062 651
1008063 651
1008065 59
1008066 1011
1008067 59, 1011
1008068 59, 1011
1008069 59
1008070 59
1008071 399
1008081 355
1008082 355
1008083 355
1008084 354
1008085 354
1008086 354
1008087 1013
1008088 1013
1008095 59, 1011
1008096 59, 1011
1008097 59
1008098 59
1008099 177

1008100
1008100 177
1008101 177
1008102 177
1008103 177
1008104 333
1008105 333
1008106 333
1008107 333
1008108 333
1008109 478
1008110 478
1008111 478
1008112 478
1008113 478
1008114 225
1008115 225
1008116 225
1008117 225
1008118 225
1008119 177, 225, 333, 479
1008123 334
1008124 335
1008125 168
1008126 168
1008127 169
1008128 169
1008129 313
1008130 313
1008131 313
1008132 313
1008133 309
1008134 309
1008135 309
1008136 229
1008137 229
1008138 228
1008139 228
1008140 182, 232, 336, 338
1008141 184, 234, 630
1008142 186, 236, 632
1008143 188, 238, 634
1008144 182, 232, 336, 338
1008145 184, 234, 630
1008146 186, 236, 632
1008147 188, 238, 634
1008148 555
1008149 555
1008150 555
1008151 1040
1008152 1041
1008153 1039, 1041
1008154 1035
1008155 1040
1008156 1042
1008157 1043
1008158 1034
1008159 1040
1008160 1040

1008161 1040
1008162 1042
1008163 1040
1008164 1041
1008165 1041
1008168 579
1008169 579
1008170 656
1008171 656
1008172 285
1008173 285
1008174 579
1008175 579
1008176 657
1008177 657
1008178 285
1008179 285
1008180 576
1008181 576
1008182 577
1008183 577
1008184 657
1008185 657
1008186 285, 579, 657
1008187 285, 579, 657
1008188 285, 579, 657
1008189 285, 579, 657
1008190 285, 579, 657
1008191 285, 579, 657
1008192 285, 579, 657
1008193 711
1008194 711
1008195 711
1008196 711
1008197 844
1008198 844
1008199 825

1008200
1008200 825
1008201 379
1008202 379
1008203 379
1008204 379
1008205 379
1008206 379
1008207 567
1008208 567
1008209 567
1008210 623
1008211 623
1008212 623
1008213 429, 567, 623
1008214 429, 567, 623
1008215 429, 567, 623
1008216 429, 567, 623
1008217 429, 567, 623
1008218 429, 567, 623
1008219 429, 567, 623
1008220 429, 567, 623
1008221 429, 567, 623
1008222 429, 567, 623
1008223 429, 567, 623
1008224 429, 567, 623
1008225 429, 567, 623
1008226 429, 567, 623
1008227 429, 567, 623
1008228 427
1008229 427
1008230 427
1008231 427
1008232 426
1008233 426
1008234 427
1008235 427
1008236 427
1008237 427
1008238 427
1008239 427
1008240 427
1008241 427
1008242 563
1008243 563
1008244 563
1008245 563
1008246 563
1008247 563
1008248 563
1008249 563
1008250 563
1008251 563
1008252 563
1008253 563
1008254 565
1008255 565
1008256 565
1008257 565
1008258 565
1008259 565
1008260 565
1008261 565
1008262 565
1008263 565
1008264 565
1008265 565
1008266 619
1008267 619
1008268 619
1008269 619
1008270 619
1008271 619
1008272 619
1008273 619
1008274 619
1008275 621
1008276 621
1008277 621
1008278 621
1008279 621
1008280 621
1008281 621
1008282 621
1008283 621
1008284 421
1008285 421
1008286 421
1008287 421
1008288 423
1008289 423
1008290 423
1008291 423
1008292 425
1008293 425
1008294 425
1008295 425
1008296 421
1008297 421
1008298 421
1008299 421

1008300
1008300 423
1008301 423
1008302 423
1008303 423
1008304 425
1008305 425
1008306 425
1008307 425
1008308 420
1008309 420
1008310 420
1008311 420
1008312 422
1008313 422
1008314 422
1008315 422
1008316 424
1008317 424
1008318 424
1008319 424
1008320 421
1008321 421
1008322 421
1008323 421
1008324 423
1008325 423
1008326 423
1008327 423
1008328 425
1008329 425
1008330 425
1008331 425
1008332 421
1008333 421
1008334 421
1008335 421
1008336 423
1008337 423
1008338 423
1008339 423
1008340 425
1008341 425
1008342 425
1008343 425
1008344 421
1008345 421
1008346 421
1008347 421
1008348 423
1008349 423
1008350 423
1008351 423
1008352 425
1008353 425
1008354 425
1008355 425
1008356 566
1008357 566
1008358 566
1008359 622
1008360 622
1008361 421
1008362 421
1008363 421
1008364 421
1008365 423
1008366 423
1008367 423
1008368 423
1008369 425
1008370 425
1008371 425
1008372 425
1008374 1041
1008375 1035
1008376 429, 567, 623
1008377 429, 567, 623
1008378 429, 567, 623
1008379 686
1008380 686
1008381 686
1008384 933
1008385 735
1008386 717
1008387 717
1008388 717
1008389 717
1008390 569
1008392 569
1008393 569
1008394 569
1008395 569
1008397 569
1008398 569
1008399 569

1008400
1008400 569
1008402 569

1008403 569
1008404 569
1008405 529
1008407 529
1008408 529
1008409 529
1008410 529
1008412 529
1008413 529
1008414 529
1008415 529
1008417 529
1008418 529
1008419 529
1008420 571
1008422 571
1008423 571
1008424 571
1008425 571
1008427 571
1008428 571
1008429 571
1008430 571
1008432 571
1008433 571
1008434 571
1008435 624
1008436 624
1008437 624
1008438 624
1008439 624
1008440 624
1008441 625
1008442 625
1008443 625
1008444 625
1008445 625
1008446 625
1008447 573
1008449 573
1008450 573
1008451 573
1008452 627
1008453 627
1008454 531
1008456 531
1008457 531
1008458 531
1008459 531
1008461 531
1008462 531
1008463 531
1008464 531
1008466 531
1008467 531
1008468 531
1008469 573
1008471 573
1008472 573
1008473 573
1008474 728
1008475 728
1008476 701
1008477 701
1008478 804
1008479 804
1008480 805
1008481 953
1008482 447, 449, 582, 583, 644, 645
1008483 447, 449, 582, 583, 644, 645
1008484 447, 449, 582, 583, 644, 645
1008485 447, 449, 582, 583, 644, 645
1008486 447, 449, 582, 583, 644, 645
1008487 447, 449, 582, 583, 644, 645
1008488 575
1008489 575
1008490 575
1008491 575
1008492 575, 627
1008493 575, 627
1008494 575, 627
1008495 575, 627
1008496 575, 627
1008497 575, 627
1008498 575, 627
1008499 575, 627

1008500

1008500 231
1008501 231
1008502 231
1008503 231
1008504 231
1008505 231
1008506 231
1008507 231
1008508 231
1008509 116
1008510 116
1008511 117
1008512 117
1008513 117
1008514 117
1008515 687
1008516 687
1008517 687
1008518 688
1008519 688
1008520 688
1008521 689
1008522 689
1008523 689
1008524 689
1008525 1021
1008526 1021
1008527 1021
1008528 1023
1008529 1023
1008530 1023
1008531 1023
1008532 1023
1008535 316
1008536 317
1008537 317
1008538 316
1008539 561
1008540 561
1008541 655
1008542 913
1008543 796
1008544 796
1008545 173
1008546 173
1008547 173
1008548 173
1008549 173
1008550 173
1008551 175
1008552 175
1008553 175
1008554 175
1008555 175
1008556 175
1008567 62
1008568 62
1008569 62
1008570 62
1008571 63
1008572 63
1008573 63
1008574 63
1008575 1023
1008576 1022
1008577 418
1008578 418
1008579 418
1008580 418
1008581 419
1008582 419
1008583 419
1008584 419
1008585 419
1008586 419
1008587 419
1008588 419
1008589 240
1008590 240
1008591 241
1008592 241
1008593 241
1008594 241
1008595 241
1008596 241
1008597 990
1008598 993

1008600

1008601 991
1008602 993
1008605 995
1008607 995
1008609 995
1008610 995
1008612 385
1008613 385
1008614 385
1008615 297
1008616 297
1008617 297
1008618 195
1008619 195
1008620 195
1008621 1005
1008622 1005
1008623 1005
1008624 1005
1008625 1006
1008626 1006
1008627 1007
1008628 1007
1008629 132
1008630 134
1008631 132
1008632 134
1008633 133
1008634 135
1008635 133
1008636 135
1008641 1039
1008642 1039
1008643 1039
1008644 1039
1008645 1042
1008646 1042
1008647 1034
1008648 1034
1008649 1034
1008650 1034
1008651 1048
1008652 1048
1008653 1047
1008654 1047
1008655 1047
1008656 1050
1008657 1050
1008658 1050
1008659 1051
1008660 132, 134, 1051
1008661 1052
1008662 1053
1008663 132, 134, 1053
1008664 1053
1008665 133, 135, 1053
1008666 132, 134, 1053
1008667 132, 134, 1054
1008668 1054
1008669 133, 135, 1054
1008672 132, 134, 1054
1008673 132, 134, 1054
1008674 133, 135, 1054

1008675 1046
1008676 647
1008677 647
1008678 647
1008679 647
1008680 1031
1008681 1031
1008682 1031
1008683 1031
1008684 1031
1008685 1031
1008686 1031
1008687 1031
1008688 1031
1008689 1031
1008690 1031
1008691 1031
1008692 1031
1008693 1031
1008694 1031
1008695 1031
1008696 1031
1008697 1031
1008698 152

1008700
1008703 447
1008704 447
1008705 447
1008706 447
1008707 447
1008708 447
1008709 449
1008710 449
1008711 449
1008712 449
1008713 449
1008714 449
1008715 449
1008716 449
1008717 449
1008718 449
1008719 449
1008720 449
1008721 916
1008722 916
1008723 916
1008724 916
1008725 795
1008726 795
1008727 795
1008728 647
1008729 647
1008730 647
1008731 647



VARYT
1008111 + 1007858

1-PHASE

1-PHASE SURFACE-MOUNTED TRACK 553
1-PHASE SURFACE-MOUNTED TRACK ACCESSORIES 555
1-PHASE RECESSED TRACK 557
1-PHASE RECESSED TRACK ACCESSORIES 557

3-PHASE

EUTRAC® 3-PHASE SURFACE-MOUNTED TRACK 613
EUTRAC® 3-PHASE SURFACE-MOUNTED TRACK ACCESSORIES 615
EUTRAC® 3-PHASE RECESSED TRACK 617
EUTRAC® 3-PHASE RECESSED TRACK ACCESSORIES 617
S-TRACK 3-PHASE MOUNTING RAIL DALI 605
S-TRACK 3-PHASE MOUNTING RAIL DALI ACCESSORIES 607
S-TRACK 3-PHASE MOUNTING TRACK DALI 609
S-TRACK 3-PHASE MOUNTING TRACK DALI ACCESSORIES 611

48V SYSTEMS

48V TRACK MOUNTING TRACK DALI 503
48V TRACK MOUNTING TRACK DALI ACCESSORIES 505
48V TRACK MOUNTING TRACK DEEP DALI 507
48V TRACK MOUNTING TRACK DEEP DALI ACCESSORIES 509
48V TRACK RECESSED TRACK DALI 511
48V TRACK RECESSED TRACK DALI ACCESSORIES 513

A

ABRIDOR 100 POLE 797
ABRIDOR 100 POLE 100, HYBRID 796
ABRIDOR 60 POLE 797
ABRIDOR 60 POLE, HYBRID 796
ABRIDOR SENSOR WL 915
ABRIDOR WL 915
ABRIDOR WL, HYBRID 913
ADEGAN FL, E27 775
ADEGAN FL, FLAT SOLAR 717
ADEGAN FL, SOLAR 717
ADI EL 950
AINOS CW 942
AINOS CW SENSOR 943
AINOS CW SENSOR, SQUARE 943
AINOS CW, SQUARE 943
AKALO D83 EL 155
ALPA CONE 100 POLE, E27 777
ALPA MUSHROOM 45 POLE, E27 777
ALPA MUSHROOM 75 POLE, E27 777
ALTRA DICE CL, QPAR51 203
ALTRA DICE CW, DOUBLE, QPAR51 203, 456
ALTRA DICE TRACK 1-PHASE, QPAR51 599
ALTRA DICE TRACK 3-PHASE, QPAR51 658
ANELA CL, PHASE 199
ANELA PD, PHASE 310
ANGOLUX SENSOR WL 902
ANGOLUX WL 902
APONI 120 POLE, PHASE 778
APONI 90 POLE, PHASE 778
ARLINA 130 WL 361
ARLINA 60 WL 361
ARROCK ARC POLE, QPAR51 760
ARROCK GRANITE 40 POLE, SQUARE, E27 759
ARROCK GRANITE 70 POLE, SQUARE, E27 759
ARROCK SLOT POLE, QPAR51 761
ARROCK STONE 50 POLE 761
ARROCK STONE 75 POLE 761
ASMARA LV, QR-C51 544
ASSO 300 WL, PHASE 396, 397
ASTINA CL, QPAR51 198
ASTINA PD, QPAR51 309
ASTINA STEEL WL, QPAR51 899
ASTINA UP/DOWN WL, QPAR51 407
ASTINA WL, QPAR51 899
ASTO CW, DOUBLE, QPAR51 435
ASTO CW, QUAD, QPAR51 435
ASTO CW, SINGLE, QPAR51 435
ASTO CW, TRIPLE, QPAR51 435
ASTO TUBE 287, 443
ASTO TUBE 1-PHASE, GU10 585
ASTO TUBE CL, SINGLE, GU10 201
ASTO TUBE CW, DOUBLE, GU10 443
ASTO TUBE CW, QUADRUPLE, GU10 443
ASTO TUBE CW, SINGLE, GU10 443
ASTO TUBE CW, TRIPLE, GU10 443
ASTO TUBE DECORATIVE REFLECTOR 201, 287, 375, 443, 585
ASTO TUBE PD, DOUBLE, GU 10 287
ASTO TUBE PD, QUADRUPLE, GU 10 287
ASTO TUBE PD, SINGLE, GU 10 287
ASTO TUBE PD, TRIPLE, GU 10 287
ASTO TUBE WL, SINGLE, GU10 375
ASTO TUBE WL, UP/DOWN, GU10 375
AVO CW, DOUBLE, QPAR51 433
AVO CW, QUAD, QPAR51 433
AVO CW, SINGLE, QPAR51 433
AVO CW, TRIPLE, QPAR51 433
AVO TRACK 1-PHASE, QPAR51 593
AVO TRACK 3-PHASE, QPAR51 665

ACCESSORY PARTS

CABLE CLAMP 1057
CASAMBI MODULE FOR DALI DRIVER 1056
CEILING HOOK 1057
CONNECTION BOX 5 POLES, DALI 1058
CONTROLLER LED STIP CCT / RGBW 1047
DALI INTERFACE 1-10V + ON/OFF 1046
DALI KONTROLER 24V DC 1047
DALI UNIVERSAL DIMMER 10-300W 1047
DRIVER STRAIN RELIEF STANDARD 1054
DRIVER STRAIN RELIEF STANDARD 1054
DRIVER STRAIN RELIEF THROUGH-WIRABLE 1054
DT8 CONTROLLER WITH PUSH-DIM FUNCTION 1056
E-TRANSFORMATOR 60W | 12V DIMMABLE 1046
EMERGENCY LIGHT FEATURE DALI 2 1056
GLENOS® 1057
GU10 CONNECTION BOX WITH BASE, UNIVERSAL 1057
GU10 FITTING 1058
GU10 LED CONNECTION BOX WITH BASE, MAX. 10W 1057
IP68 CONNECTION BOX, 3-POLE 1058
IP68 CONNECTION BOX, 5-PIN 1058
IP68 T-CONNECTION BOX, 3-PIN 1058
LED DRIVER 10,7W | 200MA | DALI DIMMABLE 1055
LED DRIVER 10W | 180-270MA PHASE 1051
LED DRIVER 10W | 350MA ROUND 1050
LED DRIVER 10W | 500-700MA PHASE 1052
LED DRIVER 12W | 250MA DALI DIMMABLE WITH RF INTERFACE 1055
LED DRIVER 15W | 100-700MA DALI 1053
LED DRIVER 15W | 200-350MA PHASE 1053
LED DRIVER 15W | 700MA ROUND 1051
LED DRIVER 20W | 350-500MA PHASE 1053
LED DRIVER 20W | 350MA 1051
LED DRIVER 20W | 350MA | DIMMABLE 1051
LED DRIVER 20W | 350MA/500MA | PHASE 1051
LED DRIVER 21W | 500MA INCLUDING STRAIN RELIEF 1051
LED DRIVER 25W | 150-700MA | DALI DIMMABLE 1053
LED DRIVER 30W | 500-700MA PHASE 1053
LED DRIVER 36W | 100-900MA DALI 1054
LED DRIVER 3W | 100-700MA DALI 1054
LED DRIVER 40W | 1050MA DALI CCT TUNABLE 1055
LED DRIVER 40W | 1050MA DALI DIMMABLE WITH RF INTERFACE 1055
LED DRIVER 40W | 500MA DALI DIMMABLE WITH RF INTERFACE 1055
LED DRIVER 40W | 700-1050MA PHASE 1053
LED DRIVER 40W | 700MA DALI DIMMABLE WITH RF INTERFACE 1055
LED DRIVER 4W | 350MA 1050
LED DRIVER 4W | 700MA 1050
LED DRIVER 53W | 650-1400MA DALI 1054
LED POWER SUPPLY 100W | 24V | 2 KANAL DALI DIMMABLE 1050
LED POWER SUPPLY 100W | 24V DC 1049
LED POWER SUPPLY 100W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 1049
LED POWER SUPPLY 100W | 24V DC INCLUDING STRAIN RELIEF 1048
LED POWER SUPPLY 12V | 24W, ROUND 1048
LED POWER SUPPLY 150W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 1049
LED POWER SUPPLY 150W | 24V DC INCLUDING STRAIN RELIEF 1048
LED POWER SUPPLY 24V | 24W 1047
LED POWER SUPPLY 24V | 25W, ROUND 1048
LED POWER SUPPLY 24V | 36W 1047
LED POWER SUPPLY 24V | 60W 1047
LED POWER SUPPLY 250W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 1050
LED POWER SUPPLY 250W | 24V DC INCLUDING STRAIN RELIEF 1048
LED POWER SUPPLY 25W | 24V 1049
LED POWER SUPPLY 30W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 1049
LED POWER SUPPLY 30W | 24V DC INCLUDING STRAIN RELIEF 1048
LED POWER SUPPLY 50W | 24V 1049
LED POWER SUPPLY 60W | DALI, 24V, 2 CHANNEL DALI DIMMABLE 1050
SMART REMOTE CONTROL ZIGBEE, CCT/RGBW 1056
TEXTILE CABLE 10M 1057
TRAILING-EDGE PHASE DIMMER CONVERTER 1046
TRANSFORMER TENSEO 12V AC | 105VA CONVENTIONAL 1046
TRANSFORMER TENSEO 12V AC | 210VA CONVENTIONAL 1046
TRANSFORMER TENSEO 12V AC | 50VA CONVENTIONAL 1046
ZIGBEE MODULE FOR DALI DRIVER, 1-CHANNEL 1056
ZIGBEE MODULE FOR DALI DRIVER, 2-CHANNEL 1056

B

BASKET WL, E27 402
BATTEN 120 CW 471
BATTEN 60 CW 471
BIG NAILS 50 POLE, E27 780
BIG NAILS 80 POLE, E27 780
BIG NAUTILUS SP, ROUND, QPAR51 810
BIG PLOT COVER, 2-PACK 983
BIG PLOT COVER, 4-PACK 983
BIG PLOT MODULES 983
BIG QUAD UP/DOWN WL 891
BIG QUAD WL 890
BIG THEO BEAM UP/FLOOD DOWN WL 861
BIG THEO CL 833
BIG THEO CL, QPAR111 833

BIG THEO FLOOD UP/DOWN WL 862
BIG THEO UP/DOWN WL, QPAR111 861
BIG THEO WL 863
BIG THEO WL, QPAR111 863
BIMA 1-PHASE, DOUBLE, QPAR51 597
BIMA 1-PHASE, SINGLE, QPAR51 597
BIMA 3-PHASE, DOUBLE, QPAR51 663
BIMA 3-PHASE, SINGLE, QPAR51 663
BOOKAT POLE 800
BOOKAT WL 889
BOX UP/DOWN WL, QT-DE12 919
BOX-L WL 919
BOX-L WL, E27 919
BRICK DOWNUNDER EL 955
BRICK DOWNUNDER EL, E14 955
BRICK EL, ASYMMETRICAL 953
BRICK EL, SYMMETRICAL 953
BRICK MESH EL 953
BULAN CW, E14 945
BULAN GRID CW, E27 945
BULKHEAD V 360 1027

C
C-POL POLE, E27 784
CARISO WL, PHASE 398
CHROMBO WL, PHASE 399
COMET LED LV 549
COMET LV, QR-C51 549
CONCRETO EL, CUT 949
CONCRETO EL, WING 949
CONCRETO FL, SQUARE, QPAR51 733
CONCRETO FL, ROUND, QPAR 51 733
CONCRETO L WL 855
CONCRETO M WL 855
CONE FL, E27 772
CONTONE® DL, ROUND, RIGID, PHASE 149
CONTONE® DL, ROUND, ADJUSTABLE, PHASE 149
COSMIC LV, QR-C51 545
COUPA FLEX WL 409
CUBIX FL, QPAR51 772
CYFT CW, PHASE 439
CYFT DECORATIVE RING 439
CYFT WAVE CW, PHASE 439

D
D-RING M WL, PHASE 851
D-RING S WL, PHASE 851
DASAR® 115 RL, SQUARE, QPAR51 973
DASAR® 115 RL, ROUND, QPAR51 973
DASAR® 1200 EL 959
DASAR® 215 RL, SQUARE, QPAR111 977
DASAR® 215 RL, ROUND, E27 977
DASAR® 215 RL, ROUND, QPAR111 976
DASAR® 255 EL 969
DASAR® 270 EL, ASYMMETRICAL 971
DASAR® 270 EL, SYMMETRICAL 971
DASAR® 370 EL, ROUND 977
DASAR® 600 EL 959
DASAR® 920 EL 970
DASAR® 920 SP, 230V 815
DASAR® EXACT 116 EL, SQUARE, QPAR51 975
DASAR® EXACT 116 EL, ROUND, QPAR51 975
DASAR® FLAT 120 EL 969
DASAR® FLAT 80 EL 969
DASAR® L RL, SQUARE 965
DASAR® L RL, ROUND 965
DASAR® M RL, SQUARE 963
DASAR® M RL, ROUND 962
DASAR® PROJECTOR SP, 12/24V 815
DASAR® S RL, SQUARE 961
DASAR® S RL, ROUND 961
DASAR® XL RL, SQUARE 967
DASAR® XL RL, ROUND 966
DECONA 30 CW, PHASE 418
DECONA 42 CW, PHASE 419
DEKLED EL 152
DELWA WL 907
DENA 30 WL, E14 402
DIO FLEX PLATE WL 415
DIO FLEX PLATE WL QPAR51 415
DIRETO 60 WL, PHASE 401
DIRETO 90 WL, PHASE 401
DISPLAY ADL 50 QPAR51 417
DL 126 EL 145
DOLIX OUT EL, SQUARE, QPAR51 153
DOLIX OUT EL, ROUND, QPAR51 153
DORISA 30 WL 367
DORISA 50 WL 367
DOWNLIGHT C 150 1005, 1006
DOWNLIGHT C 200 1005, 1007
DOWNLIGHT V 100 1008
DOWNLIGHT V 150 1008
DOWNLIGHT V 200 1008
DOWNUNDER OUT L EL 951
DOWNUNDER OUT M EL 951
DOWNUNDER OUT S EL 951
DOWNUNDER OUT WL, SQUARE 911
DOWNUNDER OUT WL, ROUND 911
DOWNUNDER PUR 150 EL 160
DOWNUNDER PUR 80 EL 160
DURNO LV 547

E
ENOLA S/M/L REFLECTOR 873
ENOLA B 1-PHASE, PD, QPAR51 595
ENOLA B CL, QPAR51 197
ENOLA B CW, DOUBLE, QPAR51 455
ENOLA B CW, SINGLE, QPAR51 455
ENOLA B PD, QPAR51 309
ENOLA B TRACK 1-PHASE, QPAR51 595
ENOLA B WL, QPAR51 407
ENOLA C CL 197
ENOLA C TRACK 1-PHASE 594
ENOLA C TRACK 3-PHASE 665
ENOLA M LINSE 19° 873
ENOLA M LINSE ASYMMETRICAL 873
ENOLA OCULUS CL 828
ENOLA OCULUS WL, SINGLE 865
ENOLA OCULUS WL, UP/DOWN 865
ENOLA PD, E27 309
ENOLA ROUND L CL 829
ENOLA ROUND L UP/DOWN WL 869
ENOLA ROUND L WL, SINGLE 867
ENOLA ROUND M CL 829
ENOLA ROUND M UP/DOWN WL 869
ENOLA ROUND M WL, SINGLE 867
ENOLA ROUND S CL 829
ENOLA ROUND S UP/DOWN WL 869
ENOLA ROUND S WL, SINGLE 867
ENOLA SQUARE L CL 831
ENOLA SQUARE L UP/DOWN WL 872
ENOLA SQUARE L WL, SINGLE 871
ENOLA SQUARE M CL 831
ENOLA SQUARE M UP/DOWN WL 872
ENOLA SQUARE M WL, SINGLE 871
ENOLA SQUARE S CL 831
ENOLA SQUARE S UP/DOWN WL 872
ENOLA SQUARE S WL, SINGLE 871
ESKINA 30 POLE 739
ESKINA 80 POLE 739
ESKINA D DISPLAY, PHASE 929
ESKINA FRAME 125 POLE, DOUBLE 738
ESKINA FRAME 175 POLE, DOUBLE 738
ESKINA FRAME 45 POLE, SINGLE 737
ESKINA FRAME 75 POLE, DOUBLE 737
ESKINA FRAME 75 POLE, SINGLE 737
ESKINA FRAME CL, SINGLE 827
ESKINA FRAME WL 887
ESKINA FRAME WL, DOUBLE 887
ESKINA SPOT CW, PHASE 937
ESKINA SPOT SENSOR CW, PHASE 937
EURO CUBE 658
EURO SPOT TRACK 1-PHASE, QPAR51 598
EURO SPOT TRACK 3-PHASE, QPAR111 659
EURO SPOT TRACK 3-PHASE, QPAR51 659

F
F-POL POLE, E27 784
F-POL WL, E27 924
FENDA 15 CM, ROUND 300, 497
FENDA 30 CM, ROUND 301, 497
FENDA CEILING ROSE, E27 206
FENDA FL, E27 495, 497
FENDA GLASS SHADE 12,5 CM, ROUND 300
FENDA HALF SHADE 408
FENDA Ø 30 CM, ROUND 207
FENDA Ø 45 CM, ROUND 207, 301, 497
FENDA Ø 70 CM, ROUND 301
FENDA Ø 70CM, ROUND 207, 497
FENDA PD, E27 300
FENDA TL, E27 495
FENDA WL, BASIS, E27 408
FERA 25 CL 212
FERA 25 CL, DALI 212
FITU CUBE WL, E27 404
FITU PD, E27 299
FITU WALL BRACKET 404
FLAC BEAM® SP 809
FLATT 100 POLE 793
FLATT 65 POLE 793
FLATT SENSOR WL 898
FLATT WL 898
FLOODI L SP 1029
FLOODI M SP 1029
FLOODI S SP 1029
FORCHINI 50 PD, E27 316
FORCHINI 70 PD, E27 316
FORCHINI M 40 PD, E27 317
FORCHINI M 40 TRACK 1-PHASE, PD, E27 561
FORCHINI M 40 TRACK 3-PHASE, PD, E27 655
FORCHINI M 50 PD, E27 317
FRAME BASIC RL 156
FRAME BASIC RL, HV 156
FRAME BASIC SET RL 156
FRAME CURVE EL 157

G
GALEN 120 SP 808
GALEN 60 SP 808
GLENOS PD, 1M, 1-10V 293
GLENOS PD, 2M, 1-10V 293
GLENOS® 60 WL 367
GLOO PURE 27 POLE, E27 767
GLOO PURE 44 POLE, E27 767
GLOO PURE 70 POLE, E27 767
GLOO PURE WL, E27 923
GRAFIT 30 POLE, E27 747
GRAFIT 30 POLE, ROUND, E27 745
GRAFIT 60 POLE, E27 747
GRAFIT 60 POLE, ROUND, E27 745
GRAFIT 90 POLE, E27 747
GRAFIT 90 POLE, ROUND, E27 745
GRAFIT WL, E27 881
GRAFIT WL, SQUARE, SENSOR, E27 881
GRAFIT WL, ROUND, E27 880
GRAFIT WL, ROUND, SENSOR, E27 880
GRAZIA 10 SURFACE-MOUNTED PROFILE, FLAT 2 M 671
GRAZIA 10 SURFACE-MOUNTED PROFILE, STANDARD 671
GRAZIA 10 ACCESSORIES 673
GRAZIA 10 EDGE 2 M 674

GRAZIA 10 RECESSED PROFILE 671
GRAZIA 10 EDGE ACCESSORIES 675
GRAZIA 20 STANDARD SURFACE-MOUNTED PROFILE, 3 M 677
GRAZIA 20 RECESSED PROFILE, 3 M 677
GRAZIA 20 ACCESSORIES 678, 679
GRAZIA 60 SURFACE MOUNTED PROFILE, 1.5 M 681
GRAZIA 60 RECESSED PROFILE, 1.5 M 681
GRAZIA 60 ACCESSORIES 682, 683
GRAZIA IP FLEXSTRIP 24V 694
GRAZIA IP FLEXSTRIP RGBW, 24V 695
GRAZIA IP FLEXSTRIP TUNABLE WHITE, 24V 695
GRAZIA LED STRIP CORE MAIN LIGHTING, 2700K 689
GRAZIA LED STRIP VALUE ADDITIONAL LIGHTING, 2700K 686
GRAZIA LED STRIP VALUE MAIN LIGHTING +, 3000K 688
GRAZIA LED STRIP VALUE MAIN LIGHTING, 2700K 687
GRAZIA PRO FLEXSTRIP RGBW, 24V 693
GRAZIA PRO FLEXSTRIP TUNABLE WHITE, 24V 692
GRAZIA PRO MAX FLEXSTRIP 24V 690, 691
GRID CUBE 701
GRIP! L 1-PHASE, PD, QPAR51, Ø 5,7 CM 573
GRIP! L 1-PHASE, QPAR51, Ø 5,7 CM 573
GRIP! L 3-PHASE, QPAR51, Ø 5,7 CM 627
GRIP! L DECORATIVE RING Ø 5,4 CM 575, 627
GRIP! M 1-PHASE, PHASE, Ø 4,3 CM 571
GRIP! M 3-PHASE, DALI, Ø 4,3 CM 624
GRIP! M 3-PHASE, PHASE, Ø 4,3 CM 625
GRIP! M DECORATIVE RING Ø 4,0 CM 575, 627
GRIP! S 1-PHASE 569
GRIP! S 1-PHASE, PHASE, Ø 3,0 CM 569
GRIP! S 48V, DALI, Ø 3,0 CM 529
GRIP! S 48V, PD, DALI, Ø 3,0 CM 531
GRIP! S DECORATIVE RING Ø 2,7 CM 575
GU10 LED CONNECTION BOX 118

H

H-POL 30 POLE 788
H-POL 60 POLE 788
H-POL TWIN 60 POLE 789
HELIA 30 PD 305
HELIA 30 PD, PHASE 305
HELIA 40 PD 307
HELIA 40 PD, PHASE 307
HELIA 50 TRACK 1-PHASE 589
HELIA 50 TRACK 3-PHASE 665
HELIA AMBIENT 35 PD 304
HELIA AMBIENT 35 PD, PHASE 304
HELIA CW, DOUBLE 939
HELIA CW, SINGLE 939
HELIA SLIM POLE, DOUBLE 816
HELIA SLIM POLE, SINGLE 816
HELIA SPOT L SP, SINGLE, PHASE 817
HELIA SPOT S SP, SINGLE 817
HIGHBAY C 1021, 1022, 1023
HIGHBAY V 1024, 1025
HORN DL, DOUBLE, QPAR51 137
HORN DL, GU10, BLOWER DOOR TESTED 138
HORN DL, SINGLE, ASYMMETRICAL, QPAR51 137
HORN DL, SINGLE, QPAR51 137, 138
HORN EL, SINGLE, QPAR51 138
HORN MAGNA EL 139
HORN MINI EL 136
HORN-T EL, QPAR111 139

I

I-RING POLE 718
I-RING WL 852
IN-LINE 22 48V, DARKLIGHT REFLECTOR, DALI 523
IN-LINE 22 48V, OPAL, DALI 523
IN-LINE 24 48V, MOVE, DARKLIGHT REFLECTOR, DALI 527
IN-LINE 44 48V, DARKLIGHT REFLECTOR, DALI 525
IN-LINE 44 48V, OPAL, DALI 525
IN-LINE 46 48V, MOVE, DARKLIGHT REFLECTOR, DALI 527
INDA CW, QPAR51 457
INDUSTRY BATTEN V 1018, 1019
IPERI 50 POLE 798
IPERI WL 926

K

KADUX DL, DOUBLE, DALI 063
KADUX DL, DOUBLE, PHASE 065
KADUX DL, SINGLE, DALI 062
KADUX DL, SINGLE, PHASE 065
KADUX DL, TRIPLE, PHASE 065
KADUX EL, DOUBLE, QPAR111 067
KADUX EL, DOUBLE, QPAR51 066
KADUX EL, SINGLE, QPAR111 067
KADUX EL, SINGLE, QPAR51 066
KADUX EL, TRIPLE, QPAR51 066
KALU CW, DOUBLE, PHASE 451
KALU CW, DOUBLE, QPAR111 453
KALU CW, QUAD, PHASE 451
KALU CW, QUAD, QPAR111 453
KALU CW, SINGLE, PHASE 451
KALU CW, SINGLE, QPAR111 453
KALU CW, TRIPLE, PHASE 451
KALU CW, TRIPLE, QPAR111 453
KALU TRACK 1-PHASE, PHASE 581
KALU TRACK 1-PHASE, QPAR111 581
KALU TRACK 3-PHASE, PHASE 662
KALU TRACK 3-PHASE, QPAR111 662
KAMI CL, DOUBLE, LONG, QPAR51 171
KAMI CL, DOUBLE, QPAR51 171
KAMI CL, SINGLE, QPAR51 170
KAMI CL, TRIPLE, LONG, QPAR51 171
KAMI CW, SINGLE, QPAR51 441
KAMI RL, SINGLE, QPAR51 057
KAMUELA ECO EL, ROUND, PHASE 155
KARDAMOD CL, DOUBLE, SQUARE, QPAR111 205
KARDAMOD CL, SINGLE, SQUARE, QPAR111 205
KARPO 30 CW, SINGLE 445
KARPO 30 EL 150
KARPO 30 WL, SINGLE 411
KARPO FL 498
KARPO GOOSE WL 410
KARPO MAGN CW, SINGLE, PHASE 410
KARPO TL 498
KARPO WL 411
KENKUA SPOT WL, E27 409
KERAS ELT WL, E27 925
KINI EL, PHASE 155

L

L-LINE 60 WL 369
L-LINE 120 WL 369
L-LINE OUT 30 FL, VERTICAL 762
L-LINE OUT 50 POLE, HORIZONTAL 763
L-LINE OUT 60 FL, VERTICAL 763
L-LINE OUT 80 POLE, HORIZONTAL 763
L-LINE OUT WL 921
LALU® CONE 15 LAMPSHADE, MIX&MATCH 260, 535
LALU® ELYPSE 15 LAMPSHADE, MIX&MATCH 261, 535
LALU® ELYPSE 22 LAMPSHADE, MIX&MATCH 261, 535
LALU® ELYPSE 33 LAMPSHADE, MIX&MATCH 261
LALU® LAMPSHADE, E27 BASE, MIX&MATCH 257
LALU® PD 48V, LED BASE, MIX&MATCH 533
LALU® PD, E27 257
LALU® PD, LED BASE, MIX&MATCH 258, 259
LALU® PLATE 15 LAMPSHADE, MIX&MATCH 260, 535
LALU® PLATE 22 LAMPSHADE, MIX&MATCH 260, 535
LALU® TETRA 14 LAMPSHADE, MIX&MATCH 260, 534
LALU® TETRA 24 LAMPSHADE, MIX&MATCH 260, 534
LALU® TETRA 36 LAMPSHADE, MIX&MATCH 260
LED CONNECTION BOX WITH BASE MAX. 10W 118
LED SPIKE SP 819
LED SPOT SP 931
LID I 45 POLE, SINGLE 719
LID I 75 POLE, DOUBLE 719
LID I WL, DOUBLE 846
LID I WL, SINGLE 846
LID II 847
LID II WL. UP/DOWN 847
LIGHT EYE® 150 1-PHASE, PD, QPAR111 579
LIGHT EYE® 150 1-PHASE, QPAR111 577
LIGHT EYE® 150 3-PHASE, PD, QPAR111 657
LIGHT EYE® 150 3-PHASE, QPAR111 657
LIGHT EYE® 150 DECORATIVE RING 285, 579, 657
LIGHT EYE® 150 PD, QPAR111 285
LIGHT EYE® 90 1-PHASE, PD, QPAR51 579
LIGHT EYE® 90 1-PHASE, QPAR51 576
LIGHT EYE® 90 3-PHASE, PD, QPAR51 656
LIGHT EYE® 90 DECORATIVE RING 285, 579, 657
LIGHT EYE® 90 PD, QPAR51 285
LIPSY® 30 CW, DOME 465
LIPSY® 30 CW, DRUM 467
LIPSY® 40 CW, DOME 465
LIPSY® 40 CW, DRUM 467
LIPSY® 40 CW, DRUM, DALI 468
LIPSY® 50 CW, DOME 465
LIPSY® 50 CW, DRUM 467
LIPSY® 50 CW, DRUM, DALI 468
LISENNE 40 POLE, E27 774
LISENNE 70 POLE, E27 774
LITTLE SUN TL 491
LOGS 40 POLE 743
LOGS 70 POLE 743
LOGS IN L WL, PHASE 393
LOGS IN WL 392
LOGS IN WL, PHASE 392
LOGS WL 921
LONG GRILL CW 473
LYGANT WL, DOUBLE 331
LYGANT WL, SINGLE 331

LAMP

LED A19 SOFT CAGE E27 1039
LED A60 E27 1039
LED A60 E27 CLEAR FILAMENT 1039
LED A60 E27 CLEAR FILAMENT HIGH EFFICIENCY 1039
LED A60 E27, MIRRORHEAD, CHROM 1043
LED A60 E27, RGBW, SMART 1039
LED A60 E27, TUNABLE 2700-6500K, SMART 1038
LED A60 GU10 1035
LED BULB SOFT CAGE A19 E27 1041
LED C35 E14 GOLD CURLY FILAMENT 1034
LED C35 E14 1035
LED CANDLE G9 1034

LED FLOATING GLOBE 125 E27 1040
LED FLOATING GLOBE 150 E27 1040
LED FLOATING GLOBE 200 E27 1041
LED FLOATING GLOBE 300 E27 1041
LED G125 E27 1043
LED G45 E14 GOLD CURLY FILAMENT 1034
LED GLOBE 125
HALF MOON FROSTED, E27 1043
LED GLOBE 125 ILLUSION,
CRESCENT SLANTING, E27 1040
LED GLOBE 125 ILLUSION,
SLANTING TOP, E27 1040
LED GLOBE 125 ILLUSION,
TWO CRESCENT, E27 1040
LED GU10 1036
LED QPAR111 GU10 1037, 1038
LED QPAR51 GU10 1036
LED QR51 GU5.3 1035
LED QT-DE12 R7S, 118 MM 1034
LED QT-DE12 R7S, 78 MM 1034
LED QT14 G9 1034
LED RUSTIKA SOFT CAGE E27 1042
LED SOFT TUBE T300 E27 1041
LED ST58 E27 1042
LED ST64 E27 1042
LED ST64 E27 GOLD CURLY FILAMENT 1042
LED T32 FILAMENT GU10 BULB GU10 1036
LED T38 E27 1041
LED T45 E27 1042
LED TCR-TSE GX53 1035
LED TUBE C T5 EM 1200 26W 1031
LED TUBE C T5 EM 1500 34W 1031
LED TUBE C T8 EM 1200 16W 1031
LED TUBE C T8 EM 1500 24W 1031
LED TUBE HIGH BRIGHTNESS, E27 1042
LED TUBE SOFT SPIRAL E27 1041
LED TUBE V T8 EM 1200 16W 1031
LED TUBE V T8 EM 1500 22W 1031

M

M-POL 30 POLE 729
M-POL 60 POLE 729
M-POL 90 POLE 729
M-POL CAP 728
M-POL M POLEHEAD 725
M-POL M POLEHEAD, DALI 725
M-POL M POLEHEAD, LOUVER 727
M-POL M POLEHEAD, LOUVER, DALI 727
M-POL M POLEHEAD, SHADER 726
M-POL M POLEHEAD, SHADER, DALI 726
M-POL POLE 60, SOCKET 728
M-POL S POLEHEAD 722
M-POL S POLEHEAD 180°,
GLARE REDUCTION 721
M-POL S POLEHEAD 180°,
GLARE REDUCTION, DALI 721
M-POL S POLEHEAD 360°,
GLARE REDUCTION 720
M-POL S POLEHEAD 360°,
GLARE REDUCTION, DALI 720
M-POL S POLEHEAD, DALI 723
M-POL S POLEHEAD, LOUVER 724
M-POL S POLEHEAD, LOUVER, DALI 724
M-POL S POLEHEAD, SHADER 723
M-POL S POLEHEAD, SHADER, DALI 723
MAGANDA WL 365
MAGICO 20 PD, E27 231
MAGICO 38 PD, E27 231
MAGICO 55 PD, E27 231
MANA 40 SHADE, ROUND 379
MANA 40 SHADE, ROUND, ACOUSTIC FELT 378
MANA 40 SHADE, ROUND,
MOON STRUCTURE 379
MANA 60 SHADE, ROUND 379
MANA 60 SHADE, ROUND, ACOUSTIC FELT 378
MANA 60 SHADE, ROUND,
MOON STRUCTURE 379
MANA BASE ROUND 378
MANA BASE WL, ROUND, PHASE 377, 858
MANA OUT WL, PHASE 859
MANA OUT WL, SET 859
MANA SHADE 383
MANA WL, BASIS, PHASE 381, 383
MARONA CL, PHASE 213
MARYLIN 40 WL 363
MARYLIN 60 WL 363
MARYLIN 90 WL 363
MEDO® 30 CW, PHASE 250, 352
MEDO® 30 RL, FRAME 132
MEDO® 30 RL, FRAMELESS 134
MEDO® 40 CW, PHASE 250, 352
MEDO® 40 RL, FRAME 132
MEDO® 40 RL, FRAMELESS 134
MEDO® 60 CW, PHASE 251, 353
MEDO® 60 RL, FRAME 133
MEDO® 60 RL, FRAMELESS 135
MEDO® 90 CW, PHASE 251, 353
MEDO® 90 RL, FRAME 133
MEDO® 90 RL, FRAMELESS 135
MEDO® CL, SQUARE, 1-10V 191, 253
MEDO® CL, SQUARE, DALI 191, 253
MEDO® PRO 30 CW, DALI 246, 348
MEDO® PRO 30 CW, DALI, UGR<19 242, 344
MEDO® PRO 30 CW, PHASE 246, 348
MEDO® PRO 30 CW, PHASE, UGR<19 242, 344
MEDO® PRO 40 CW, DALI 247, 349
MEDO® PRO 40 CW, DALI, UGR<19 243, 345
MEDO® PRO 40 CW, PHASE 247, 349
MEDO® PRO 40 CW, PHASE, UGR<19 243, 345
MEDO® PRO 60 CW, DALI 248, 350
MEDO® PRO 60 CW, DALI, UGR<19 244, 346
MEDO® PRO 60 CW, PHASE 248, 350
MEDO® PRO 60 CW, PHASE, UGR<19 244, 346
MEDO® PRO 90 CW, DALI 249, 351
MEDO® PRO 90 CW, DALI, UGR<19 245, 347
MEDO® PRO 90 CW, PHASE 249, 351
MEDO® PRO 90 CW, PHASE, UGR<19 245, 347
MEDO® RING 60 PD, DALI 240
MEDO® RING 60 PD, PHASE 241
MEDO® RING 90 PD, DALI 241
MEDO® RING 90 PD, PHASE 241
MELAN CW, E27 469
MERADO FLOOD WL, PHASE 416
MERIDIAN BOX SENSOR WL, E27 885
MERIDIAN BOX WL, E27 884, 885
MERIDIAN WL, E27 884
MIBO UP/DOWN WL, QT14 365
MOBALA EL 161
MODELA WL, UP/DOWN 901
MOLAT CL, E27 834
MOLAT PD, E27 773
MOLAT POLE, E27 773
MOLAT WL, E27 923
MYRA CW, SINGLE, QPAR51 931
MYRA DISPLAY WL, CURVED, QPAR51 929
MYRA SPOT DOUBLE, GU10 801
MYRA UP/DOWN WL, QPAR51 904
MYRA WL, DOUBLE, QPAR51 941

N

NAUTILUS 10 SP, SQUARE 812
NAUTILUS 10 SP, ROUND, QPAR51 810, 811
NAUTILUS 10 SPOT LED SP 813
NAUTILUS 10 SPOT SP, QPAR51 813
NAUTILUS SP, QR-C51 813
NAUTILUS WL QPAR51 931
NEW TRIA® 150 DL, SQUARE, QPAR111 131
NEW TRIA® 150 DL, ROUND, QPAR111 131
NEW TRIA® 155 DL, DOUBLE 117
NEW TRIA® 155 DL, DOUBLE, QPAR51 116
NEW TRIA® 155 RING, DOUBLE, SQUARE
GU10/LED MODULES 127
NEW TRIA® 300 DL, DOUBLE, QPAR111 131
NEW TRIA® 45 DL, ROUND 130
NEW TRIA® 68 DL, DTW, PHASE 108
NEW TRIA® 68 DL, PHASE 104, 106
NEW TRIA® 68 DL, QPAR51 112
NEW TRIA® 68 RING, SQUARE,
GU10/LED MODULE 121
NEW TRIA® 68 RING, SQUARE,
GU10/LED MODULE 120, 121
NEW TRIA® 68 RING, ROUND,
GU10/LED MODULE 121
NEW TRIA® 68 RING, ROUND,
GU10/LED MODULE 120, 121
NEW TRIA® 75 / XL DL, QPAR51 114
NEW TRIA® 75 DL, ROUND, PHASE 106
NEW TRIA® 75 RING, SQUARE,
GU10/LED MODULE 122
NEW TRIA® 75 RING, ROUND,
GU10/LED MODULE 122
NEW TRIA® 75 RING, ROUND,
GU10/LED MODULE 122
NEW TRIA® 75 XL RING, ROUND,
GU10/LED MODULE 123
NEW TRIA® 95 RING, SQUARE, LED MODULE 125
NEW TRIA® 95 RING, ROUND, LED MODULE 125
NEW TRIA® DL, DOUBLE LED MODULE, PHASE 127
NEW TRIA® DL, LED MODULE, DTW, PHASE 119
NEW TRIA® DL, LED MODULE, PHASE 119, 125
NEW TRIA® UNIVERSAL 68 DL, PHASE 110
NEW TRIA® UNIVERSAL DL, LED MODULE,
PHASE 119
NOBLO SPOT 1-PHASE, PHASE 582, 583
NOBLO SPOT 1-PHASE, TRIPLE TRACK SET 582
NOBLO SPOT 3-PHASE, PHASE 644, 645
NOBLO SPOT LV, ROPE TRACK 549
NOBLO® CW DOUBLE, PHASE 449
NOBLO® CW DOUBLE, PHASE, DTW 447
NOBLO® CW SINGLE, PHASE 449
NOBLO® CW SINGLE, PHASE, DTW 447
NOBLO® CW TRIPLE, PHASE 449
NOBLO® CW TRIPLE, PHASE, DTW 447
NOTAPO L RL 159
NOTAPO S RL 159
NOYA PD, PHASE 292
NUMINOS® L PD 236
NUMINOS® GIMBLE L DL 094
NUMINOS® GIMBLE M DL 092
NUMINOS® GIMBLE S DL 090
NUMINOS® GIMBLE XL DL 096
NUMINOS® GIMBLE XS DL 088
NUMINOS® L 3-PHASE 632
NUMINOS® L CL 186
NUMINOS® L CW 340
NUMINOS® L DL 074
NUMINOS® M 3-PHASE 630
NUMINOS® M CL 184
NUMINOS® M CW 338
NUMINOS® M DL 072
NUMINOS® M PD 234
NUMINOS® MOVE L DL 084
NUMINOS® MOVE M DL 082
NUMINOS® MOVE S DL 080
NUMINOS® MOVE XL DL 086
NUMINOS® MOVE XS DL 078
NUMINOS® S 3-PHASE 628
NUMINOS® S 48V, DALI 516, 520
NUMINOS® S CL 182
NUMINOS® S CW 336
NUMINOS® S DL 070
NUMINOS® S PD 232
NUMINOS® XL 3-PHASE 634
NUMINOS® XL CL 188
NUMINOS® XL CW 342

NUMINOS® XL DL 076
NUMINOS® XL PD 238
NUMINOS® XS 48V, DALI 514, 518
NUMINOS® XS DL 068
NUMINOS® ZOOM M 3-PHASE 636
NUMINOS® ACCESSORIES 98-103

O

OCCULDAS 13 CL, INDIRECT, PHASE 202
OCCULDAS 14 EL, INDIRECT, PHASE 148
OCCULDAS 23 CL, INDIRECT, PHASE 202
OCCULDAS 23 EL, INDIRECT, PHASE 148
OCULUS CL, DTW 195
OCULUS CL, MOVE, PHASE 147
OCULUS CL, PHASE 196
OCULUS CW, PHASE 445
OCULUS PD, DTW 297
OCULUS PD, SINGLE, PHASE 296
OCULUS WL UP/DOWN, DTW 385
OCULUS WL UP/DOWN, PHASE 385
OCULUS WL, SINGLE, PHASE 385
ONE 40 CL, DALI, UP/DOWN 175
ONE 40 CL, PHASE, UP/DOWN 173
ONE 40 CW, DALI 357
ONE 40 TRACK 3-PHASE, DALI 643
ONE 60 CL, DALI, UP/DOWN 175
ONE 60 CL, PHASE, UP/DOWN 173
ONE 60 CW, DALI 357
ONE BOW FL 483
ONE LINEAR 50 WL, PHASE, UP/DOWN 354
ONE LINEAR 70 WL, PHASE, UP/DOWN 355
ONE STRAIGHT FL 483
ONE® 60 PD, DALI 271
ONE® 60 PD, DALI, UP/DOWN 271
ONE® 60 PD, PHASE, UP/DOWN 271
ONE® 80 PD, DALI 273
ONE® 80 PD, DALI, UP/DOWN 273
ONE® CUBE PD, DALI 269
ONE® CUBE PD, DALI, UP/DOWN 269
ONE® DOUBLE PD, DALI, UP/DOWN 274
ONE® DOUBLE PD, PHASE, UP/DOWN 274
ONE® FELT PLATE, ACOUSTIC FELT,
FOR ONE® 80/ ONE® CUBE 269, 273
ONE® FLAT PD, DALI, TRIPLE 265
ONE® FLAT PD, PHASE, SINGLE 265
ONE® LINEAR 100 PD, PHASE, UP/DOWN 277
ONE® LINEAR 140 PD, PHASE, UP/DOWN 277
ONE® TRIPLE PD, DALI 275
ONE® VERTICAL PD, PHASE 267
ORDI II POLE 45 795
ORDI II POLE 70 795
ORDI II POLE 70, SENSOR 795
ORDI II SENSOR WL 916
ORDI II WL 916
ORDI SENSOR WL 917
ORDI WL 917
OSSA 180 WL, QT-DE12 397
OSSA 300 WL, QT-DE12 397
OTOS GLAS POLE, E27 771
OUT-BEAM FRAME SP 941
OUT-BEAM UP/ FLOOD DOWN WL 921
OVAL 14 WL, UP/DOWN 853
OVAL 18 WL, UP/DOWN 853
OVALISK 100 POLE 765
OVALISK 75 POLE 765
OVALISK CL 833
OVALISK SENSOR WL 895
OVALISK WL 895

P

PANEL 60 CL, ROUND, DALI 217
PANEL 60 CL, ROUND, PHASE 217
PANEL 60 PD, ROUND, DALI 291
PANEL 600 SURFACE-MOUNTING FRAMES 997
PANEL 600 RECESSED MOUNTING FRAMES 997
PANEL 625 SURFACE-MOUNTING FRAMES 999
PANEL 625 RECESSED MOUNTING FRAMES 999
PANEL C 600 990
PANEL C 625 993
PANEL C 1200 995
PANEL C DALI 600 991
PANEL C DALI 625 993
PANEL C DALI 1200 995
PANEL TRACK 1-PHASE, SQUARE 589
PANEL TRACK 1-PHASE, ROUND 589
PANEL V 600 996, 997
PANEL V 625 998, 999
PANEL V DALI 600 997
PANEL V DALI 625 999
PANTILO 20 PD, E27 281
PANTILO 28 PD, E27 281
PANTILO CONVEX 29 PD, E27 283
PANTILO CONVEX 40 PD, E27 283
PANTILO OVAL PD, E27 281
PANTILO ROPE 19 CW, E27 437
PANTILO ROPE 19 PD, E27 279, 585
PANTILO ROPE 20 PD, E27 279
PANTILO ROPE 27 CW, E27 437
PANTILO ROPE 27 PD, E27 279
PANTILO ROPE WL, G9 373
PARA 380 PD, E27 321
PARA CONE 14 1-PHASE, GU10 587
PARA CONE 14 1-PHASE, PD, GU10 587
PARA CONE 14 3-PHASE, GU10 651
PARA CONE 14 3-PHASE, PD, GU10 651
PARA CONE 20 PD, E27 313
PARA CONE 30 PD, E27 313
PARA CONE GL 1-PHASE, GU10 587
PARA CONE GL 3-PHASE, GU10 653
PARA CONE GL PD, GU10 653
PARA DOME PD, E27 320
PARA DOME SHADE 320
PATTA-F EL, SQUARE, PHASE 165
PATTA-F EL, ROUND, PHASE 164
PATTA-I DL, SQUARE, PHASE 162
PATTA-I EL, SQUARE, PHASE 163
PATTA-I EL, ROUND, PHASE 162, 163
PEMA® WL 896, 897
PEMA® WL, E27 897
PHELIA 10 PD, E27 315
PHELIA 20 PD, E27 315
PHELIA 30 PD, E27 315
PHELIA FL, E27 499
PHELIA WL, QPAR51 416
PHOTONI 45 POLE, E27 713
PHOTONI 75 POLE, E27 713
PHOTONI CL, E27 825
PHOTONI CYL CL 825
PHOTONI CYL POLE 45 711
PHOTONI CYL POLE 75 711
PHOTONI CYL WL 844
PHOTONI WL, E27 845
PHOTONIA POLE, E27 771
PHOTONIA WL, E27 923
PIKA DL, ROUND, QPAR51, PIVOTING 146
PIKA DL, ROUND, QPAR51, RIGID 146
PLASTRA 101 WL, E14 391
PLASTRA 104 CL, E27 211
PLASTRA 104 WL, QT14 391
PLASTRA 105 CL, E27 211
PLASTRA CL, PHASE 211
PLASTRA CL, QPAR51 210
PLASTRA RL, SQUARE, QPAR51 151
PLASTRA RL, ROUND, QPAR51 151
PLASTRA WL, CUBE, QT14 386
PLASTRA WL, CUBES 386
PLASTRA WL, CURVE, QT-DE12 391
PLASTRA WL, E14 387
PLASTRA WL, SQUARE 389
PLASTRA WL, SEMICIRCULAR 389
PLASTRA WL, QPAR51 390
PLASTRA WL, RECTANGULAR, QT-DE12 387
PLASTRA WL, SHIELD ROUND 389
PLYTTA LV 548
POWER TRAIL-LITE® EL, SQUARE 979
POWER TRAIL-LITE® EL, ROUND 979
PURI 2.0 BASIC 426
PURI 2.0 BASIC 1-PHASE, QPAR51 566
PURI 2.0 BASIC 3-PHASE, QPAR51 622
PURI 2.0 BASIC CW, DOUBLE ASYM.,
QPAR51 426
PURI 2.0 BASIC CW, DOUBLE LONG,
QPAR51 427
PURI 2.0 BASIC CW, QUADRUPLE LONG,
QPAR51 427
PURI 2.0 BASIC CW, SWITCH, SINGLE,
QPAR51 427
PURI 2.0 BASIC CW, SINGLE, QPAR51 427
PURI 2.0 BASIC CW, TRIPLE LONG,
QPAR51 427
PURI 2.0 BASIC CW, TRIPLE ROUND,
QPAR51 427
PURI 2.0 BASIC PD, 1-PHASE, QPAR51 567
PURI 2.0 BASIC PD, 3-PHASE, QPAR51 623
PURI 2.0 CONE 422
PURI 2.0 CONE 1-PHASE, QPAR51 563
PURI 2.0 CONE 3-PHASE, QPAR51 619
PURI 2.0 CONE CW, DOUBLE ASYM.,
QPAR51 422
PURI 2.0 CONE CW, DOUBLE LONG,
QPAR51 423
PURI 2.0 CONE CW, QUADRUPLE LONG,
QPAR51 423
PURI 2.0 CONE CW, SWITCH, SINGLE,
QPAR51 423
PURI 2.0 CONE CW, SINGLE, QPAR51 423
PURI 2.0 CONE CW, TRIPLE LONG,
QPAR51 423
PURI 2.0 CONE CW, TRIPLE ROUND,
QPAR51 423
PURI 2.0 CONE PD, 1-PHASE, QPAR51 565
PURI 2.0 CONE PD, 3-PHASE, QPAR51 621
PURI 2.0 CONE SHADE 567, 623
PURI 2.0 DOME 424
PURI 2.0 DOME 1-PHASE, QPAR51 563
PURI 2.0 DOME 3-PHASE, QPAR51 619
PURI 2.0 DOME CW, DOUBLE ASYM.,
QPAR51 424
PURI 2.0 DOME CW, DOUBLE LONG,
QPAR51 425
PURI 2.0 DOME CW, QUADRUPLE LONG,
QPAR51 425
PURI 2.0 DOME CW, SWITCH, SINGLE,
QPAR51 425
PURI 2.0 DOME CW, SINGLE, QPAR51 425
PURI 2.0 DOME CW, TRIPLE LONG,
QPAR51 425
PURI 2.0 DOME CW, TRIPLE ROUND,
QPAR51 425
PURI 2.0 DOME PD, 1-PHASE, QPAR51 565
PURI 2.0 DOME PD, 3-PHASE, QPAR51 621
PURI 2.0 DOME SHADE 567, 623
PURI 2.0 TUBE 420
PURI 2.0 TUBE 1-PHASE, QPAR51 563
PURI 2.0 TUBE 3-PHASE, QPAR51 619
PURI 2.0 TUBE CW, DOUBLE ASYM.,
QPAR51 420
PURI 2.0 TUBE CW, DOUBLE LONG, QPAR51 421
PURI 2.0 TUBE CW, QUADRUPLE LONG,
QPAR51 421
PURI 2.0 TUBE CW, SWITCH, SINGLE,
QPAR51 421
PURI 2.0 TUBE CW, SINGLE, QPAR51 421
PURI 2.0 TUBE CW, TRIPLE LONG,
QPAR51 421

PURI 2.0 TUBE CW, TRIPLE ROUND, QPAR51 421
PURI 2.0 TUBE PD, 1-PHASE, QPAR51 565
PURI 2.0 TUBE PD, 3-PHASE, QPAR51 621
PURI 2.0 TUBE SHADE 567, 623
PURI CONE SHADE 429
PURI CW 431
PURI CW, DOUBLE, QPAR51 431
PURI CW, QUAD, QPAR51 431
PURI CW, SINGLE, QPAR51 431
PURI CW, TRIPLE, QPAR51 431
PURI DOME SHADE 429
PURI TRACK 1-PHASE, QPAR51 591
PURI TRACK 1-PHASE, TRIPLE TRACK SET 591
PURI TRACK 3-PHASE, QPAR51 661
PURI TUBE SHADE 429
PURIA TRACK 1-PHASE, QPAR51 593

Q

Q-LINE® CL, 1M, BAP, PHASE 215
Q-LINE® CL, 2M, BAP, PHASE 215
Q-LINE® PD, 1M, BAP, PHASE 295
Q-LINE® PD, 2M, BAP, PHASE 295
Q-LINE® PD, DALI, SINGLE 295
Q-LINE® WL 368
Q-RING WL 849
Q-RING WL, SENSOR 849
QUAD FRAME 14 WL 395
QUAD FRAME 19 WL 395
QUAD POLE POLE 800
QUAD UP/DOWN 15 WL 893
QUAD WL 892
QUADRASS PD, E27 311
QUADRASS SPOT WL, E27 403
QUADRASS WL, E27 403
QUADRASYL 75 POLE, TCR-TSE 799
QUADRASYL WL, TCR-TSE 927
QUADRULO CL 941
QUADRULO FL 749
QUADRULO SENSOR WL, E27 883
QUADRULO WL 882
QUADRULO WL, E27 883
QUIMERA 1-PHASE, PD 559
QUIMERA PD, PHASE 223
QUIMERA TL 481
QUIMERA WL, PHASE 329

R

R-CUBE 35 POLE 715
R-CUBE 75 POLE 715
R-CUBE CW 935
R-CUBE W 843
RASTERLYS POLE 70 735
RASTERLYS WL 933
ROCCI 200 EL, SQUARE 985
ROCCI 200 EL, ROUND 985
ROCCI EL, SQUARE 984
ROCCI EL, ROUND 984
ROTOBALL 25 FL, E27 769
ROTOBALL 25 PD, E27 319
ROTOBALL 40 FL, E27 769
ROTOBALL 40 PD, E27 319
ROTOBALL 50 FL, E27 769
ROTOBALL 50 PD, E27 319
ROX ACRYL 30 POLE, E27 781
ROX ACRYL 60 POLE, E27 781
ROX ACRYL 90 POLE, E27 781
ROX CL, GX53 837
ROX CL, QPAR111 837
ROX UP/DOWN WL, QPAR111 907
RUBA CW 944
RUSTY® 40 POLE 754
RUSTY® 40 POLE, E27 755, 758
RUSTY® 70 POLE 755
RUSTY® 70 POLE, E27 755, 758
RUSTY® CONE 24 FL, E14 757
RUSTY® CONE 40 POLE, E27 757
RUSTY® CONE 70 POLE, E27 757
RUSTY® MANA SHADE, SQUARE 858
RUSTY® MANA SHADE, ROUND 858
RUSTY® PATHLIGHT 40 POLE 753
RUSTY® PATHLIGHT 70 POLE 753
RUSTY® PATHLIGHT POLE, TCR-TSE 752
RUSTY® SLOT 50 POLE 750
RUSTY® SLOT 50 POLE, E27 751
RUSTY® SLOT 80 POLE 750
RUSTY® SLOT 80 POLE, E27 751
RUSTY® UP/DOWN WL, SQUARE 894
RUSTY® UP/DOWN WL, ROUND 894

S

S-CUBE 35 POLE 714
S-CUBE 75 POLE 714
S-CUBE CL 826
S-CUBE CW 843, 935
S-TUBE 32 POLE, GU10 709
S-TUBE 75 POLE, GU10 709
S-TUBE CW 935
SALUNA LV, QR-C51 547
SAMRINA SP, SINGLE, GU10 809
SEDO 14 WL 360
SEDO 21 WL 360
SENSER 12 CW, SQUARE, PHASE 459
SENSER 12 CW, ROUND, PHASE 461
SENSER 12 EL, SQUARE 143
SENSER 12 EL, ROUND 141
SENSER 18 CW, SQUARE, PHASE 459
SENSER 18 CW, ROUND, PHASE 461
SENSER 18 EL, SQUARE 143
SENSER 18 EL, ROUND 141
SENSER 24 CW, SQUARE, PHASE 459
SENSER 24 CW, ROUND, PHASE 461
SENSER 24 EL, SQUARE 143
SENSER 24 EL, ROUND 141
SIGHT 115 CW 369, 475
SIGHT 60 CW 369, 475
SIGHT EASY 3-PHASE 647
SIGHT EASY 3-PHASE DALI 647
SIGHT MOVE 3-PHASE 649
SIGHT MOVE 3-PHASE, DALI 649
SIGHT TRACK 3-PHASE 648
SIGHT TRACK 3-PHASE, DALI 648
SIMA CW, SQUARE, PHASE 463
SIMA CW, SQUARE, SENSOR 463
SIMA CW, ROUND, PHASE 462
SIMA CW, ROUND, SENSOR 462
SITRA 360 CW, TCR-TSE 938
SITRA 360 POLE, TCR-TSE 801
SITRA 360 SPIKE SP, DOUBLE, TCR-TSE 821
SITRA 360 SPIKE SP, SINGLE, TCR-TSE 821
SITRA CL, TCR-TSE 835
SITRA CUBE WL, TCR-TSE, UP/DOWN 879
SITRA L WL, UP/DOWN, SQUARE 879
SITRA M WL, UP/DOWN, SQUARE 879
SITRA S WL, SINGLE, SQUARE 877
SITRA UP/DOWN WL 905
SITRA UP/DOWN WL, TCR-TSE 905
SITRA WL, TCR-TSE 925
SLOTBOX 40 POLE 791
SLOTBOX 70 POLE 791
SLOTS 45 POLE 787
SLOTS 65 POLE 787
SMALL PLOT COVER, 2-PACK 981
SMALL PLOT COVER, 4-PACK 981
SMALL PLOT MODULES 981
SOLASTO EL, SQUARE 987
SOLASTO EL, ROUND 987
SOLID CUBE WL, QT14 405
SOMNILA FLEX WL, LEFT 413
SOMNILA FLEX WL, RIGHT 413
SOMNILA SPOT WL, LEFT 412
SOMNILA SPOT WL, RIGHT 413
SOPRANA CL, E27 209
SPOT 79 CW, QPAR51 457
SQUARE POLE 30 POLE, E27 785
SQUARE POLE 60 POLE, E27 785
SQUARE POLE 90 POLE, E27 785
SQUARE TURN WL, G9 927
SQUARE WL, E27 925
SUN 20 CL, E27 168
SUN 20 PD, E27 228
SUN 30 CL, E27 169
SUN 30 PD, E27 229
SUN GRID 701
SUN WL, G9 SQUARE 334
SUN WL, G9 ROUNDED 335
SURFACE V 390 1001
SURFACE V 390 SENSOR 1001
SYNA GARDEN SP 807
SYNA PLANT SP 807
SYNA SHADE, SP, GU10 805
SYNA SP 807
SYNA WIDE, SP 804
SYROS LV, QR-C51 547

T

T-TUBE 70 POLE, GU10 DOUBLE 741
T-TUBE 70 POLE, GU10 DOUBLE, SENSOR 740
T-TUBE 70 POLE, GU10 SINGLE 741
T-TUBE 70 POLE, GU10 SINGLE, SENSOR 740
T-TUBE WL GU10 DOUBLE 909
T-TUBE WL GU10 DOUBLE, SENSOR 908
T-TUBE WL GU10 SINGLE 909
T-TUBE WL GU10 SINGLE, SENSOR 908
TAHA LIGHT SET, BATTERY-POWERED 488, 707
TELESKOP LV, QR-C51 544
TENSEO LOW-VOLTAGE CABLE 540, 541
TENSEO LOW-VOLTAGE CABLE ACCESSORIES 543
TENORA CL, E27 208
TERANG 200 CW 944
THEO BRACKET CW 938
THEO BRACKET SP 819
THEO PATHLIGHT POLE, DOUBLE 764
THEO UP/DOWN WL, QPAR51 405, 861
THEO WL, QPAR51 862
TINY SUN TL 491
TODAY PRO DISPLAY 929
TONGA® 1-PHASE, PD, E14 592
TONGA® PD, E14 311
TRACKSPOT V 3-PHASE 1002, 1003
TRAIL-LITE® 60 EL 978
TRILEDO CL, DOUBLE, SQUARE 181
TRILEDO CL, DOUBLE, SQUARE, QPAR51 193
TRILEDO CL, SINGLE, SQUARE 181
TRILEDO CL, SINGLE, SQUARE, QPAR51 193
TRILEDO CL, SINGLE, ROUND 181
TRILEDO CL, SINGLE, ROUND, QPAR51 193
TRUKKO 60 WL 359
TRUKKO 80 WL, ROUND 359
TRUKKO 90 WL 359
TRUKKO WL, ROUND 358
TRUKKO WL,RECTANGULAR 358
TRUST 30 POLE 779
TRUST 60 POLE 779

U

UNIVERSAL DOWNLIGHT COVER, NON TILT, SQUARE 59, 1011
UNIVERSAL DOWNLIGHT COVER, NON TILT, ROUND 59, 1011
UNIVERSAL DOWNLIGHT COVER, TILT, SQUARE 59, 1011

UNIVERSAL DOWNLIGHT COVER, TILT, ROUND 59, 1011
UNIVERSAL DOWNLIGHT DL, PHASE 059
UNIVERSAL DOWNLIGHT DL, PHASE, MULTIPACK 1011

V

VANO WING SP, DALI 857
VAP SLIM 30 POLE, E27 783
VAP SLIM 60 POLE, E27 783
VAP SLIM 90 POLE, E27 783
VARU EL, QPAR51 152
VARYT 333
VARYT CL, E14 177
VARYT GLASS SHADE DIAMOND FOR PD, WL, CL, TL 177, 225, 333, 479
VARYT GLASS SHADE FOR PD, WL, CL, TL177, 225, 333, 479
VARYT GLASS SHADE LINE FOR PD, WL, CL, TL 177, 225, 333, 479
VARYT GLASS SHADE PLEATED FOR PD, WL, CL, TL 177, 225, 333, 479
VARYT PD, E14 225
VARYT TL, E14 478
VERLUX EL, SQUARE, PHASE 145
VILUA L WL 903
VILUA S WL 903
VILUA UP/DOWN, WL 903
VINOLINA ONE TL, BATTERY 485, 703
VINOLINA TL, BATTERY 485, 703
VINOLINA TWO IEC CONNECTION CABLE WITH SAFETY PLUG 487, 705
VINOLINA TWO CHARGING BASE 487, 705
VINOLINA TWO TL, BATTERY, DTW 487, 705

W

WALLYX WL, QPAR51 910
WATERPROOF V 600 1013
WATERPROOF V 1200 1014
WATERPROOF V 1500 1017
WATERPROOF V DALI 600 1013
WATERPROOF V DALI 1200 1015
WATERPROOF V DALI 1500 1017
WL 106 E14 364
WORKLIGHT FL 493
WORKLIGHT PD, DALI 290
WORKLIGHT PRO 120 PD, DALI 289
WORKLIGHT PRO 150 PD, DALI 289
WORKLIGHT PRO FL, DOUBLE 492
WORKLIGHT PRO FL, SINGLE 492
WORKLIGHT TL 493
WORO EL 161
WUD PD, E27, BALLSHAPE 226
WUD PD, E27, CLYLINDRICAL 227
WUD PD, E27, CONICAL 227
WUD PD, E27, HALF ROUND 227

SYMBOLS KEY

Recommendations

Displays accessories and recommended lamps for the chosen product

Mix & Match

Indicates products that can be combined

Energy efficiency class

„This light is suitable for bulbs with an energy class rating of...“

Dimmable with:

- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

Protection classes

- Protection class I / protective conductor
- Protection class II/Protection by double or reinforced insulation
- Protection class III / protection through low voltage

IPprotection type:
Indicates the suitability of electrical equipment for different environmental conditions.

IK-Impact resistance level :
The IK impact resistance level is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:

- Rotation range
- Pivot range
- Gimballed

Unified **G**lare **R**ating:
The lower the UGR value, the lower the psychological glare.

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Pendant cable length in cm

Power cable length in cm
Supply cable length in cm (with open cable end)

Shape of the installation opening

Specification of the installation depth

Product’s capacity to be driven over specified

The weight capacity of the product up to specified value in tonnes. Measurements based on concrete installation.

Allows the installation of electrical control equipment on materials whose flammability is not known.

Through-wiring possible

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

For indoor use only Not suitable for indoor use

Sea-air resistant coating

Connected lighting:
Indicates smart products that use the following protocols:

- Zigbee®
- DALI
- Bluetooth

CCT-Switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Indicates lights with RGB+W and RGB (Red-Green-Blue + White and Red-Green-Blue)

Dim-to-Warm:
With dimmers, the light colour can be altered from cold white to warm white.

- Products with integrated LEDs
- Products with lamp socket

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.
All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated without VAT.

Publisher
SLV GmbH, Germany
Daimlerstraße 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833-0
slv.com

Copyright
© SLV GmbH, 2024

FSC
www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C011124



SLV is among the top 5 % of companies assessed by EcoVadis in early 2024, demonstrating its strong sustainability management system.

SLV GmbH | Daimlerstraße 21-23, 52531 Uebach-Palenberg, Germany, +49 (0) 2451 4833 - 333, info@slv.de
SLV Austria | +49 (2451) 4833 355, export@slv.de
SLV Belgium | Herentalsebaan 429, B-2160 Wommelgem, +32 (0) 3/385 30 08, info@slv.be
SLV Nordics | Flade Engvej 4, 9900 Frederikshavn, Denmark, +45 9310 7474, info@nordics.slv.com
SLV France | Zac du Martelet, 88, rue Henri Dépagneux, F-69400 Limas, +33 4 74 02 71 20, infofr@slv.com
SLV LIGHTING UK LTD | Unit E Chiltern Park, Boscombe Road, Dunstable, LU5 5LT, +44 (0)203 968 11 00, sales@uk.slv.com
SLV Italia S.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LC), +39 039 5983575, infoit@slv.com
SLV Nederland | Kazernestraat 19, 5928 NL Venlo, +31 773204343, info@slv.nl
SLV i Norge, del av SLV Nordics | Tors veg 9B, 7035 Trondheim, +47 4777 1080, post-no@slv.com
SLV Poland | al. Jerozolimskie 200, 02-486 Warszawa, Polska, (0048 22) 722-49-75, slv@slv.pl
SLV Portugal | R. Margarida de Abreu, no13 – Lj2, 1900-314 Lisboa, +351 210 185 961, info@pt.slv.com
SLV Swiss SA | Route du Bey 6 Box 1-4, Z.I. La Jonnaire, CH-1847 Rennaz, +41 218113232, info@slv-swiss.ch
SLV d.o.o | Barjanska cesta 50, SI-1000 Ljubljana, +386 1 2009 730, info@slv.si
SLV Spain | Antic Cami Ral Valencia, 38, L17, 08860 Castelldefels, Barcelona, 931 168 161, info@slv.es
SLV Czech s.r.o. | V Sedlci 28/17, CZ-160 00 Praha 6, +420 739 282 151, info@cz.slv.com





slv.com