

LIVIA 160

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, protection rating IP55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GX53 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




3A9.000.D1K

CCT SETTABLE



MADE IN ITALY



LIVIA 160 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GX53 lampholder.

***BASE** in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada GX53.*


DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.*

LIVIA 160



Dimensions and weight

Diameter: Ø160 mm
Height: 100 mm
Weight: 0,76 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PC:

☒ Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

GX53 LED

100 - 240 V


***ADD. SUFFIX**




Ceiling surface downlight supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINAIRES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

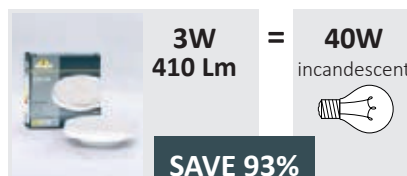

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.



LIVIA 60		
1A9.000.Z1L	1,7W	1A9.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 8,4
mc 0,057

LIVIA 90	
3,5 W	2A9.000.U1K
6 W	2A9.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

LIVIA 160	
3W	3A9.000.G1K
10W	3A9.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

LIVIA 180	
15W	4A9.000.R1K
30W	4A9.000.Q1K

CCT SETTABLE E27 HIGHPOWER LED LAMP INCLUDED
3000K/4000K

Pcs 12
Kg 22,5
mc 0,147