

MINITOMMY

FLOODLIGHT

LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover ad anello o a palpebra senza viti a vista. Fornito nella versione standard con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.



1M1.001.U1K

CCT SETTABLE

SDCM <3

2700 K 4000 K

CE	CB IECEE CB SCHEME	UV UV-TREATED	CLASS II DOUBLE INSULATION
RECYCLABLE	ANTI-SHOCK	TEMPERATURE +90° -60°	
PUBLIC	RESIDENTIAL	INDOOR OUTDOOR	
WALL	CEILING	SPIKE	

MINITOMMY - COMPONENTS

IP 66




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO in resina predisposto per il fissaggio degli accessori elettrici e **FORCELLA** di supporto per permettere l'orientamento del proiettore.

INSTALLATION ELEMENTS:

- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:

- DISCO DI ROTAZIONE per l'installazione a parete.
- PICCHETTO per l'installazione nel terreno.
- SUPPORTO per la versione a luce doppia.

MINITOMMY



Dimensions and weight

Height: 127 mm
Width: 122 mm
Weight: 0,45 Kg

Moulded Colours:

Black Grey **White**

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5W	366 Lm	4000 K	.U1K
			2700 K	
	6W	615 Lm	4000 K	.L1K
			2700 K	


Floodlight supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W 366 Lm = **35W HALOGEN**
SAVE 90%

6W 615 Lm = **50W HALOGEN**
SAVE 88%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MINITOMMY
FLOODLIGHT



1M1.001.L1K





3M1.001.U2K





1M1.000.U1K






MINITOMMY	
3,5W	1M1.000.U1K
6W	1M1.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
	
Pcs 30 Kg 12,6 mc 0,092	

MINITOMMY SPIKE	
3,5W	1M1.001.U1K
6W	1M1.001.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
	
Pcs 30 Kg 13,8 mc 0,092	

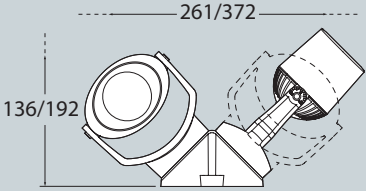MINITOMMY 2L	
2x3,5W	3M1.000.U2K
2x6W	3M1.000.L2K
2 CCT SETTABLE GU10 LED LAMPS INCLUDED 2700K/4000K	
	
Pcs 18 Kg 16,2 mc 0,092	

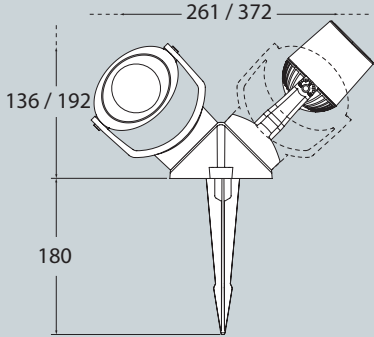
MINITOMMY 2L SPIKE	
2x3,5W	3M1.001.U2K
2x6W	3M1.001.L2K
2 CCT SETTABLE GU10 LED LAMPS INCLUDED 2700K/4000K	
	
Pcs 18 Kg 17 mc 0,092	

MINITOMMY-EL

FLOODLIGHT



MADE IN ITALY



MINITOMMY-EL


3,5W

1M2.000.U1K

6W

1M2.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

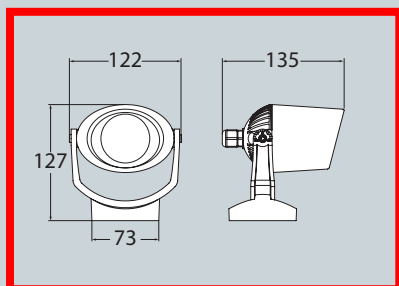

Pcs 30
Kg 12,6
mc 0,092

MINITOMMY-EL SPIKE


3,5W

1M2.001.U1K

6W

1M2.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
273000K/4000K



Pcs 30
Kg 13,8
mc 0,092

MINITOMMY-EL 2L


2x3,5W

3M2.000.U2K

2x6W

3M2.000.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

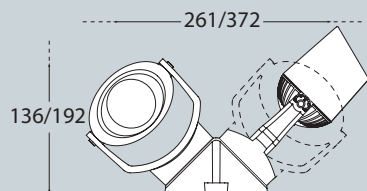

Pcs 18
Kg 16,2
mc 0,092

MINITOMMY-EL 2L SPIKE


2x3,5W

3M2.001.U2K

2x6W

3M2.001.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

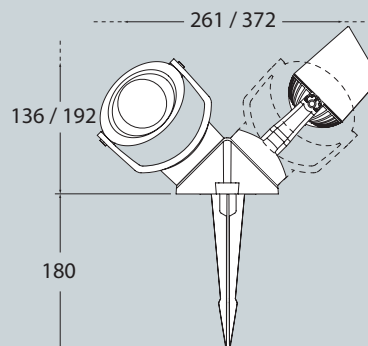

Pcs 18
Kg 17
mc 0,092