

FIORINA - FORTUNATO

MODERN SOLAR LED




SOLAR lamp with **motion sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Post or wall version available. Provided with TÜV-CB certified **LED solar module**, self-adjusting in "energy saving" or "full power" mode. Insulation class III, protection rating IP55.

*Lampada **SOLARE**, con **sensore di movimento** e **batteria sostituibile**. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione a palo o a muro. Fornita completa di **modulo solare a LED** certificato TÜV-CB. Impostazione automatica della modalità "energy saving" o "full power". Classe di isolamento III, grado di protezione IP55.*



F11.542.S3L

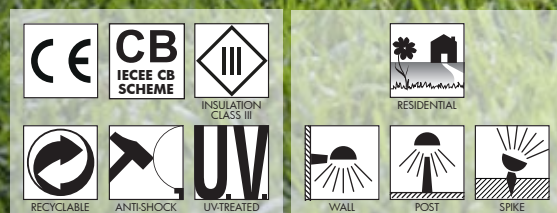

FIORINA / FORTUNATO - COMPONENTS

IP55



FIORINA



DUAL USE



FORTUNATO

LED SOLAR MODULE with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.

MODULO SOLARE A LED provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.

POLE in one piece only complete with spike. Made in shockproof resin material, UV rays stabilized, rust and corrosion free. Dual use: you can fix the spike outside the pole for in-ground installation, or inside the pole for surface installation with screws.

PALO in un unico pezzo completo di picchetto. Fabbricato in resina antiurto stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Duplice utilizzo: il picchetto può essere montato all'esterno del palo per installazione diretta nel terreno o al suo interno per installazione al suolo mediante tasselli di fissaggio.

WALL BRACKET suitable to host the solar module. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

BRACCIO A MURO atto ad accogliere il modulo solare, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

FIORINA

— Ø160 —



Dimensions and weight

Diameter: Ø160 mm
Height: 560mm
Weight: 1,3 Kg

FORTUNATO

— 160 —



Dimensions and weight

Width: 160 mm
Depth: 180 mm
Height: 40mm
Weight: 0,76 Kg

Moulded colours:

Black White Grey

SOLAR MODULE



POWER

5V/2W

LUMINOUS FLUX

max 280 lm

COLOUR TEMP.

4000 K

*ADD. SUFFIX

.S3L

SOLAR MODULE




Technical details on page 636.

BATTERY ACTIVATION BOTTOM



ON/OFF

SELF-ADJUSTING WORKING MODE

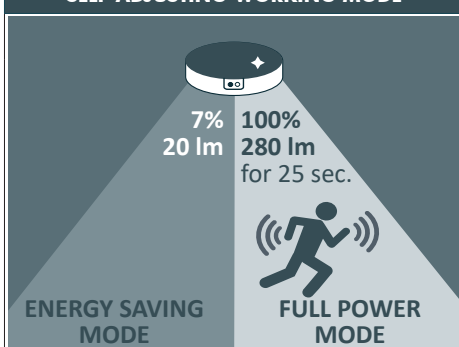

ENERGY SAVING MODE

FULL POWER MODE

OFF MODE TO PRESERVE THE BATTERY

AUTONOMY
46h

(at fully charged battery)

CHARGING TIME 6h
at 60.000 Lux (full sunny day)

REPLACEABLE BATTERY



- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR



- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL



- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

FIORINA - FORTUNATO MODERN SOLAR LED



F01.000.S3L



F11.542.S3L




F11.542.S3L

MADE IN ITALY

FIORINA


FI1.542.S3L

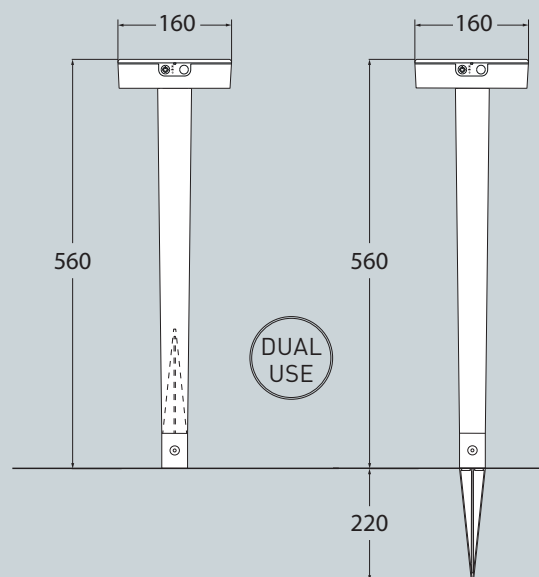

Pcs 6
Kg 10,81
mc 0,147

FORTUNATO

FO1.000.S3L

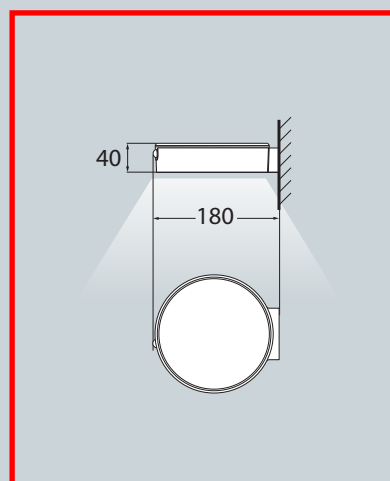

Pcs 12
Kg 10,53
mc 0,057