

SERGIO HIGH POWER LED

LARGE SIZE



E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra E27 in stile revival moderno, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



T33.000.Q1K

CCT SETTABLE

3000 K

4000 K

SDCM <6

CE

CB
IECEE CB SCHEME

UV
UV-TREATED

CLASS II
DOUBLE INSULATION

PUBLIC

RESIDENTIAL

WALL

POST

HANGING

RECYCLABLE

ANTISHOCK

TEMPERATURE
+90°
-60°

SERGIO HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

TETTO realizzato in resina antiurto, stabilizzato ai raggi UV.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a **LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SERGIO HIGH POWER LED


T33.000 *



Dimensions and weight

Height: 460 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,089

Moulded colours:



Diffuser PMMA:



HIGH POWER LED





Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K 3000 K	.R1K
	30 W	3620 lm	4000 K 3000 K	.Q1K
LED E27	50W	6550 lm	4000 K 3000 K	.H1L .H1R

PHOTOMETRIC DATA SAMPLE




SERGIO E27 LED HIGH POWER 30W

POST height 3,5mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (15 and 30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SERGIO

LARGE SIZE



MADE IN ITALY



ROBY



DARIO



SERGIO

IOLE/SERGIO	
	T33.243
GX53	T35.243
Pcs 1 Kg 5,2 mc 0,061	

MIDIPILAR/SERGIO	
	T33.254
GX53	T35.254
Pcs 1 Kg 5,5 mc 0,83	

SICAR/SERGIO	
	T33.126
GX53	T35.126
Pcs 1 Kg 5 mc 0,061	

SERGIO	
	T33.000
GX53	T35.000
Pcs 1 Kg 4,2 mc 0,061	

EMILIO/SERGIO	
	T33.307
GX53	T35.307
Pcs 2 Kg 28,2 mc 0,334	

DINO/SERGIO	
	T33.306
GX53	T35.306
Pcs 2 Kg 26,7 mc 0,304	

DANILO/SERGIO	
	T33.305
GX53	T35.305
Pcs 2 Kg 23,7 mc 0,273	

MAXIDISMA/SERGIO	
	T33.117
GX53	T35.117
Pcs 1 Kg 4,5 mc 0,061	

SERGIO

LARGE SIZE





ROBY



DARIO



SERGIO


VANNI 2500 IOLE/SERGIO 2L

T33.310.E20

GX53

T35.310.E20

Pcs 1
Kg 30,8
mc 0,268




VANNI 2500 IOLE/SERGIO 3L

T33.310.E30

GX53

T35.310.E30

Pcs 1
Kg 35
mc 0,342




VANNI 2500/SERGIO

T33.310

GX53

T35.310

Pcs 1
Kg 25,2
mc 0,196



Ø 265


VANNI 2500 IOLE/SERGIO 1L

T33.310.E10

GX53

T35.310.E10

Pcs 1
Kg 25,6
mc 0,233

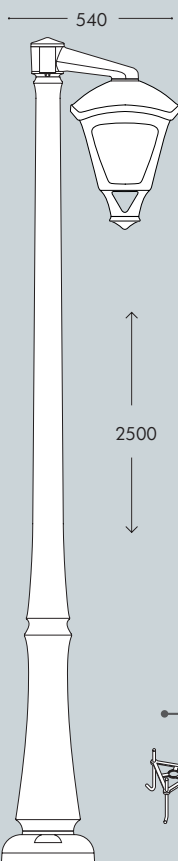

Ø 265


VANNI 2500 IOLE/SERGIO 2L

T33.310.E20

GX53

T35.310.E20

Pcs 1
Kg 30,8
mc 0,268

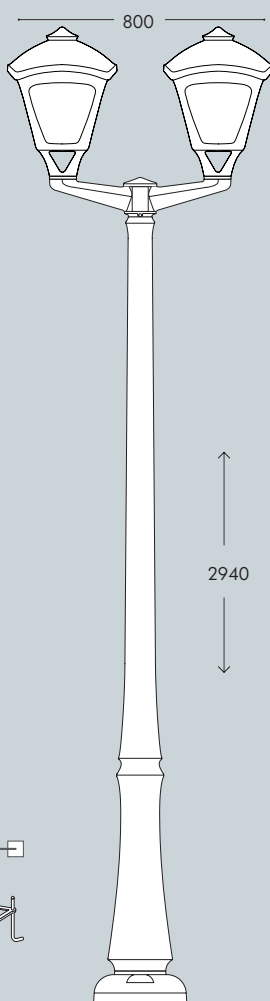

Ø 265


VANNI 2500 IOLE/SERGIO 3L

T33.310.E30

GX53

T35.310.E30

Pcs 1
Kg 35
mc 0,342

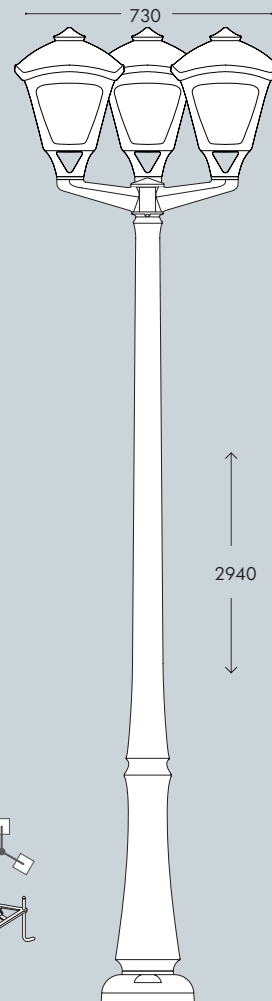

Ø 265

SERGIO

LARGE SIZE



MADE IN
ITALY



ROBY



DARIO



SERGIO

AKILLE 3000 IOLE/SERGIO 1L
T33.414.E10
GX53 T35.414.E10
Pcs 1 Kg 36,1 mc 0,282

EKTOR 3000 IOLE/SERGIO 2L	AKILLE 3000 IOLE/SERGIO 2L
T33.364.E20	T33.414.E20
GX53 T35.364.E20	GX53 T35.414.E20
Pcs 1 Kg 40,7 mc 0,315	

EKTOR 3000 IOLE/SERGIO 3L	AKILLE 3000 IOLE/SERGIO 3L
T33.364.E30	T33.414.E30
GX53 T35.364.E30	GX53 T35.414.E30
Pcs 1 Kg 45,3 mc 0,369	

EKTOR 3000 SERGIO
T33.364
GX53 T35.364
Pcs 1 Kg 35,7 mc 0,223
Ø 265

AKILLE 3000 SERGIO
T33.414
GX53 T35.414
Pcs 1 Kg 35,7 mc 0,223
Ø 265

EKTOR 3000 IOLE/SERGIO 1L
T33.364.E10
GX53 T35.364.E10
Pcs 1 Kg 36,1 mc 0,282
Ø 265

EKTOR 3000 IOLE/SERGIO 2L	AKILLE 3000 IOLE/SERGIO 2L
T33.364.E20	T33.414.E20
GX53 T35.364.E20	GX53 T35.414.E20
Pcs 1 Kg 40,7 mc 0,315	
Ø 265	Ø 265

EKTOR 3000 IOLE/SERGIO 3L	AKILLE 3000 IOLE/SERGIO 3L
T33.364.E30	T33.414.E30
GX53 T35.364.E30	GX53 T35.414.E30
Pcs 1 Kg 45,3 mc 0,369	
Ø 265	Ø 265

SERGIO

LARGE SIZE



MADE IN ITALY



ROBY



DARIO



SERGIO

EKTOR 4000 MIDIPIILAR/SERGIO 1L	AKILLE 4000 MIDIPIILAR/SERGIO 1L
T33.371.A10	T33.421.A10
GX53 T35.371.A10	GX53 T35.421.A10
Pcs 1 Kg 45,1 mc 0,306	

EKTOR 3500 MIDIPIILAR/SERGIO 3L	AKILLE 3500 MIDIPIILAR/SERGIO 3L
T33.367.A30	T33.417.A30
GX53 T35.367.A30	GX53 T35.417.A30
975 Pcs 1 Kg 50,7 mc 0,54	

EKTOR 4000 MIDIPIILAR/SERGIO 3L	AKILLE 4000 MIDIPIILAR/SERGIO 3L
T33.371.A30	T33.421.A30
GX53 T35.371.A30	GX53 T35.421.A30
975 Pcs 1 Kg 55,5 mc 0,568	

EKTOR 3500 SERGIO	AKILLE 3500 SERGIO
T33.367	T33.417
GX53 T35.367	GX53 T35.417
Pcs 1 Kg 39,3 mc 0,249 330 Ø 265	

EKTOR 3500 MIDIPIILAR/SERGIO 1L	AKILLE 3500 MIDIPIILAR/SERGIO 1L
T33.367.A10	T33.417.A10
GX53 T35.367.A10	GX53 T35.417.A10
Pcs 1 Kg 40,3 mc 0,281 670 Ø 265	

EKTOR 3500 MIDIPIILAR/SERGIO 2L	AKILLE 3500 MIDIPIILAR/SERGIO 2L
T33.367.A20	T33.417.A20
GX53 T35.367.A20	GX53 T35.417.A20
Pcs 1 Kg 43 mc 0,342 1070 Ø 265	

EKTOR 4000 MIDIPIILAR/SERGIO 2L	AKILLE 4000 MIDIPIILAR/SERGIO 2L
T33.371.A20	T33.421.A20
GX53 T35.371.A20	GX53 T35.421.A20
1070 Pcs 1 Kg 50,3 mc 0,490 Ø 265	