

light-tec
be bright. save energy.




Reflector LED 1000w

Advantages

- Die-casting integrated AL casing make faster heat dissipation
- 45/60/90 Degree lens over 90% light transmitting
- 99.99% Goldwire 3030 LED chip with low lumen decay
- IP65 driverwith short circuit/over-flow/over-temperature/over-voltage protection/flicker Free
- 150lm/W, over 90% energy saving
- Lifespan 50,000 hours
- Easy installation and low maintenance

Product size

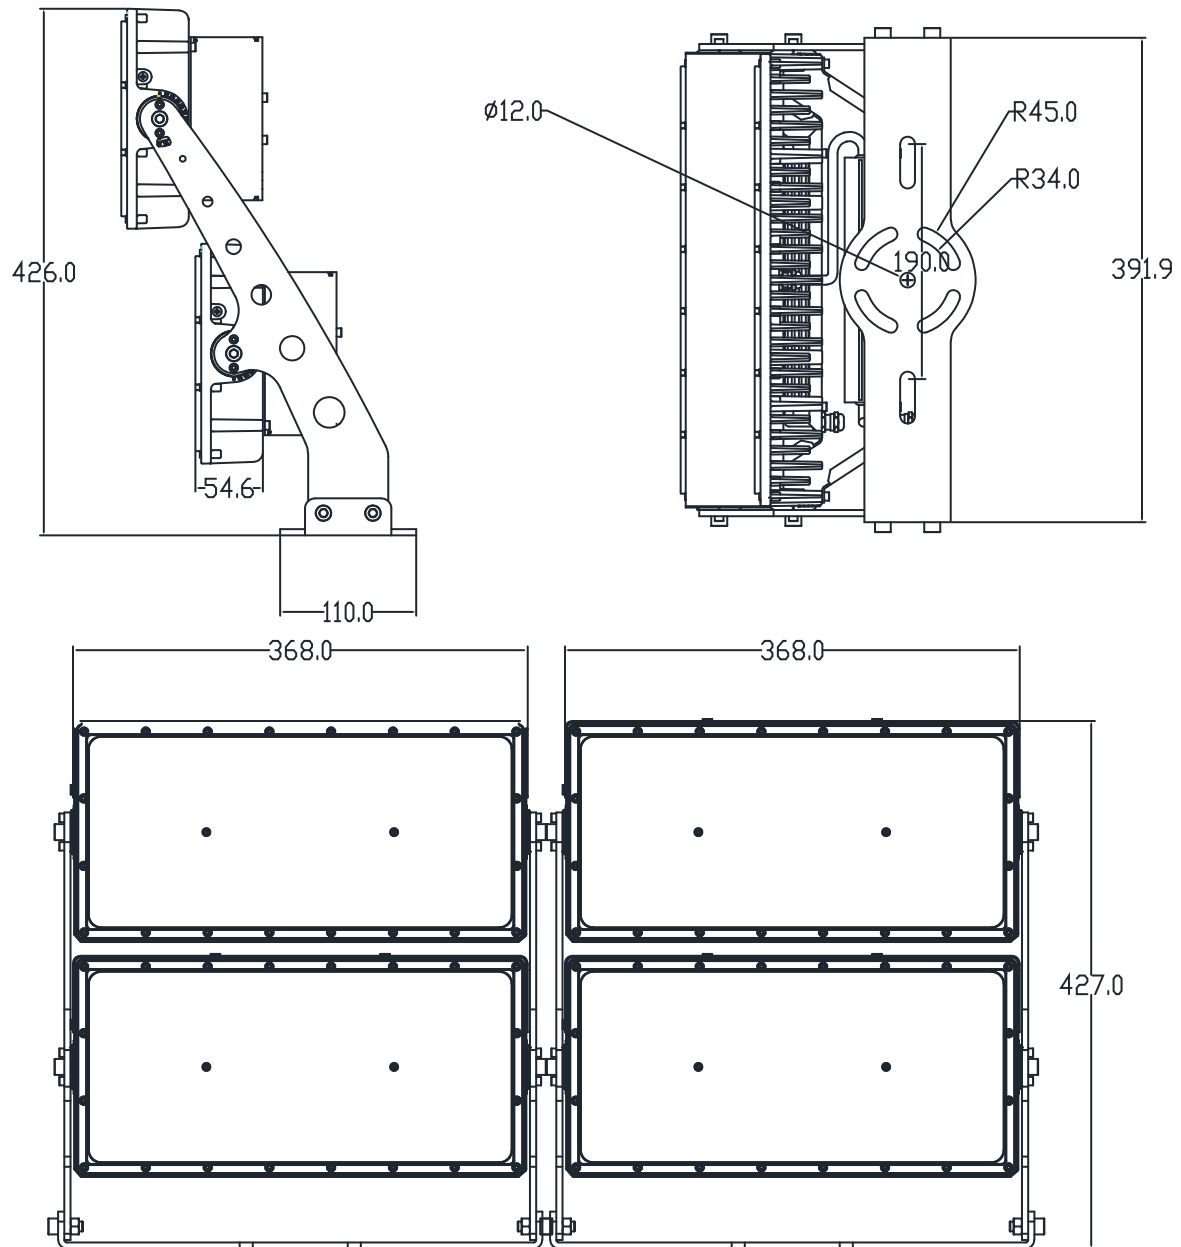

Unit: mm

Specification

Model	Lt/fl1000w
Input voltage	AC100-277V
Power	1000W
Dimming	DALI
PF	>0.95
LED Type	3030
Beam angle	45°/60°/90°
Light efficiency	150 lm/W
luminous	150,0000lm
Color Temp	6000K
CRI	>70
IP	65
SPD	10KV
Working Temp	-20°C~45°C
Storage Temp	-40°C~60°C
Life span	50000h@25°C
IK	8