


DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
 TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_

**LNC**  
COMPACT LED LITEPAK

**FEATURES**

- Compact LNC LED is designed for perimeter illumination and available in 3 lumen packages for safety, security and identity
- 3000K, 4000K, 5000K and Amber color temperatures
- Up to 4:1 spacing to mounting height ratio means fewer fixtures to install
- Acrylic diffuser included! Use for applications near entrances or locations where reduced brightness is desired. (Maximum spacing with diffuser 30ft)
- Die-cast aluminum housing with decorative Laredo styling
- Full cut-off neighbor friendly
- Listed to UL1598 for use in wet locations

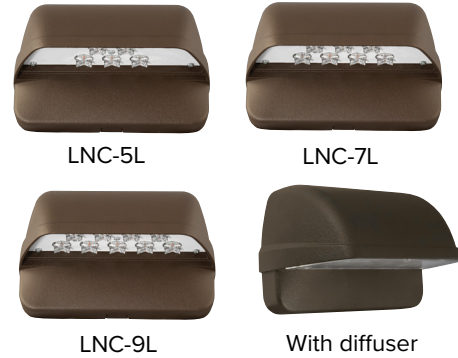

**SPECIFICATIONS**

**CONSTRUCTION**

- Decorative die-cast aluminum housing and door
- Rugged design protects internal components and provides excellent thermal management for long life
- Powder paint finishes provide lasting appearance in outdoor environments
- Full cut-off distribution; Ambient diffuser included, use for applications near entrances or locations where reduced brightness is desired

**OPTICS**

- Drivers are 120-277V, 50/60Hz Type II, III and Type IV lenses provide wide lateral spread
- 3000K - 80 CRI, 4000K - 70 CRI, and 5000K - 70 CRI, CCT nominal
- Drivers have greater than .90 power factor and less than 20% Total Harmonic Distortion

**INSTALLATION**

- Quick mount adapter provides quick installation, designed for recessed box 4" square junction box

**ELECTRICAL**

- 60,000 hours minimum LED life at L96 rating per IESNA TM-21-11
- Minimum operating temperature is -40°C/-40°F
- 0-10V dimming 120-277V only
- LNC5L – 5 LEDs, Types II, III or IV available, see page 2 for electrical details
- LNC7L – 7 LEDs, Type II, III or IV available, see page 2 for electrical details
- LNC9L – 9 LEDs, Types II, III or IV available, see page 2 for electrical details

**CONTROLS**

- Photocontrol option is available to provide dusk-to-dawn control for additional energy savings

**CERTIFICATIONS**

- Listed and labeled to UL 1598 for wet locations, 25°C ambient environments

**WARRANTY**

- 5 year warranty

KEY DATA	
Lumen Range	800–2100
Wattage Range	13–22
Efficacy Range (LPW)	64–95
Fixture Projected Life (Hours)	L96>60K
Weights lbs. (kg)	9.6 (24.5)

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

**ORDERING GUIDE**

Example: LNC-5L-U-3K-2-BLT-PCU

CATALOG #

**ORDERING INFORMATION**

Series	# LEDs	Voltage	CCT/CRI	IES Distribution	Finish	Controls
<b>LNC</b> LNC Zero Uplight	<b>5L</b> 5 LEDs <b>7L</b> 7 LEDs <b>9L</b> 9 LEDs	<b>U</b> 120-277V 1 120V 2 208V 3 240V 4 277V	<b>3K</b> 3000K nominal, 70 CRI <b>4K</b> 4000K nominal, 70 CRI <b>5K</b> 5000K nominal, 70 CRI <b>AM</b> Amber (590 μm available for "Turtle Friendly"/ observatory applications, 350mA (consult factory) <sup>1</sup>	<b>2</b> Type II <b>3</b> Type III <b>4</b> Type IV	<b>BLT</b> Black Matte Textured <b>BLS</b> Black Gloss Smooth <b>DBT</b> Dark Bronze Matte Textured <b>DBS</b> Dark Brone Gloss Smooth <b>GTT</b> Graphite Matte Textured <b>LGS</b> Light Grey Gloss Smooth <b>PSS</b> Platinum Silver Smooth <b>WHT</b> White Matte Textured <b>WHS</b> White Gloss Smooth <b>VGT</b> Verde Green Textured <b>Color Option</b> <b>CC</b> Custom Color	<b>PCU</b> Universal Button Photocell

Notes:  
1 Amber LEDs only available on 7L and 9L configurations, 350mA

**REPLACEMENT PARTS AND ACCESSORIES**

Catalog Number	Description
<input type="checkbox"/> 93039574	Frosted comfort shield, improved uniformity with only 5% reduction

**PERFORMANCE DATA**

# Of LEDs	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)		4K (4000K NOMINAL 70 CRI)		3K (3000K NOMINAL 80 CRI)		AM (<580 nm wave-length)		
				Lumens	LPW*	Lumens	LPW	Lumens	LPW	Lumens	System Watts	LPW*
5	STD. (700mA) AM (350mA)	13W	2	1,150	88.5	1,052	81	883	68	-	-	-
			3	1,132	87	1,077	83	833	64	-	-	-
			4	1,146	88	1,053	81	849	65	-	-	-
7		17W	2	1,515	89	1,369	80.5	1,272	75	-	-	-
			3	1,500	88	1,539	90.5	1,392	82	268	6.6	59
			4	1,557	91.5	1,535	90	1,425	84	-	-	-
9	22W	2	2,069	94	2,033	92	1,588	72	-	-	-	
		3	2,024	92	1,989	90	1,623	74	-	-	-	
		4	2,095	95	2,059	93.5	1,680	76	382	8.3	46	

\* Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment and application. Please consult IES files for BUG ratings.

**PROJECTED LUMEN MAINTENANCE**

Ambient Temperature	OPERATING HOURS					
	0	25,000	50,000	TM-21-11* L96 60,000	100,000	L70 (Hours)
25°C / 77°F	1.00	0.97	0.97	0.96	0.95	>791,000
40°C / 104°F	0.99	0.96	0.96	0.96	0.94	>635,000

\* Projected per IESNA TM-21-11\* Data references the extrapolated performance projections for the LNC-12LU-5K base model in a 40°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08

**LNC**  
COMPACT LED LITEPAK

**ELECTRICAL DATA**

# OF LEDS	Drive Current (mA)	Input Voltage (V)	Oper. Current (Amps)	System Power (W)
9	STD. (700mA)	120	0.11	13
		277	0.05	
12	STD. (700mA)	120	0.14	17
		277	0.07	
12	STD. (700mA)	120	0.17	22
		277	0.09	


**LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)**

Ambient Temperature		Lumen Multiplier
0° C	32° F	1.02
10° C	50° F	1.01
20° C	68° F	1.00
25° C	77° F	1.00
30° C	86° F	1.00
40° C	104° F	0.99
50° C	122° F	0.98


Use these factors to determine relative lumen output for average ambient temperatures from 0-50°C (32-122°F).

**PHOTOMETRY**


LNC9LU – Type II




LNC9LU – Type III



LNC9LU – Type IV



**DIMENSIONS**

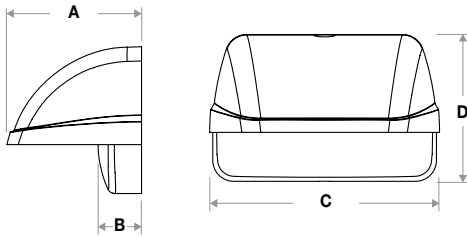

A	B	C	D
4.81" (122 mm)	1.55" (39 mm)	8.22" (209 mm)	5.25" (133 mm)

**ADDITIONAL INFORMATION**

**SHIPPING INFORMATION**

Catalog Number	G.W(kg)/ CTN	Carton Dimensions			Carton Qty. per Master Pack
		Length Inch (cm)	Width Inch (cm)	Height Inch (cm)	
LNC-5LU	9.6 (4.36)	14.5 (37)	9.6 (24.5)	6.8 (17.5)	2
LNC-7LU	9.6 (4.36)	14.5 (37)	9.6 (24.5)	6.8 (17.5)	2
LNC-9LU	9.6 (4.36)	14.5 (37)	9.6 (24.5)	6.8 (17.5)	2

**USE OF TRADEMARKS AND TRADE NAMES**

All product and company names, logos and product identifies are trademarks™ or registered trademarks® of Current or their respective owners. Use of them does not necessarily imply any affiliation with or endorsement by such respective owners.